

UZAIR MAJEED
23I-3063
SE-A
SMD

1. Create an Expo Project

Create a new Expo project named expo-product-explorer and run it successfully.

```
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded> npx create-expo-app@latest expo-product-explorer --template blank
>>
√ Select an Expo SDK version: » Latest (SDK 57)
Creating expo-product-explorer using the blank template.
√ Downloaded and extracted project files.
> npm install
npm warn deprecated uuid@7.0.3: uuid@10 and below is no longer supported. For ESM codebases, update to uuid@latest. For CommonJS codebases, use uuid@11 (but be aware this version will likely be deprecated in 2028).

added 464 packages, and audited 465 packages in 2m

45 packages are looking for funding
  run `npm fund` for details

10 moderate severity vulnerabilities

To address all issues (including breaking changes), run:
  npm audit fix --force

Run `npm audit` for details.

✅ Your project is ready!

To run your project, navigate to the directory and run one of the following npm commands.
```

Ln 51, Col 14 Spaces: 4

Class_Task_Graded - Antigravity IDE - Appjs

File Edit Selection View Go Run Terminal Help

Explorer

- Class...
- expo-product...
- .claude
- .expo
- assets
- node_modules
- .gitignore
- AGENTS.md
- JS App.js**
- app.json
- CLAUDE.md
- index.js
- LICENSE
- package-lo... M
- package.json M

JS App.js

```
1 import { StatusBar } from 'expo-status-bar';
2 import { StyleSheet, Text, View } from 'react-native';
3
4 export default function App() {
5   return (
6     <View style={styles.container}>
7       <Text>Open up App.js to start working on your app!</Text>
8       <StatusBar style="auto" />
9     </View>
10   );
11 }
12
```

Problems Output Debug Console Terminal Ports

node - expo-product-explorer + @ | | | | |

npm expo start --web

Starting Metro Bundler



> Scan the QR code above to open in Expo Go.

> Metro: [exp://10.133.27.235:8081](http://10.133.27.235:8081)

> Web: <http://localhost:8081>

> Using Expo Go (Press s to switch to development build)

> Press ? | show all commands

Logs for your project will appear below. Press Ctrl+C to exit.

Web Bundled 772ms index.js (216 modules)

Web INFO %cDownload the React DevTools for a better development experience: <https://react.dev/link/react-devtools> font-weight:bold

Web LOG Running application "main" with appParams:


{"hydrate": undefined, "rootTag": "#root"}

Development-level warnings: ON.

Performance optimizations: OFF.

main* 0 0 0

Ln 1, Col 1 Spaces: 2 UTF-

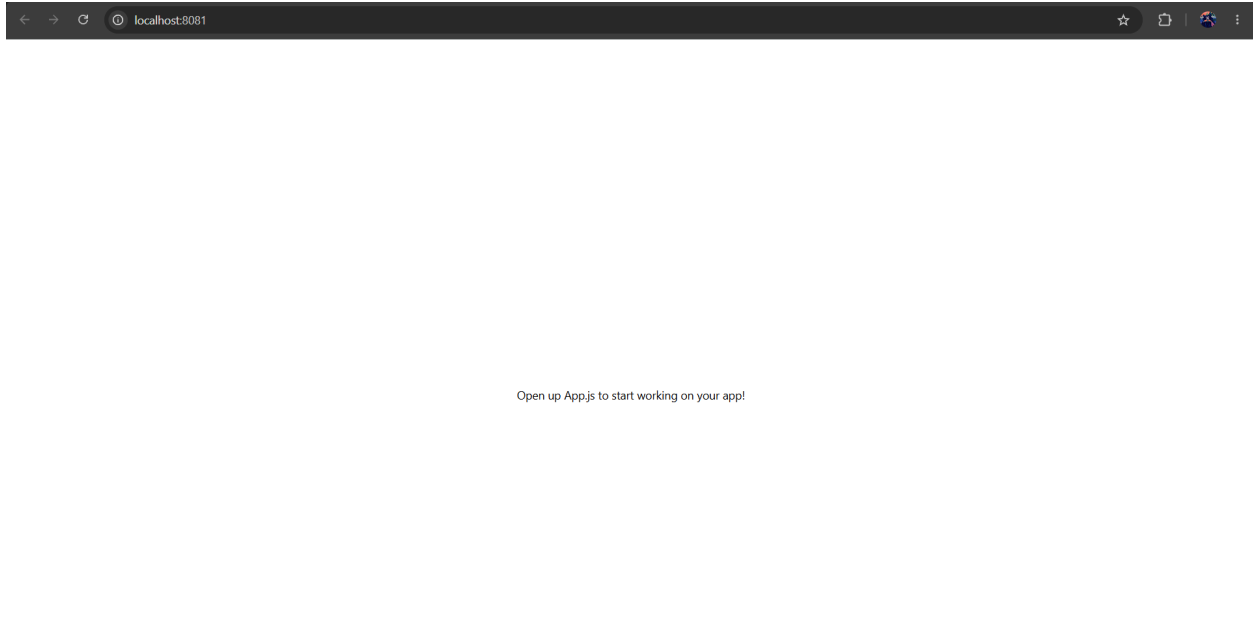

2. Initialize Git

Initialize a Git repository inside the Expo project and verify its status.

```
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git init
Reinitialized existing Git repository in D:/Semesters/Semester VII/SMD/Class_Task_Graded/expo-product-explorer/.git/
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git branch -M main
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git status
On branch main
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
        modified:   package-lock.json
        modified:   package.json

no changes added to commit (use "git add" and/or "git commit -a")
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git config user.name "Uzair Majeed"
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git config user.email "uzairmjd886@gmail.com"
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git check-ignore node_modules/ .expo/ .env
node_modules/
.expo/
.env
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> █
```

3. Configure .gitignore

Make sure unnecessary and sensitive files such as node_modules, .expo, and environment files are excluded.

```
.gitignore M X
expo-product-explorer > .gitignore
29 # macOS
30 .DS_Store
31 *.pem
32
33 # local env files
34 .env*.local
35
36 # typescript
37 *.tsbuildinfo
38
39 # generated native folders
40 /ios
41 /android
42
43
44 node_modules/
45 .expo/
46 dist/
47 web-build/
48
49 .env
50 .env.*
51 !.env.example
52
53 *log

modified: package.json
modified: package.json
modified: package.json
modified: package.json
...
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git check-ignore node_modules/ .expo/ .env
node_modules/
.expo/
.env
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> ^C
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git check-ignore node_modules/ .expo/ .env
node_modules/
.expo/
.env
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer>
```


4. Create the Initial Commit

Add the project files and create the initial Git commit.

```
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git add .
warning: in the working copy of '.gitignore', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'package-lock.json', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'package.json', LF will be replaced by CRLF the next time Git touches it
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git commit -m "Initial EXPO Setup"
[main 802377c] Initial EXPO Setup
3 files changed, 275 insertions(+), 30 deletions(-)
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git status
On branch main
nothing to commit, working tree clean
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git log --oneline -3
802377c (HEAD -> main) Initial EXPO Setup
e701fd6 Initial commit
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer>
```

5. Create a GitHub Repository


Create a GitHub repository for the Expo project.

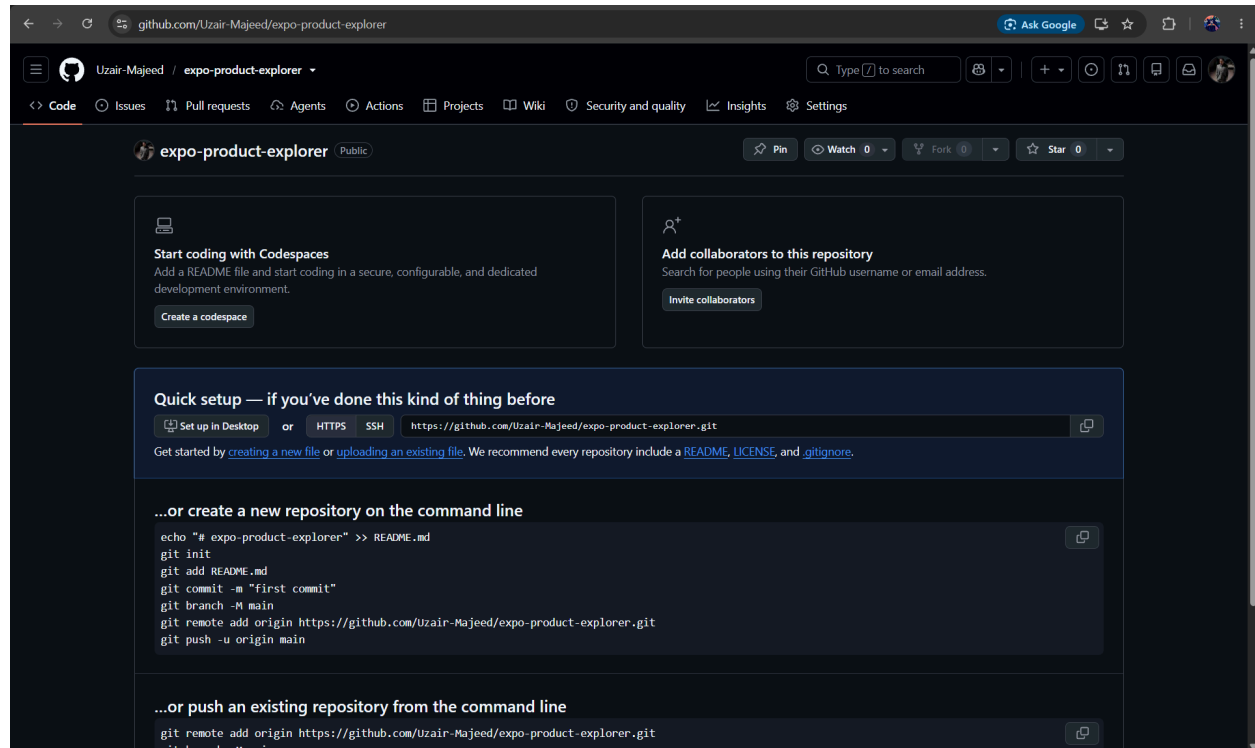

6. Connect Git to GitHub

Connect the local Git repository to GitHub and push the main branch.

```
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git remote add origin "https://github.com/Uzair-Majeed/expo-product-explorer.git"
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git remote -v
origin https://github.com/Uzair-Majeed/expo-product-explorer.git (fetch)
origin https://github.com/Uzair-Majeed/expo-product-explorer.git (push)
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git push -u origin main
remote: Permission to Uzair-Majeed/expo-product-explorer.git denied to uzair-pihof.
fatal: unable to access 'https://github.com/Uzair-Majeed/expo-product-explorer.git/': The requested URL returned error: 403
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git config --local credential.username Uzair-Majeed
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git push -u origin main
info: please complete authentication in your browser...
Enumerating objects: 25, done.
Counting objects: 100% (25/25), done.
Delta compression using up to 16 threads
Compressing objects: 100% (23/23), done.
Writing objects: 100% (25/25), 553.51 KiB | 25.16 MiB/s, done.
Total 25 (delta 4), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (4/4), done.
To https://github.com/Uzair-Majeed/expo-product-explorer.git
 * [new branch]      main -> main
branch 'main' set up to track 'origin/main'.
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git status
On branch main
Your branch is up to date with 'origin/main'.
```

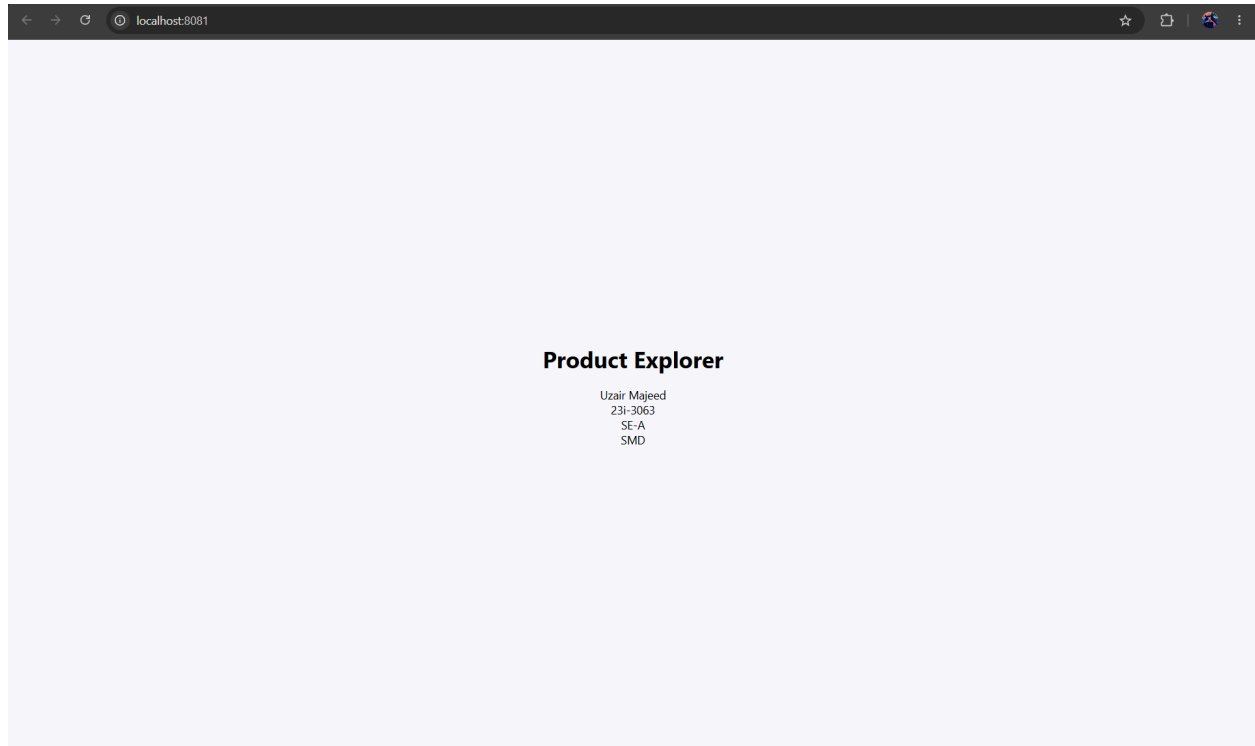9. Commit and Push the Feature

Commit the changes and push the feature branch to GitHub.


```
View Go Run Terminal Help Class_Task_Graded - Antigravity IDE - App.js
.gitignore JS App.js X
expo-product-explorer > JS App.js > styles > container

2
3 export default function App() {
4   return (
5     <View style={styles.container}>
6       <Text style={styles.title}>Product Explorer</Text>
7       <Text>Uzair Majeed</Text>
8       <Text>23i-3063</Text>
9       <Text>SE-A</Text>
10      <Text>SMD</Text>
11    </View>
12  );
13 }
14
15 const styles = StyleSheet.create({
16   container: {
17     flex: 1,
18     backgroundColor: '#f5f7fb',
19     alignItems: 'center',
20   },
21 });
22
```

Problems Output Debug Console Terminal Ports powershell - expo-product-explorer

```
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git switch -c feature/products ...
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git add App.js
warning: in the working copy of 'App.js', LF will be replaced by CRLF the next time Git touches it
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git commit -m "Display student name and roll number"
[feature/products 2a7c8fc] Display student name and roll number
1 file changed, 13 insertions(+), 5 deletions(-)
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git push -u origin feature/products
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 16 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 606 bytes | 606.00 KiB/s, done.
Total 3 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
remote:
remote: Create a pull request for 'feature/products' on GitHub by visiting:
remote:   https://github.com/Uzair-Majeed/expo-product-explorer/pull/new/feature/products
remote:
To https://github.com/Uzair-Majeed/expo-product-explorer.git
 * [new branch]   feature/products -> feature/products
branch 'feature/products' set up to track 'origin/feature/products'.
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer>
```

0 0 Uzair Majeed (now) Ln 21, Col 17 Spaces: z

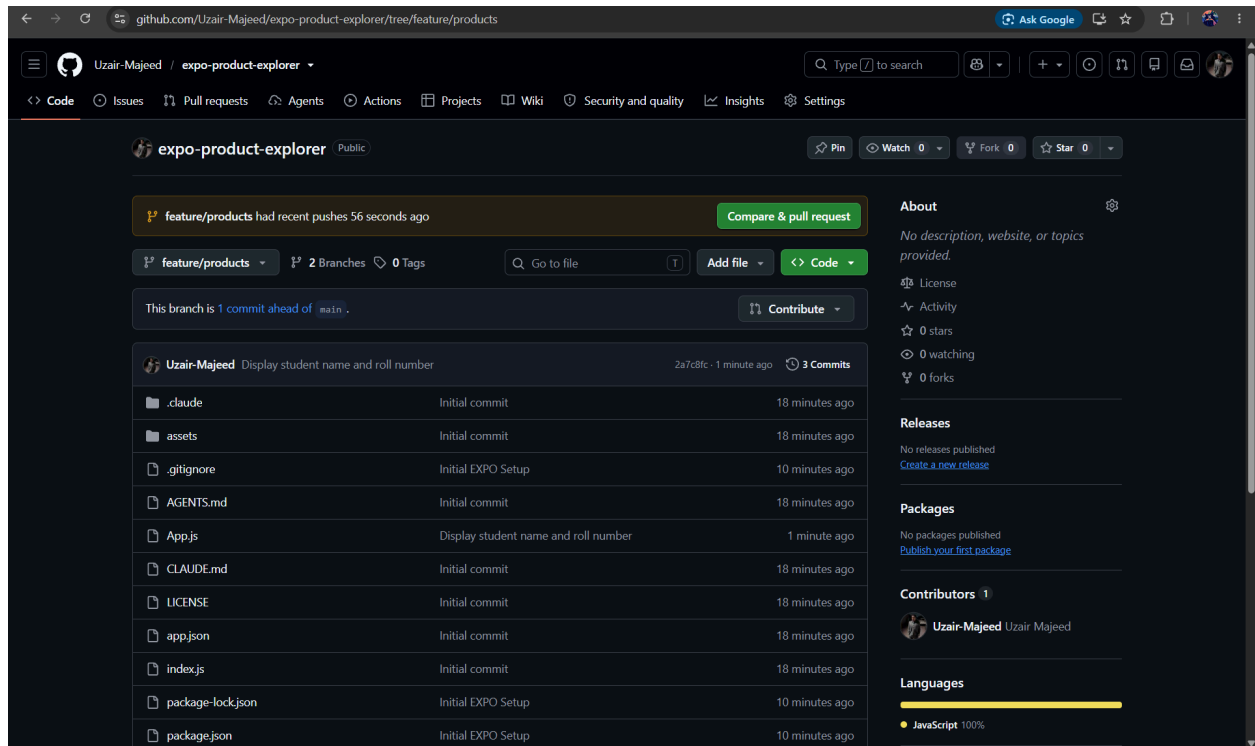


10. Integrate Expo MCP (Search 'Expo MCP' on Google and find official doc)

Connect Expo MCP with Codex and verify that the MCP server is available.

11. Use Expo MCP with Codex/Claude/Gemini

Use Codex with Expo MCP to inspect the project and obtain official Expo guidance for Development.

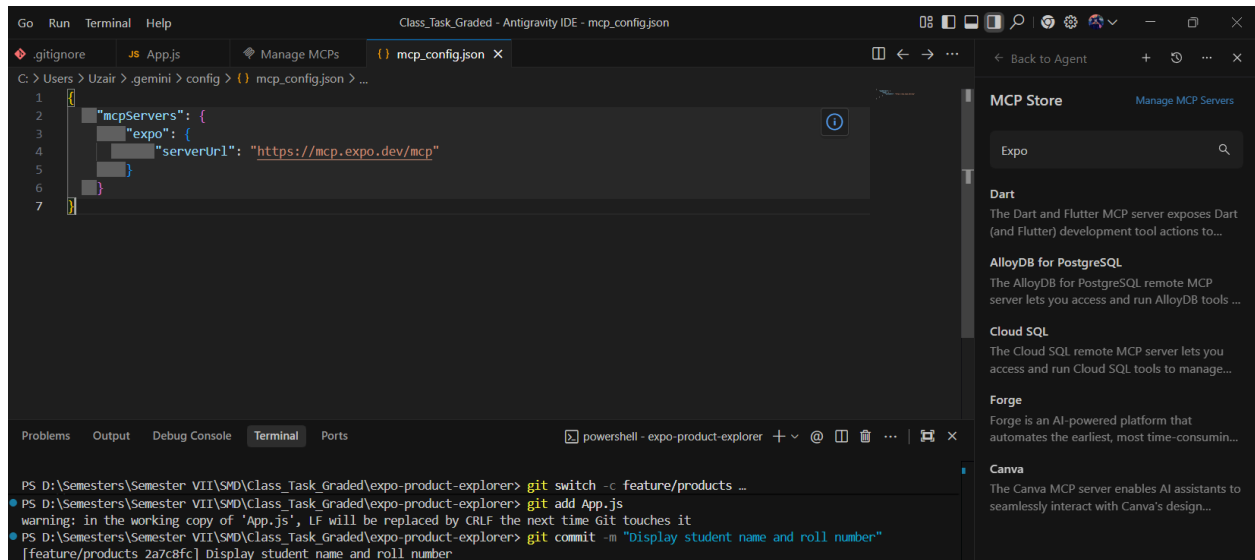

The screenshot displays the 'Manage MCP servers' interface. At the top, it shows '39 tools' and a 'Refresh' button. The 'expo' server is listed with a 'Configure' button and a status of 'Enabled'. Below this, two tasks are shown: '1. add_library' and '2. read_documentation', each with a toggle switch. The 'add_library' task description says: 'Look up an Expo library and return the `expo install` command that adds it, along with usage instructions when available. The command is a suggestion for the user or agent to run; this tool only reads documentation.' The 'read_documentation' task description says: 'Fetch a single Expo documentation page and return its content as markdown. Returns up to ~5000 tokens per call. Use offset to paginate through long pages.'

Below the configuration, a terminal window is open, showing the following commands and output:

```
ers\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git switch -c feature/products ...
ers\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git add App.js
the working copy of 'App.js', LF will be replaced by CRLF the next time git touches it
ers\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git commit -m "Display student name and roll number"
ducts 2a7c8fc] Display student name and roll number
ged, 13 insertions(+), 5 deletions(-)
```

On the right side, the 'MCP Store' is visible, listing various servers: 'Dart', 'AlloyDB for PostgreSQL', 'Cloud SQL', 'Forge', and 'Canva', each with a brief description.

12. Continue Feature Development

Use the MCP-assisted guidance to implement or improve a small feature in the Expo project.

Inspect this Expo project's package.json and its main screen.
Tell me its Expo SDK version and explain its structure.

Worked for 42s ▾

Explored 8 files, 1 folder ▾

Analyzed  package.json #L1-22

Analyzed  App.js #L1-28

Analyzed  d:\Semesters\Seme >

Analyzed  app.json #L1-25

MCP Tool: expo / read_document ▾

Tool arguments

```
json @ 📄  
  
{  
  "url":  
    "https://docs.expo.dev/workflow/web/"  
}
```

Full output written to  output.txt


Analyzed  output.txt #L1-133

Analyzed  index.js #L1-9

Thought for 1s >

13. Commit and Push the Updated Feature

Commit the latest changes and push them to the feature branch.

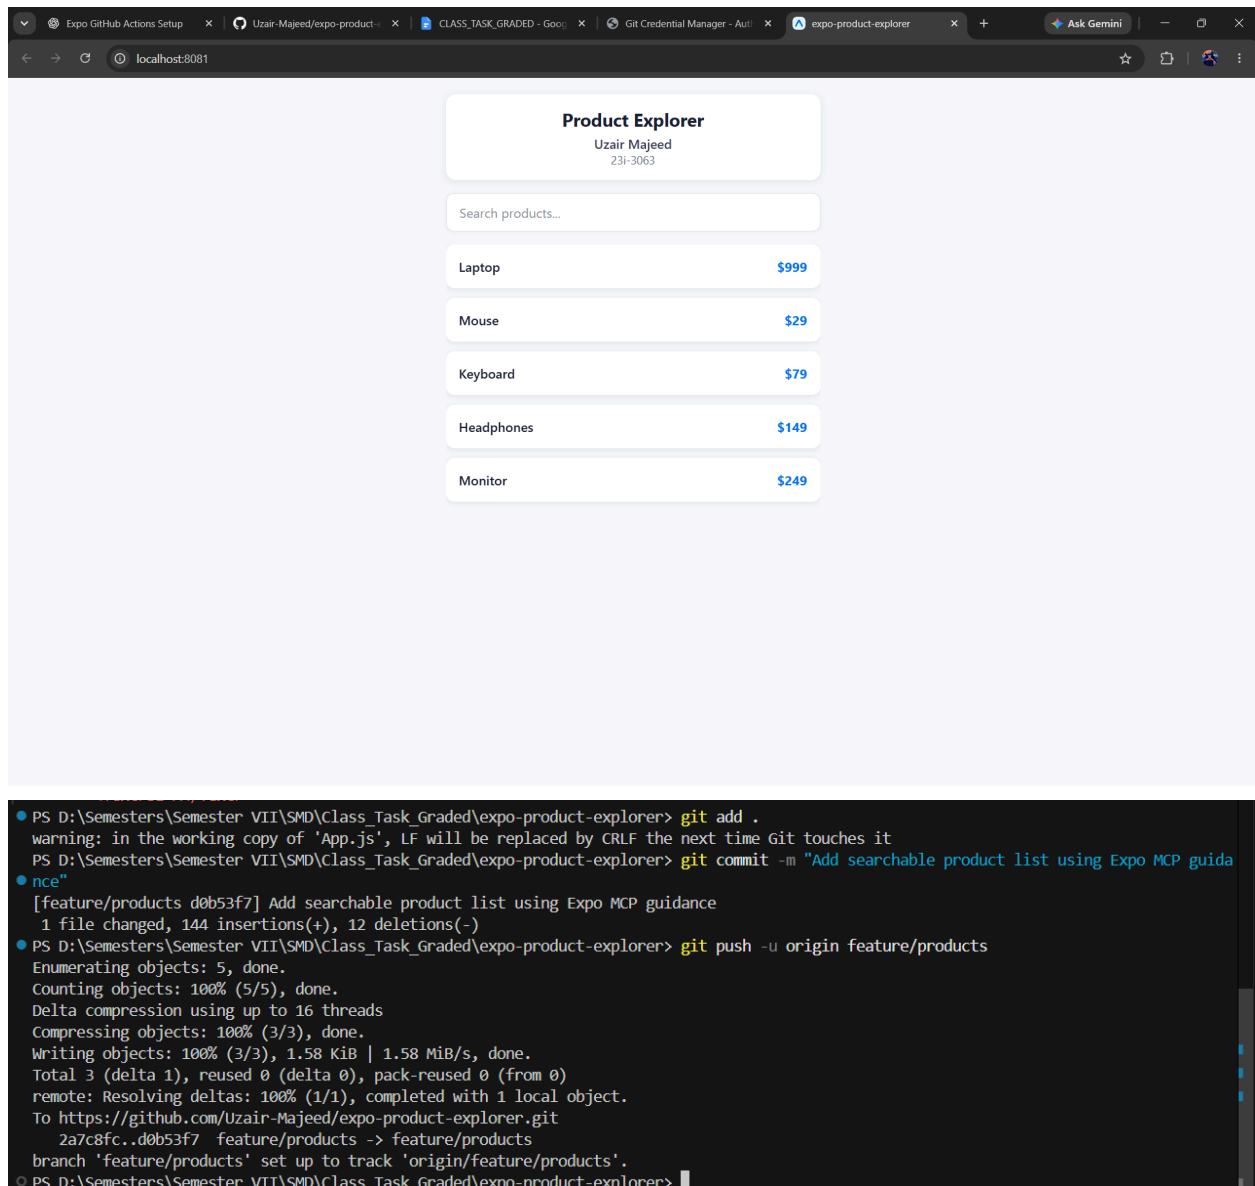

The screenshot displays a web browser window with the 'Product Explorer' application running on localhost:8081. The application shows a search bar and a list of products with their prices. Below the browser, a terminal window shows the execution of Git commands to add, commit, and push the changes to a new feature branch.

Product Explorer
Uzair Majeed
231-3063

Search products...

Laptop	\$999
Mouse	\$29
Keyboard	\$79
Headphones	\$149
Monitor	\$249

```
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git add .
warning: in the working copy of 'App.js', LF will be replaced by CRLF the next time Git touches it
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git commit -m "Add searchable product list using Expo MCP guidance"
[feature/products d0b53f7] Add searchable product list using Expo MCP guidance
 1 file changed, 144 insertions(+), 12 deletions(-)
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git push -u origin feature/products
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 16 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 1.58 KiB | 1.58 MiB/s, done.
Total 3 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/Uzair-Majeed/expo-product-explorer.git
 2a7c8fc..d0b53f7 feature/products -> feature/products
branch 'feature/products' set up to track 'origin/feature/products'.
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer>
```

14. Create a Pull Request

Create a Pull Request from feature/products into main and review the changes.

Expo GitHub Actions Setup x Comparing main...feature/pro... CLASS_TASK_GRADED - Goo... Git Credential Manager - Aut... expo-product-explorer x + Ask Gemini

github.com/Uzair-Majeed/expo-product-explorer/compare/main...feature/products

Uzair-Majeed / expo-product-explorer

Code Issues Pull requests Agents Actions Projects Wiki Security and quality Insights Settings

Comparing changes

Choose two branches to see what's changed or to start a new pull request. If you need to, you can also [compare across forks](#) or [learn more about diff comparisons](#).

base: main compare: feature/products ✓ Able to merge. These branches can be automatically merged.

Discuss and review the changes in this comparison with others. [Learn about pull requests](#) Create pull request

2 commits 1 file changed 1 contributor

Commits on Oct 1, 2026

Display student name and roll number
Uzair-Majeed committed 9 hours ago 2a7c8fc

Add searchable product list using Expo MCP guidance
Uzair-Majeed committed 1 minute ago d8b53f7

Showing 1 changed file with 149 additions and 9 deletions. Split Unified

```
App.js
1 - import { StatusBar } from 'expo-status-bar';
2 - import { StyleSheet, Text, View } from 'react-native';
+ import { useState } from 'react';
+ import { StyleSheet, Text, View, TextInput, FlatList, SafeAreaView } from 'react-native';
+
+ // 1. Static dataset of 5 products with id, name, and price
+ const PRODUCTS = [
+   { id: '1', name: 'Laptop', price: 999 },
```

Expo GitHub Actions Setup x Add product search feature. #1 CLASS_TASK_GRADED - Goo... Git Credential Manager - Aut... expo-product-explorer x + Ask Gemini

github.com/Uzair-Majeed/expo-product-explorer/pull/1

Uzair-Majeed / expo-product-explorer

Code Issues Pull requests Agents Actions Projects Wiki Security and quality Insights Settings

Add product search feature. #1

Open Uzair-Majeed wants to merge 2 commits into main from feature/products

Conversation 0 Commits 2 Checks 0 Files changed 1 +149 -9

Uzair-Majeed commented now Owner

No description provided.

Uzair-Majeed added 2 commits 9 hours ago

- Display student name and roll number 2a7c8fc
- Add searchable product list using Expo MCP guidance d8b53f7

Checking for the ability to merge automatically...
Hang in there while we check the branch's status.

Merge pull request You can also merge this with the command line. [View command line instructions.](#) Still in progress? Convert to draft

Add a comment

Write Preview H B I E < > Link Code Diff Commit Cancel

Reviewers
No reviews
[Still in progress? Convert to draft](#)

Assignees
No one—[assign yourself](#)

Labels
None yet

Projects
None yet

Milestone
No milestone

Development
Successfully merging this pull request may close these issues.
None yet

Notifications Customize Unsubscribe

15. Add GitHub Actions (Create a yml file in it)

Create an Expo CI workflow that automatically checks the project.

```
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> npm run lint

> expo-product-explorer@1.0.0 lint
> expo lint

PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> npx expo install --check
Dependencies are up to date

PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> npm run build:web

> expo-product-explorer@1.0.0 build:web
> expo export --platform web

Starting Metro Bundler

Web Bundled 1181ms index.js (180 modules)

> web bundles (1):
  _expo/static/js/web/index-353a56030436c7cb4072a3bdb7b53c80.js (416KB)

> Files (3):
  favicon.ico (15KB)
  index.html (1.2KB)
  metadata.json (49B)

Exported: dist
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer>
```

```
.gitignore  JS App.js  expo-ci.yml U X  Manage MCPs  mcp_config.json  Exp
expo-product-explorer > .github > workflows > Y expo-ci.yml
1  name: Expo CI
2
3  on:
4    push:
5      branches:
6        - main
7        - feature/products
8        - ci/**
9    pull_request:
10     branches:
11       - main
12    workflow_dispatch:
13
14  permissions:
15    contents: read
16
17  jobs:
18    checks:
19      name: Expo checks
20      runs-on: ubuntu-latest
21
22      env:
23        CI: "1"
24
25      steps:
26        - name: Checkout repository
27          uses: actions/checkout@v7
28
29        - name: Set up Node.js
30          uses: actions/setup-node@v7
31          with:
32            node-version: "24"
33            cache: npm
34
35        - name: Install dependencies
36          run: npm ci
37
38        - name: Lint
39          Debug Console (Ctrl+Shift+Y)
```

16. Push the Workflow

Commit the GitHub Actions workflow and push it to GitHub.

The screenshot shows a VS Code editor with a file named `expo-ci.yml` open. The file contains a GitHub Actions workflow configuration. The terminal window at the bottom shows the execution of `git add`, `git commit`, and `git push` commands, along with their output.


```
expo-product-explorer > .github > workflows > Y expo-ci.yml
1  name: Expo CI
2
3  on:
4    push:
5      branches:
6        - main
7        - feature/products
8        - ci/**
9    pull_request:
10     branches:
11     - main
```

Terminal Output:

```
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git add .
warning: in the working copy of 'package-lock.json', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'package.json', LF will be replaced by CRLF the next time Git touches it
warning: in the working copy of 'eslint.config.js', LF will be replaced by CRLF the next time Git touches it
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git commit -m "Add Expo CI workflow"
[feature/products 5ee08c2] Add Expo CI workflow
4 files changed, 5391 insertions(+), 1274 deletions(-)
create mode 100644 .github/workflows/expo-ci.yml
create mode 100644 eslint.config.js
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git push
Enumerating objects: 11, done.
Counting objects: 100% (11/11), done.
Delta compression using up to 16 threads
Compressing objects: 100% (6/6), done.
Writing objects: 100% (8/8), 31.88 KiB | 2.66 MiB/s, done.
Total 8 (delta 3), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (3/3), completed with 3 local objects.
To https://github.com/Uzair-Majeed/expo-product-explorer.git
d0b53f7..5ee08c2 feature/products -> feature/products
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer>
```


17. Observe the CI Workflow


Open GitHub Actions and verify that the workflow runs successfully.

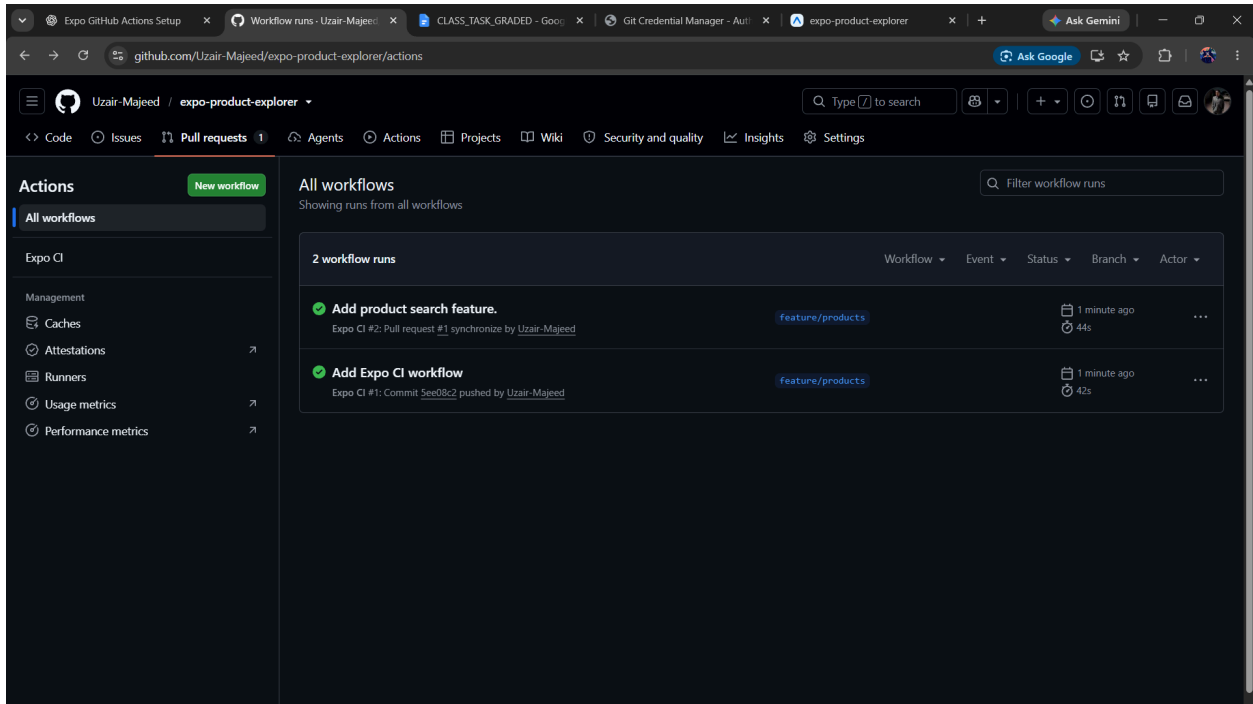

18. Review and Merge the Pull Request

Confirm that the required checks pass, then merge the Pull Request into main.

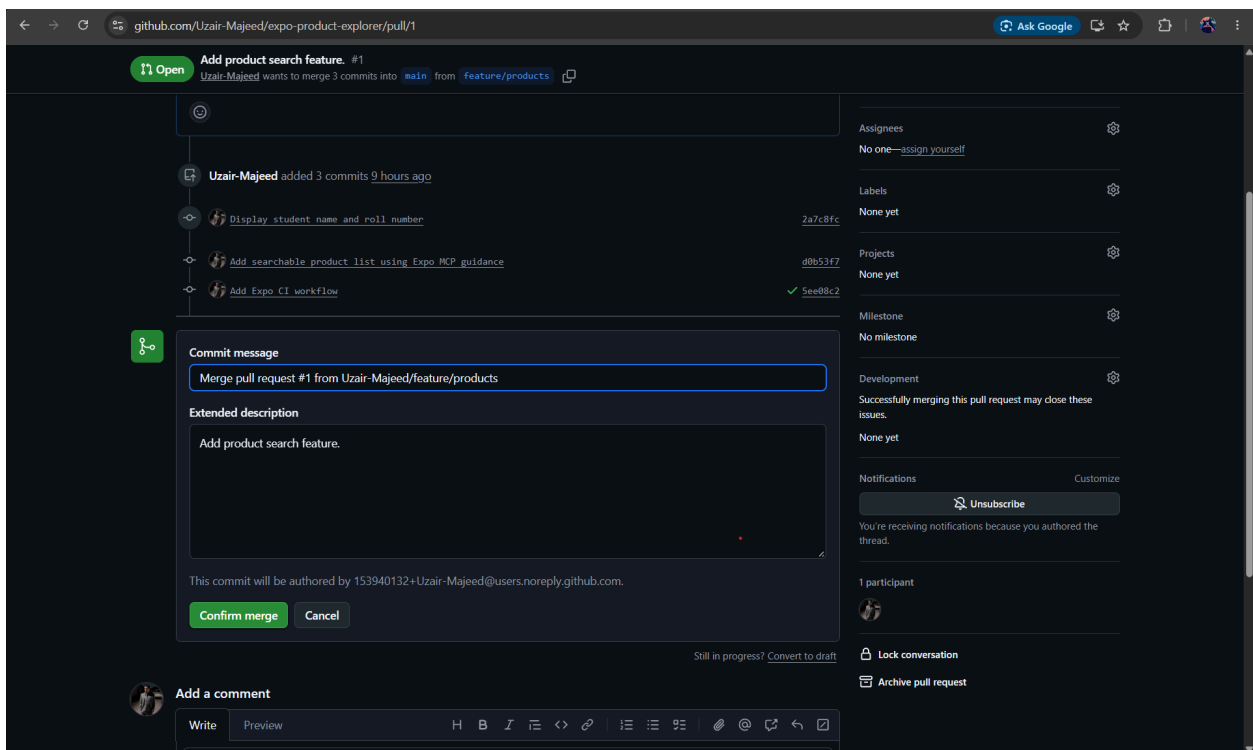

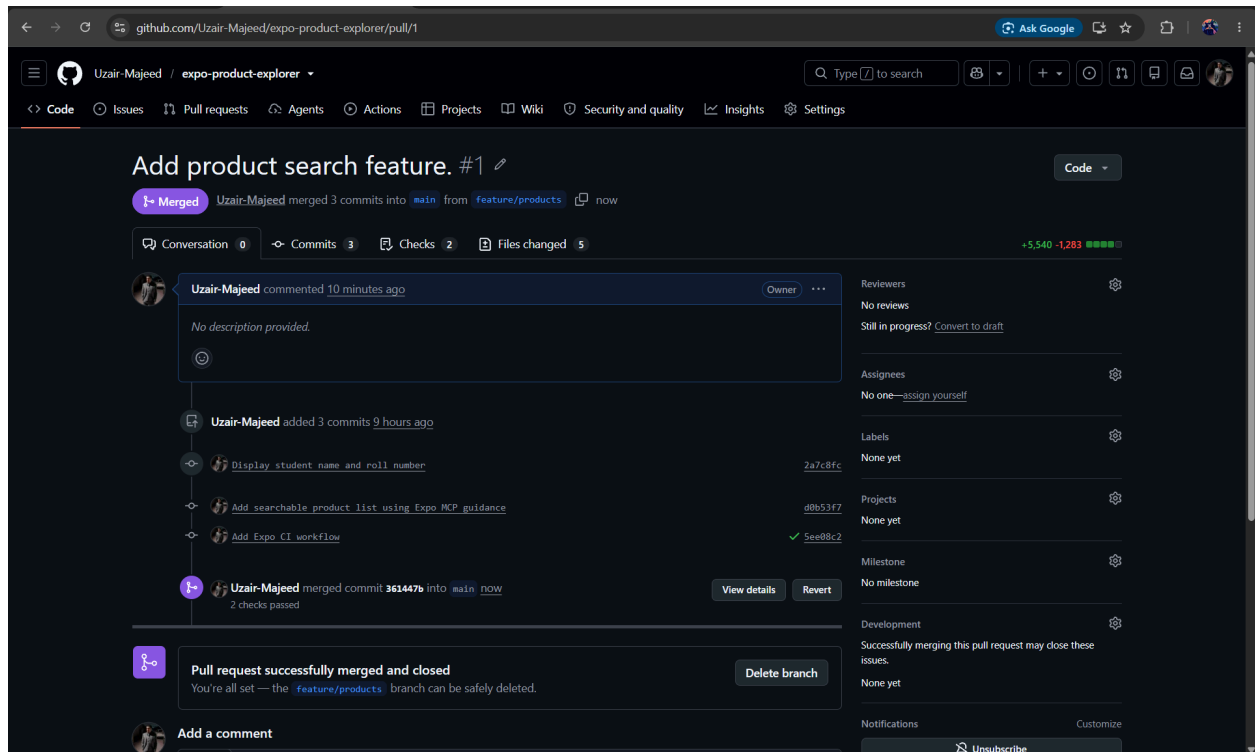

19. Break the Pipeline

Introduce a controlled error and observe the GitHub Actions failure.

```

Problems Output Debug Console Terminal Ports
powershell - expo-product-explorer

PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git switch main
Switched to branch 'main'
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git pull origin main
remote: Enumerating objects: 1, done.
remote: Counting objects: 100% (1/1), done.
remote: Total 1 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (1/1), 914 bytes | 43.00 KiB/s, done.
From https://github.com/Uzair-Majeed/expo-product-explorer
* branch main -> FETCH_HEAD
802377c..361447b main -> origin/main
Updating 802377c..361447b
Fast-forward
 .github/workflows/expo-ci.yml | 45 +
 App.js                       | 158 +-
 eslint.config.js             | 10 +
 package-lock.json            | 6600 ++++++
 package.json                 | 10 +-
 5 files changed, 5540 insertions(+), 1283 deletions(-)
 create mode 100644 .github/workflows/expo-ci.yml
 create mode 100644 eslint.config.js
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git switch -c ci/break-pipeline
Switched to a new branch 'ci/break-pipeline'
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer>

```

The image shows a VS Code editor with a file named `expo-product-explorer.js`. The code is a React Native application. A red arrow points to a syntax error on line 13: `const broken = ;`. The terminal window shows the following output:

```
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git commit -m "Introduce syntax error for CI demonstration"
[ci/break-pipeline 31fd97e] Introduce syntax error for CI demonstration
1 file changed, 2 insertions(+)
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git push git push -u origin ci/break-pipeline
error: src refspec push does not match any
error: src refspec origin does not match any
error: failed to push some refs to 'git'
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer> git push -u origin ci/break-pipeline
Enumerating objects: 5, done.
Counting objects: 100% (5/5), done.
Delta compression using up to 16 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (3/3), 338 bytes | 338.00 KiB/s, done.
Total 3 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), completed with 2 local objects.
remote:
remote: Create a pull request for 'ci/break-pipeline' on GitHub by visiting:
remote:   https://github.com/Uzair-Majeed/expo-product-explorer/pull/new/ci/break-pipeline
remote:
To https://github.com/Uzair-Majeed/expo-product-explorer.git
 * [new branch]    ci/break-pipeline -> ci/break-pipeline
branch 'ci/break-pipeline' set up to track 'origin/ci/break-pipeline'.
PS D:\Semesters\Semester VII\SMD\Class_Task_Graded\expo-product-explorer>
```

20. Diagnose the Failure

Identify the failed step, inspect the logs, and use Expo MCP with Codex when Expo-related guidance is needed.

github.com/Uzair-Majeed/expo-product-explorer/actions/runs/36898011432

Uzair-Majeed / expo-product-explorer

Code Issues Pull requests Agents Actions Projects Wiki Security and quality Insights Settings

Expo CI

Introduce syntax error for CI demonstration #4

Re-run jobs

Summary

All jobs

Expo checks

Run details

Usage

Workflow file

Triggered via push now

Uzair-Majeed pushed -o 31f697e cl/break-pipeline

Status Failure

Total duration 19s

Artifacts -

expo-ci.yml

on: push

Expo checks 17s

Annotations

2 errors, 2 warnings, and 1 notice

Expo checks

Process completed with exit code 1.

Expo checks: index.js#L3

Parse errors in imported module './App': Unexpected token ; (13:16)

Expo checks: index.js#L3

Parse errors in imported module './App': Unexpected token ; (13:16)

Expo checks: index.js#L3

Expo checks

failed now in 17s

Search logs

Explain error

Checkout repository 1s

Set up Node.js 2s

Install dependencies 9s

Lint 2s

```
1 ▶ Run npm run lint
6
7 > expo-product-explorer@1.0.0 lint
8 > expo lint
9
10
11 /home/runner/work/expo-product-explorer/expo-product-explorer/App.js
12 13:16 error Parsing error: Unexpected token ;
13
14 /home/runner/work/expo-product-explorer/expo-product-explorer/index.js
15 Error: 3:17 error Parse errors in imported module './App': Unexpected token ; (13:16) import/namespace
16 Warning: 3:17 warning Parse errors in imported module './App': Unexpected token ; (13:16) import/no-named-as-default
17 Warning: 3:17 warning Parse errors in imported module './App': Unexpected token ; (13:16) import/no-named-as-default-member
18
19 ✖ 4 problems (2 errors, 2 warnings)
20
21 Error: Process completed with exit code 1.
```

Check Expo dependencies 0s

Build web app 0s

Post Set up Node.js 0s

Post Checkout repository 1s

Complete job 0s

21. Fix and Verify

Fix the problem, push the correction, and confirm that the workflow passes again.

Here is the failed GitHub Actions log:

Run npm run lint

> expo-product-explorer@1.0.0 lint

> expo lint

/home/runner/work/expo-product-explorer/expo-product-explorer/App.js
13:16 error Parsing error: Unexpected token ;

/home/runner/work/expo-product-explorer/expo-product-explorer/index.js
Error: 3:17 error Parse errors in imported module './App': Unexpected token ; (13:16) import/namespace
Warning: 3:17 warning ^
imported module './App'

10:17 PM





Exploring 1 file ▾

Thought for 1s >

Analyzed **JS App.js** #L1-25

Working...

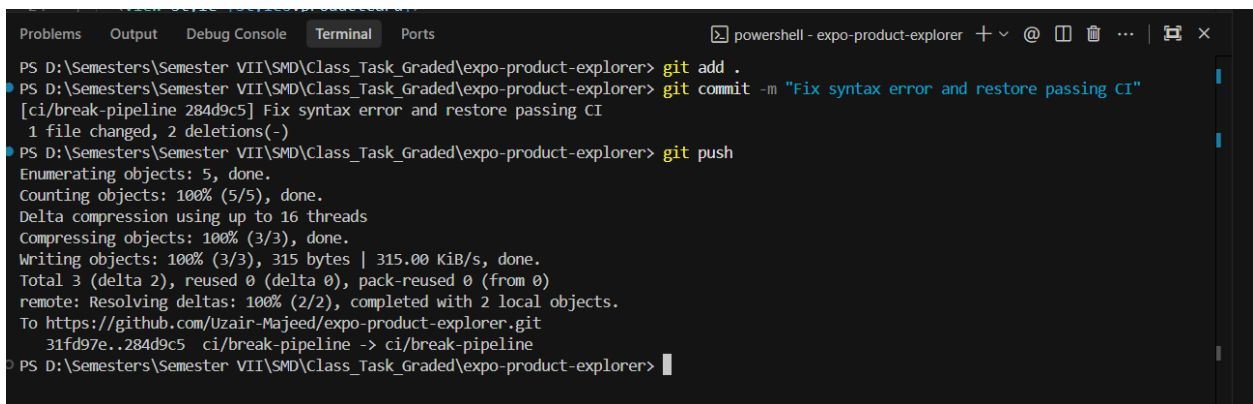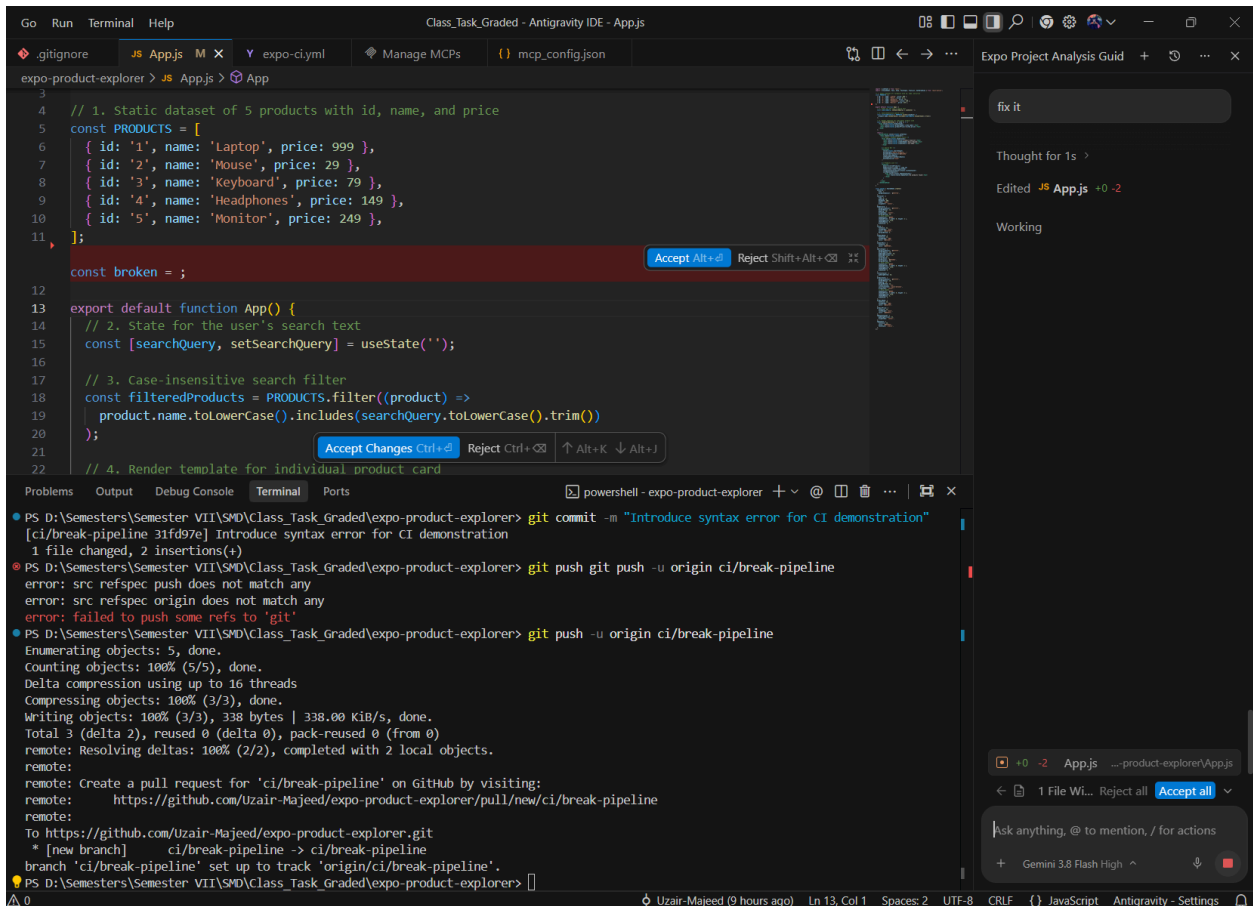

The screenshot shows the GitHub Actions interface for the 'Expo CI' workflow. The left sidebar contains the 'Actions' tab with a 'New workflow' button and a list of management tools: Caches, Attestations, Runners, Usage metrics, and Performance metrics. The main area displays the 'Expo CI' workflow with a search bar and a 'Filter workflow runs' button. Below this, it shows '5 workflow runs' with a table of recent runs. The table includes columns for status (green checkmark for success, red X for failure), title, commit hash, branch, and time taken. The runs are as follows:

Status	Title	Commit	Branch	Time
Success	Fix syntax error and restore passing CI	284d9c5	ci/break-pipeline	1 minute ago
Failure	Introduce syntax error for CI demonstration	31fd97e	ci/break-pipeline	4 minutes ago
Success	Merge pull request #1 from Uzair-Majeed/feature/products	361447b	main	7 minutes ago
Success	Add product search feature.	Pull request #1	feature/products	9 minutes ago
Success	Add Expo CI workflow	5ee08c2	feature/products	9 minutes ago

Final Flow

Expo Project → Git → GitHub → Feature Branch → Expo MCP + Codex → Pull Request → GitHub Actions → Review → Merge