

④ JQuery

1. Setting up JQuery

In HTML - above Java Script line

```
<script src = "https://code.jquery.com/jquery -3.1.js"></script>
```

go to jquery download → copy link address

In Js -

```
$(document).ready(function() {  
    target  
})
```

unnamed function.

all jquery statement starts with '\$' sign.

2. Targeting elements

In Js → document.getElementById("text").innerHTML = "this is now my text";

In JQuery →
\$("#text").html("this is the text");
\$("#lg-input").val("This is the value");
\$("p").html("I don't need this para");

Output -

This is the value

or

This is the text

I don't need this para

2. Event Handling

```
$(document).ready(function() {  
    var el = document.getElementById('text');  
    console.log("this is an el", el);  
    console.log("this is an jquery el", $el);  
});
```

(i) Click event

In Js

```
document.getElementById("go-button").addEventListener('click', clicked);  
  
function clicked() {  
    console.log("the button is clicked");  
}
```

In JQuery

```
$('#go-button').on('click', function() {  
    alert("The button is clicked");  
});
```

(ii) Hover

```
$('#go-button').hover(function() {  
    alert("I hovered upon my button");  
});
```

(iii) Mouseenter

```
$('#go-button').on('mouseenter', function() {  
    alert("The button has mouse on it");  
});
```

5 Dropdown menu

In HTML -

```
<div class = "dropdown">
```

```
<button class = "dropdown-btn" > DROPDOWN
```

```
</button>
```

```
<div class = "dropdown-menu">
```

```
<ul>
```

```
<li><a href = "#">Listed Item1
```

```
</a> </li>
```

```
<li><a href = "#">Listed Item2
```

```
</a> </li>
```

```
<li><a href = "#">Listed Item3
```

```
</a> </li>
```

```
<li><a href = "#">Listed Item4
```

```
</a> </li>
```

```
</ul>
```

```
</div>
```

```
</div>
```

In CSS -

Apply some styling -

```
.dropdown-menu {
```

```
display : none;
```

```
}
```

```
.dropdown-menu.active {
```

```
display : block
```

```
}
```


In JS -

```
$('.dropdown-btn').on('click', function() {  
    var submenu = $(this).parent().find('dropdown-menu');  
    submenu.addClass('active');  
})
```

```
$('.dropdown').on('mouseleave', function() {  
    $(this).find('dropdown-menu').removeClass('active');  
})
```

Better way to write this -

```
$('.dropdown-btn').on('click', function() {  
    var submenu = $(this).parent().find('dropdown-menu');  
    submenu.toggleClass('active');  
})
```

for appear and disappear

```
document  
$('.dropdown').on('click', function(e) {  
    if (!$(e.target).closest('dropdown').length) {  
        $('.dropdown-menu').removeClass('active');  
    }  
})
```

puts clicked element in j, object

checks whether the element that was clicked (e.target) is inside the element with the class 'dropdown'

code to filter search-bar

JavaScript -

`const searchInput = document.getElementById('search')[0];` *variable where the searched content is stored*

for storing all the card item `const cards = document.querySelectorAll('.card');`

lower case mein change karta hai sabko `searchInput.addEventListener('input', () => {
const query = searchInput.value.toLowerCase();`

retrieves data-name and converts it into lower case `cards.forEach(card => {
const countryName = card.getAttribute('data-name').toLowerCase();`

if it includes then `if (countryName.includes(query)) {
card.style.display = 'flex';
}
else {
card.style.display = 'none';
}
}`

`});`

`});`

`});`

code to get full screen

`$('#top2').on('click', function() {
this.requestFullscreen().catch(e) => {
console.log(e);
}` *function if any error occurs*

`});`

6 Multiple targets, events, and attr method

In HTML -

```
<button class="append"> Append </button>
<button class="prepend"> Prepend </button>
<button class="replace"> Replace </button>

<section id="main">
  <p> Lorem so </p>
</section>
```

In Js -

```
$( '#prepend, .append, .replace' ).on( 'click', function  
  (e) {
```


event ←

```
    var el = $( e.currentTarget );
    var action = el.attr( 'class' );
    var content = $( '#my-textArea' ).val();
    if ( action == "prepend" ) {
      console.log( "prepending" );
      $( '#main' ).prepend( content + "<br/>" );
    }
```

```
    else if ( action == "append" ) {
      console.log( "appending" );
      $( '#main' ).append( content + "<br/>" );
    }
    else if ( action == "replace" ) {
      console.log( "replacing" );
      $( '#main' ).html( content );
    }
```

```
  }
  $( '#my-textArea' ).val( '' );
}
```

Output -

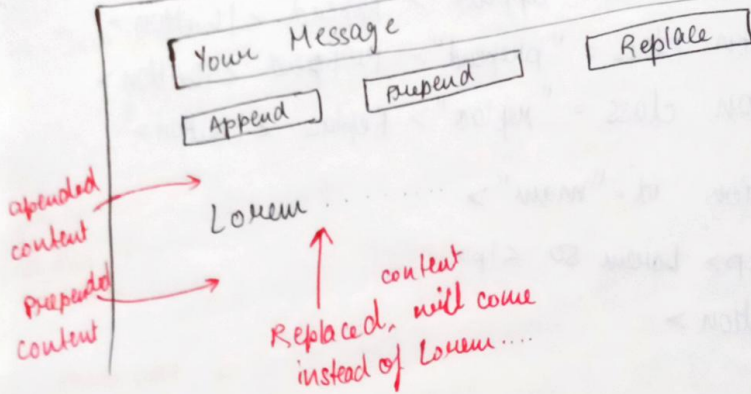

1 Preventing default html behaviour
Method 1 - using prevent default

```
$ ('[href = "https://google.com"]').on('click', function (e) {
```

```
    console.log("google");  
    e.preventDefault();
```

```
});
```

Output -

When you click the link it will do nothing but just display google in console.

Method 2 - Using return false

```
$ ('[href = "https://google.com"]').on('click', function (e) {
```

```
    console.log("google");  
    return false;
```

```
});
```

Same Output

8

event which and switch properties

`$ (document).on ('mousedown', function (e) {`

`e.preventDefault();`

`console.log (e.which);`

// Mouse left button - 1

Mouse Middle button - 2

Mouse Right button - 3 //

`switch (e.which) {`

case 1:

`console.log ("clicked left mouse button");`

`break;`

case 2:

`console.log ("clicked middle mouse button");`

`break;`

case 3:

`console.log ("clicked right mouse button");`

`break;`

`}`

3)

9 Custom context menu, Page X, Page Y

In HTML-

`<div class = "context" >`

`<div class = "context-menu" >`

`<ul >`

`<li> Back </li>`

`<li> Forward </li>`

`<li> Save.. </li>`

`<li> Reload </li>`

`<li> Kuch bhi Kuch bhi </li></ul>`

In CSS -

.context {

float : left;

position : absolute;

width : 200px;

height : 150px;

background : white;

display : none;

}

.context - menu {

padding : 0;

margin : 0;

}

.context - menu ul {

list - style : none;

padding : 0;

margin : 0;

}

.context - menu ul li {

font - weight : bold;

width : 100%;

}

.context - menu ul li : hover {

background : grey;

}

In Js -

```
$(document).on('click', function(e) {  
  if (e.which == 1) {
```

console.log (e.pageX, e.pageY);

\$('#context').css({

top: e.pageY%,

left: e.pageX

});

\$('#context').toggle();

}

3)