

Falcon-512 Verification on Starknet

Implementation Plan, Mathematics, and Optimization

falcon-starknet

July 4, 2026

Abstract

We describe a from-scratch implementation of **Falcon-512** (NIST FN-DSA) signature *verification* for Starknet/Cairo. Signing and key generation use floating-point Gaussian sampling and remain off-chain; only verification—which is integer-only—runs on-chain. We give the mathematics of each stage (modular arithmetic, the negacyclic number-theoretic transform, SHAKE-256 hash-to-point, signature/key decoding, and the norm-bounded acceptance test), the data flow between modules, the code-generation pipeline that emits an unrolled NTT, and the optimization work (lazy modular reduction, the felt-shift trick, and the compiler limits that shape the design). All figures are drawn with TikZ.

Contents

1	Overview and repository layout	2
2	Mathematical preliminaries	2
3	Per-process mathematics	2
3.1	Base ring arithmetic ($\mathbb{Z}_q$)	2
3.2	Negacyclic number-theoretic transform	3
3.3	Hash-to-point and Keccak- $f[1600]$	3
3.4	Key and signature decoding	3
3.5	Verification	4
4	Verification data flow	4
5	Code-generation pipeline	4
6	Optimization	4
6.1	Typed bounds and <code>felt252</code> mode	4
6.2	Lazy reduction and the shift trick	5
6.3	Unrolled vs. looped, and compiler limits	5
6.4	Hash choice	5
7	Measured results	6

1 Overview and repository layout

The system is a vertical of independently validated layers. A Rust *reference* (Pornin’s public-domain `fn-dsa`) generates genuine signatures and known-answer fixtures; a Rust *code generator* emits an unrolled Cairo NTT; and the Cairo *verifier* consumes the fixtures. Figure 1 shows the module dependencies.

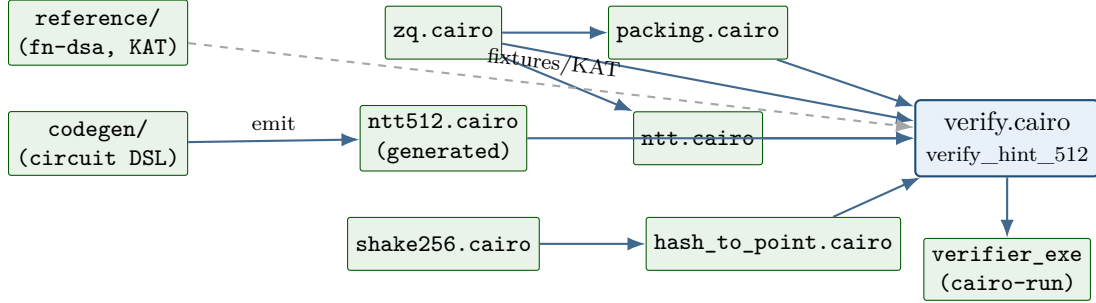


Figure 1: Module dependency flow. Solid: Cairo compile/use edges; dashed: off-chain fixtures. `ntt512.cairo` is emitted by the code generator; `verify.cairo` composes the transform, ring arithmetic, packing, and the norm test.

2 Mathematical preliminaries

Falcon operates over the ring

$$\mathcal{R}_q = \mathbb{Z}_q[x]/(x^n + 1), \quad n = 512, \quad q = 12289 = 3 \cdot 2^{12} + 1.$$

Since $2n = 1024 \mid q - 1$, $\mathcal{R}_q$ admits a length- n negacyclic NTT. A key pair is a short basis of an NTRU lattice; the public key is $h \in \mathcal{R}_q$. A signature of a message m is a pair of short polynomials (s_1, s_2) together with a 40-byte nonce r , satisfying

$$s_1 + s_2 h \equiv c \pmod{q, x^n + 1}, \quad c = \text{HashToPoint}(r \| m) \in \mathcal{R}_q. \quad (1)$$

Verification recomputes c , recovers $s_1 = c - s_2 h$, and accepts iff the pair is short:

$$\|(s_1, s_2)\|^2 = \sum_{i=0}^{n-1} (\langle s_{1,i} \rangle^2 + \langle s_{2,i} \rangle^2) \leq \lfloor \beta^2 \rfloor = 34,034,726, \quad (2)$$

where $\langle x \rangle$ is the *centered* representative, $\langle x \rangle = x$ if $x \leq \lfloor q/2 \rfloor$ and $x - q$ otherwise, so $\langle x \rangle \in [-\lfloor q/2 \rfloor, \lfloor q/2 \rfloor]$.

3 Per-process mathematics

3.1 Base ring arithmetic ($\mathbb{Z}_q$)

Coefficients are elements of $\mathbb{Z}_q$, represented canonically in $[0, q)$. The core operations are

$$\text{add}(a, b) = (a + b) \bmod q, \quad \text{sub}(a, b) = (a + q - b) \bmod q, \quad \text{mul}(a, b) = (a \cdot b) \bmod q.$$

On Cairo we track ranges in the type system, $\mathbb{Z}_q \cong \text{BoundedInt}\langle 0, q-1 \rangle$, so that overflow checks are discharged at compile time (Section 6).

3.2 Negacyclic number-theoretic transform

Let ψ be a primitive $2n$ -th root of unity mod q (so $\psi^n \equiv -1$); we use $\psi = g^{(q-1)/2n}$ with generator $g = 11$. The forward transform is

$$\hat{a}_j = \sum_{i=0}^{n-1} a_i \psi^{i(2j+1)} \pmod{q}, \quad j = 0, \dots, n-1. \quad (3)$$

Equivalently we evaluate the polynomial $a(x)$ at the n roots of $x^n + 1$, namely $\{\psi^{2j+1}\}$. In practice (3) is computed by a Cooley–Tukey decimation with $\zeta_k = \psi^{\text{brv}(k)}$ (bit-reversed powers) in $\log_2 n$ layers of butterflies

$$(u, v) \mapsto (u + \zeta v, u - \zeta v) \pmod{q}. \quad (4)$$

The transform diagonalizes negacyclic convolution: writing $a \circledast b$ for the product in $\mathcal{R}_q$,

$$\text{NTT}(a \circledast b) = \text{NTT}(a) \odot \text{NTT}(b) \quad (\text{pointwise}), \quad (5)$$

which is the identity every verifier variant relies on. The inverse INTT satisfies $\text{INTT}(\text{NTT}(a)) = a$ and carries the n^{-1} scaling.

3.3 Hash-to-point and Keccak- $f[1600]$

FN-DSA fixes the challenge map as a SHAKE-256 extendable-output function. For a raw message with empty context the absorbed string is

$$\text{HashToPoint} : \text{absorb}(r \parallel \text{hpk} \parallel 0\text{x}00 \parallel 0\text{x}00 \parallel m), \quad \text{hpk} = \text{SHAKE256}(pk)_{[0:64]}. \quad (6)$$

The squeeze phase is read as a stream of 16-bit big-endian words w ; each is accepted by rejection sampling

$$w < 5q \Rightarrow \text{coefficient} = w \bmod q, \quad (5q = 61445), \quad (7)$$

until n coefficients are produced. SHAKE-256 is the sponge over the 1600-bit Keccak permutation with rate $r = 1088$ bits and pad byte $0\text{x}1\text{F}$. One permutation is 24 rounds of

$$\theta \rightarrow \rho \rightarrow \pi \rightarrow \chi \rightarrow \iota,$$

operating on a 5×5 array of 64-bit lanes (state Θ absorbs column parities, ρ/π rotate and permute lanes, χ is the nonlinear $a_x \mapsto a_x \oplus (\overline{a_{x+1}} \wedge a_{x+2})$, ι adds a round constant).

3.4 Key and signature decoding

Base- q packing. A polynomial’s n coefficients are packed $K=18$ per felt,

$$\text{felt}_\ell = \sum_{j=0}^{K-1} v_{18\ell+j} q^j, \quad q^{18} \approx 2^{244.5} < 2^{252}, \quad (8)$$

giving $\lceil n/18 \rceil = 29$ felts. Unpacking is repeated division–remainder by q ; canonicity is enforced by requiring the final quotient to vanish (this is the “ pk coefficients $< q$ on read” check).

Compressed signature. Falcon’s “Compress” encodes each s_2 coefficient as a sign bit, 7 low bits, and a unary high part: reading t zero-bits then a one gives magnitude $|c| = (t \ll 7) \vee \text{low}$. Decoding is the inverse bit-reader; a negative zero is rejected.

3.5 Verification

Two equivalent formulations, differing in what the signer supplies.

Direct-NTT. Compute the product on-chain:

$$s_2 h = \text{INTT}(\text{NTT}(s_2) \odot \text{NTT}(h)), \quad s_1 = c - s_2 h, \quad \text{accept iff (2)}. \quad (9)$$

Hint-based. The signer additionally supplies $u = s_2 h$; the verifier checks consistency with two *forward* transforms (no inverse), using (5):

$$\text{NTT}(u) \stackrel{?}{=} \text{NTT}(s_2) \odot \hat{h}, \quad s_1 = c - u, \quad \text{accept iff (2)}. \quad (10)$$

Because (5) holds for *any* valid negacyclic transform, the on-chain NTT need not match the signer’s convention—only be internally consistent.

4 Verification data flow

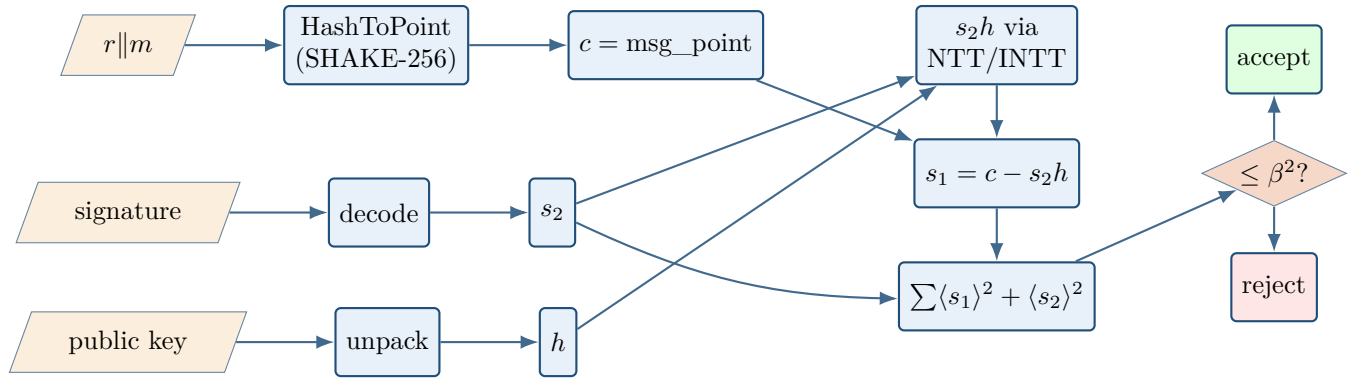


Figure 2: On-chain verification pipeline. Hash-to-point may be precomputed off-chain (FN-DSA interop path), in which case c arrives in the signature payload.

5 Code-generation pipeline

The unrolled NTT is not hand-written: a Rust circuit DSL traces the transform, validates it by replay, and emits Cairo. Figure 3 shows the flow; the same op-trace is checked against an integer reference before emission (the correctness oracle).

6 Optimization

6.1 Typed bounds and `felt252` mode

Representing coefficients as `BoundedInt<0, q-1>` lets the compiler prove the absence of overflow, eliminating runtime range checks. When all intermediates provably stay below 2^{128} , the generator switches to native `felt252` arithmetic and reduces only where necessary—cutting the generated NTT from ~ 41.6 k lines (typed) to ~ 11.3 k.

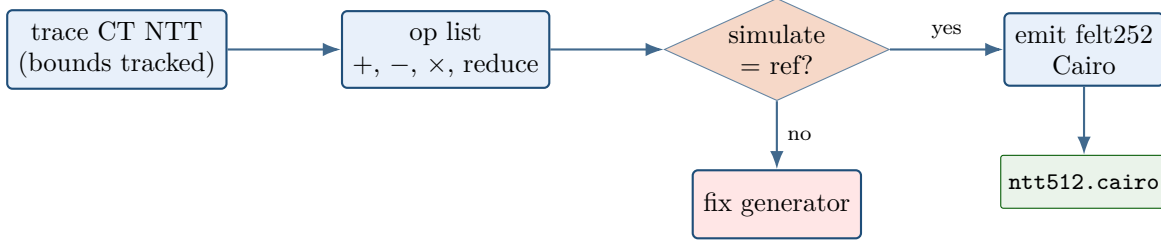


Figure 3: Code generation: bounds-tracking trace $\rightarrow$ simulate oracle $\rightarrow$ emit. The generator is a strongly-typed replacement for a Python DSL and shares constants with the Rust reference.

6.2 Lazy reduction and the shift trick

A butterfly (4) roughly multiplies the magnitude bound by q . After ℓ unreduced layers,

$$|\text{value}| \leq (q - 1) q^\ell. \quad (11)$$

Reducing every 6 layers keeps this below $q^7 \approx 2^{95} < 2^{128}$, so a `felt` value maps faithfully to `u128` and reduction is a single mod q . Subtraction is kept non-negative in the field by adding a shift: for $a - b$ with $b \in [0, B]$,

$$a - b \equiv a + \Delta - b \pmod{q}, \quad \Delta = q \lceil B/q \rceil \geq B, \quad (12)$$

so the emitted expression never underflows into a large field element.

6.3 Unrolled vs. looped, and compiler limits

The fully-unrolled NTT is fast but large; two copies (verify needs two transforms) exceed the Sierra compiler’s per-function offset limit and its statement-count cast bound under the test runner. The mitigations, in order of effect: (i) chunk the transform into per-layer functions; (ii) run the full two-NTT verifier through `scarb cairo-run` (a different compilation path); (iii) for an audit-friendly baseline, use a *looped* NTT—correct and small, but markedly slower. These occupy different points on the cost/compilability frontier.

6.4 Hash choice

Hash-to-point dominates cost. Measured per Keccak- $f[1600]$ permutation in pure Cairo versus the Poseidon builtin:

per permutation	steps	L2 gas
Poseidon (builtin)	~ 36	$\sim 3.9\text{k}$
Keccak- $f[1600]$ (pure Cairo)	$\sim 360,000$	$\sim 50\text{ M}$

Standard SHAKE-256 hash-to-point (~ 10 permutations) is therefore $\sim 3.7\text{ M}$ steps—the reason a Poseidon variant is $\sim 50\times$ cheaper but non-interoperable. A future `keccak_f1600` syscall (SNIP-32) would collapse the gap.

7 Measured results

Component (Falcon-512)	steps	L2 gas
$\mathbb{Z}_q$ op	~ 60	$\sim 40k$
Unrolled NTT-512 (felt252, lazy reduce)	57,005	17.2 M
SHAKE-256 hash-to-point (pure Cairo)	3,727,918	534 M
Hint-based verify (two NTTs + norm, cairo-run)	143,557	—
Direct-NTT verify (looped port)	1,094,283	125.8 M
Norm acceptance bound $\lfloor \beta^2 \rfloor$		34,034,726

The unrolled/hint path fits a transaction budget; the looped/direct path is audit-friendly but exceeds it—quantifying the trade the design must make.