

AT1 | harmony_snn_res.0.7

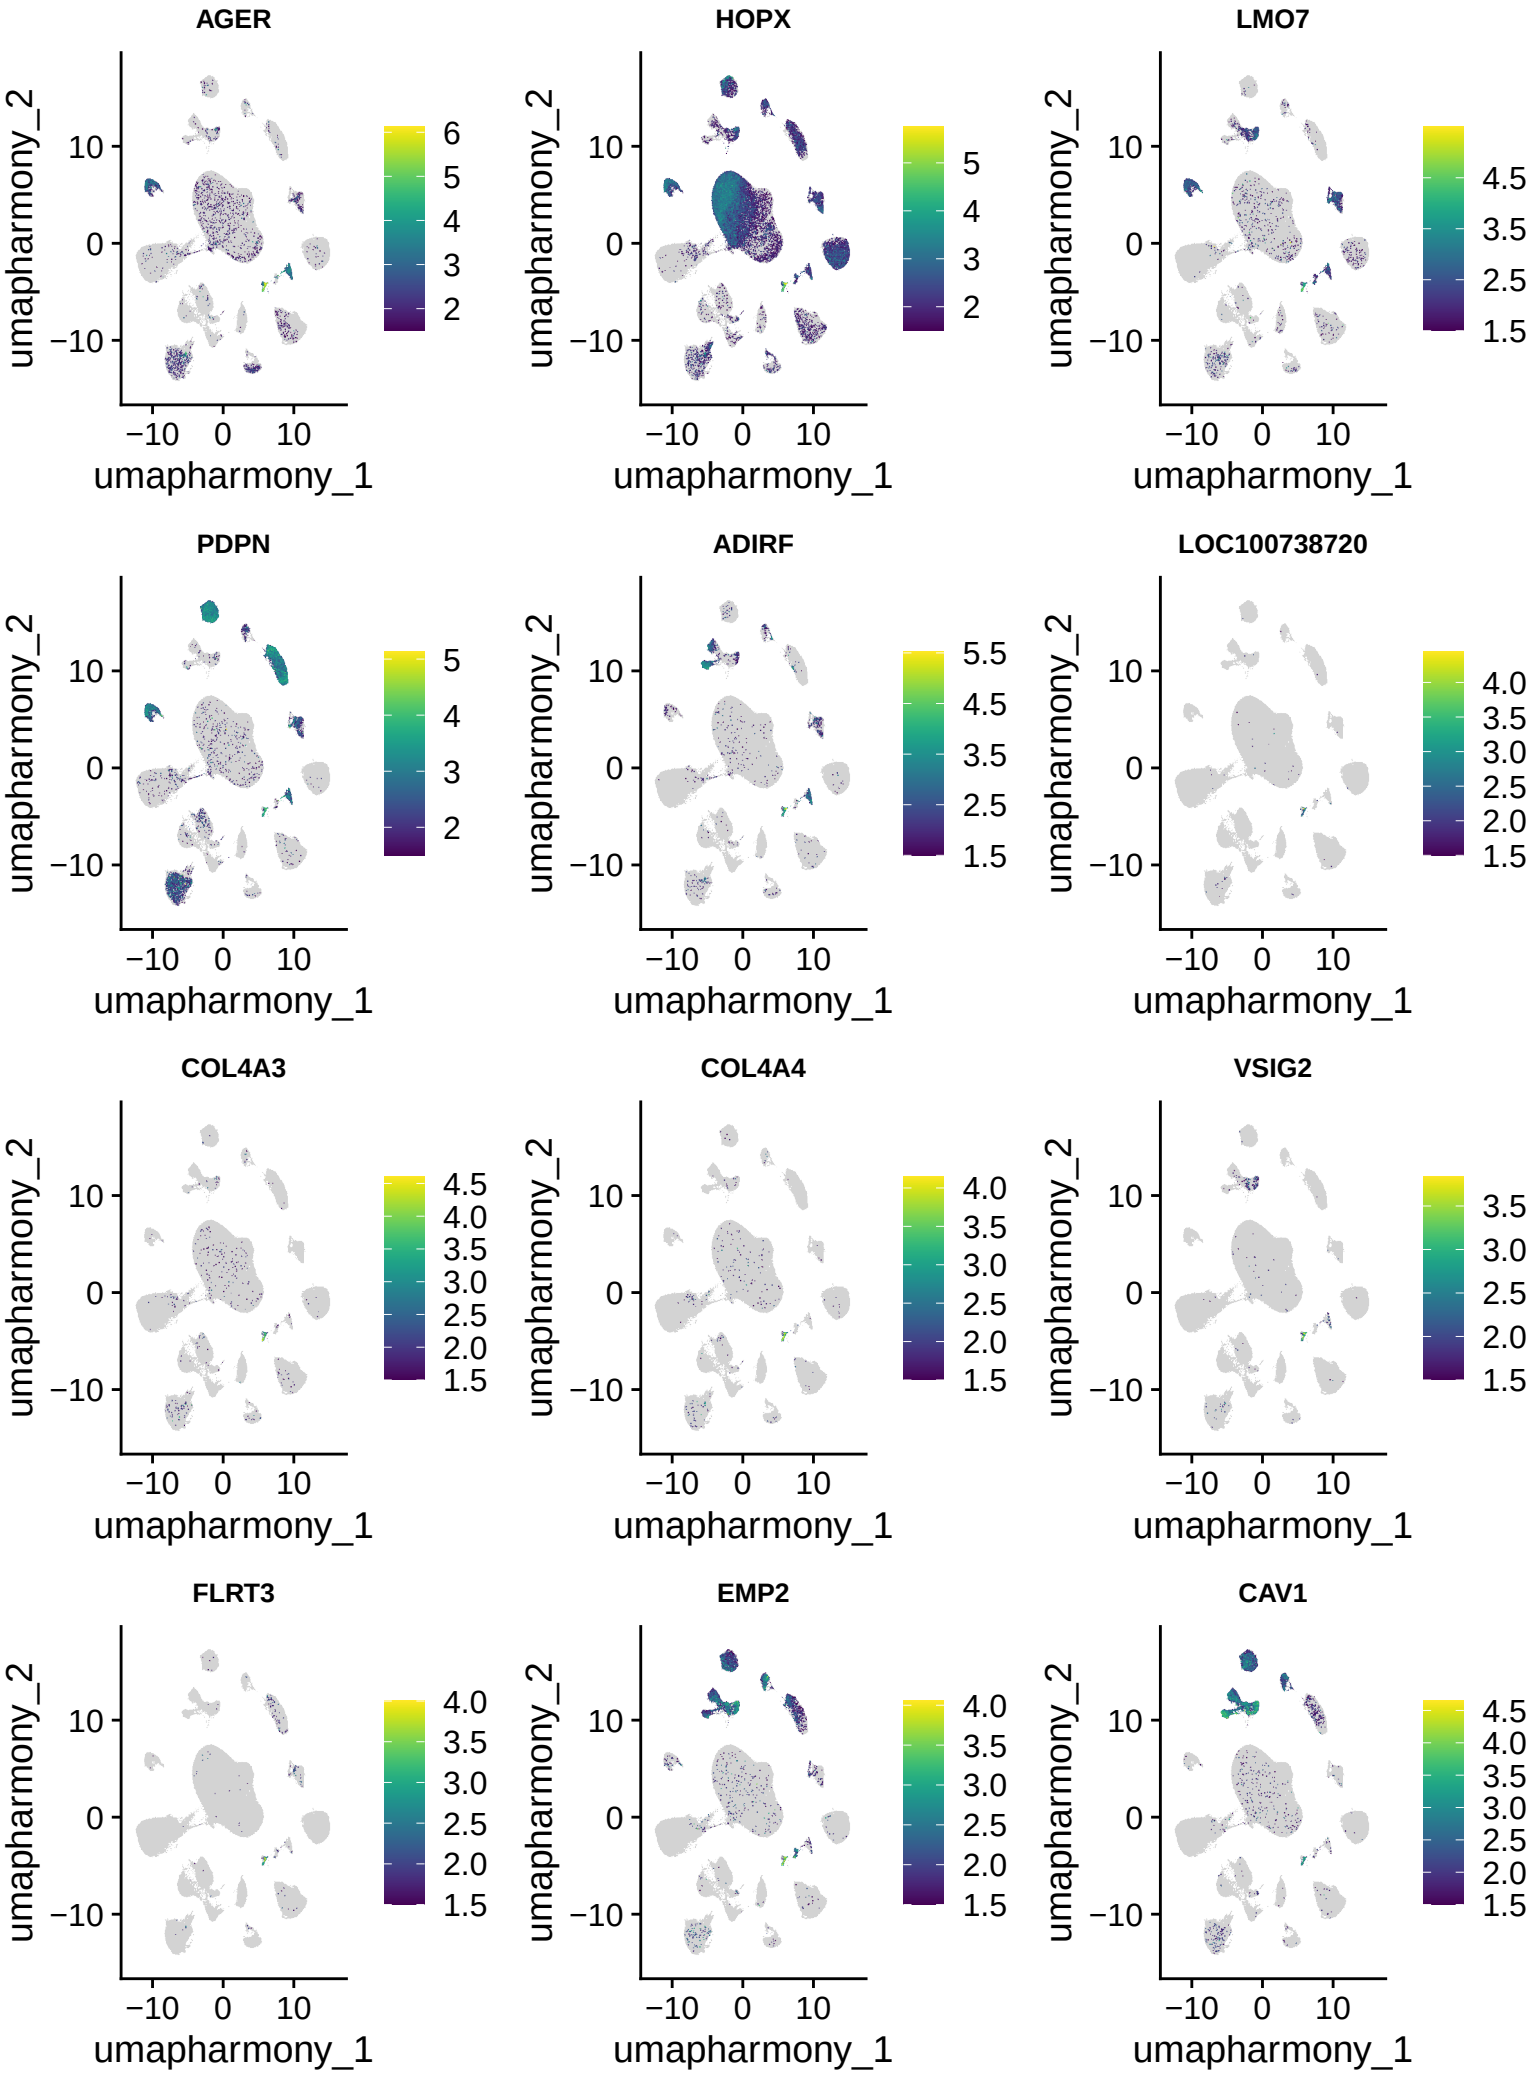


All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, low purple to high yellow.
Expression below 1.5 is grey; grey does not imply absent expression. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

AT1 | harmony_snn_res.0.7

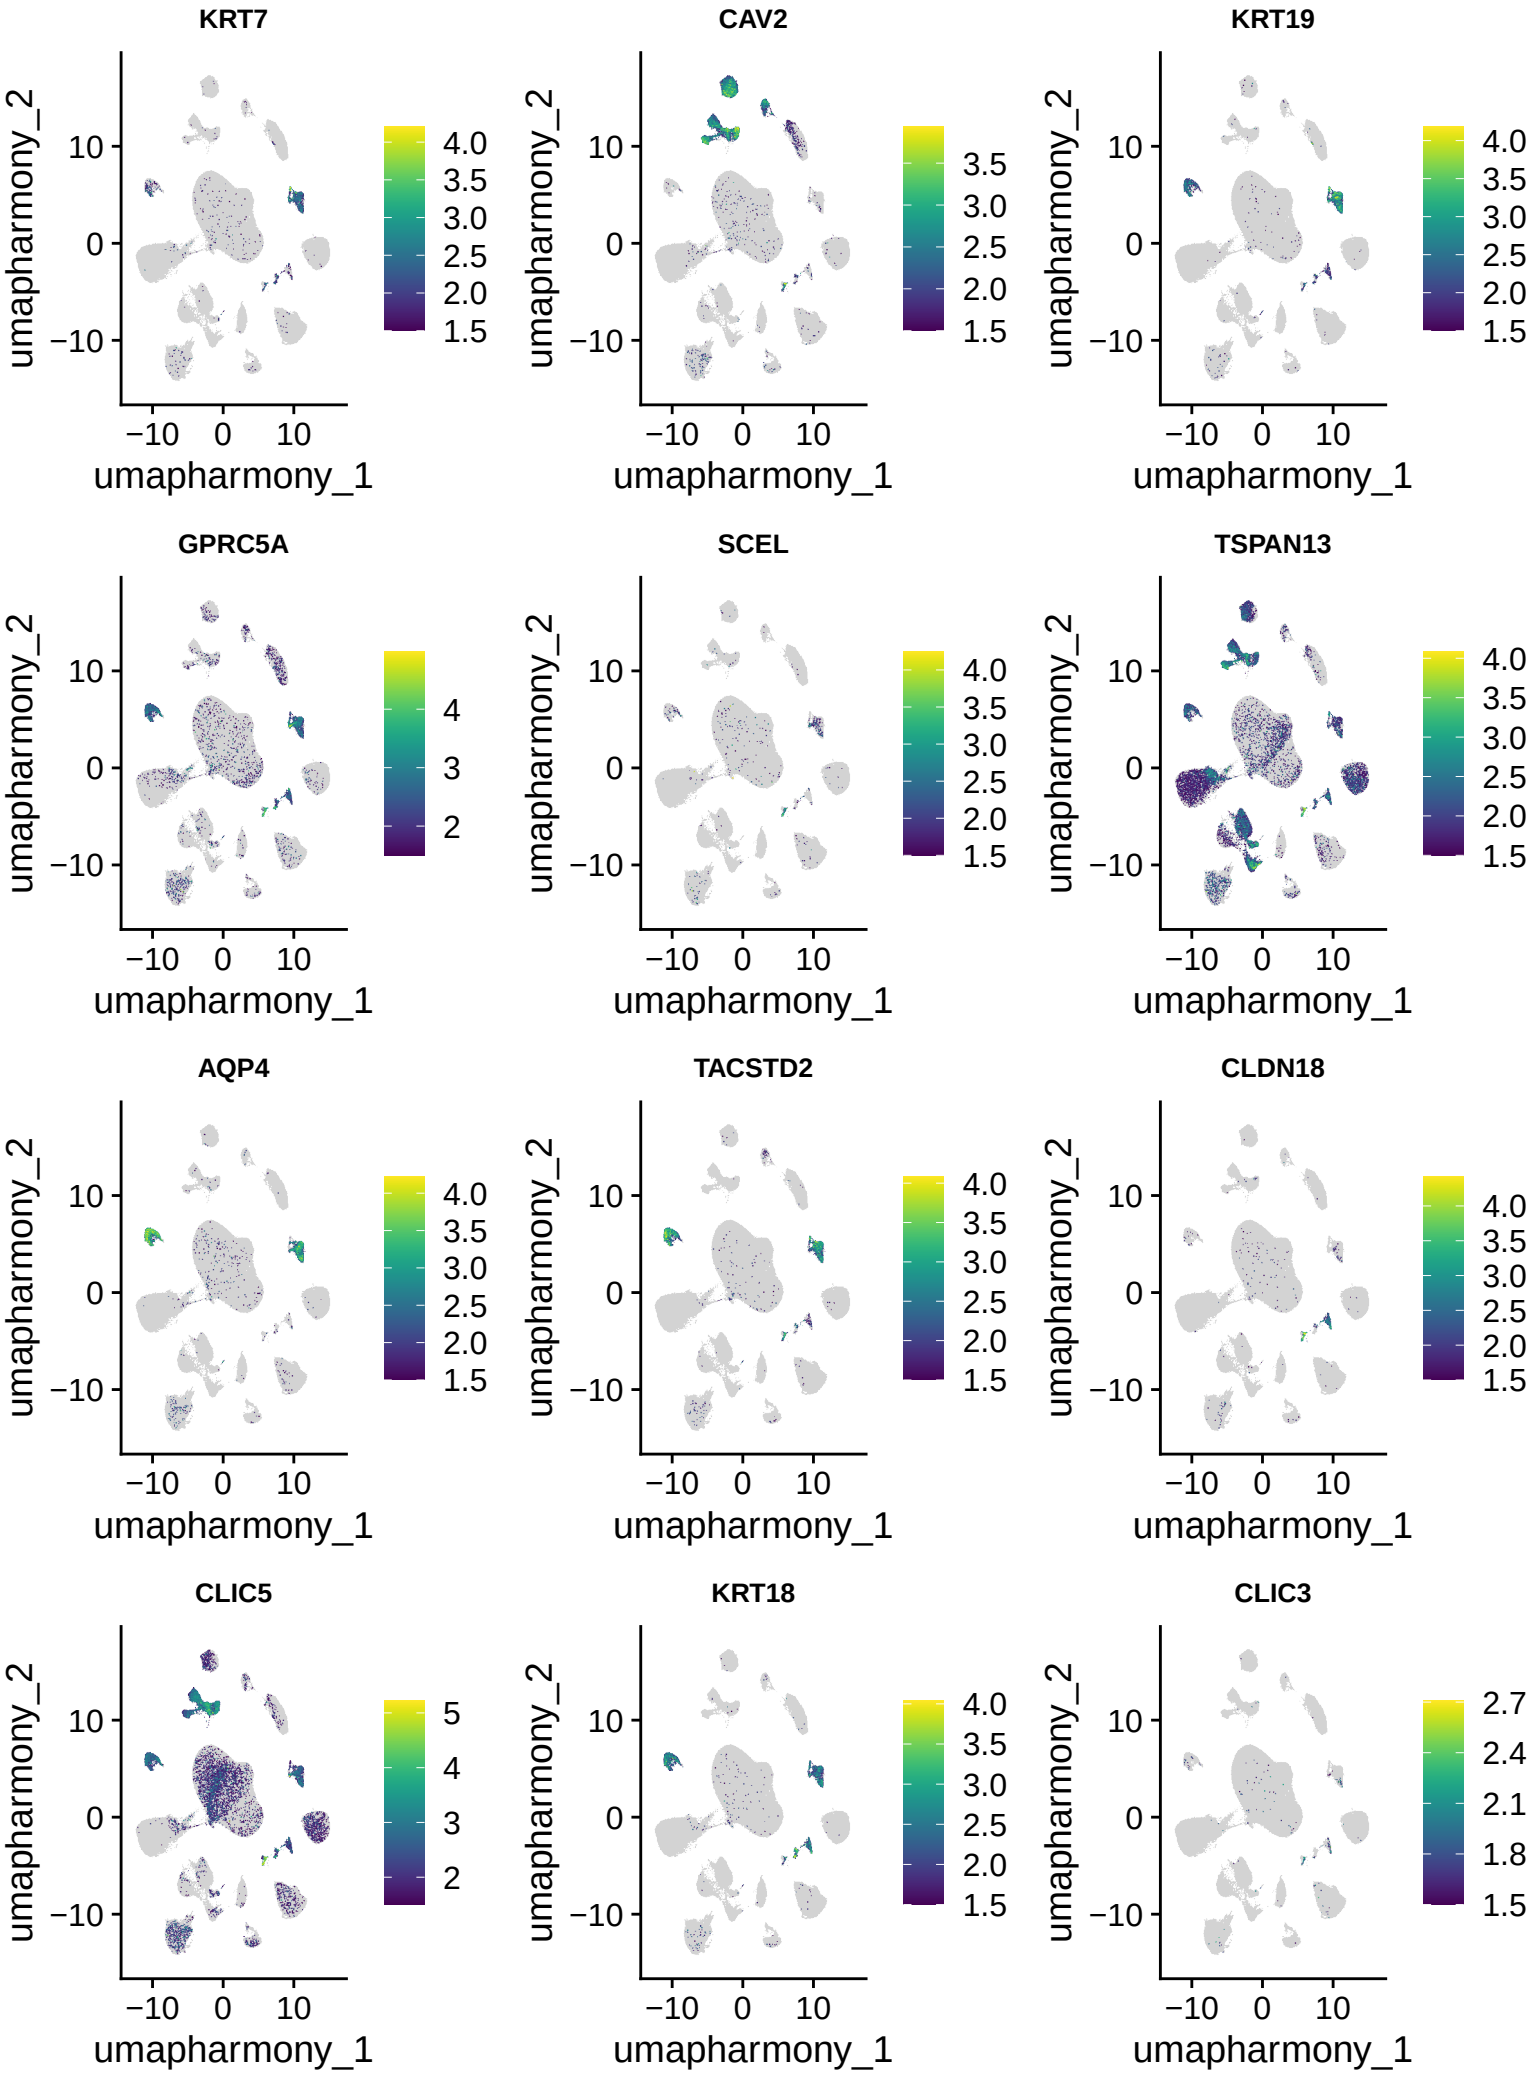


All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, low purple to high yellow.
Expression below 1.5 is grey; grey does not imply absent expression. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

AT1 | harmony_snn_res.0.7

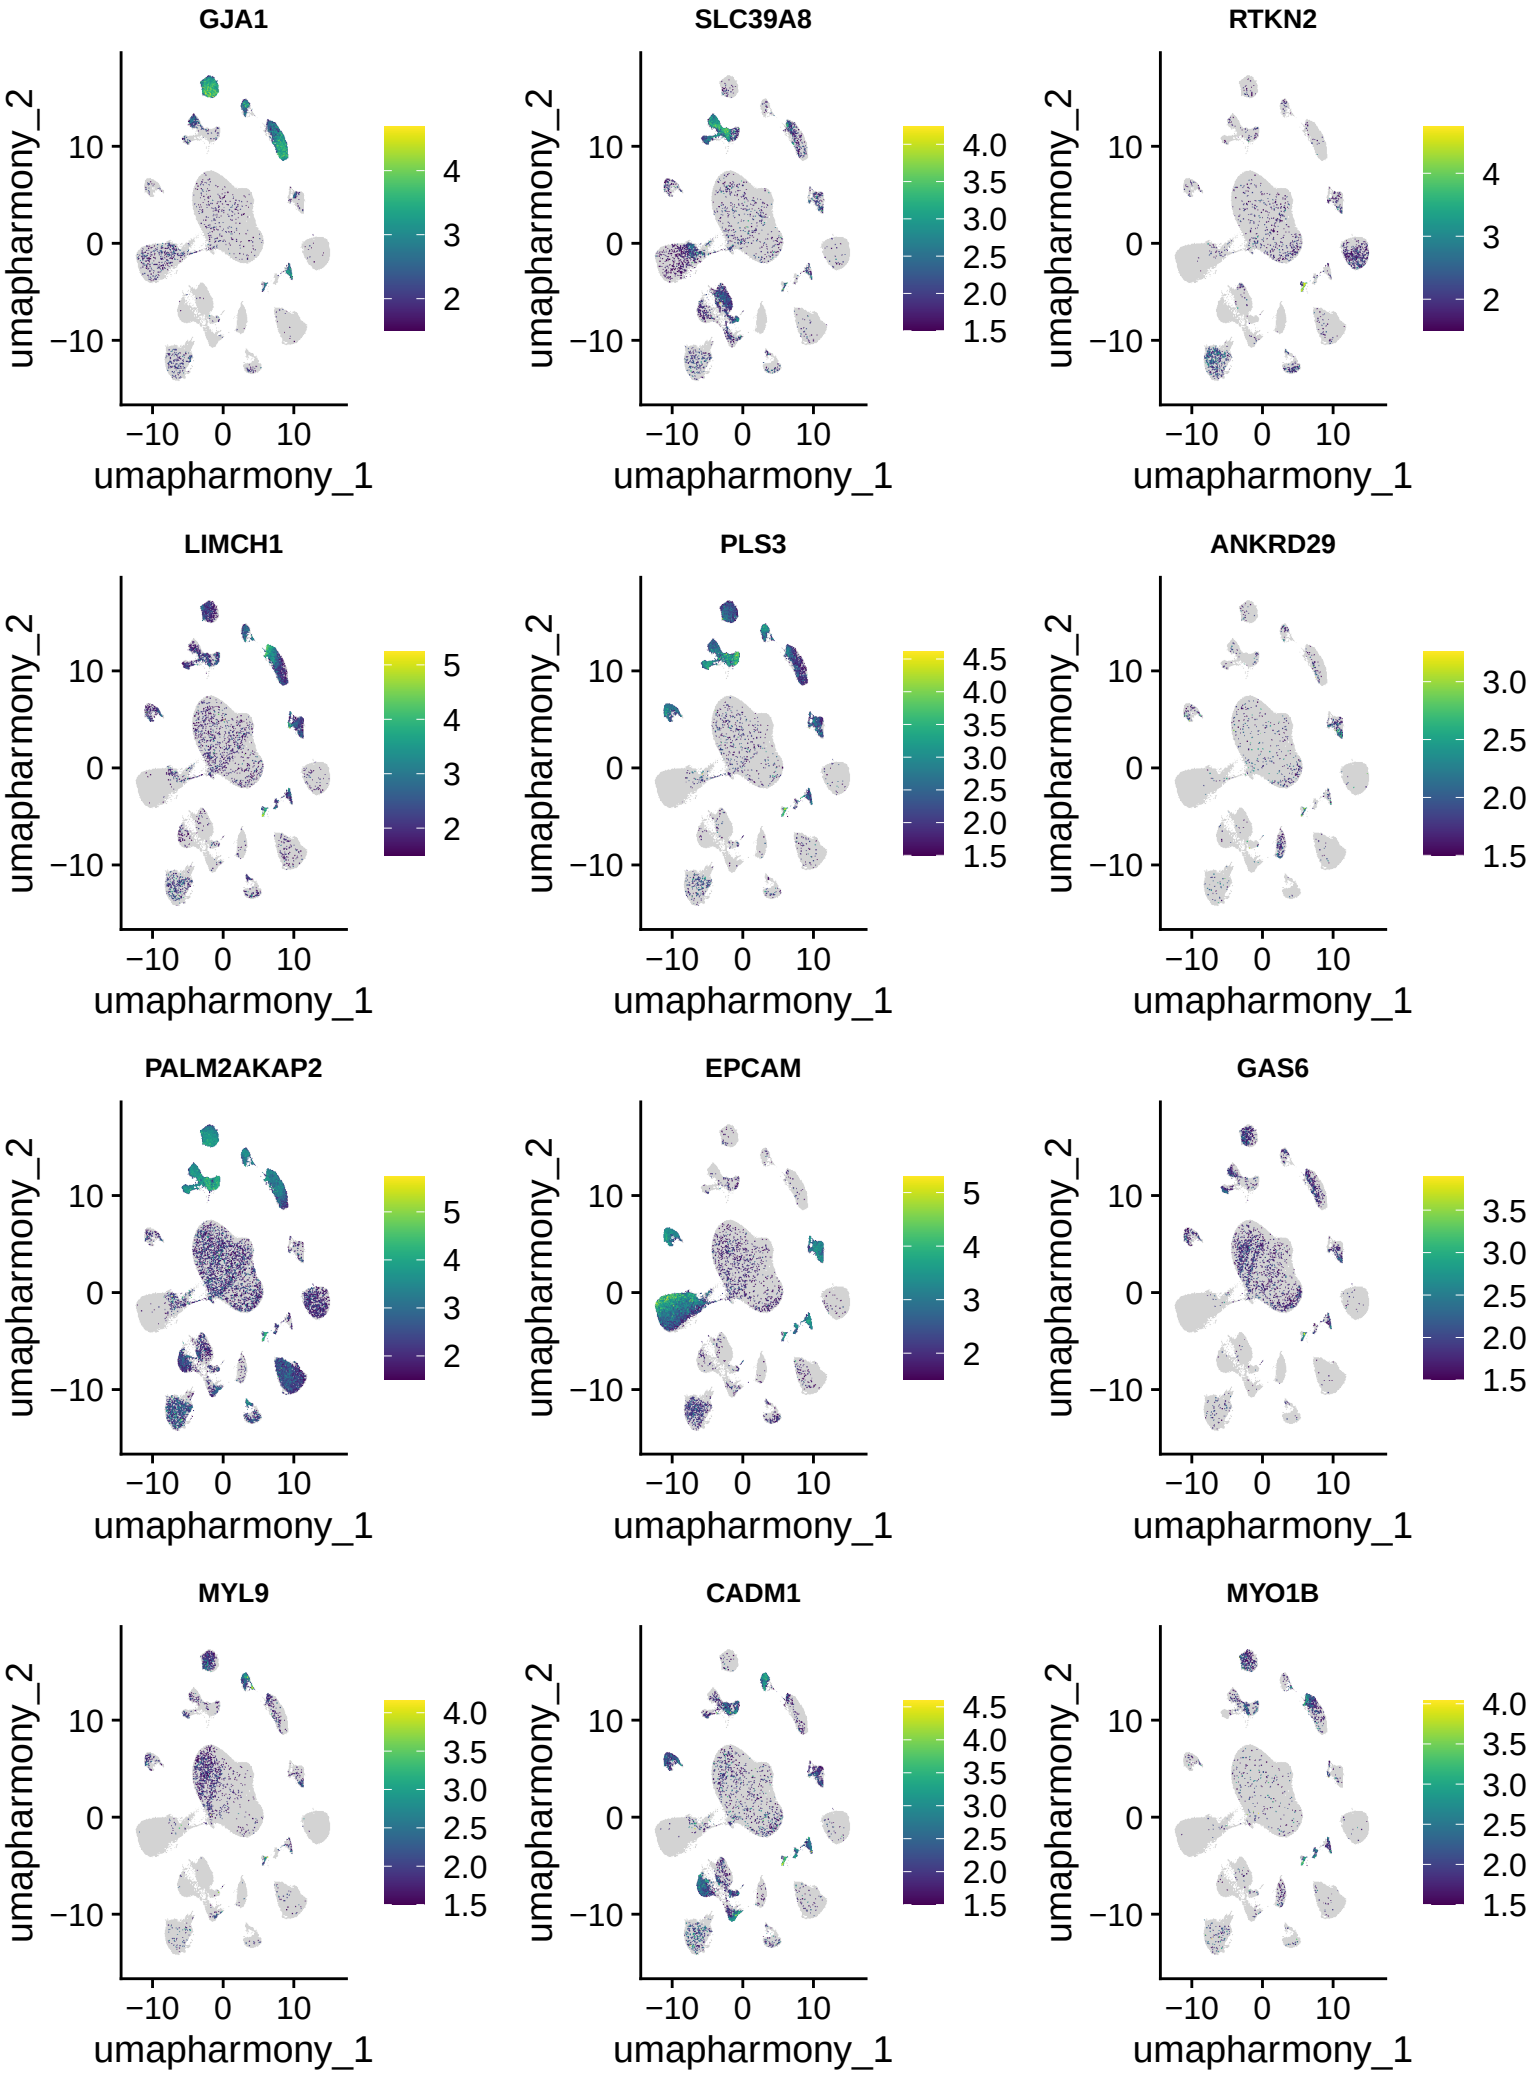


All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, low purple to high yellow.
Expression below 1.5 is grey; grey does not imply absent expression. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

AT1 | harmony_snn_res.0.7

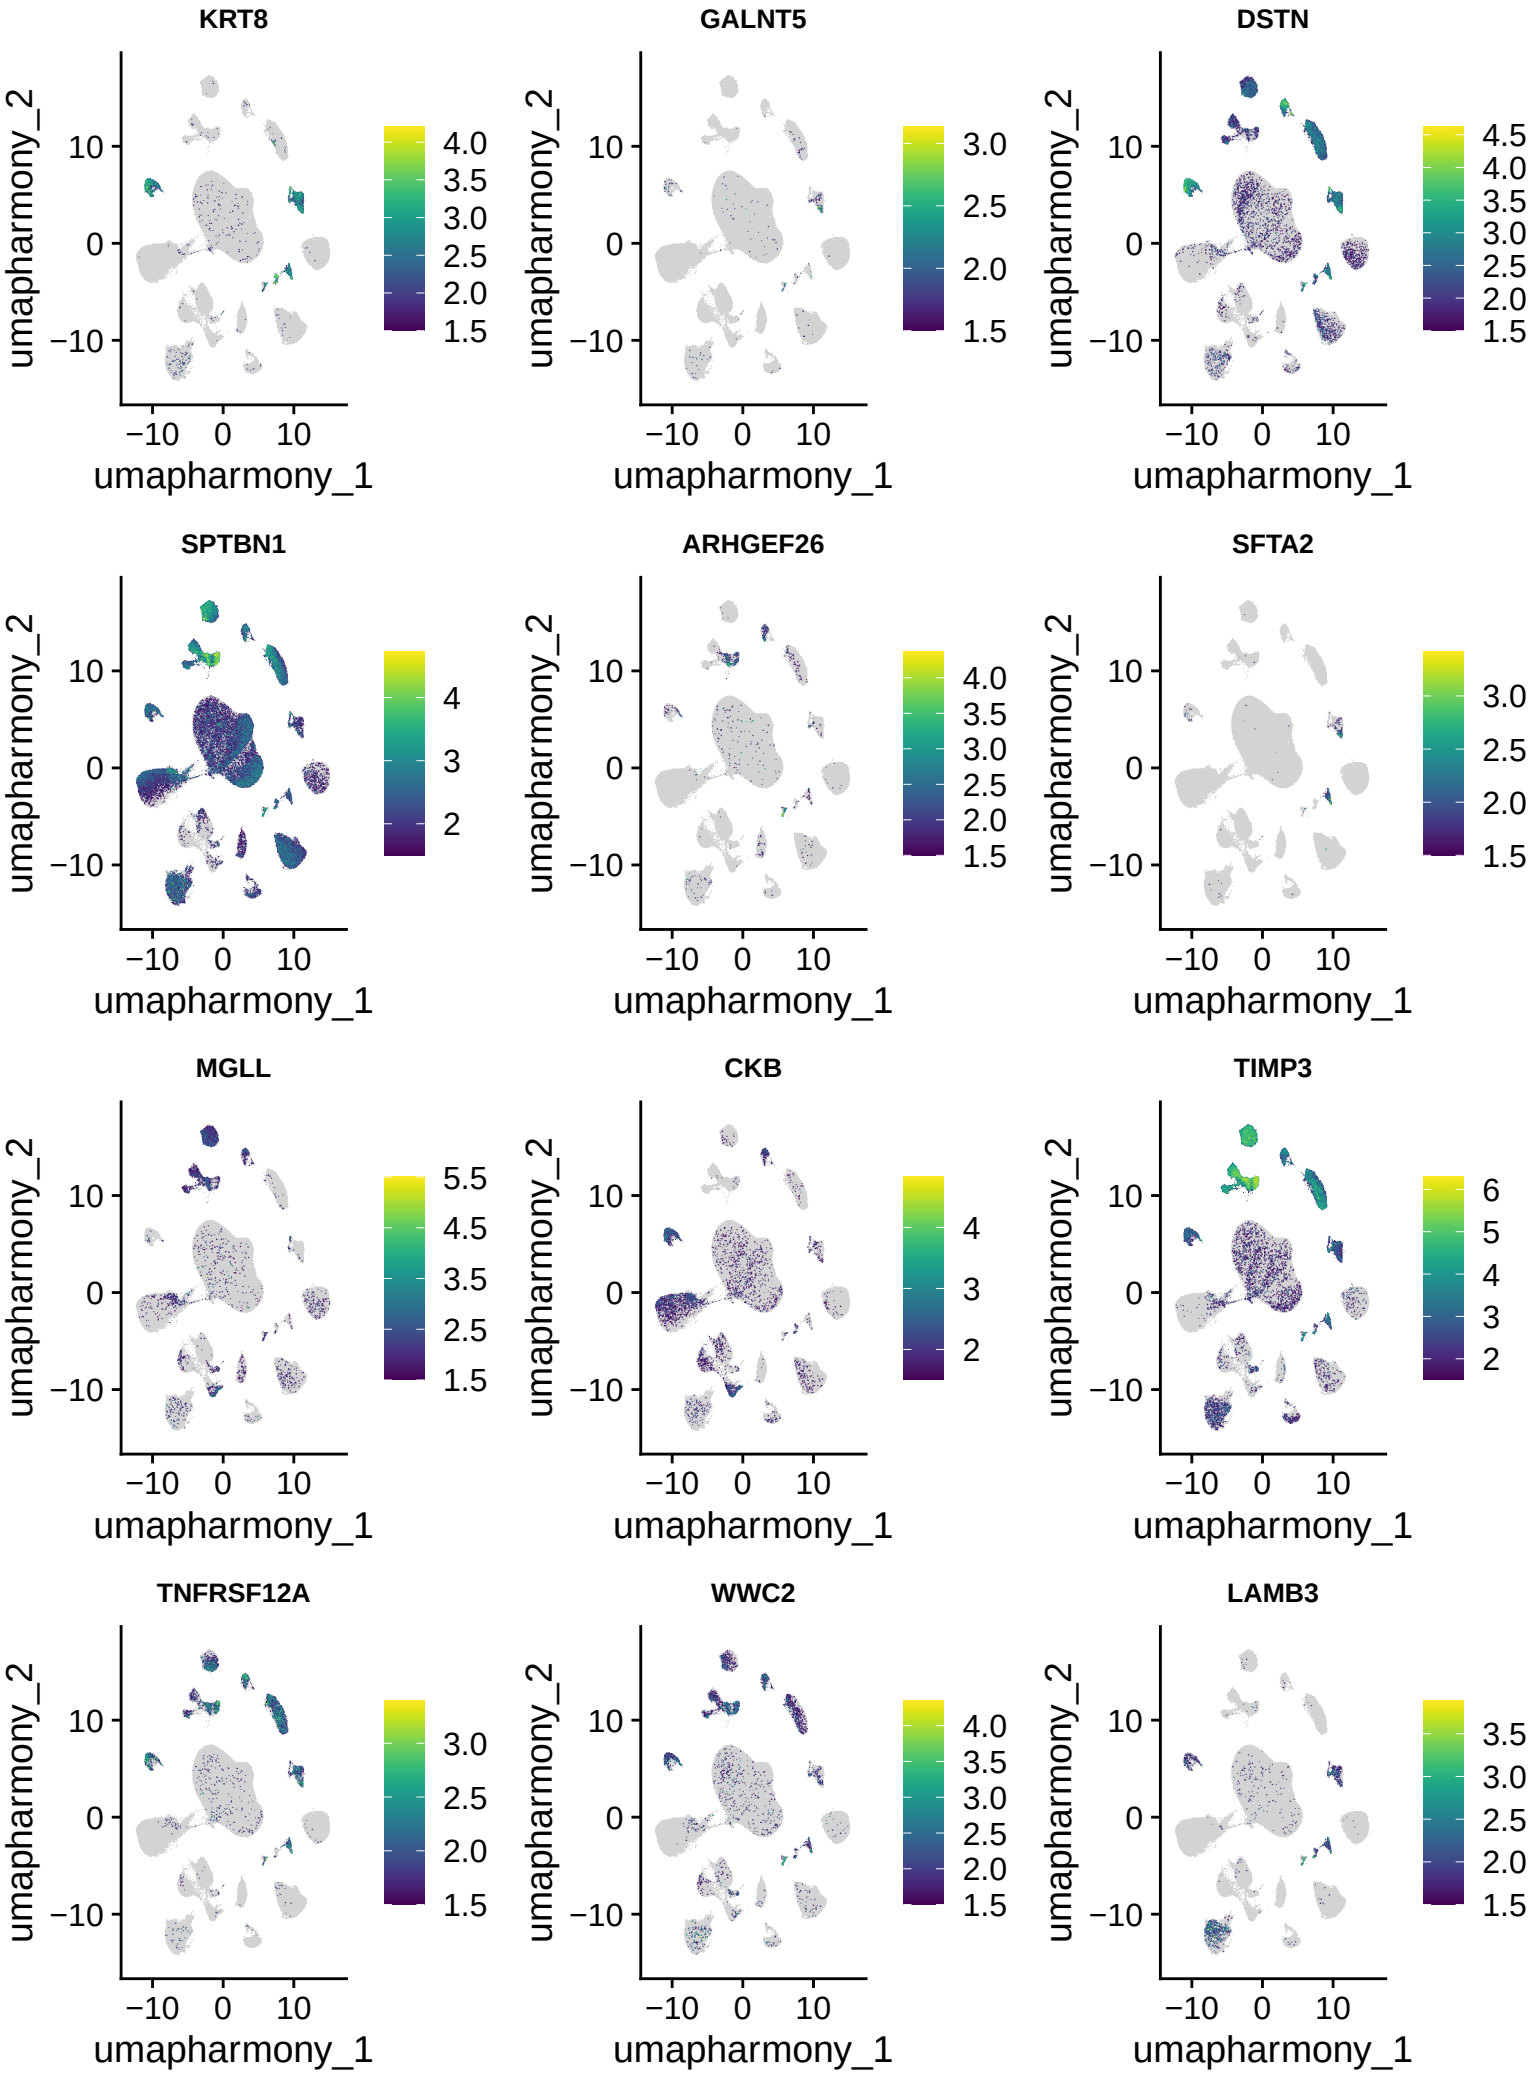

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, low purple to high yellow.
Expression below 1.5 is grey; grey does not imply absent expression. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

AT1 | harmony_snn_res.0.7

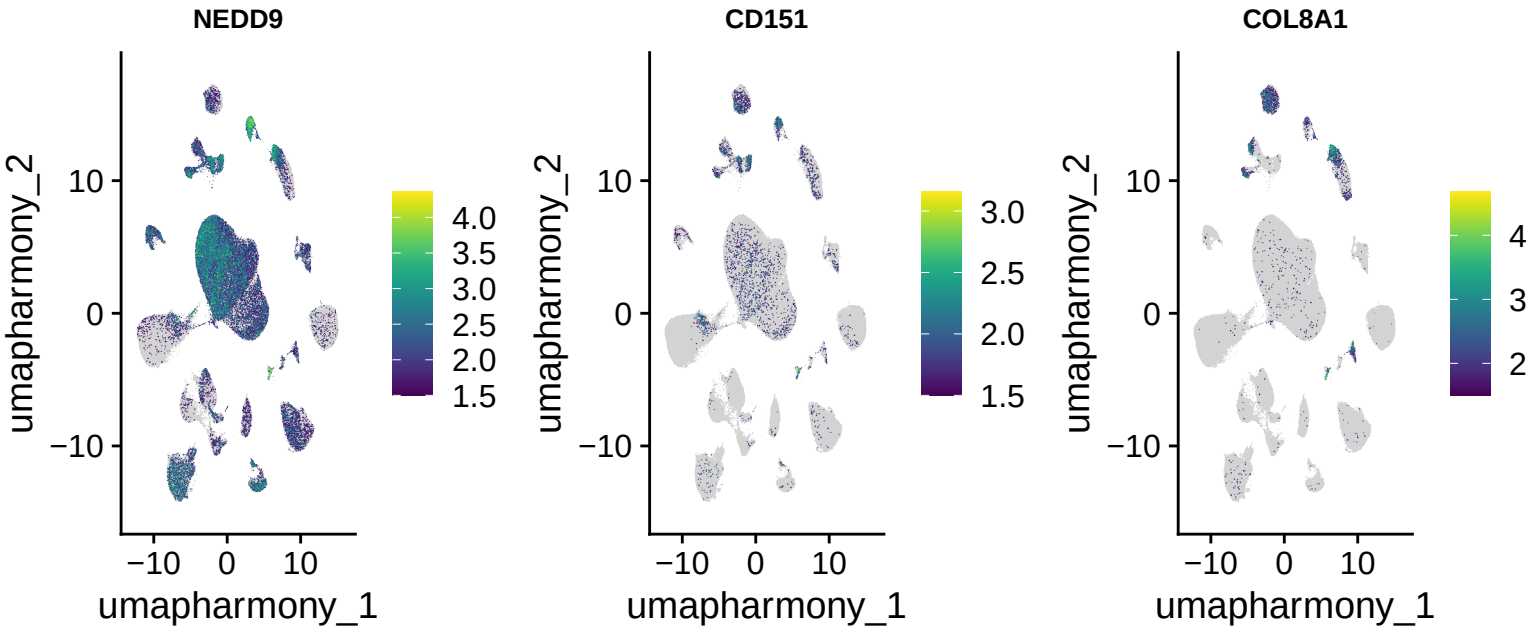

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, low purple to high yellow.
Expression below 1.5 is grey; grey does not imply absent expression. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.