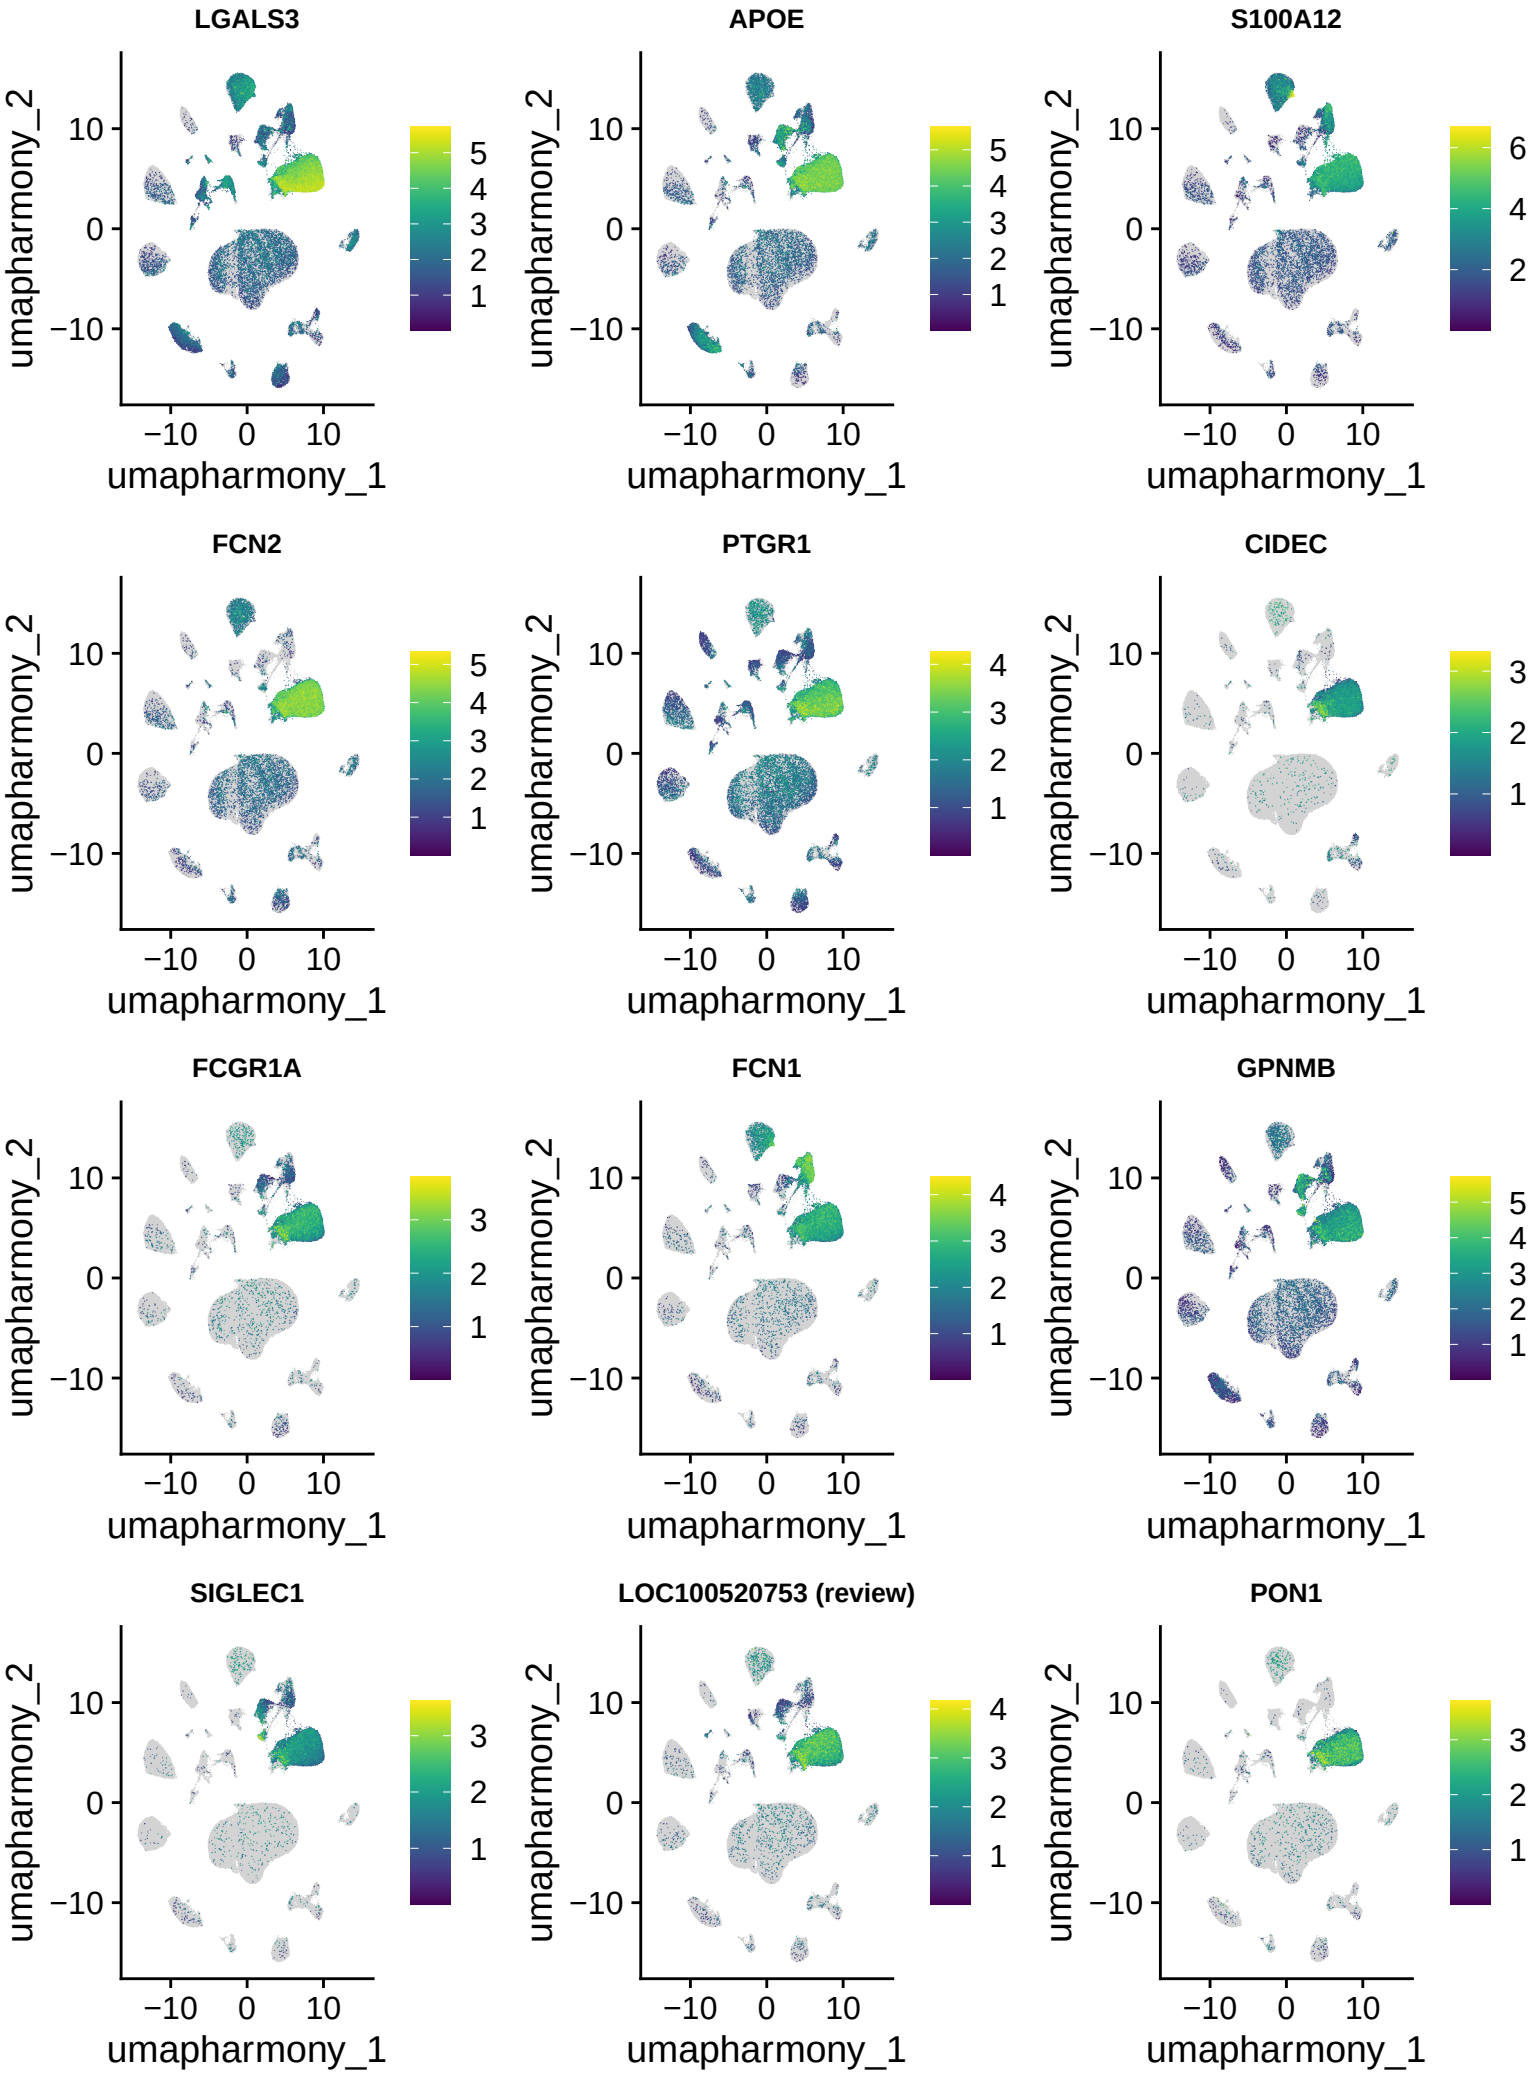
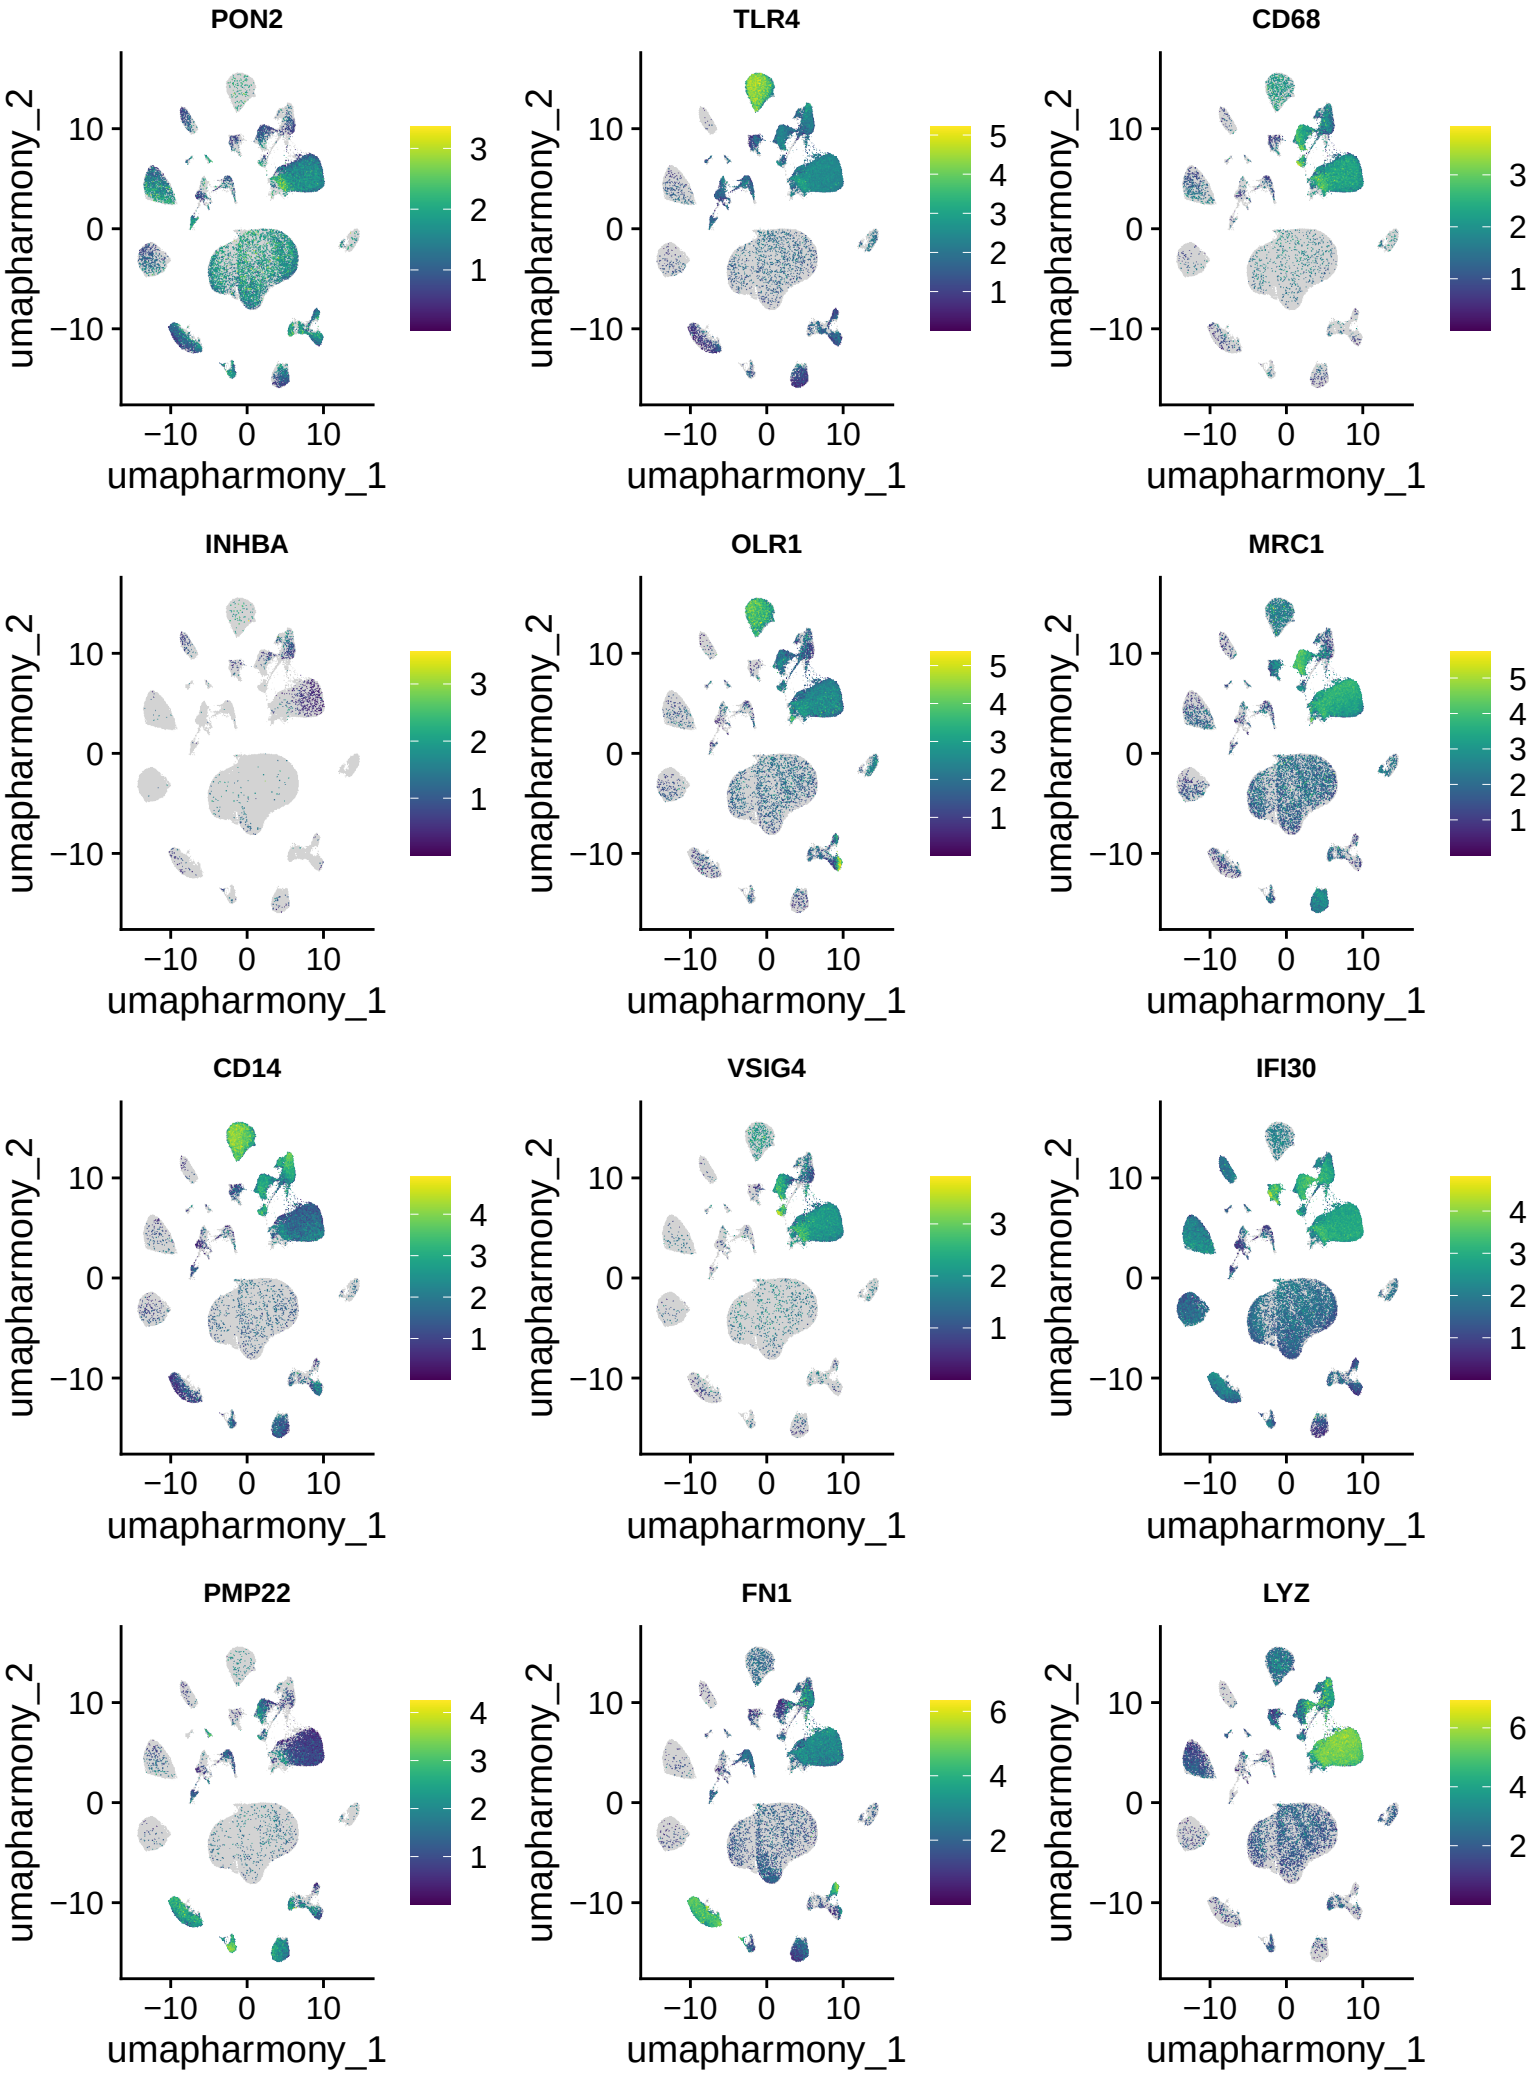
**Macrophages_AM_like | harmony_snn_res.0.7**



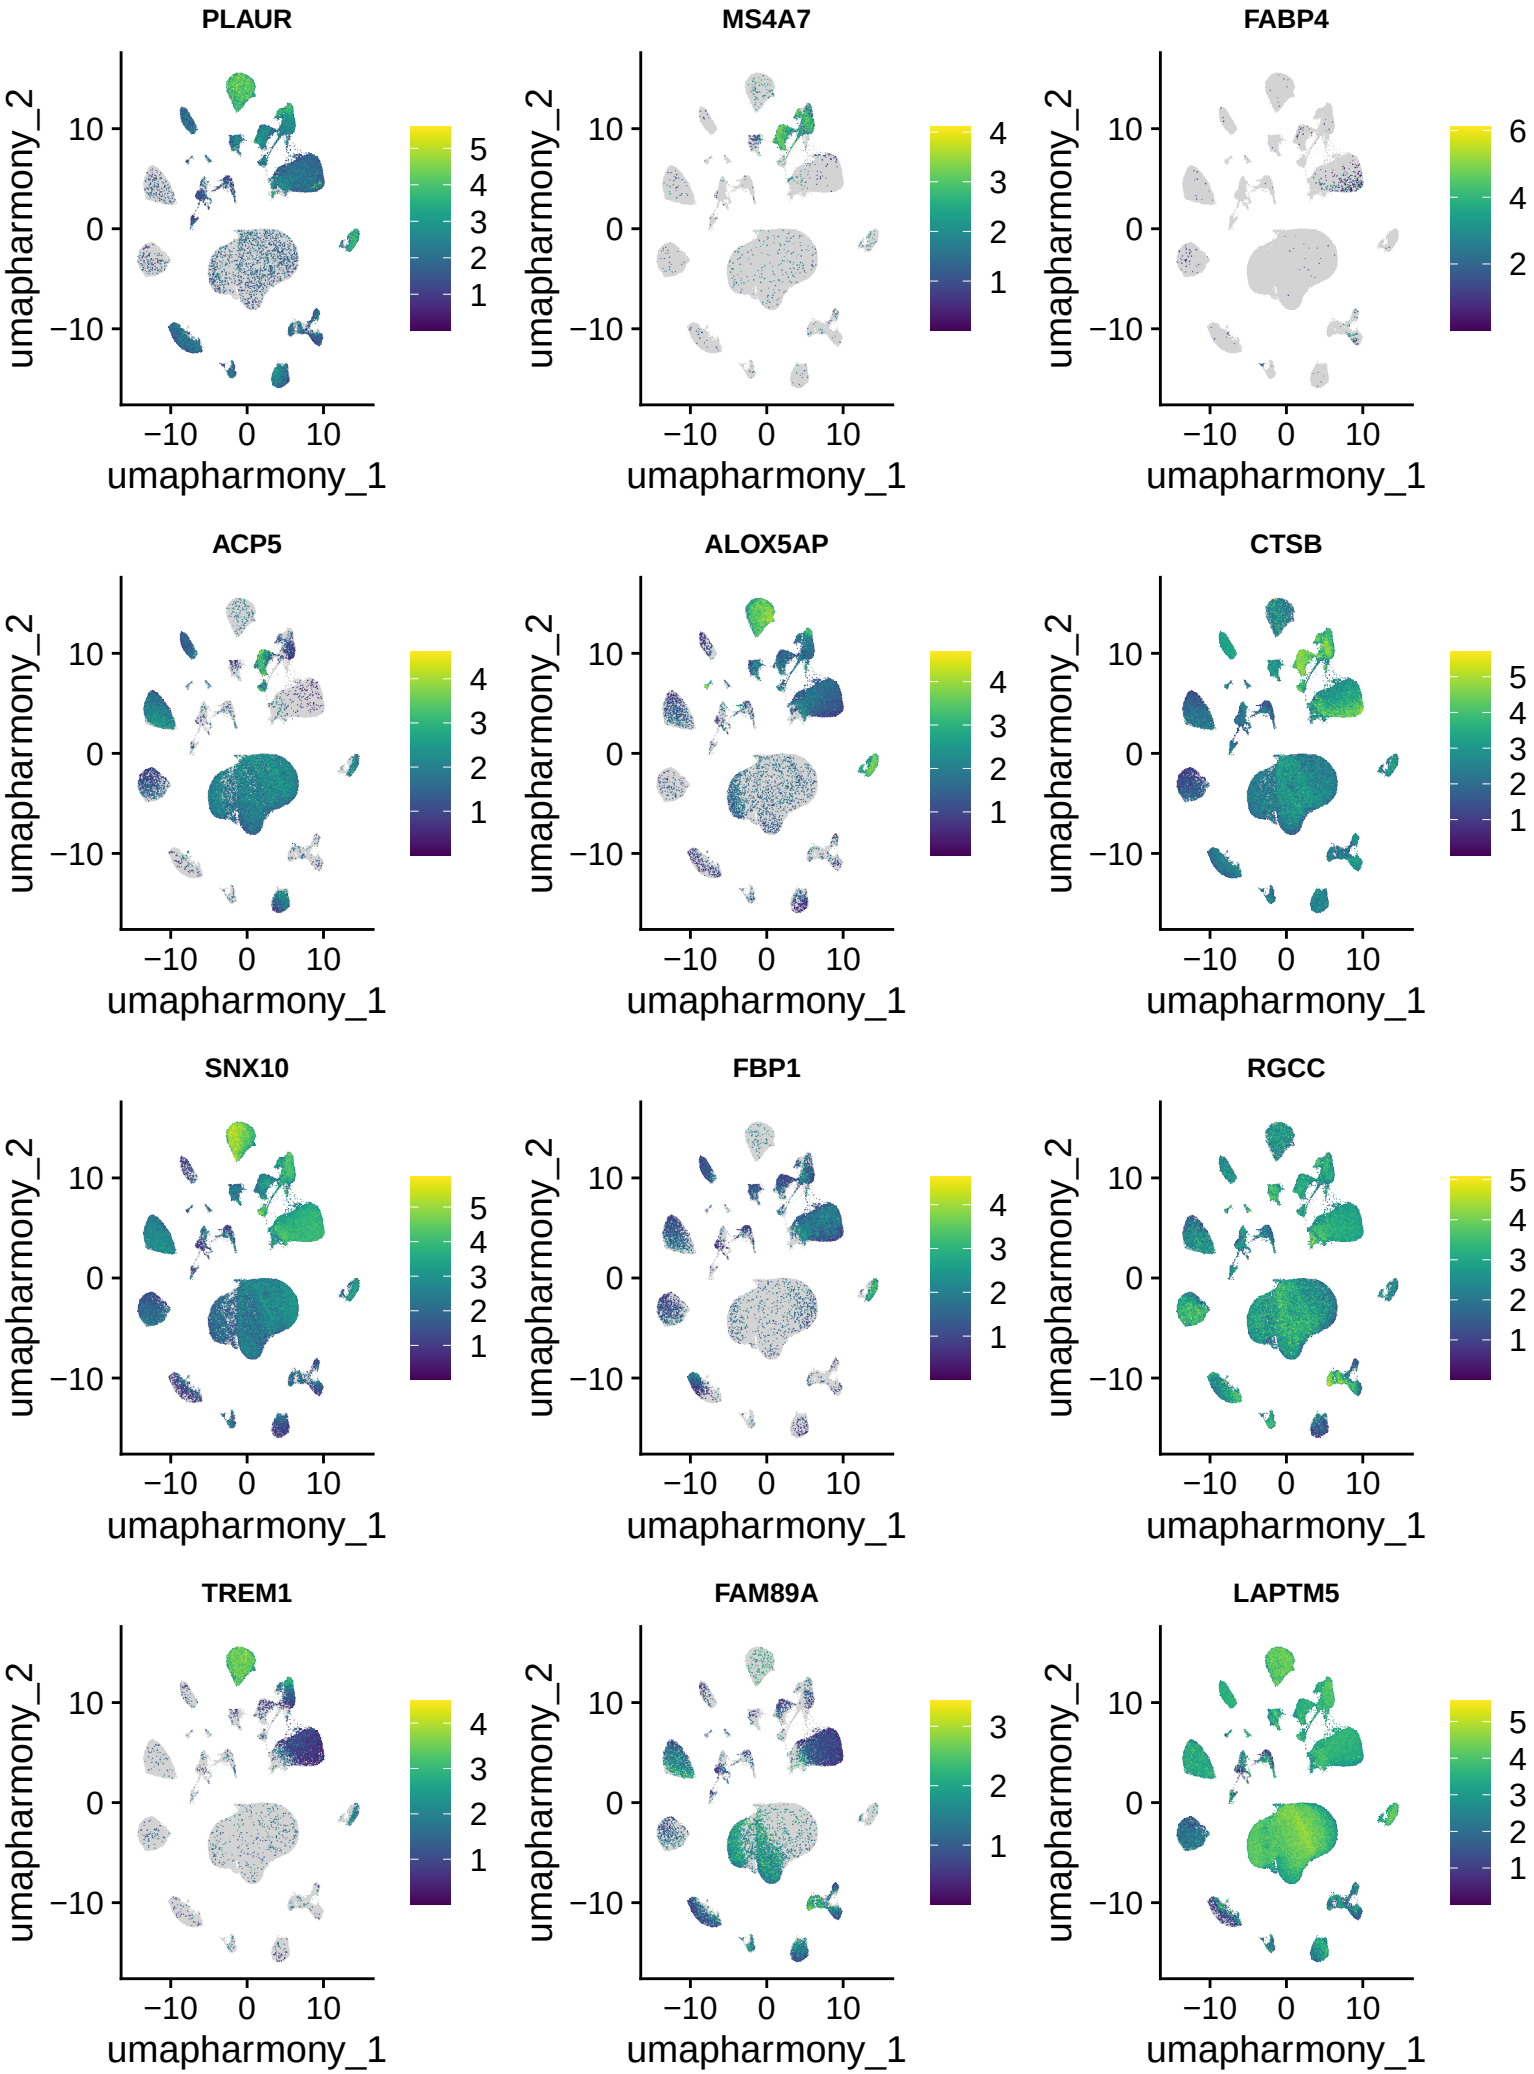

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, low purple to high yellow; zeros in grey. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

**Macrophages_AM_like | harmony_snn_res.0.7**



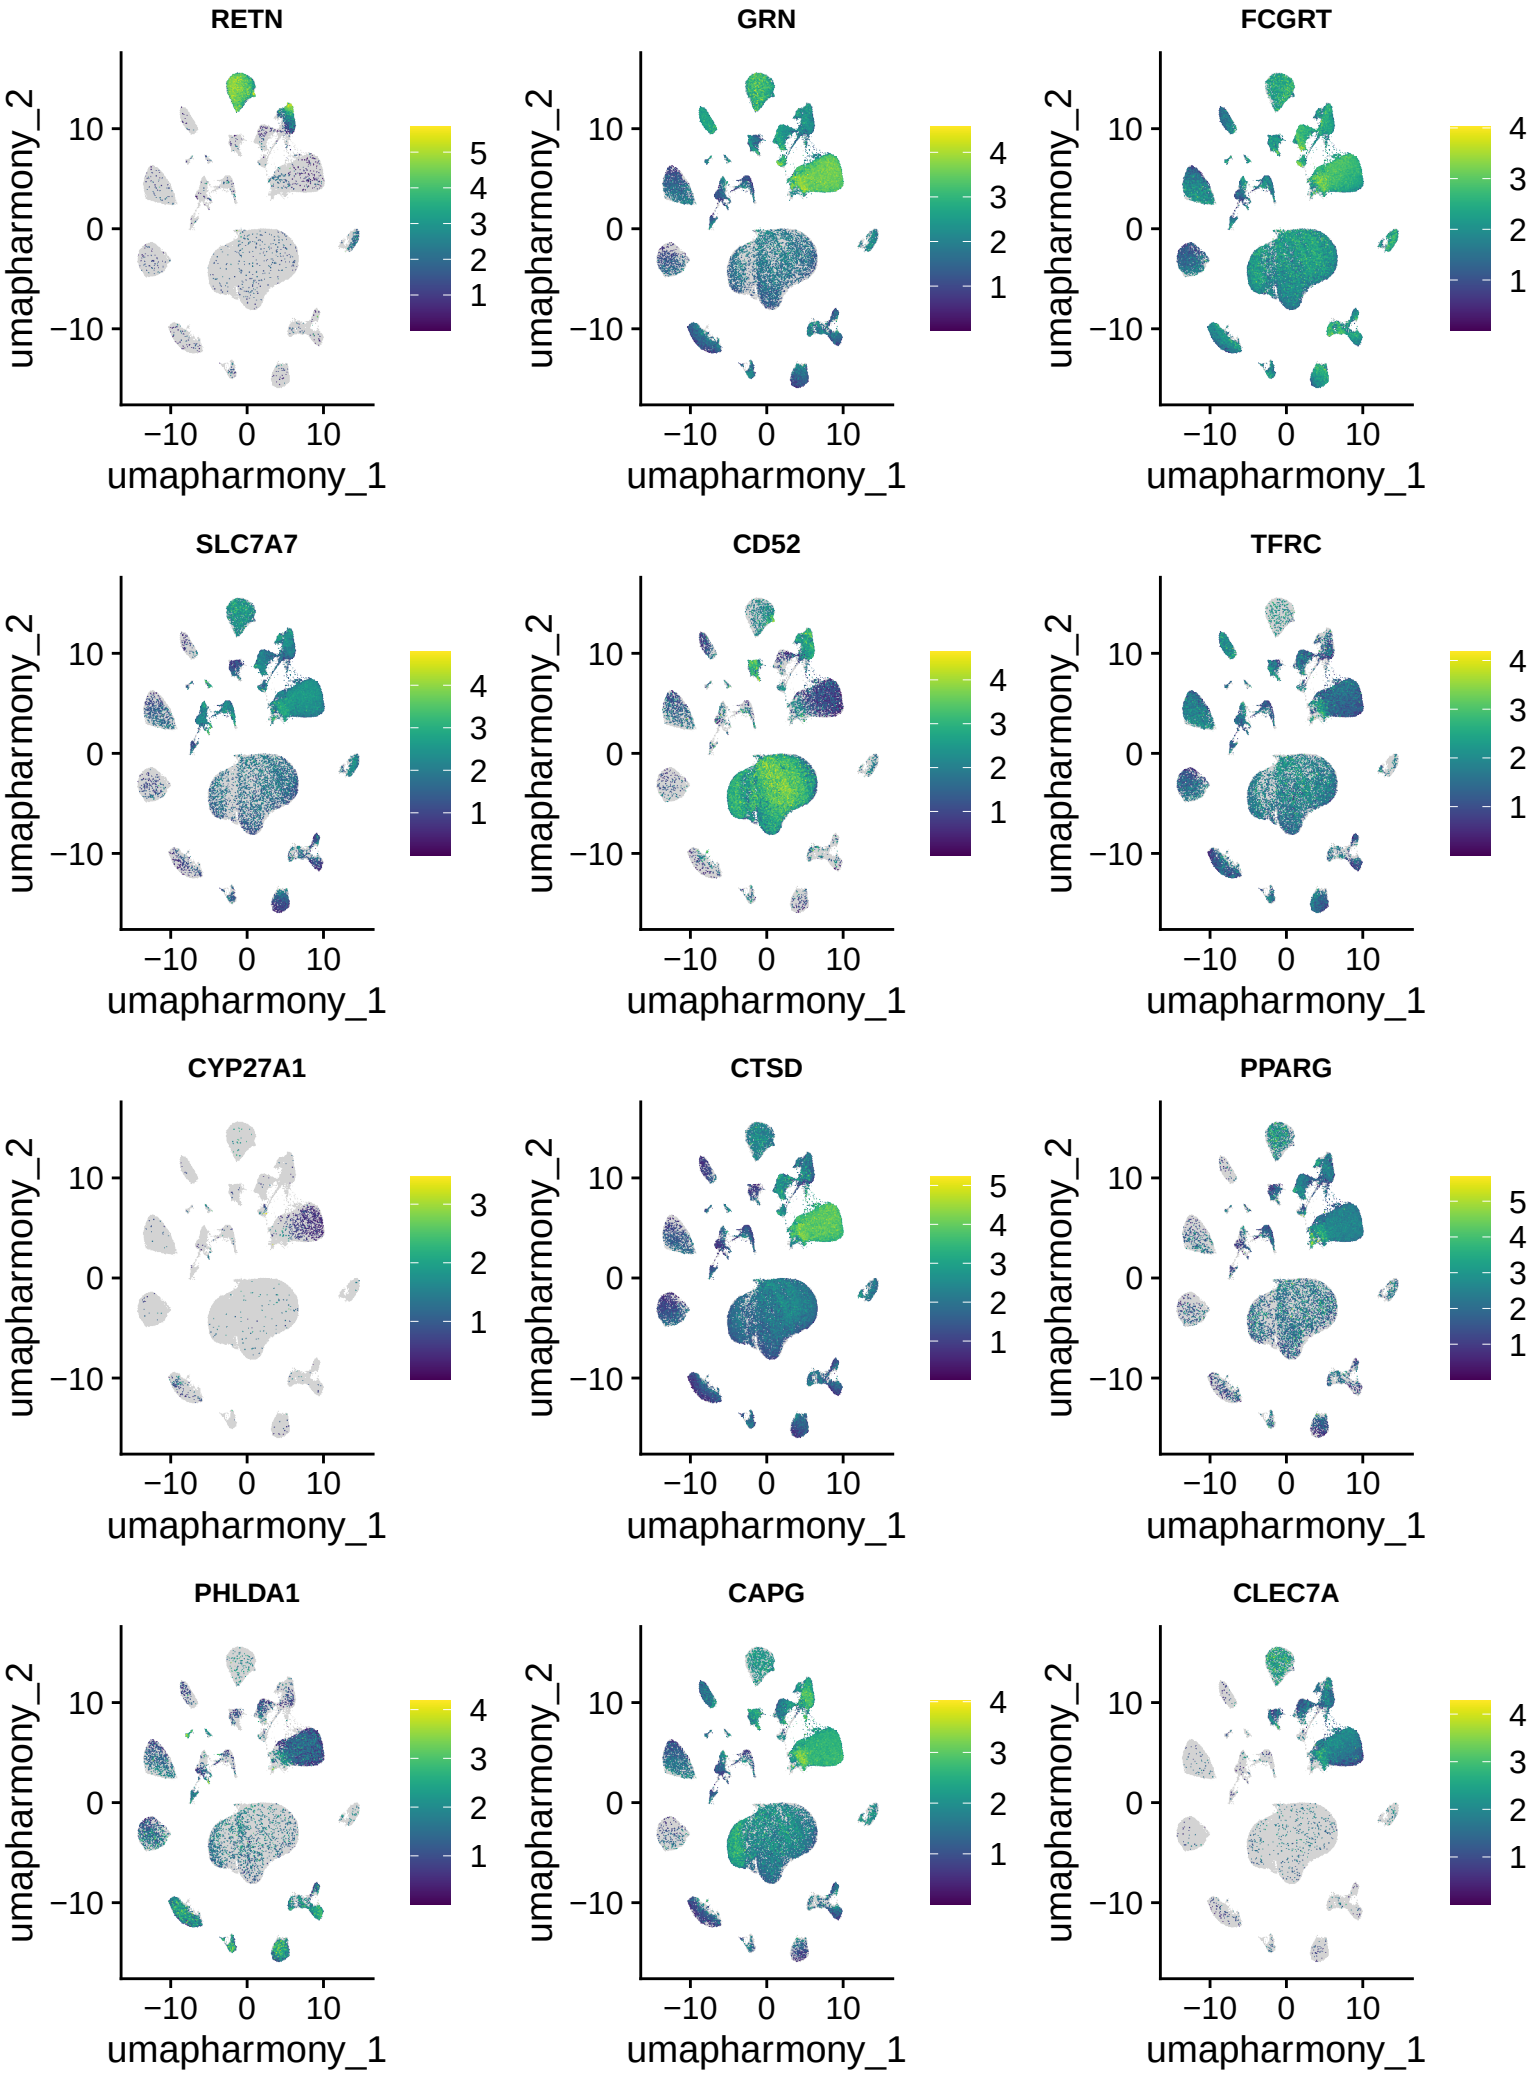

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, low purple to high yellow; zeros in grey. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

**Macrophages_AM_like | harmony_snn_res.0.7**



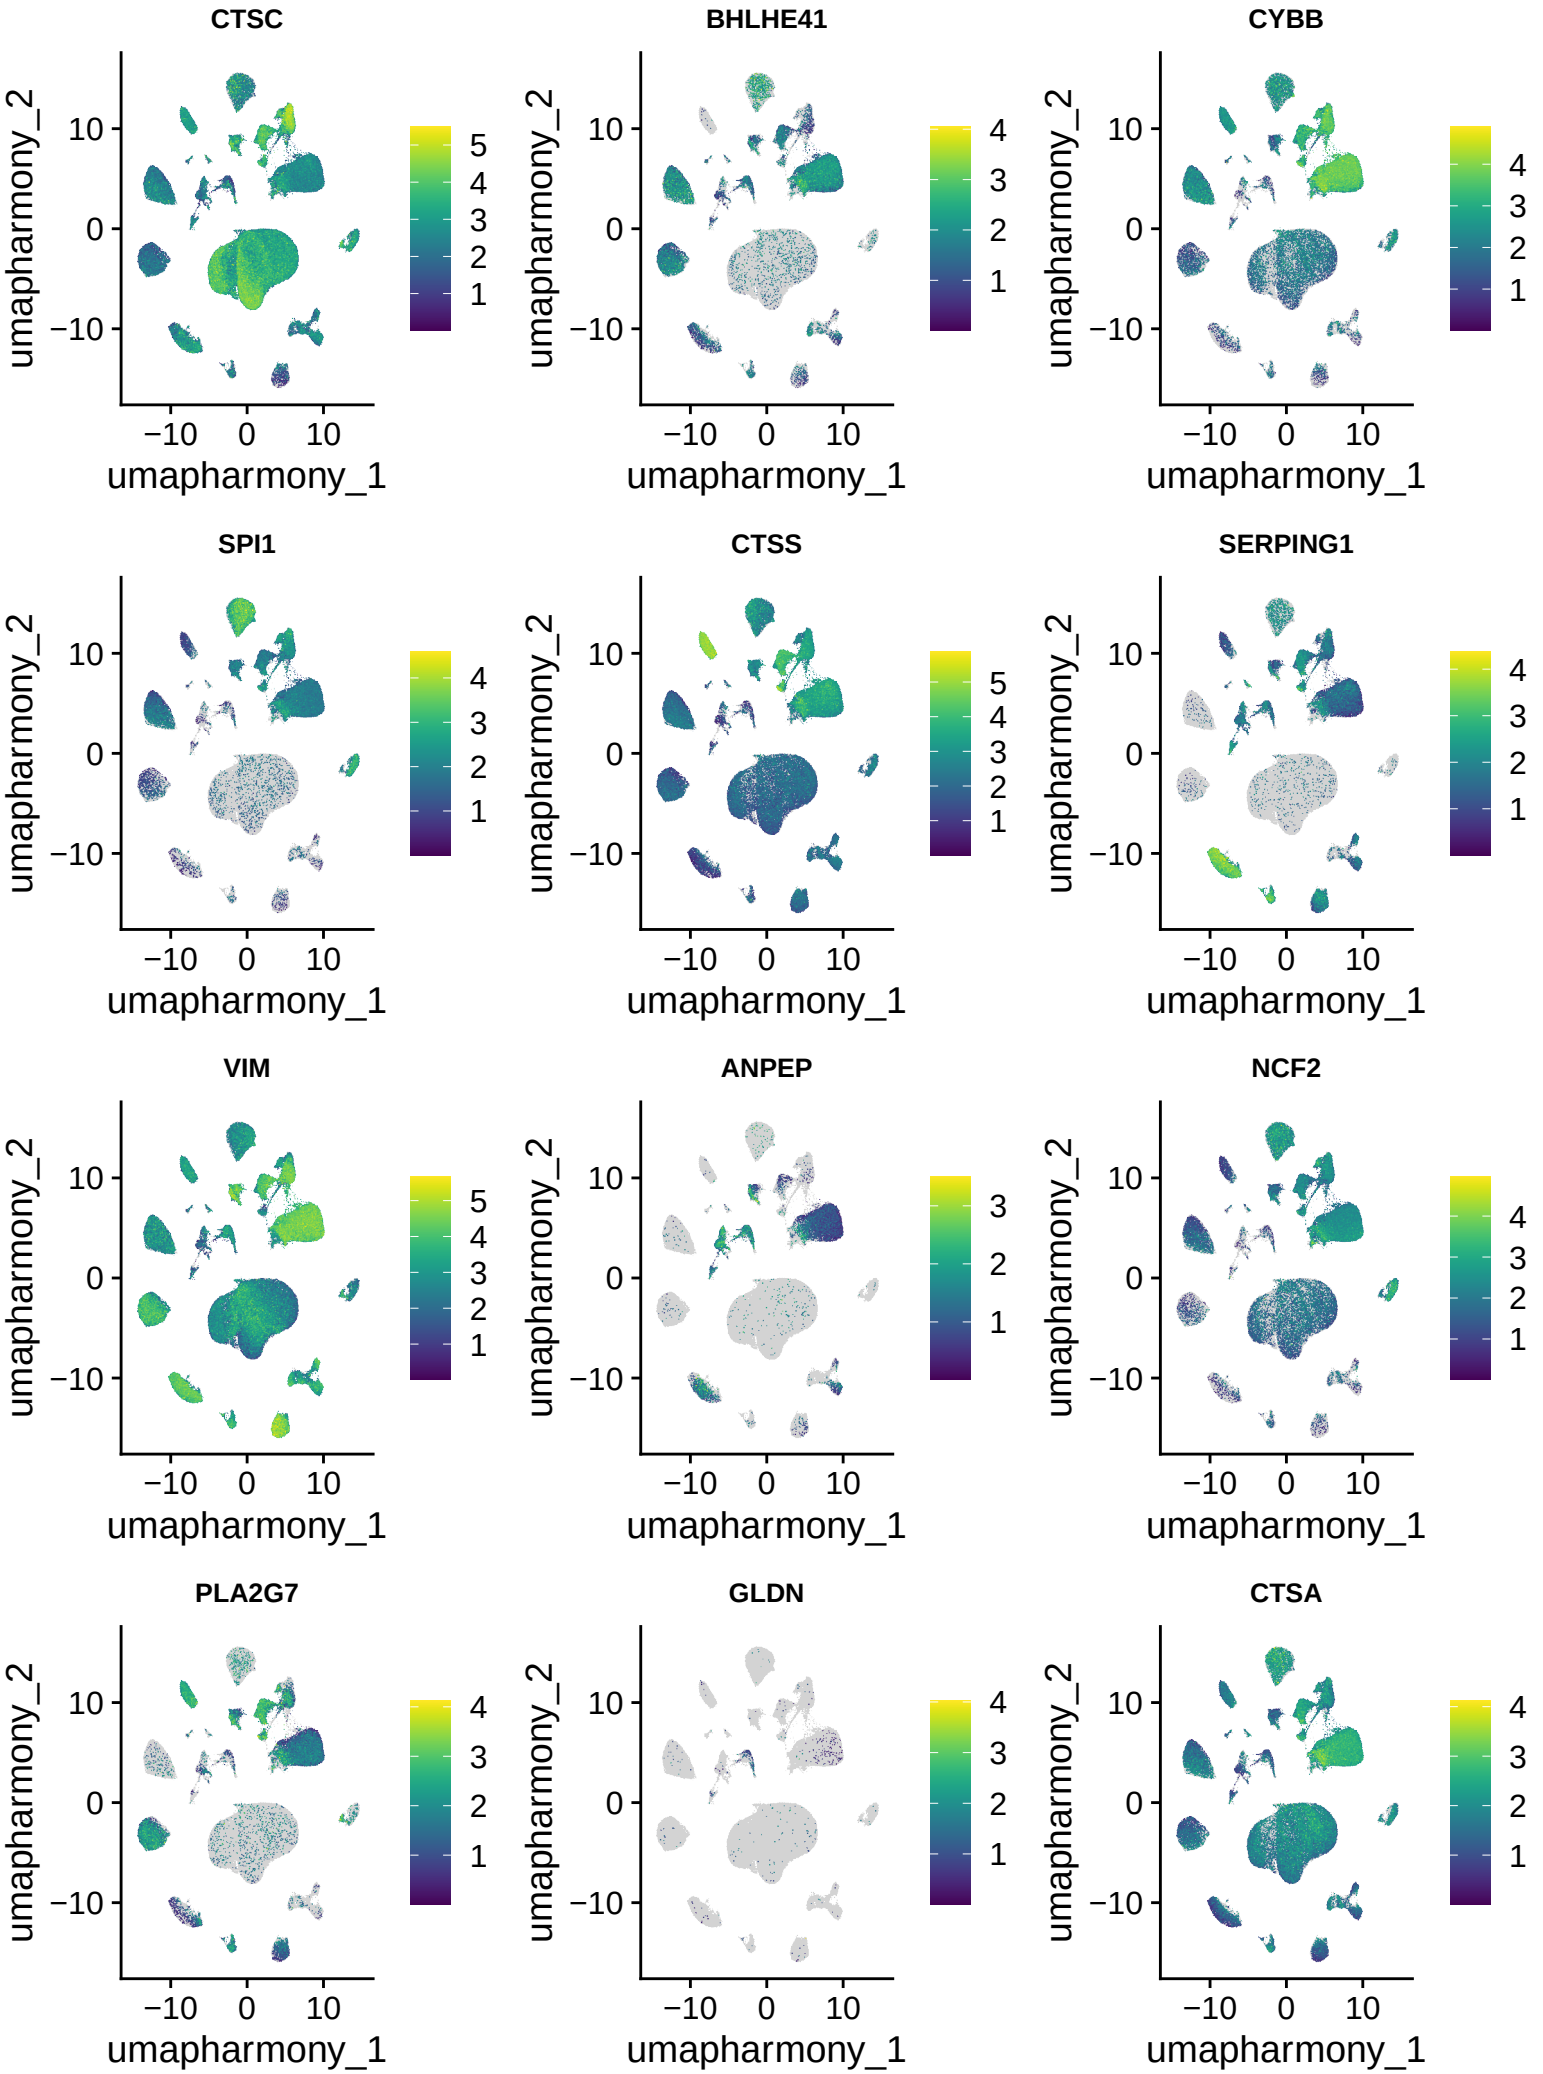

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, low purple to high yellow; zeros in grey. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

**Macrophages_AM_like | harmony_snn_res.0.7**



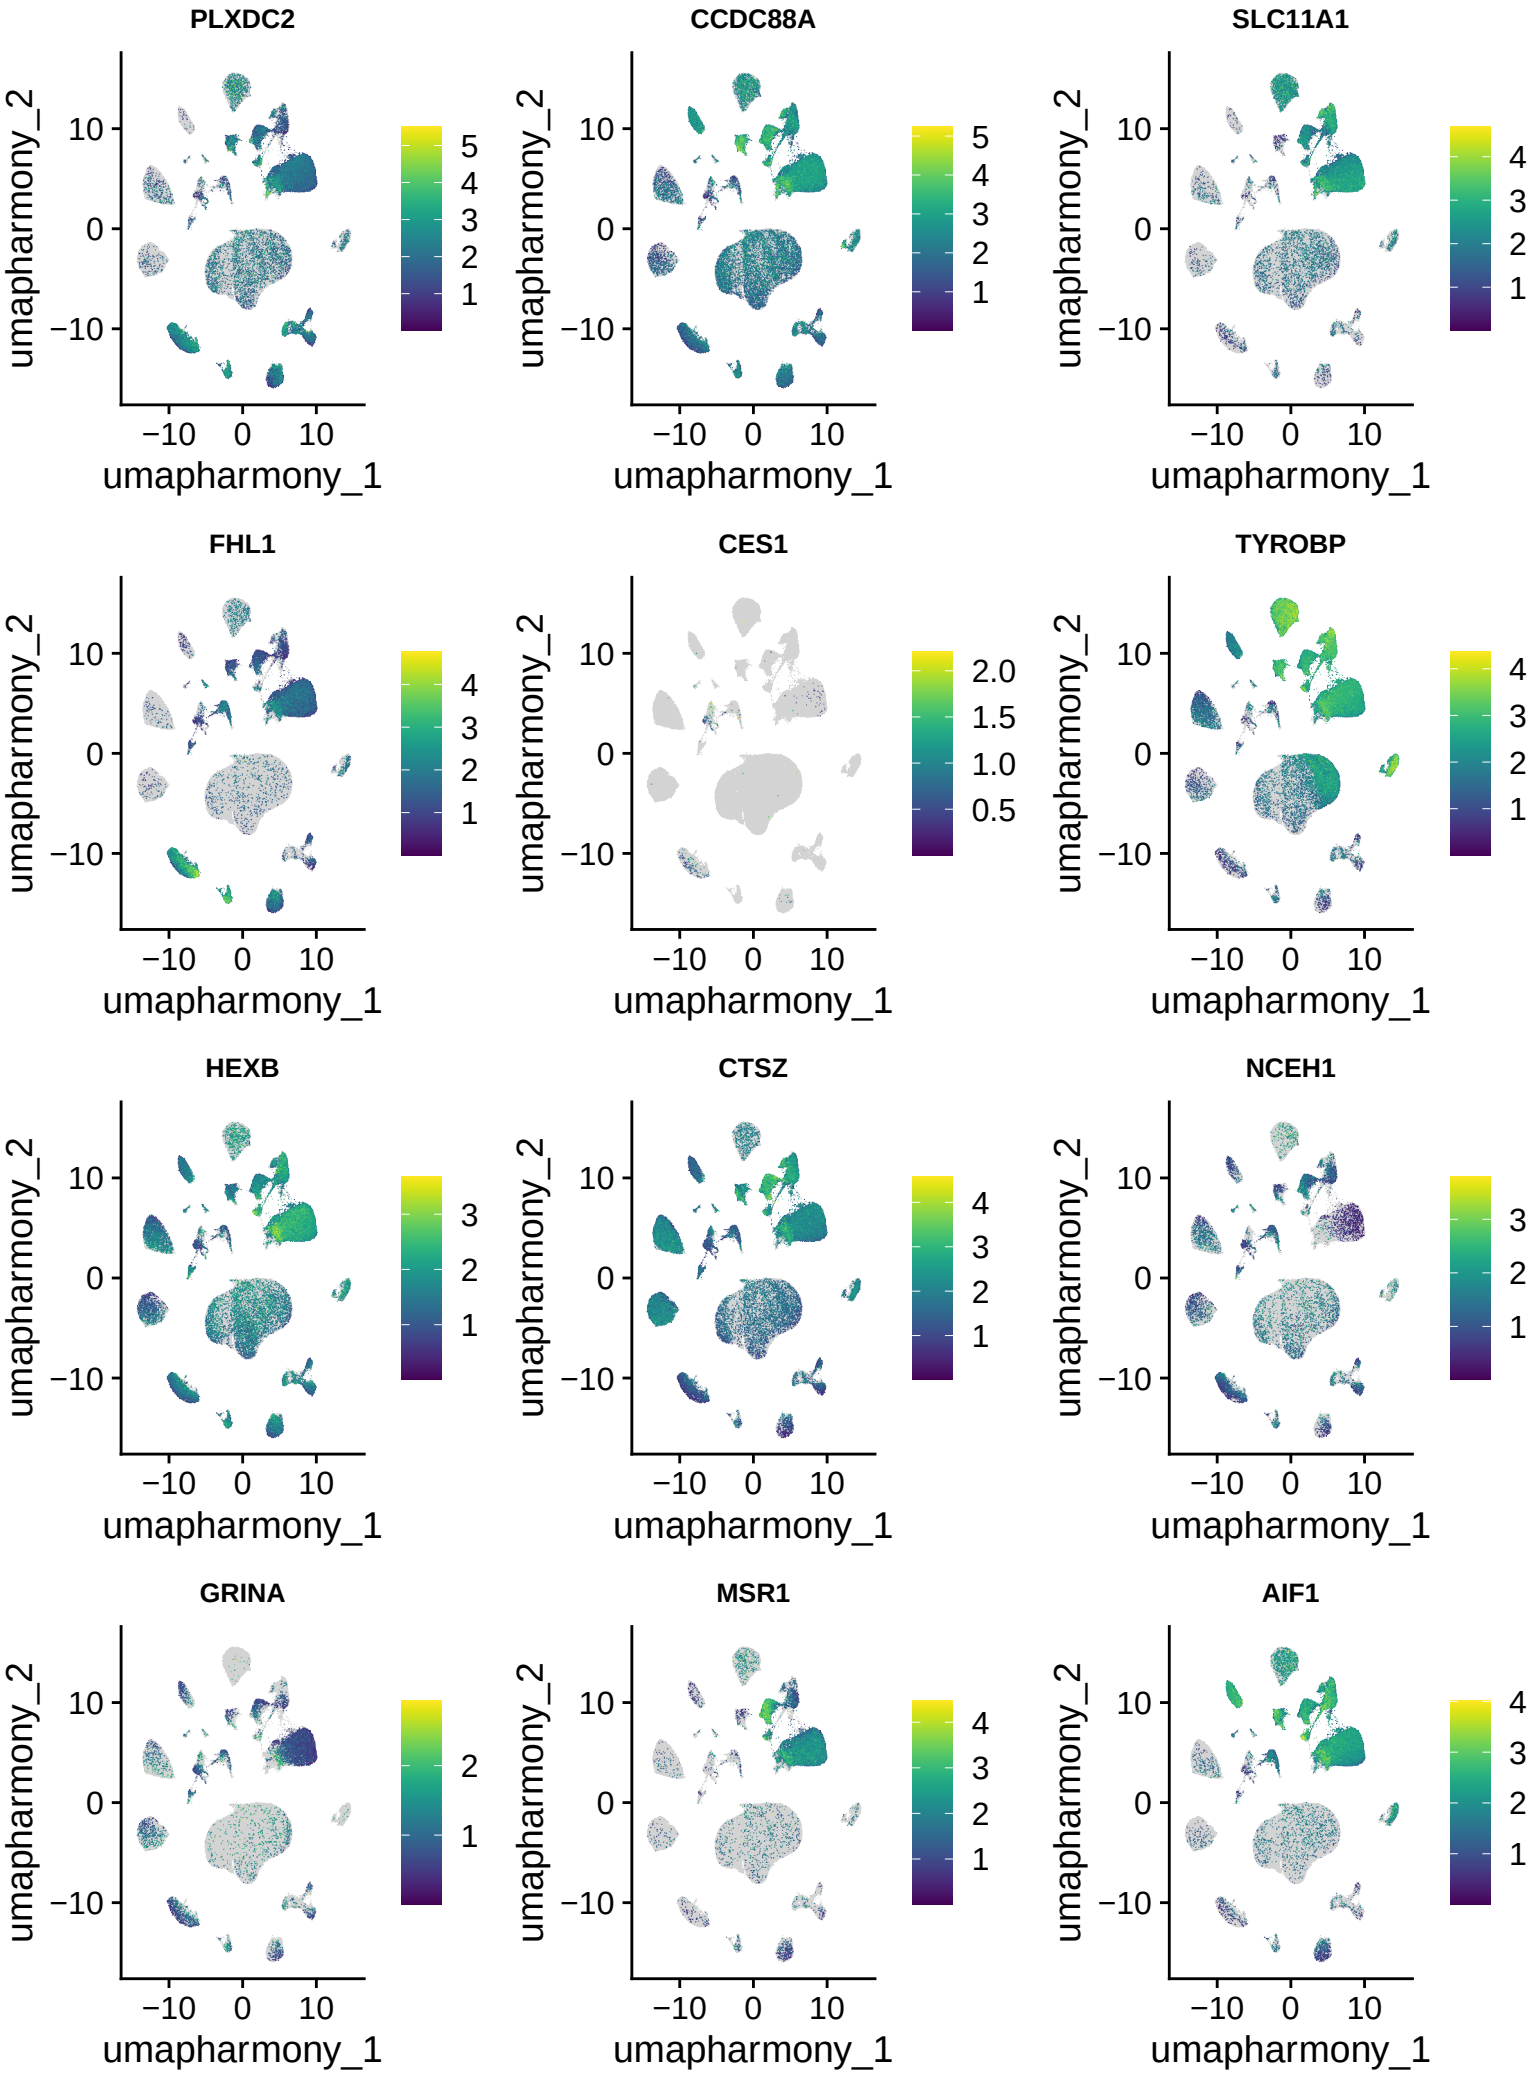

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, low purple to high yellow; zeros in grey. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

**Macrophages_AM_like | harmony_snn_res.0.7**



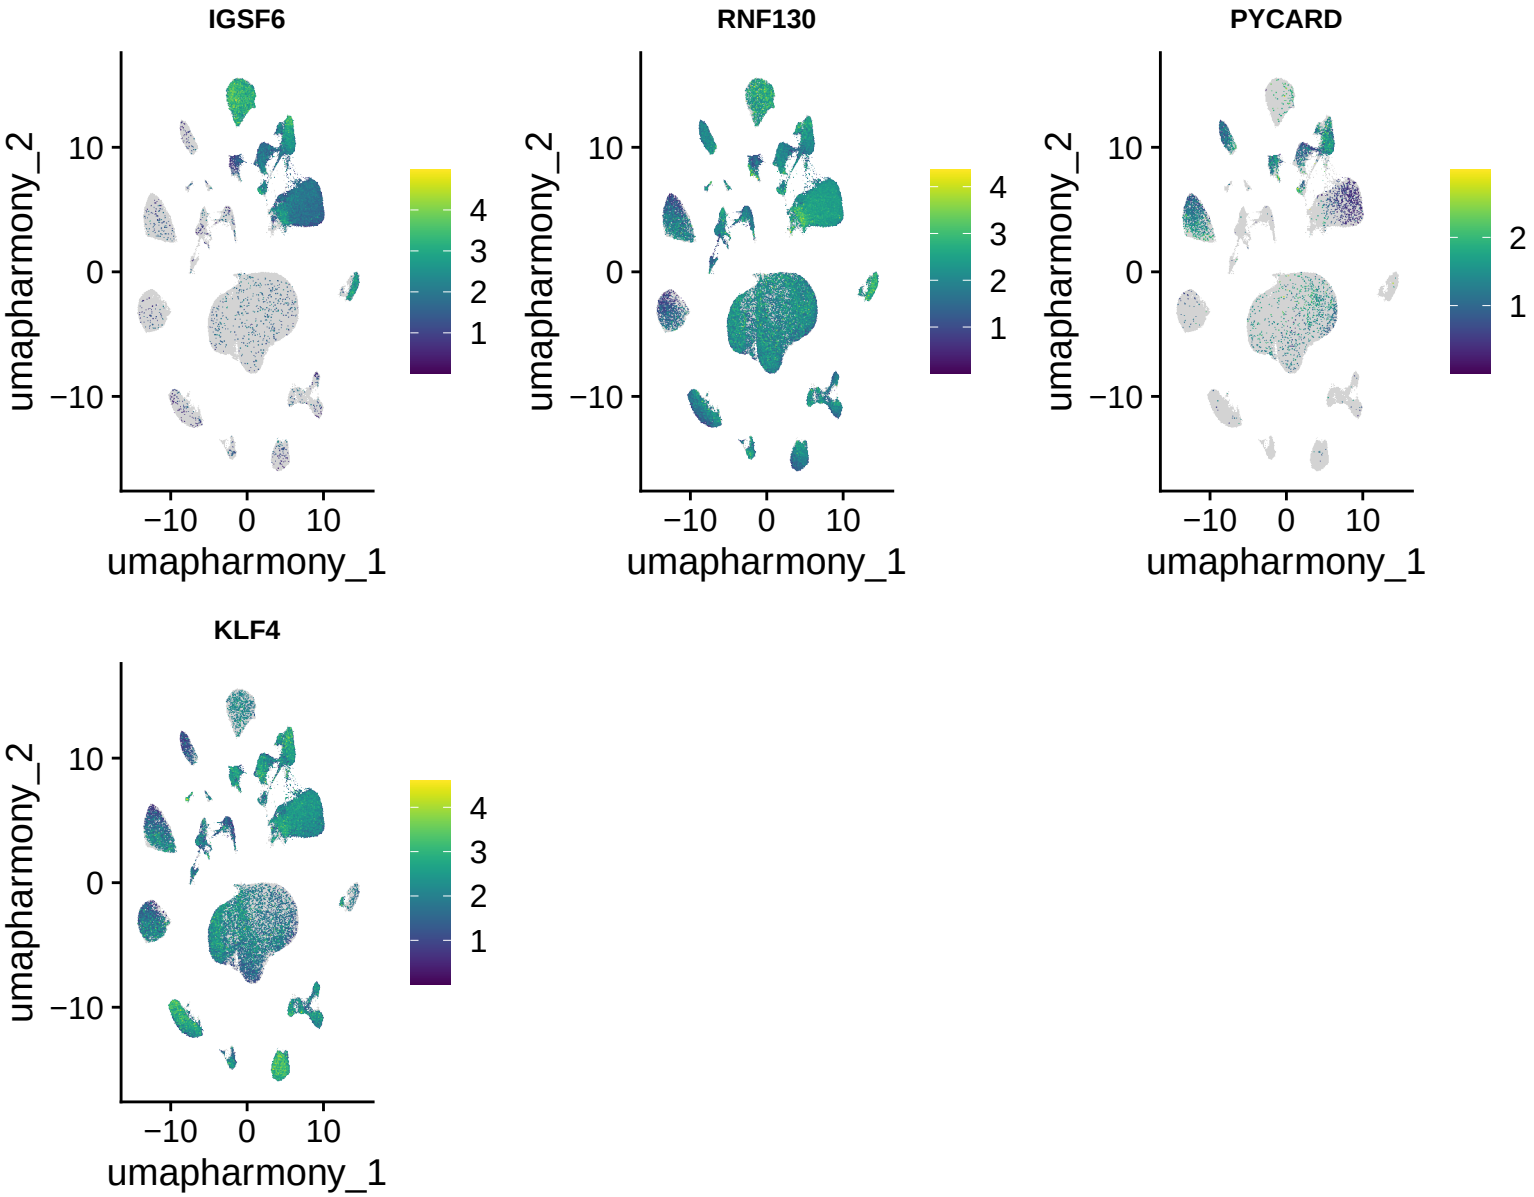

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, low purple to high yellow; zeros in grey. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

**Macrophages_AM_like | harmony_snn_res.0.7**




All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, low purple to high yellow; zeros in grey. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

**Macrophages_AM_like | harmony_snn_res.0.7**




All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, low purple to high yellow; zeros in grey. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.