Monocytes_inflammatory | harmony_snn_res.0.7

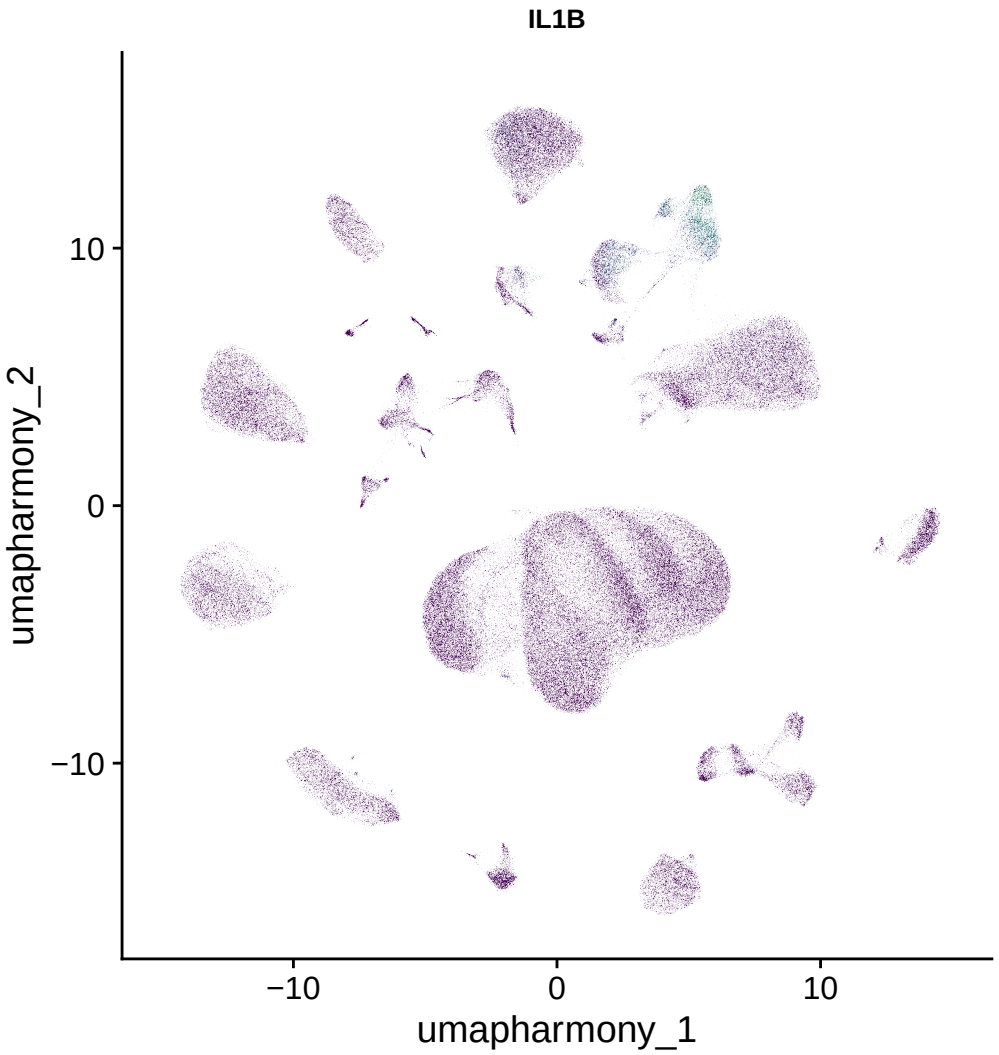

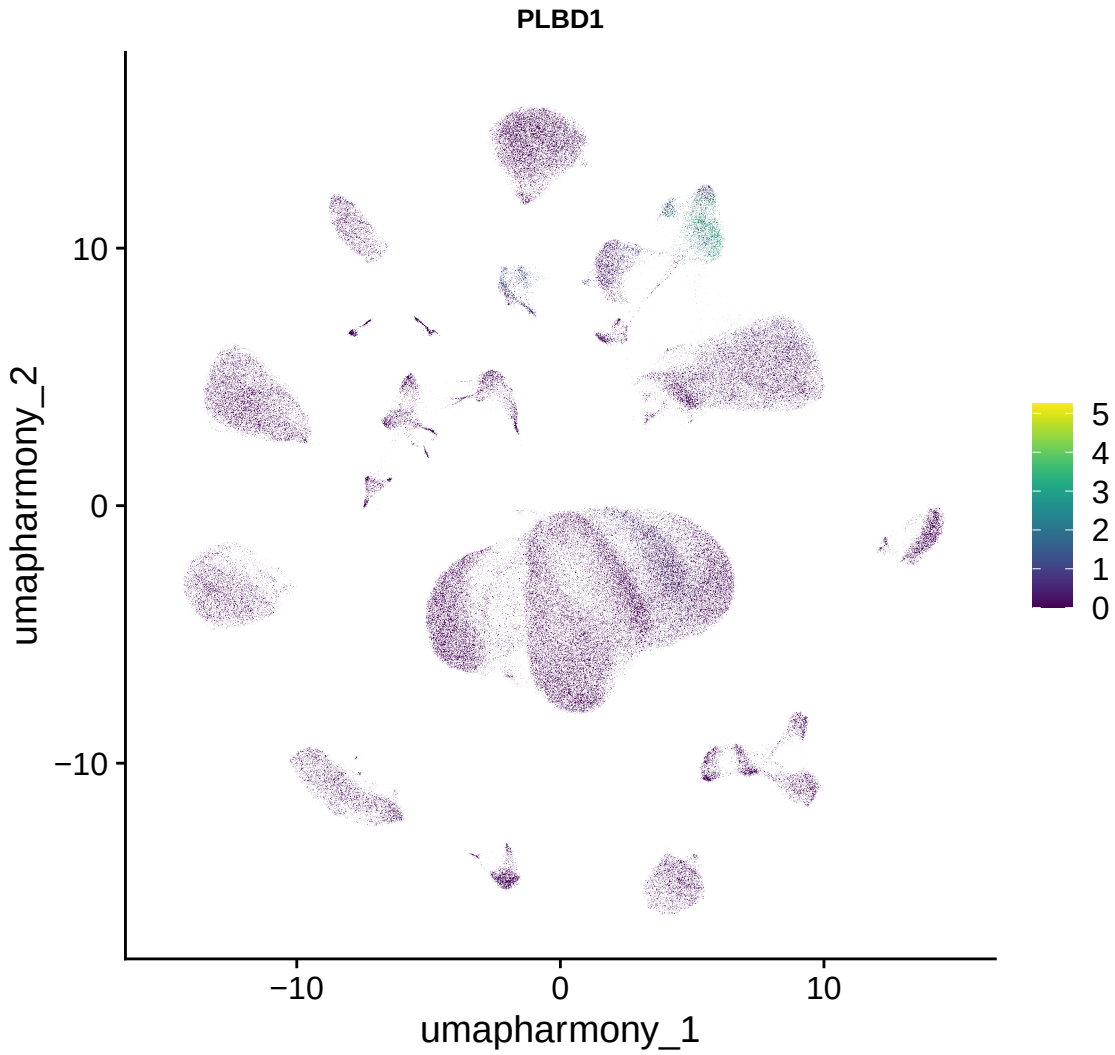

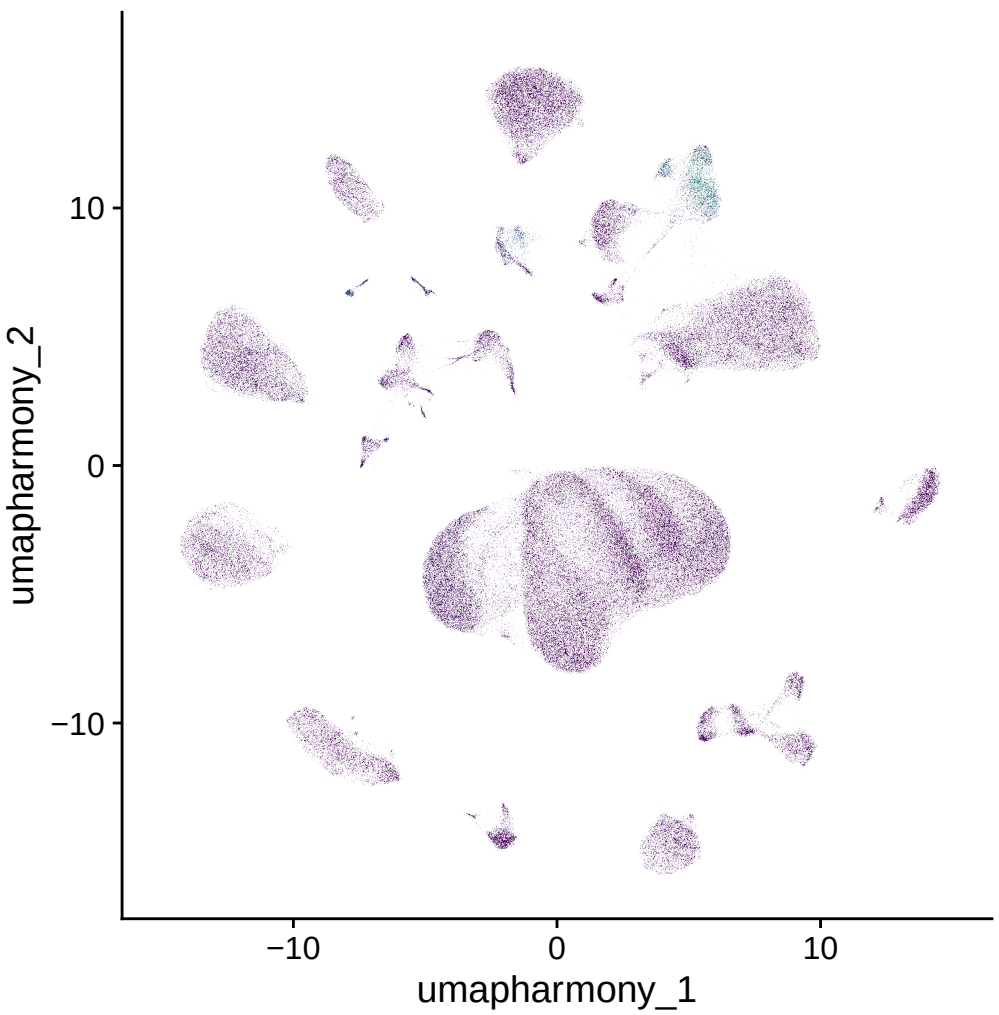

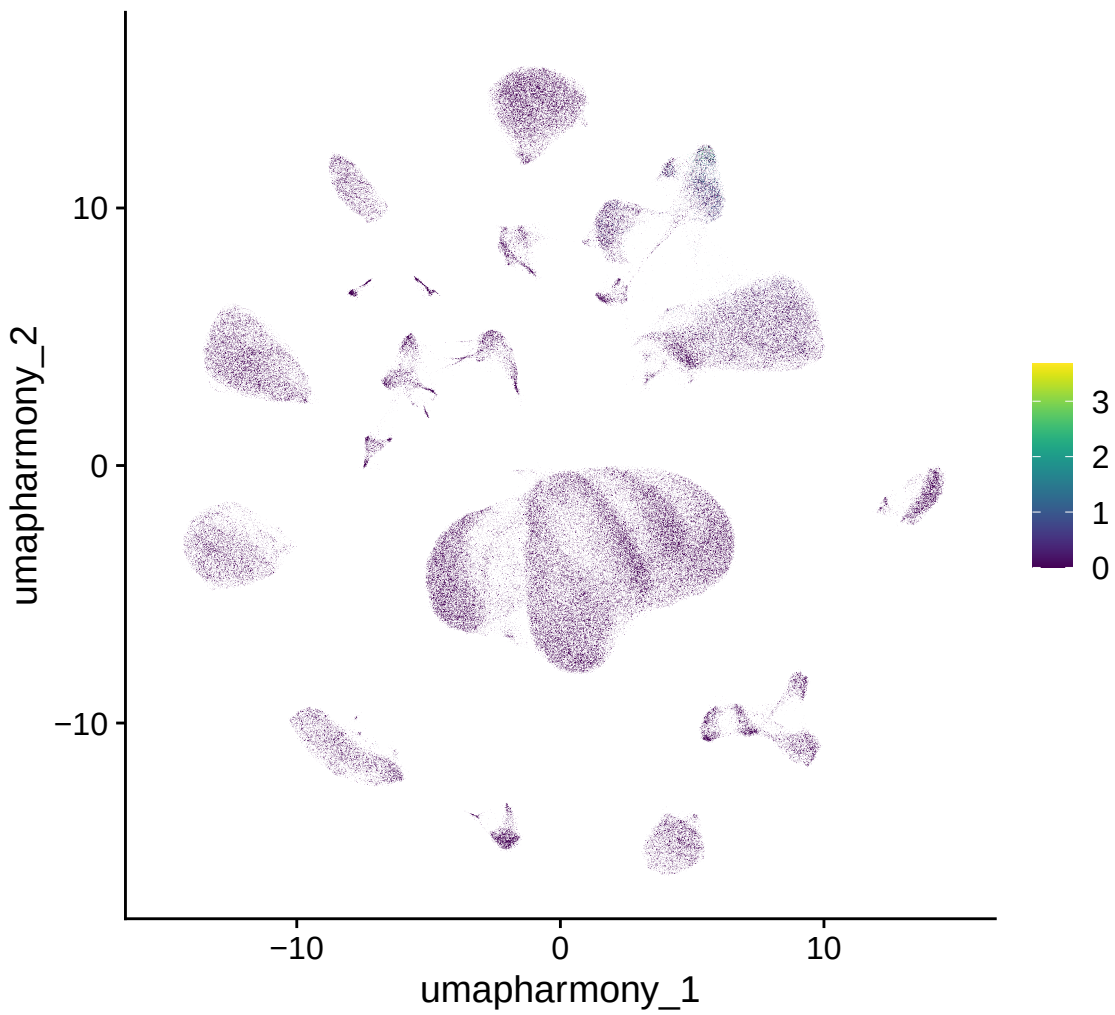

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Monocytes_inflammatory | harmony_snn_res.0.7

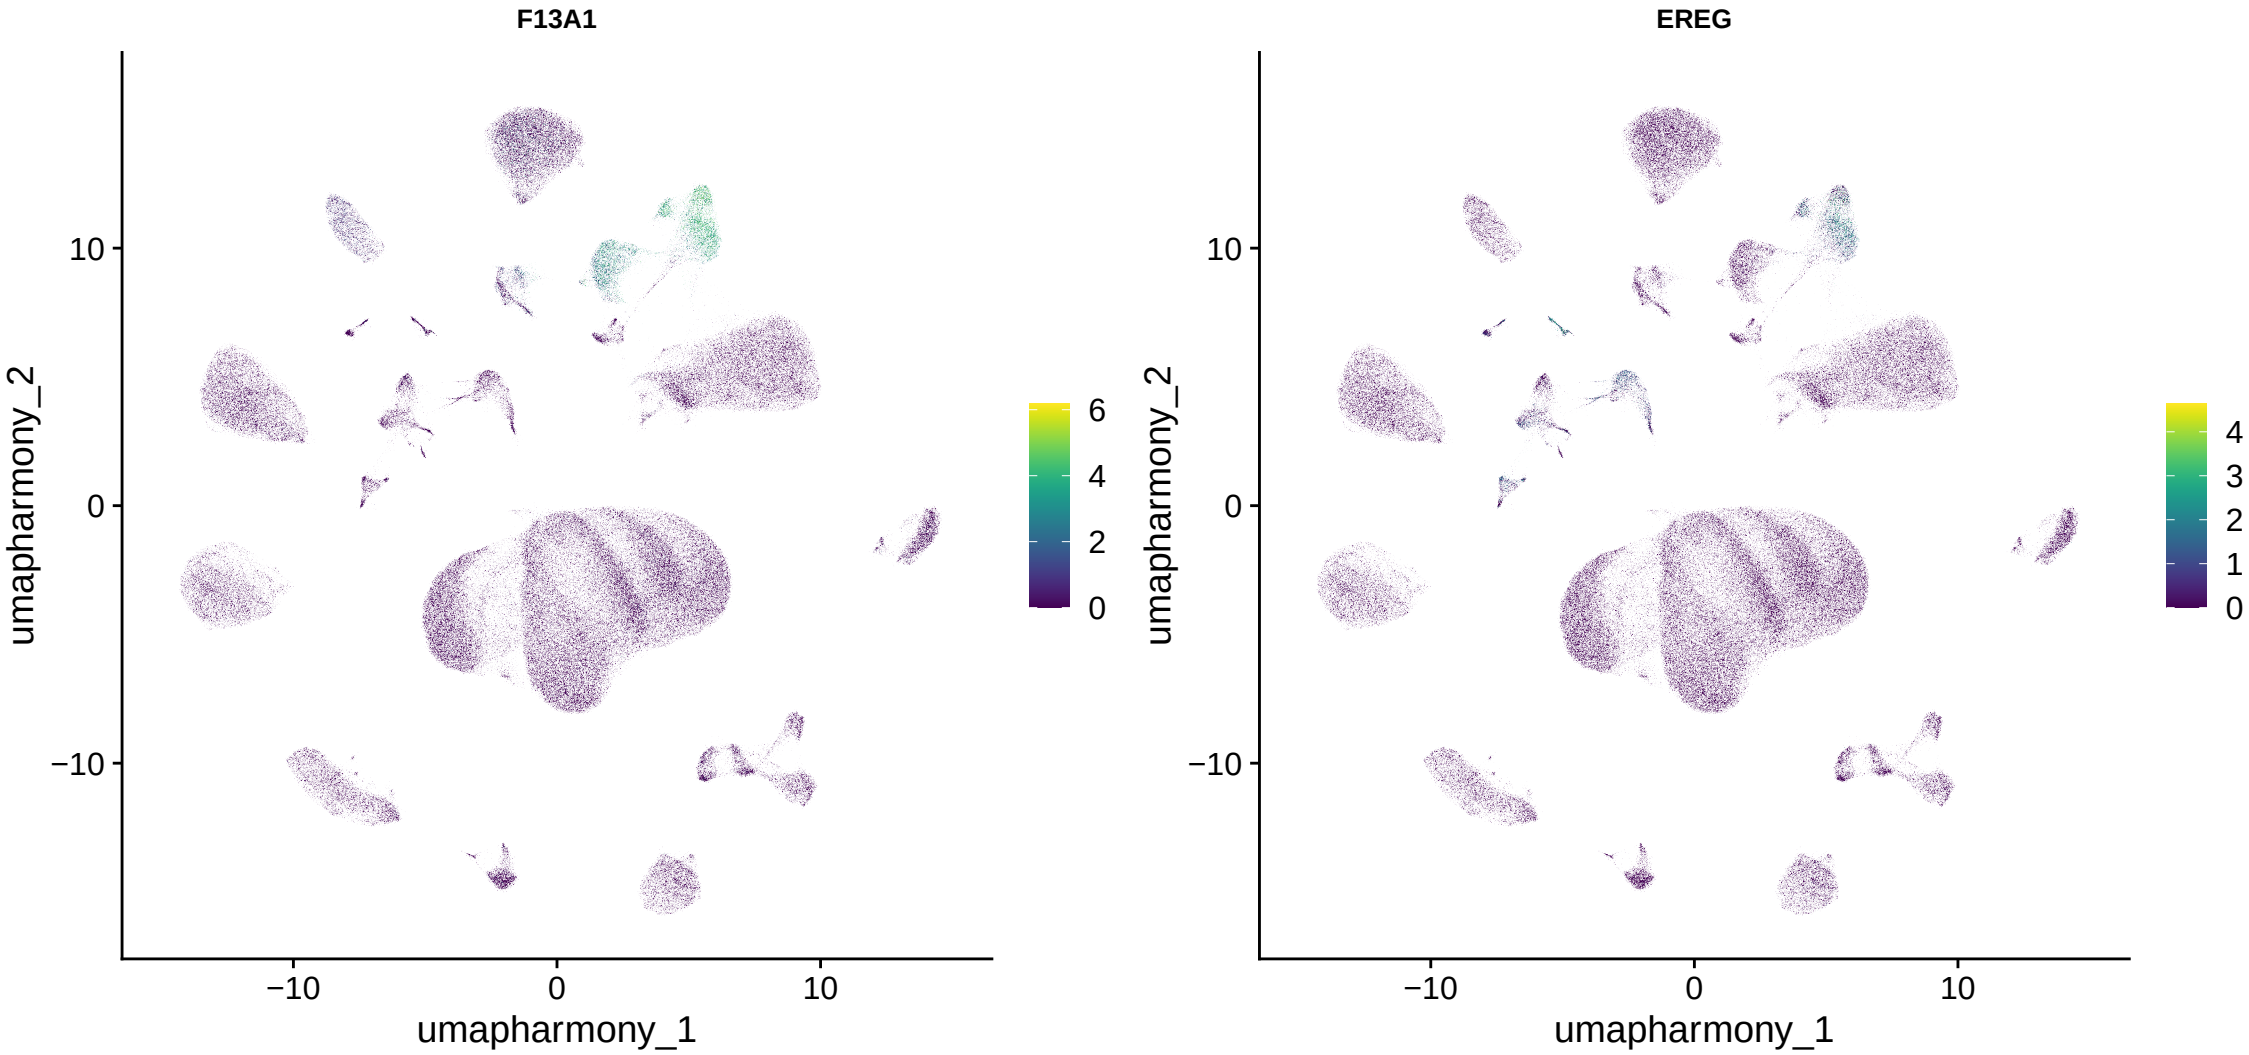

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Monocytes_inflammatory | harmony_snn_res.0.7

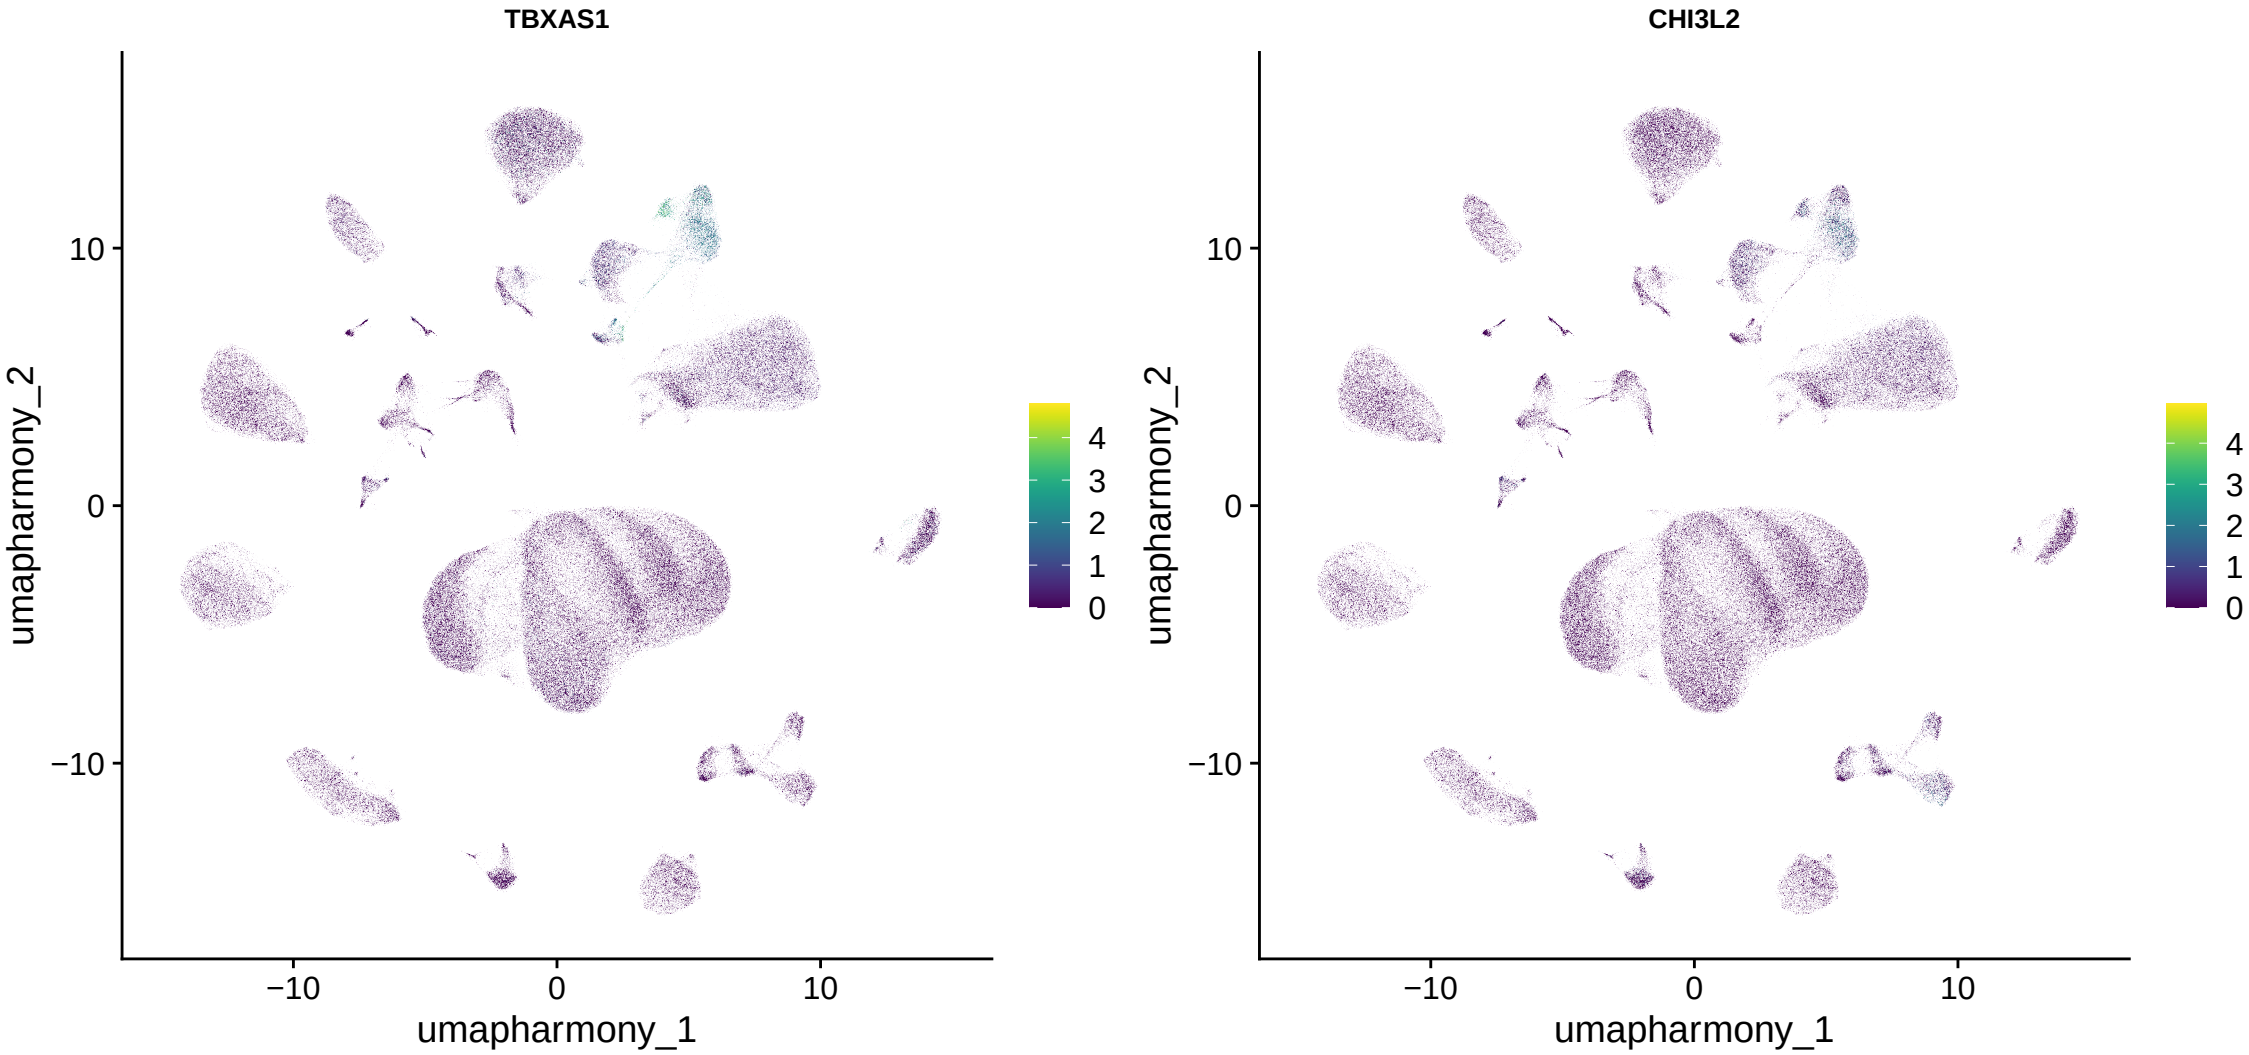

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Monocytes_inflammatory | harmony_snn_res.0.7

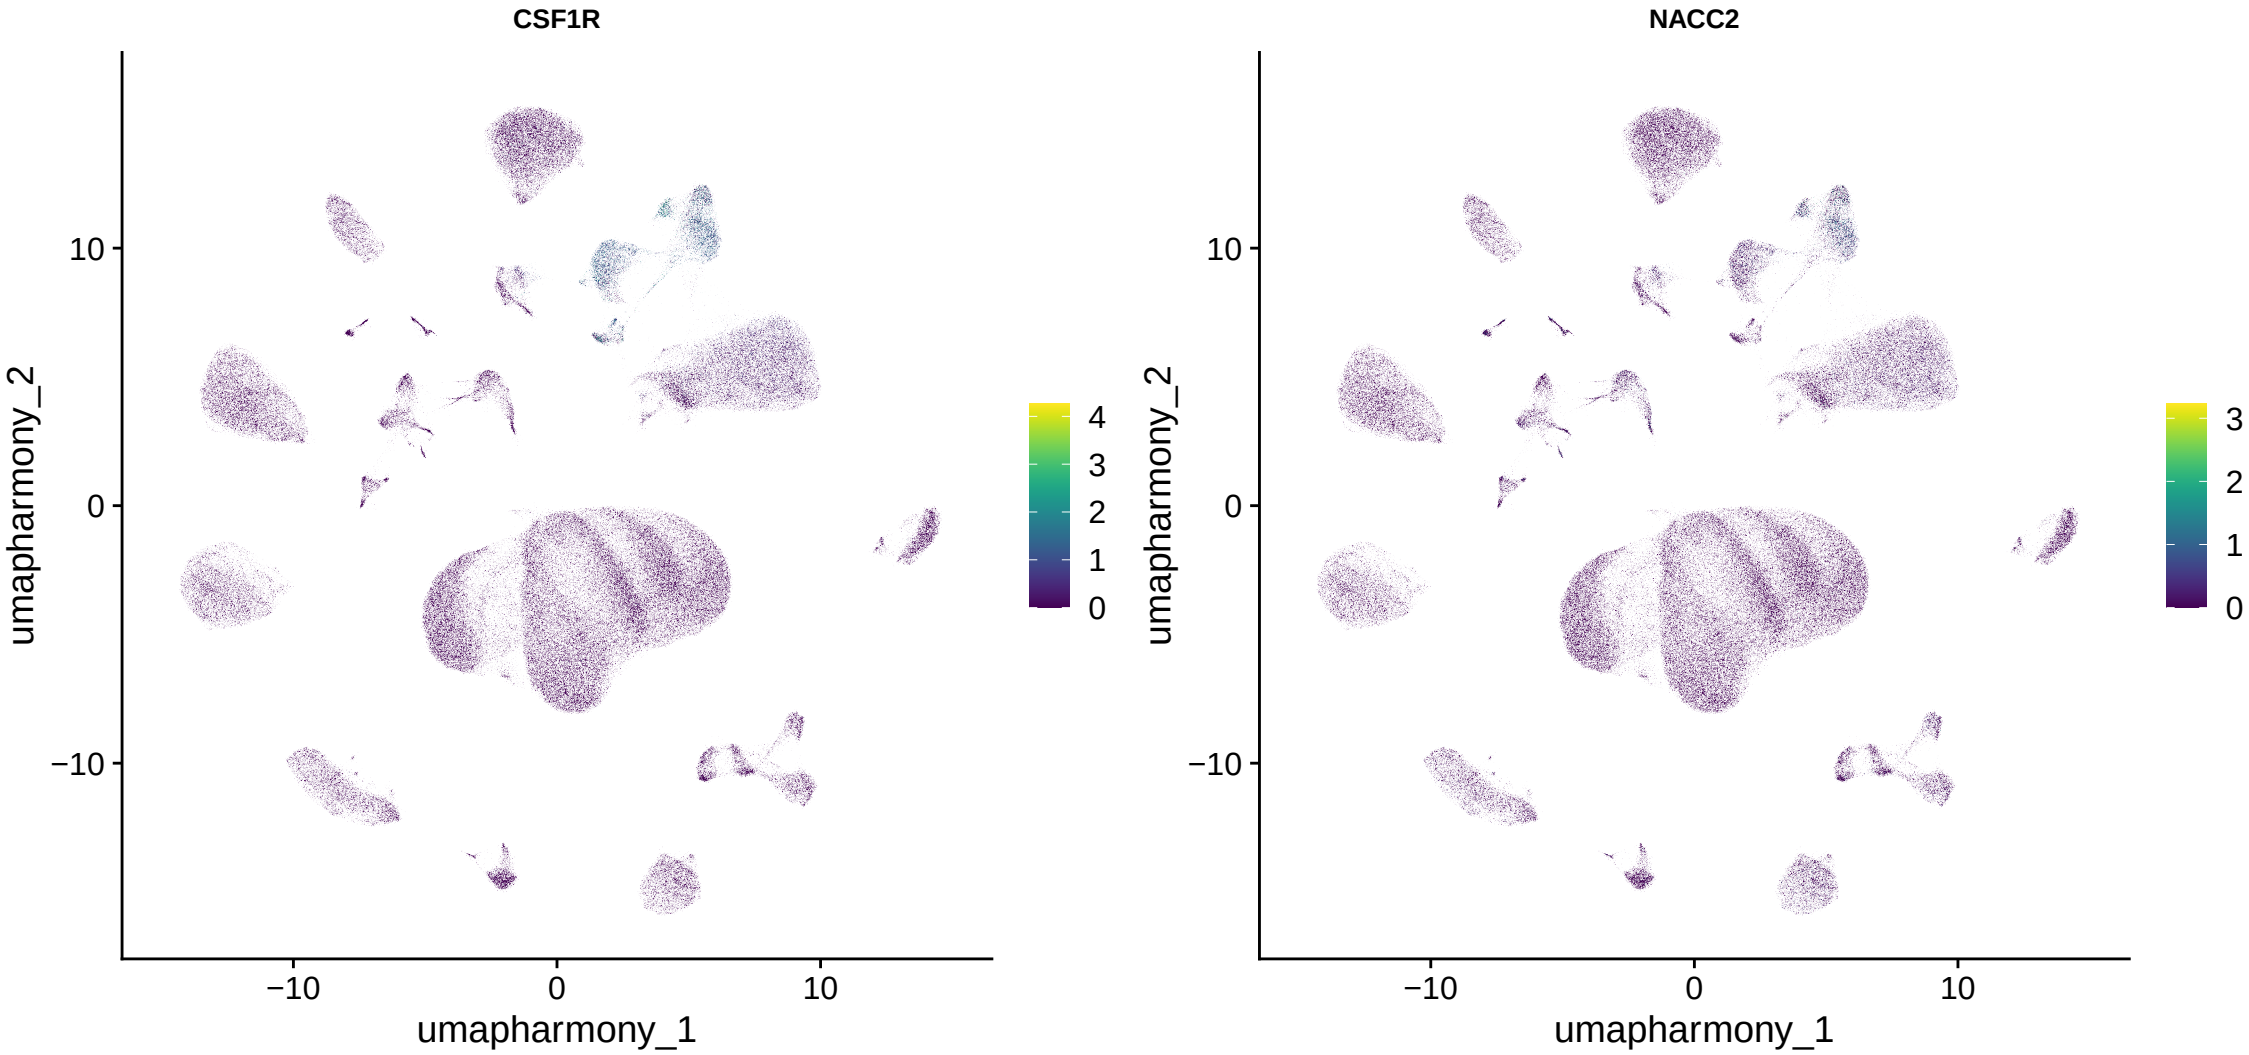

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Monocytes_inflammatory | harmony_snn_res.0.7

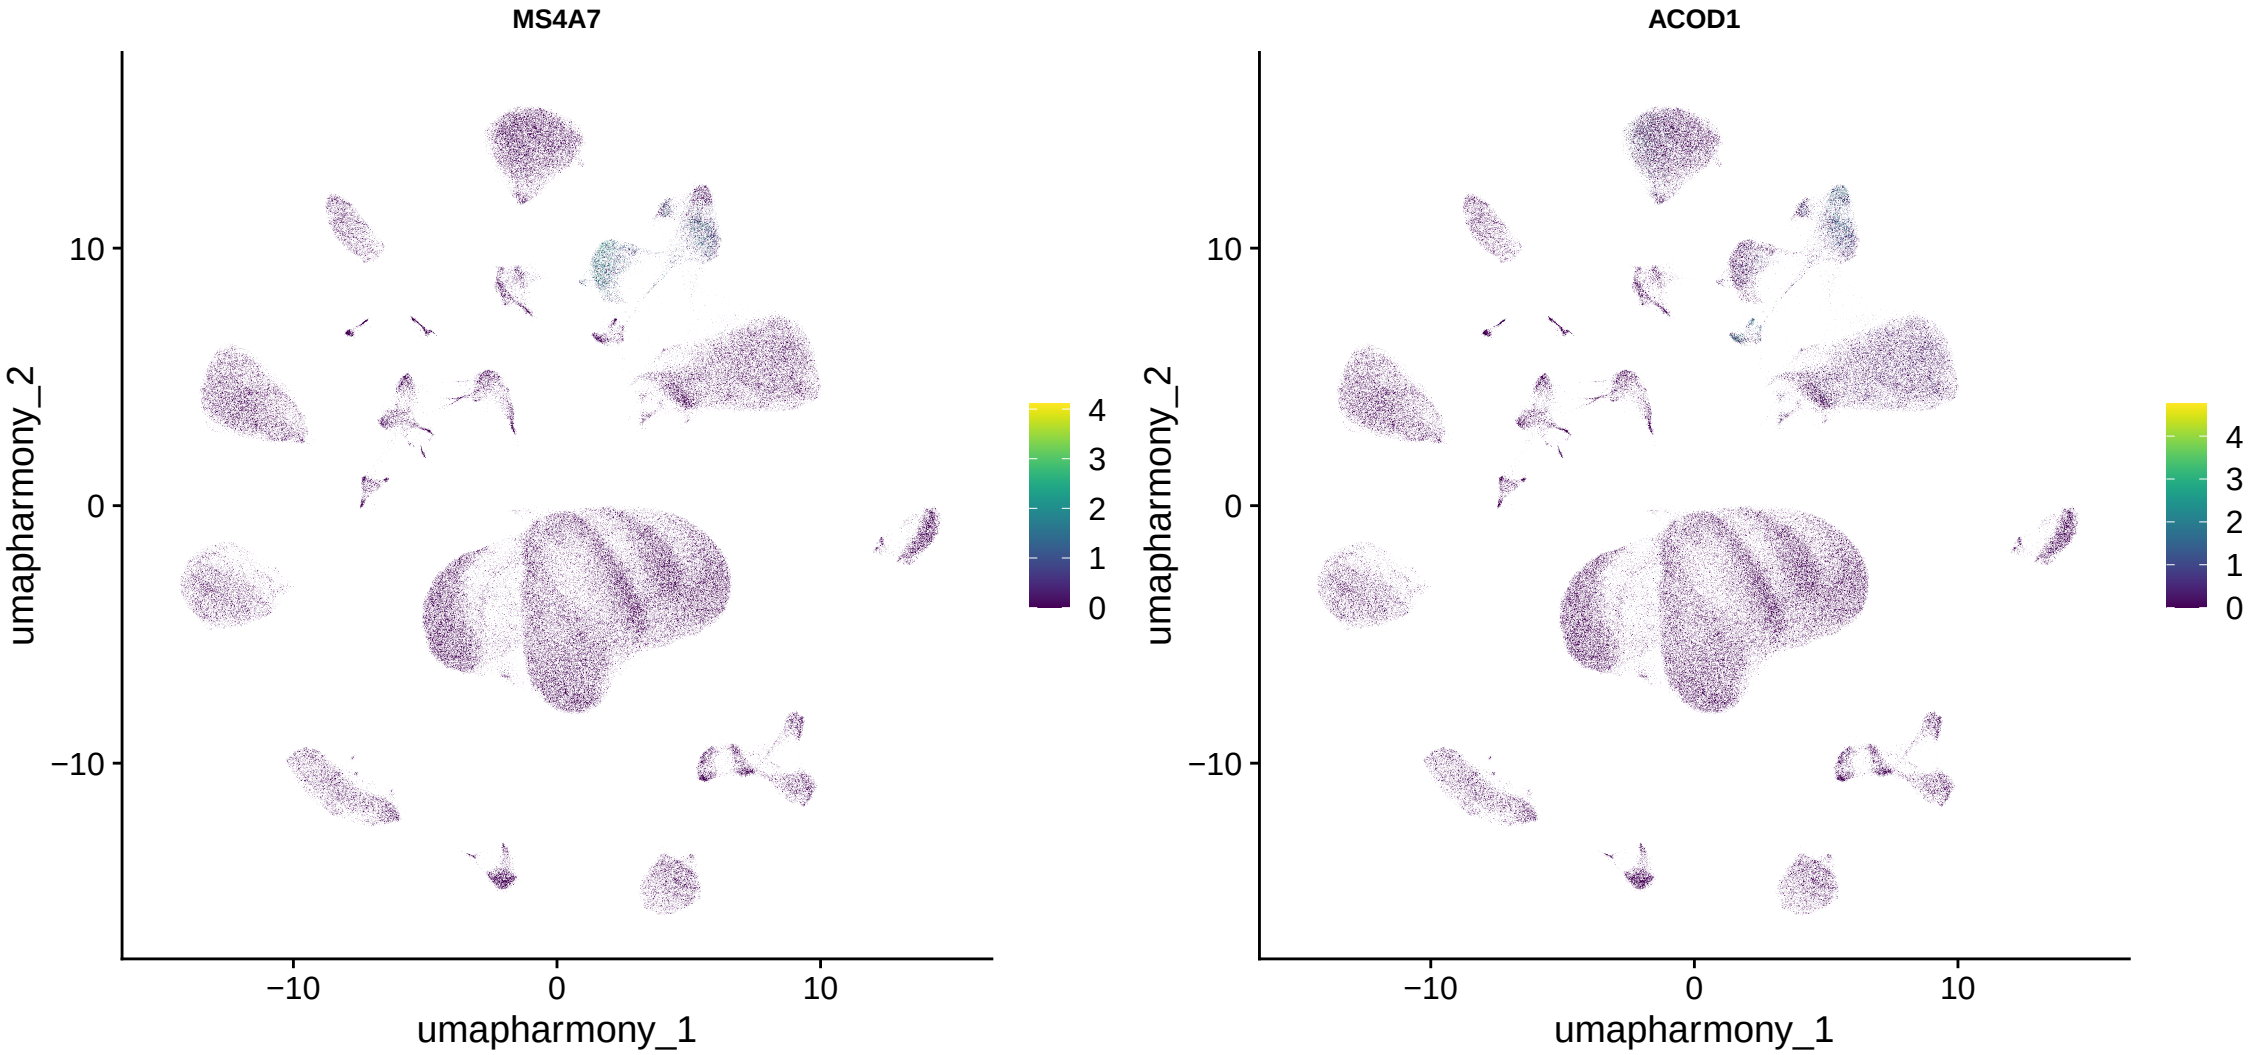

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Monocytes_inflammatory | harmony_snn_res.0.7

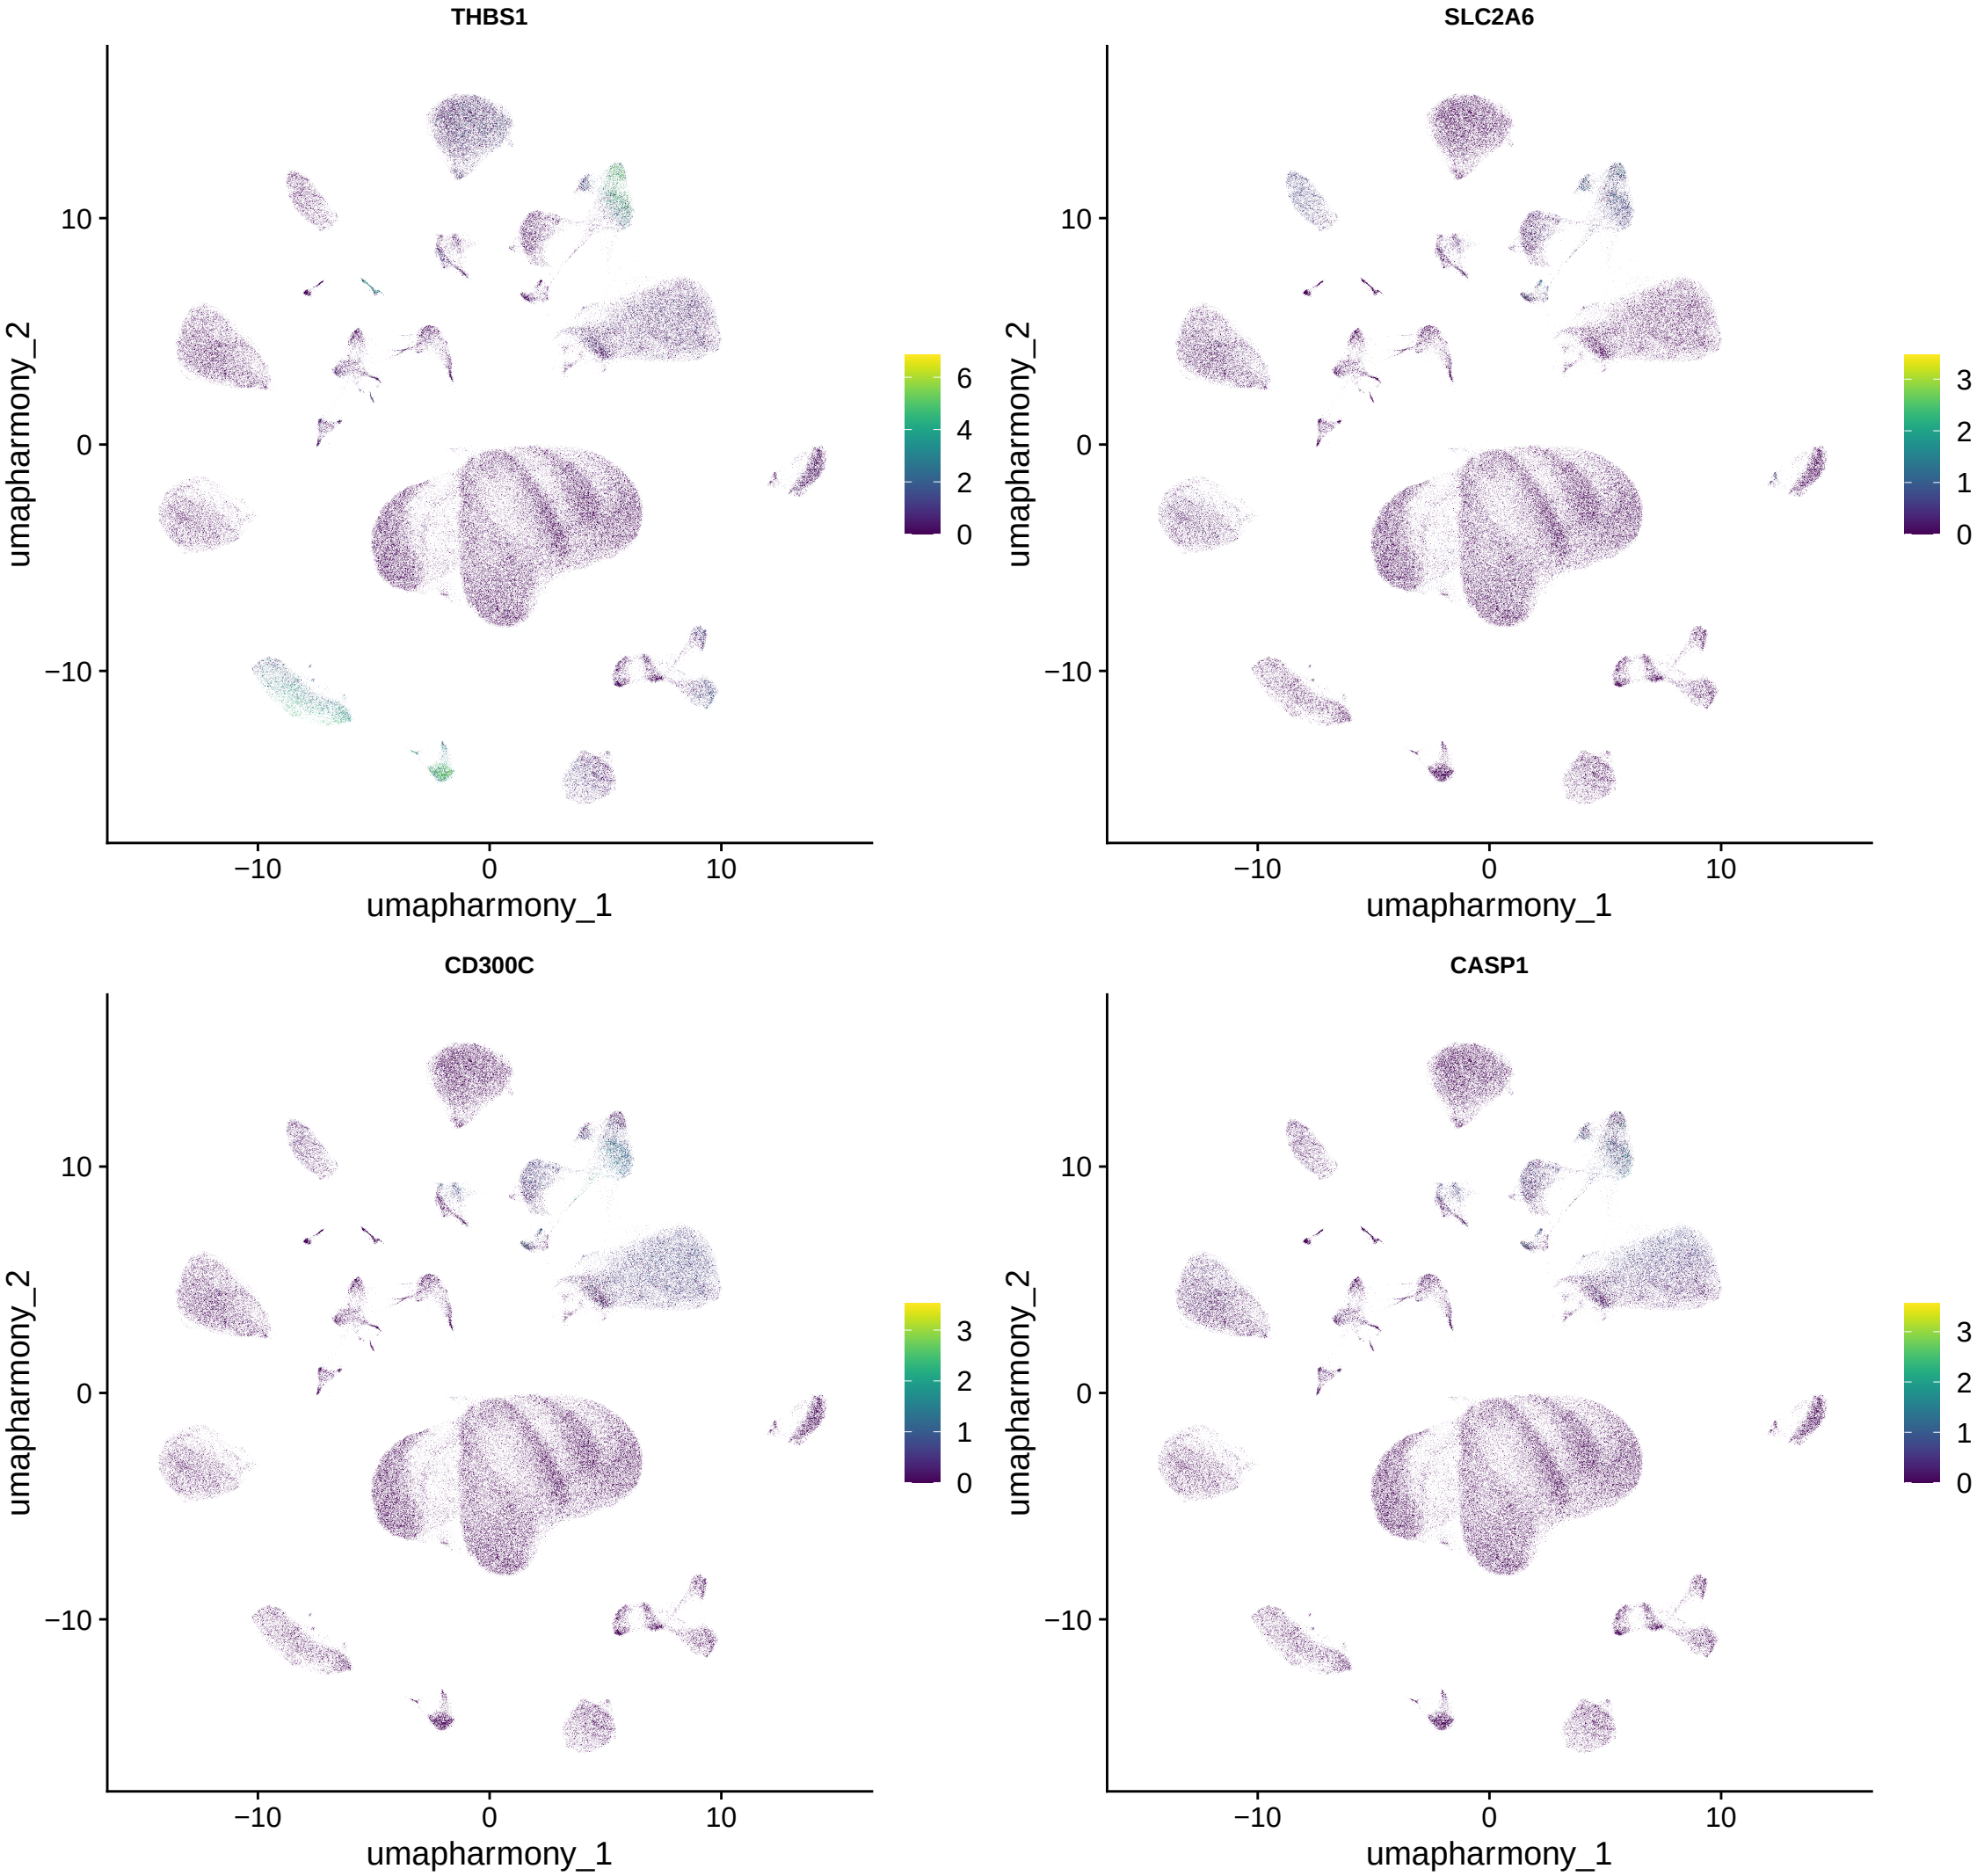

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Monocytes_inflammatory | harmony_snn_res.0.7

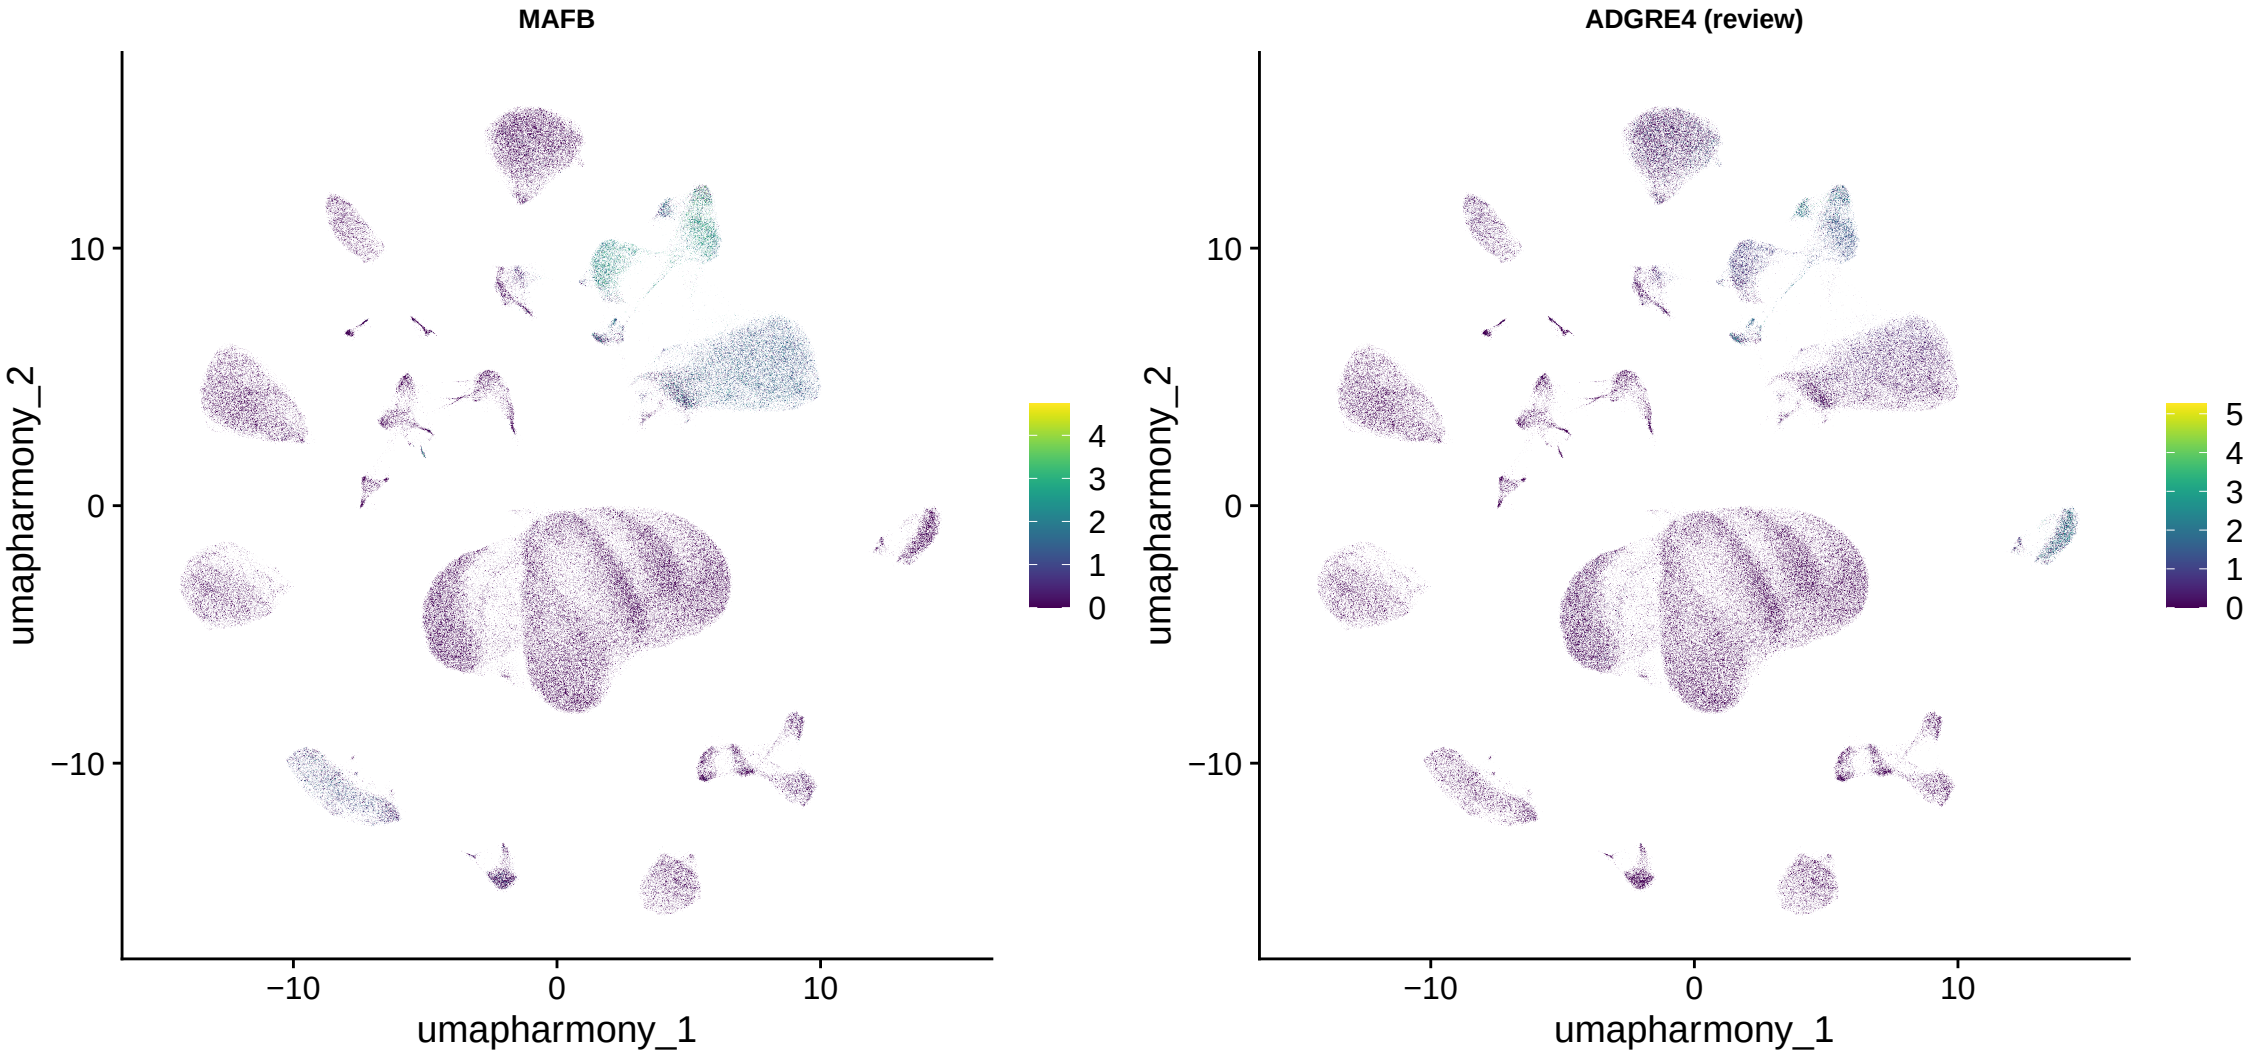

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Monocytes_inflammatory | harmony_snn_res.0.7

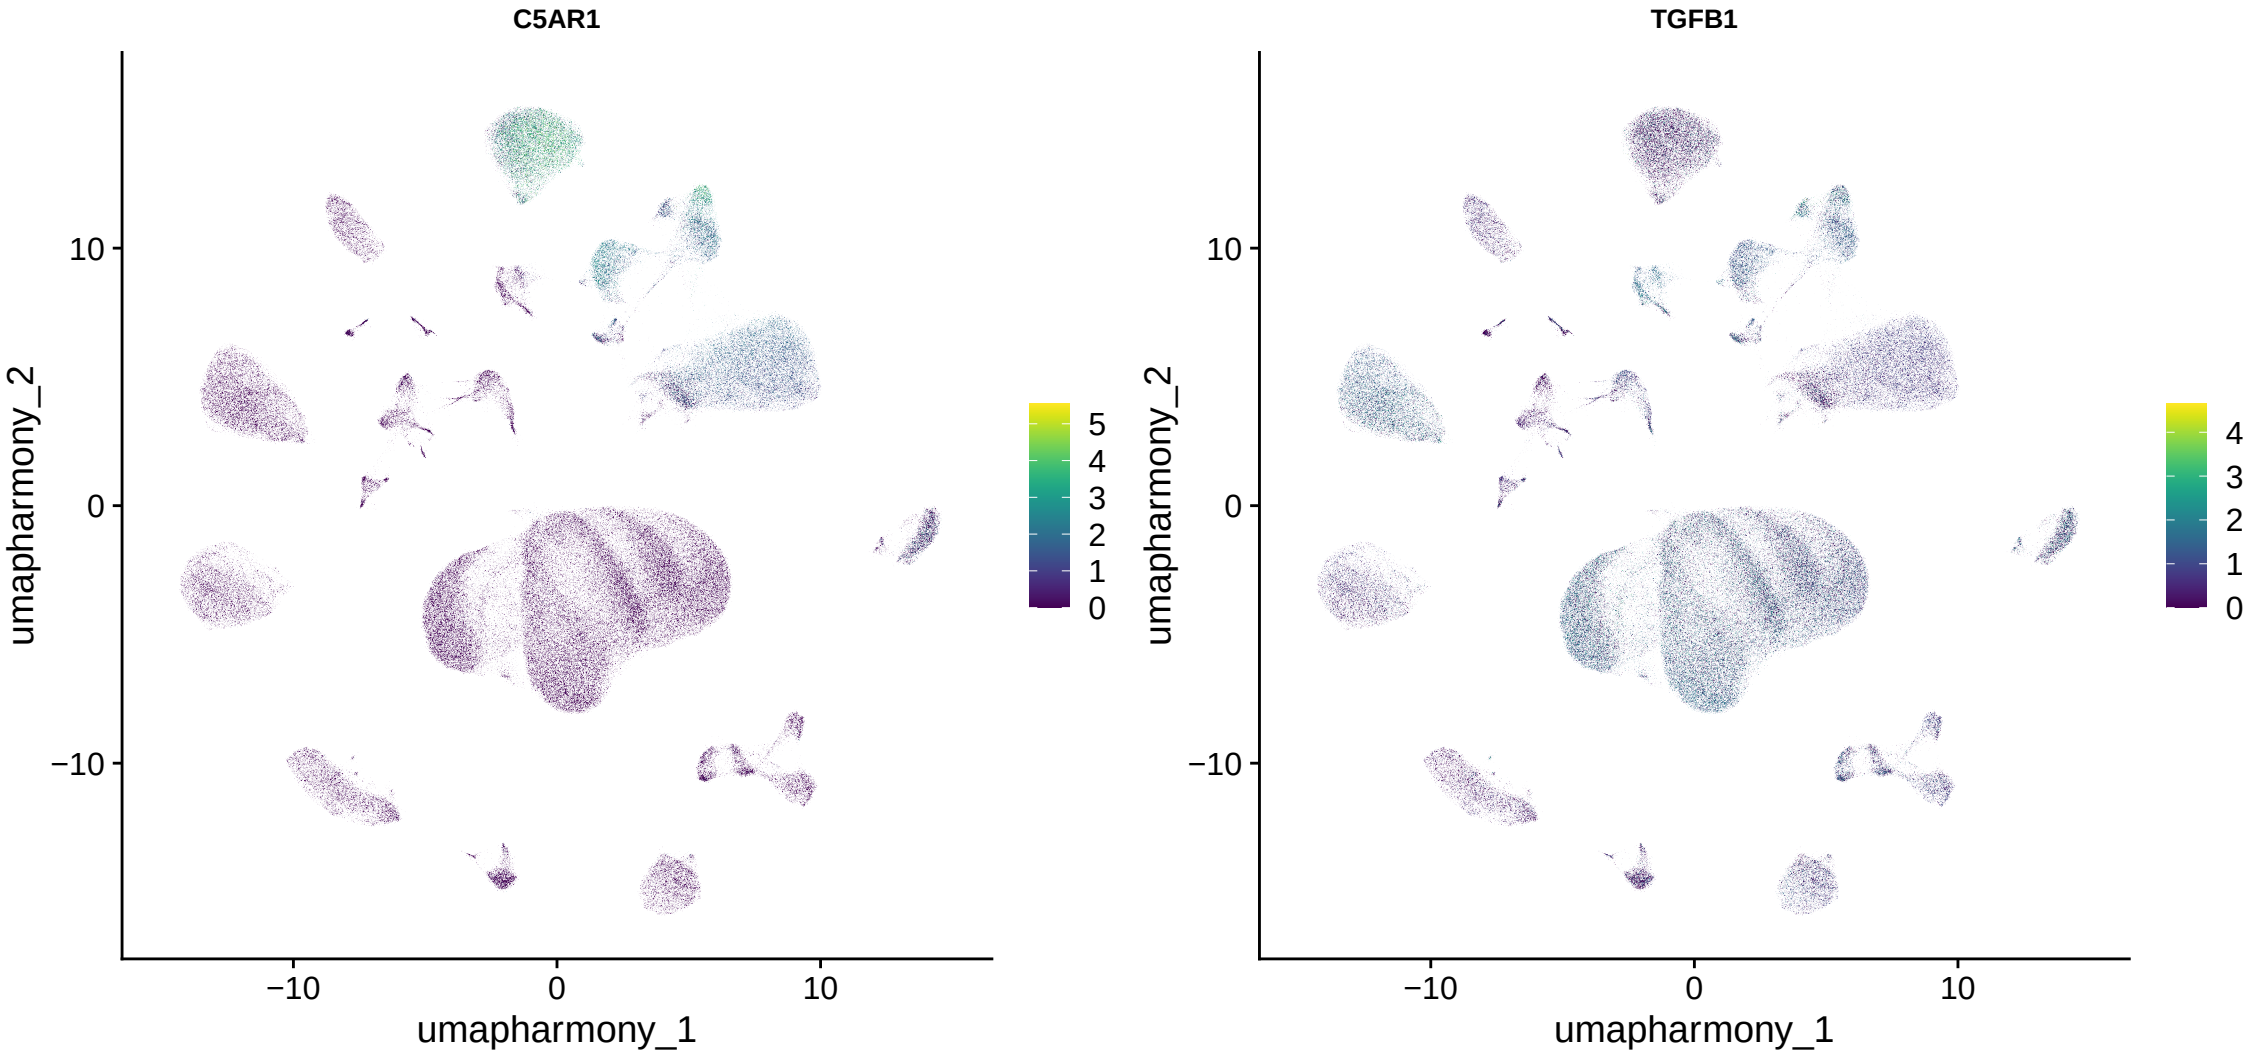

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Monocytes_inflammatory | harmony_snn_res.0.7

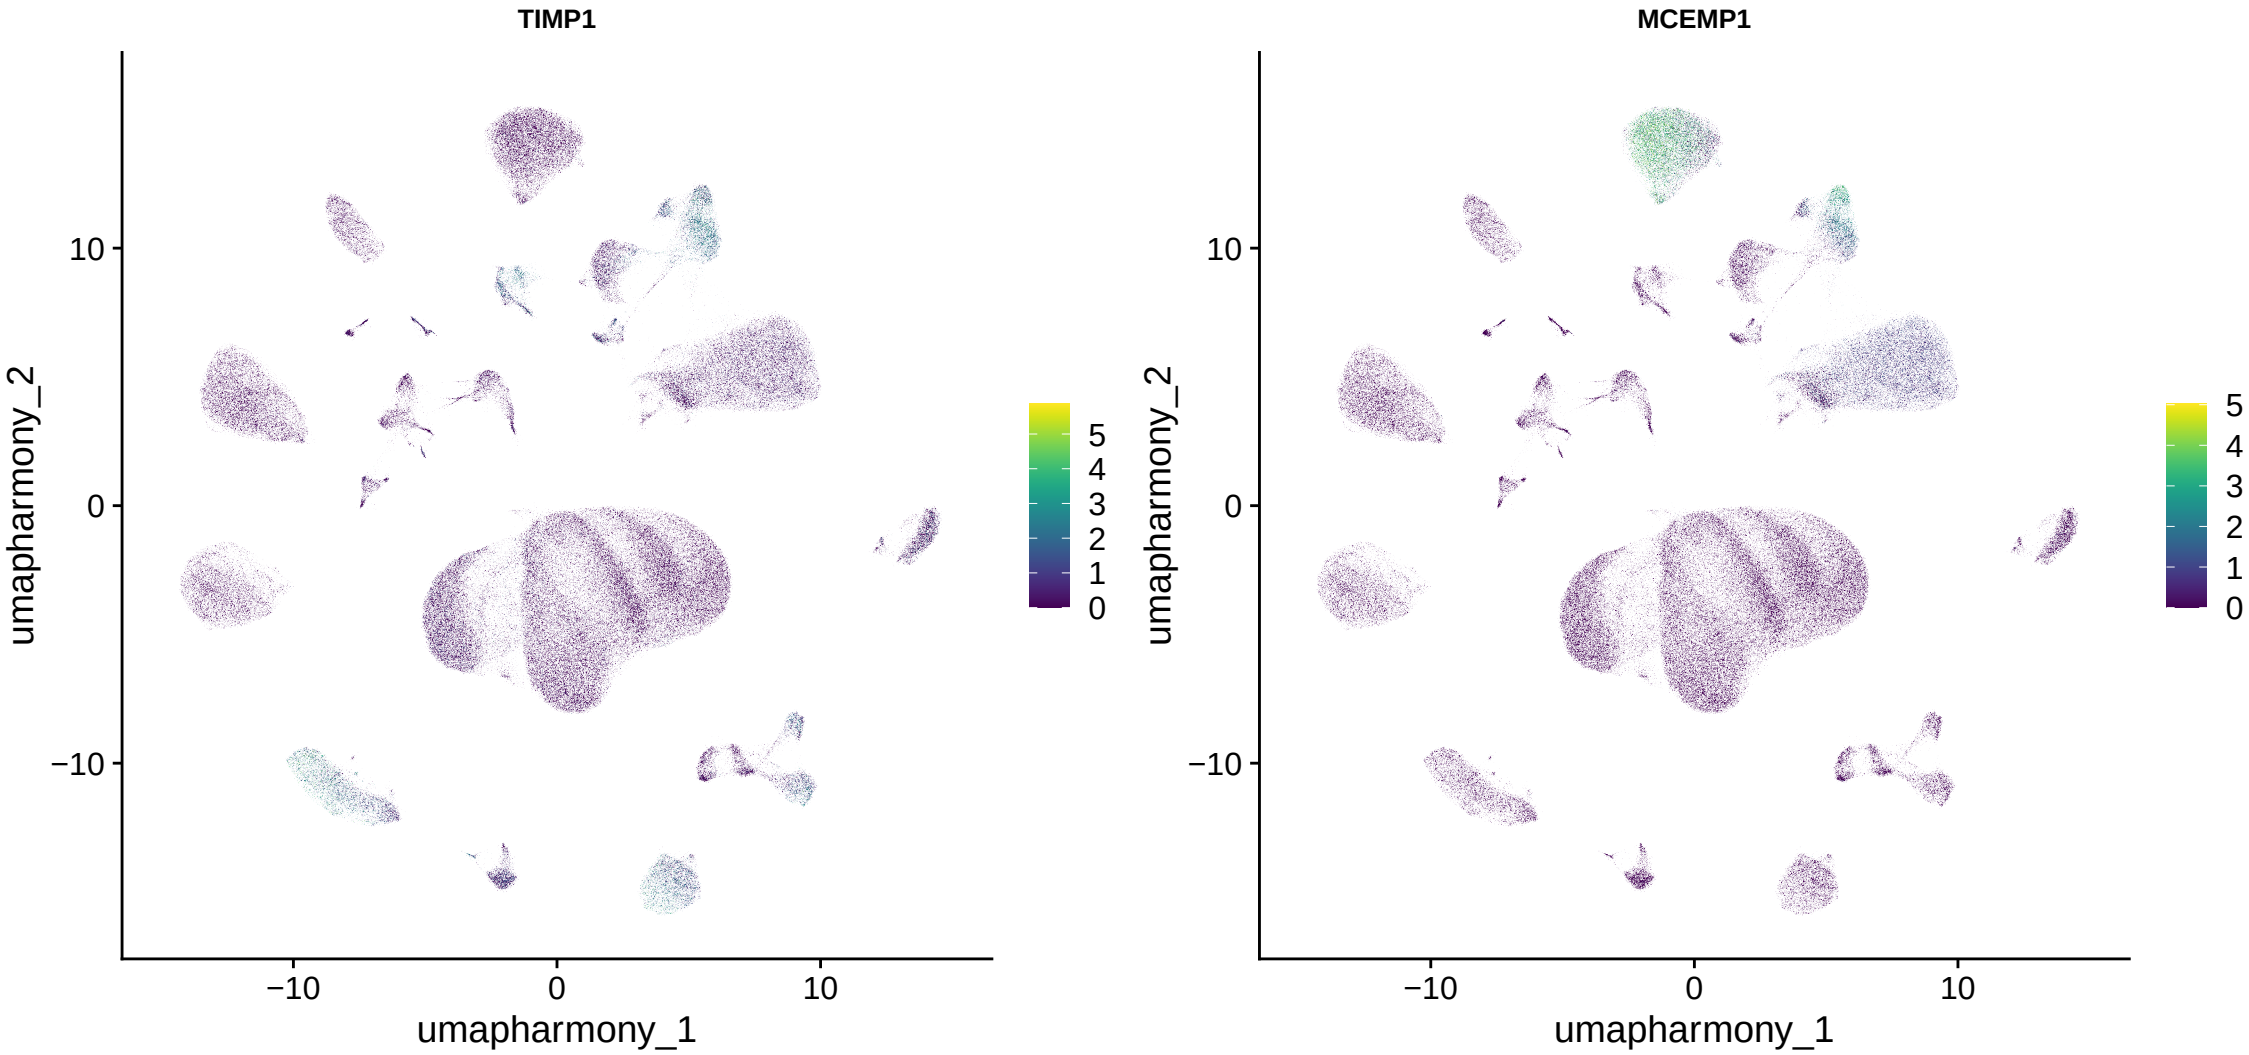

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Monocytes_inflammatory | harmony_snn_res.0.7

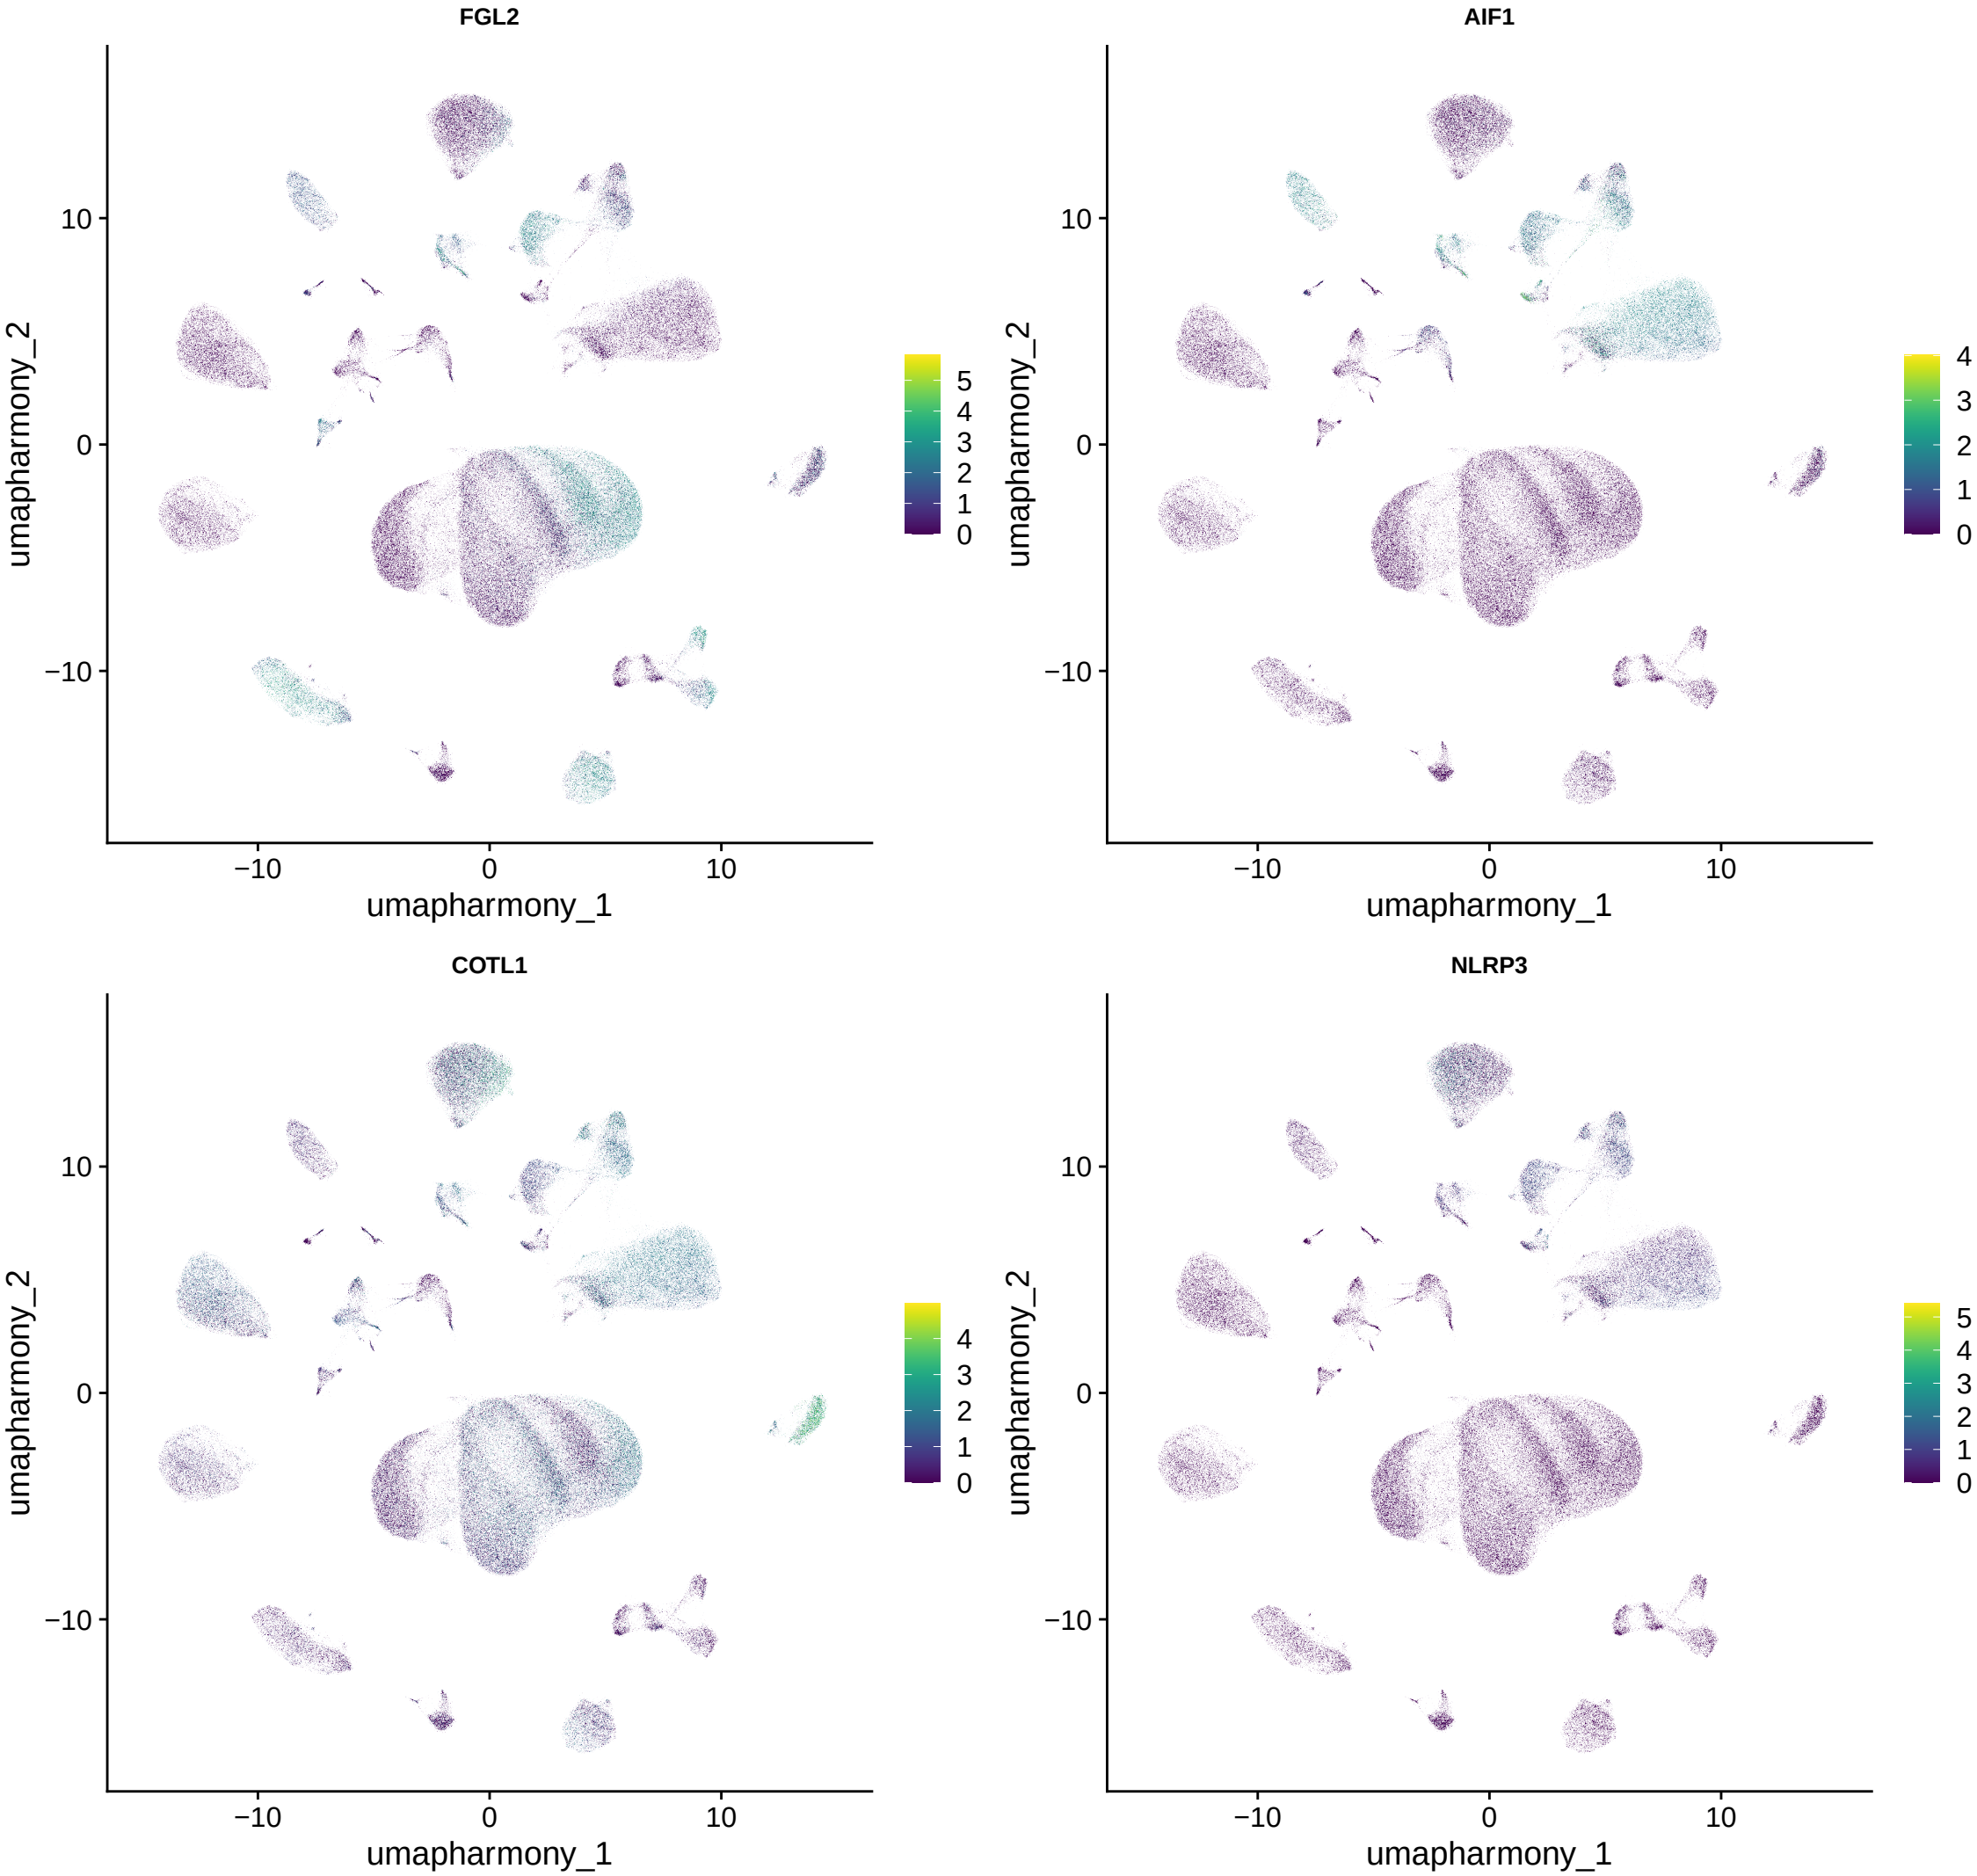

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Monocytes_inflammatory | harmony_snn_res.0.7

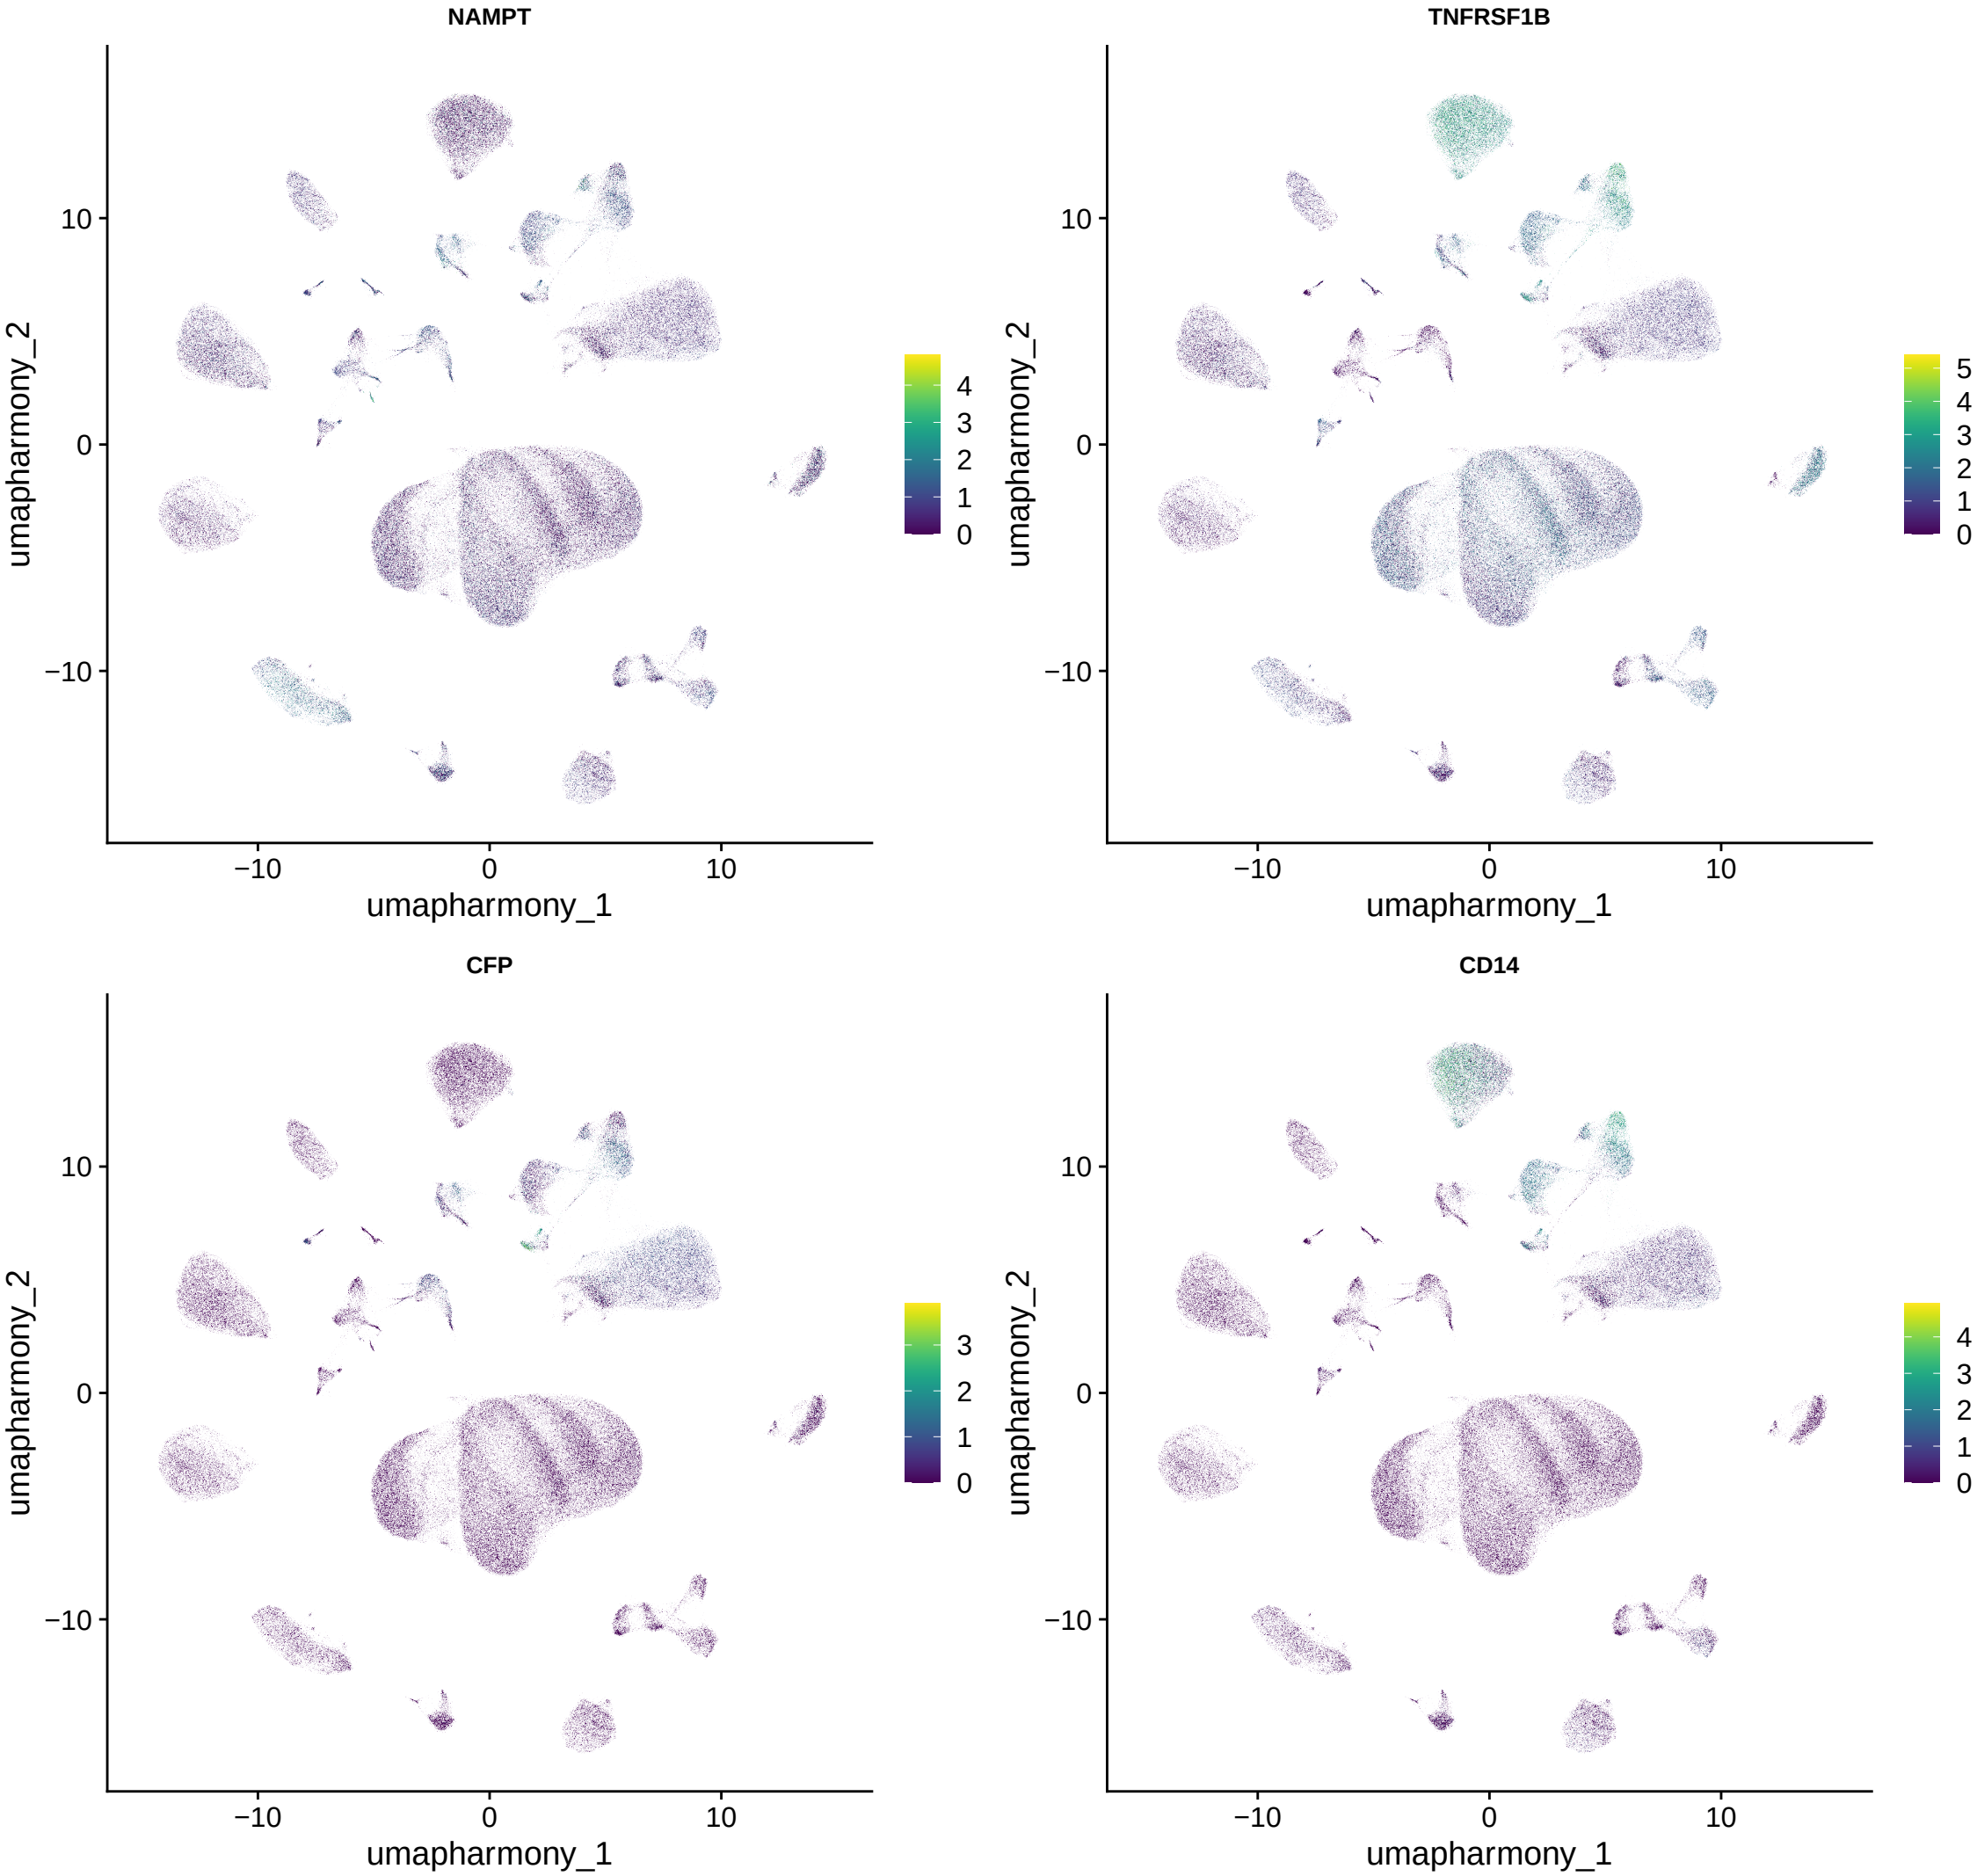

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Monocytes_inflammatory | harmony_snn_res.0.7

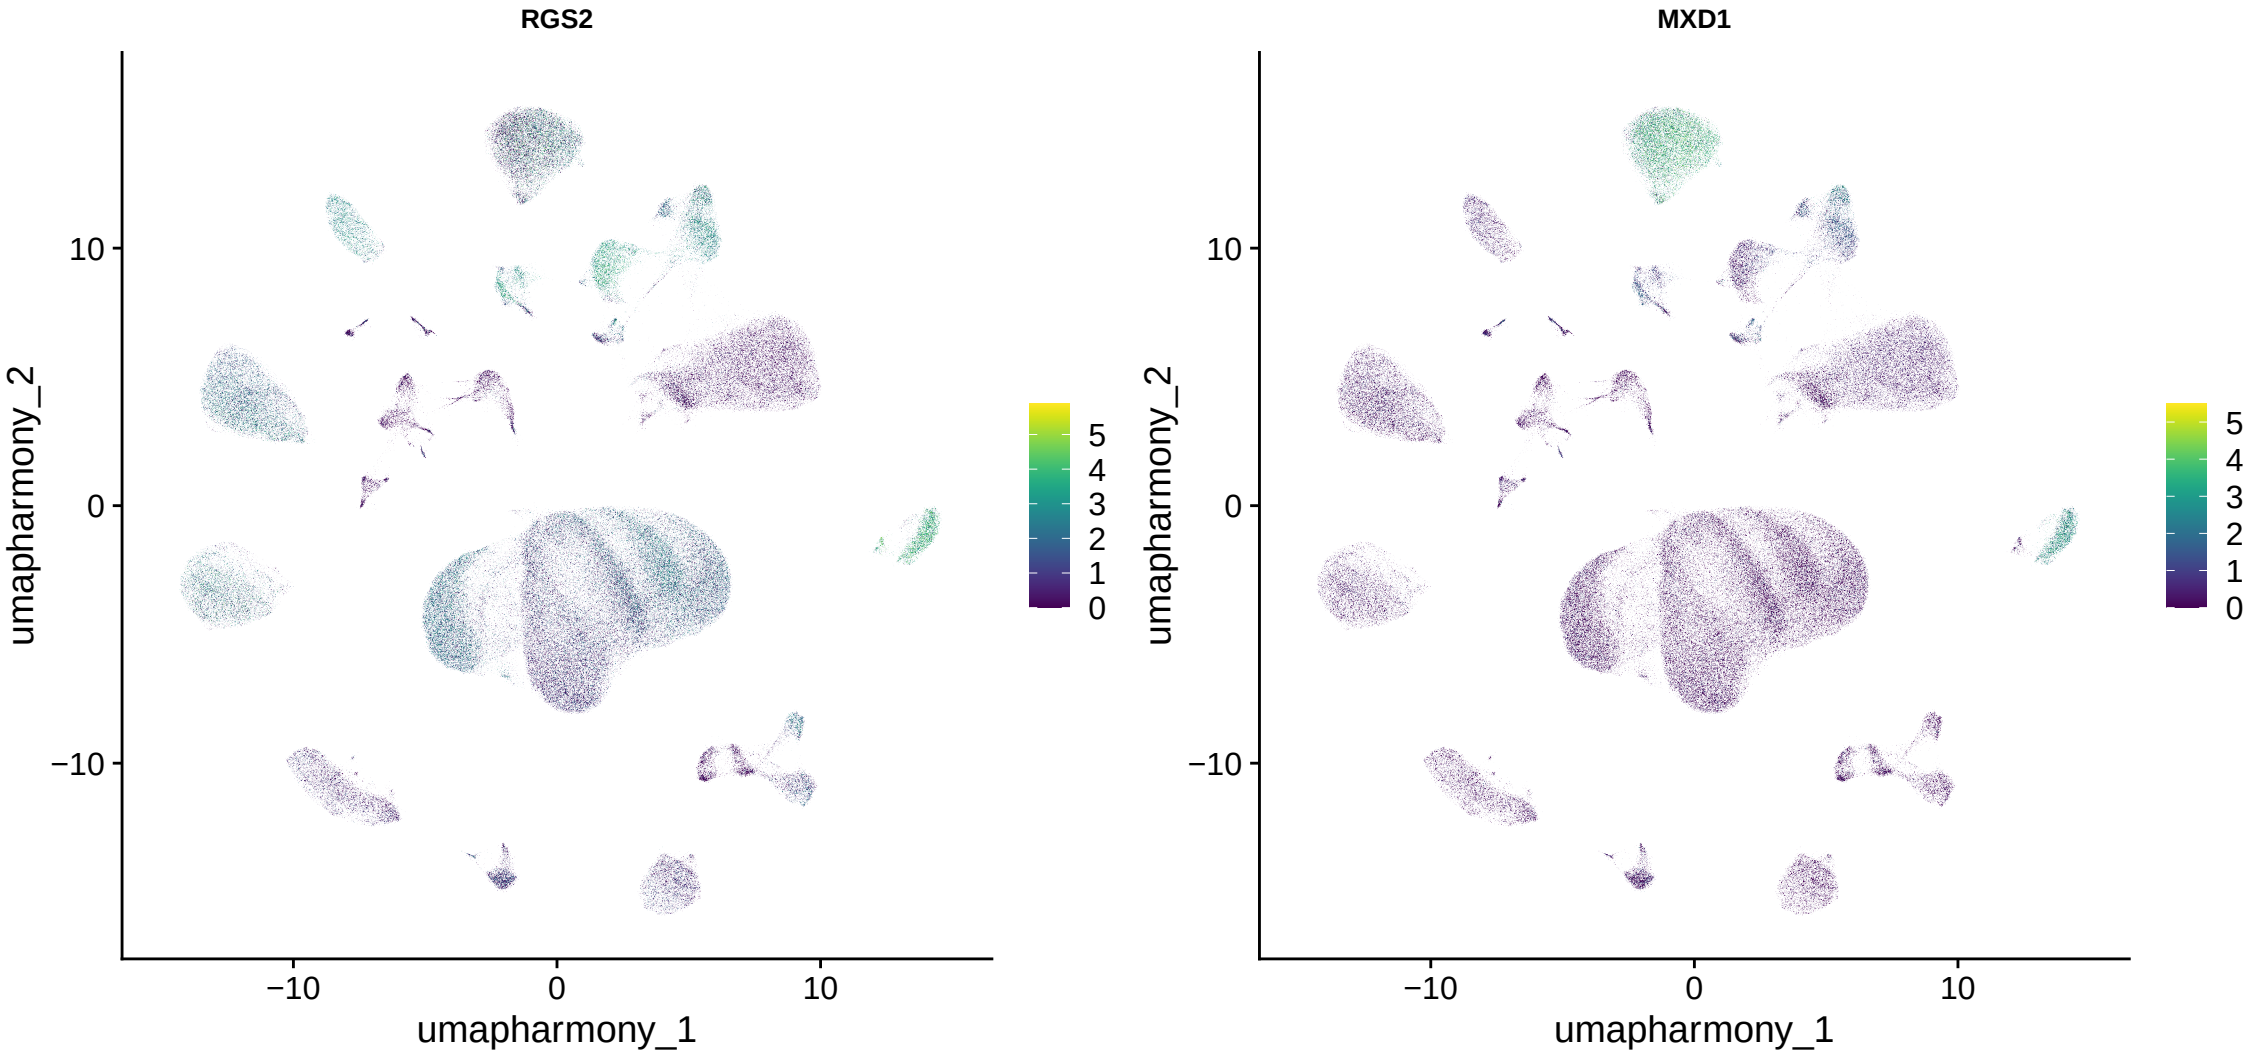

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Monocytes_inflammatory | harmony_snn_res.0.7

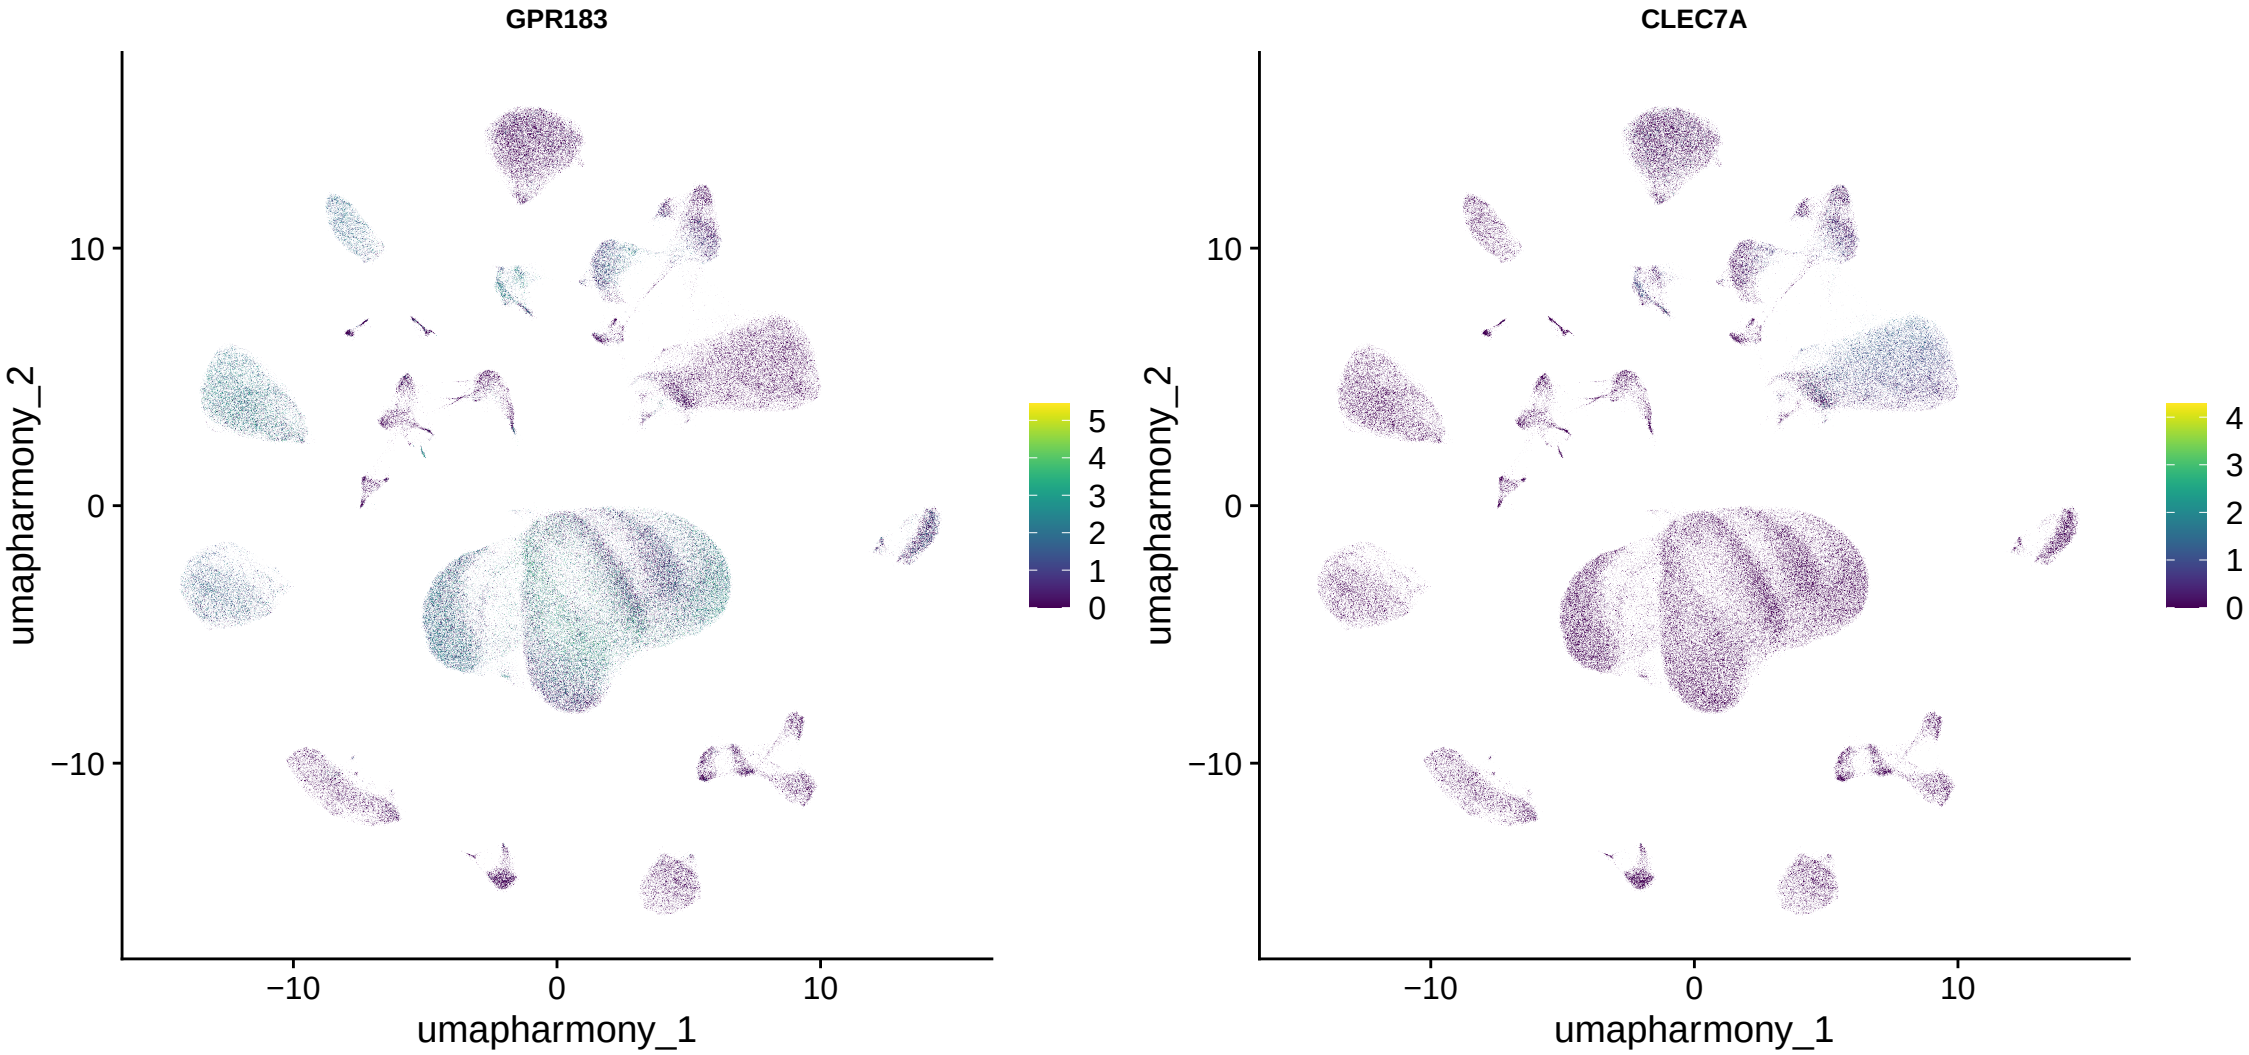

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Monocytes_inflammatory | harmony_snn_res.0.7

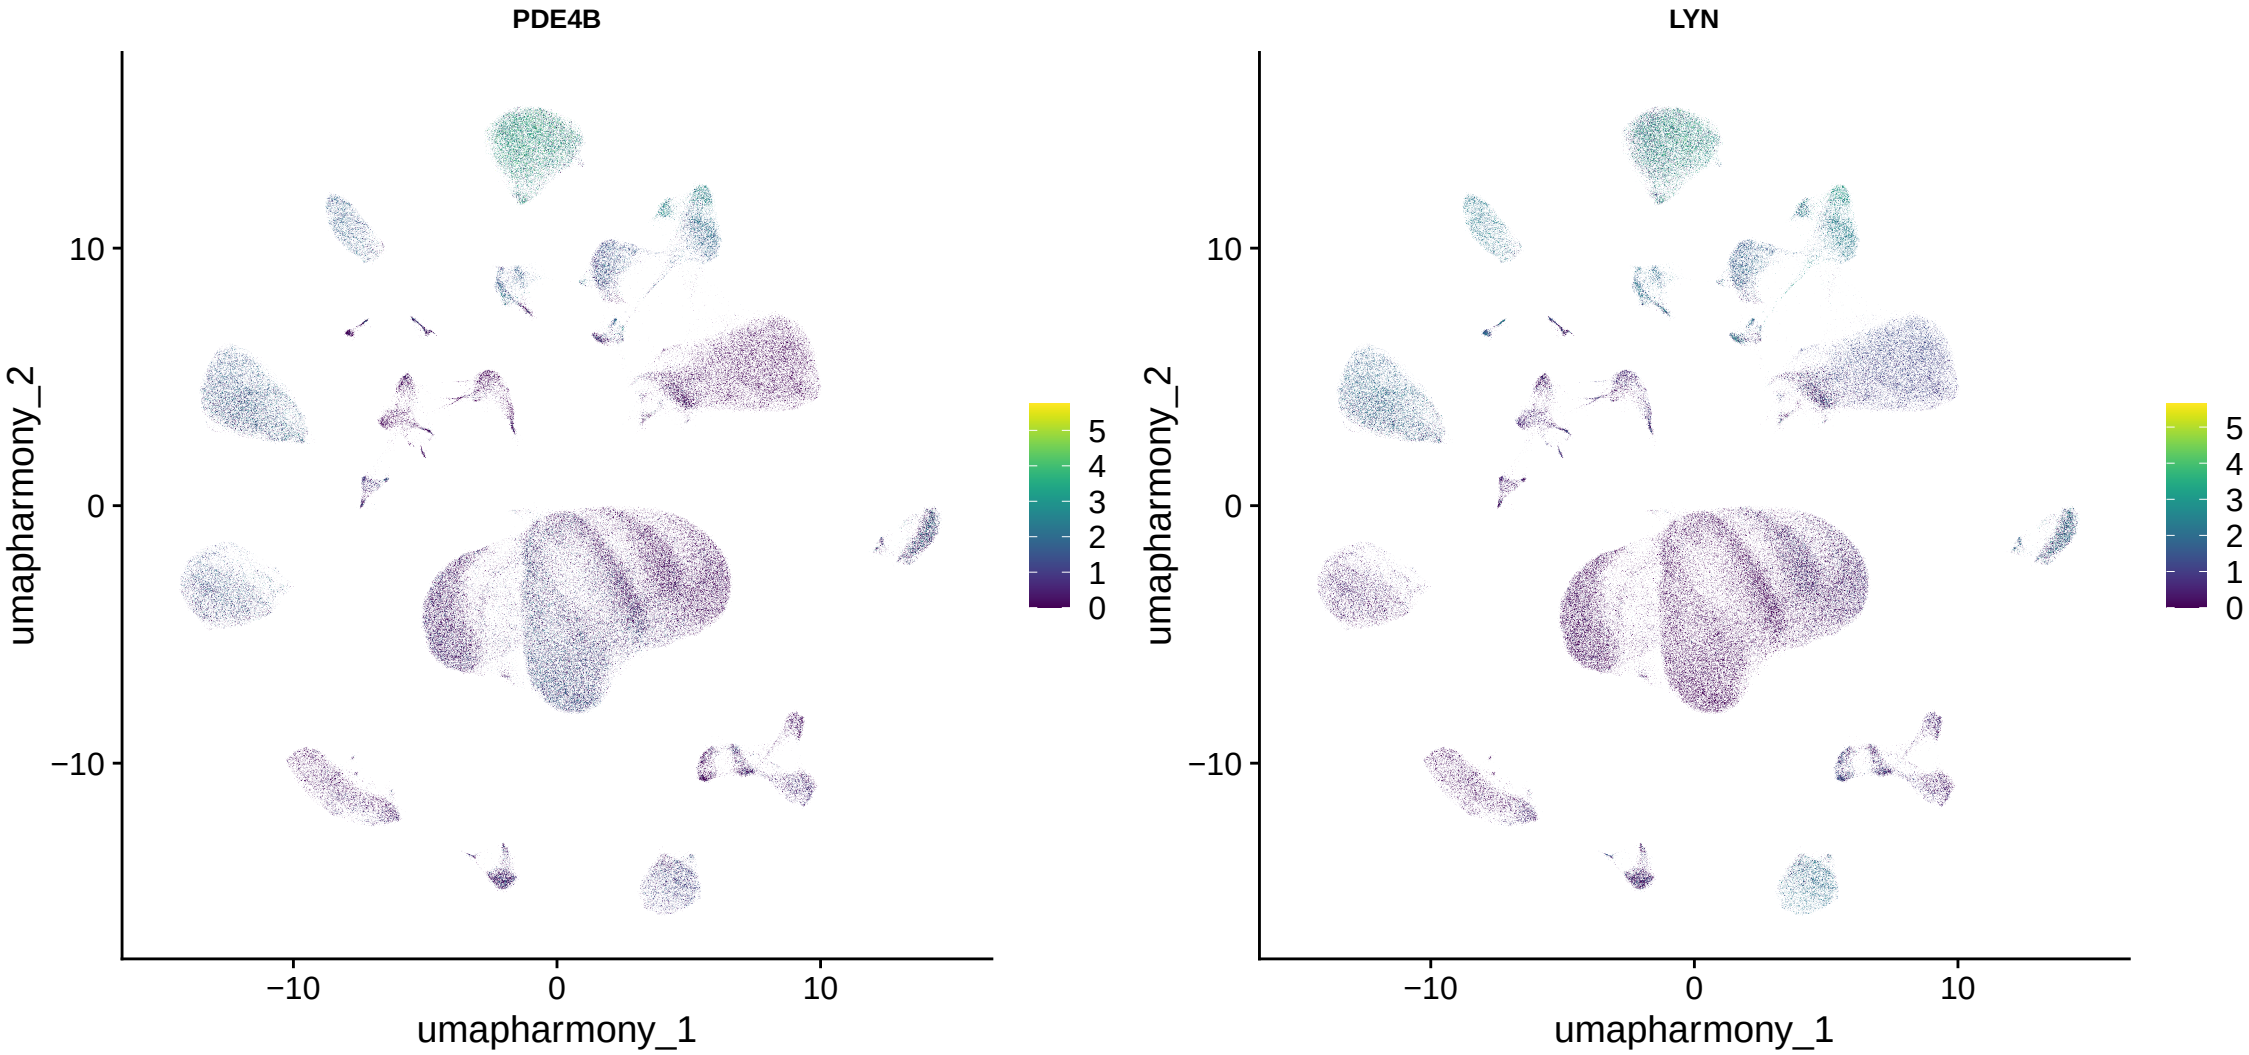

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Monocytes_inflammatory | harmony_snn_res.0.7

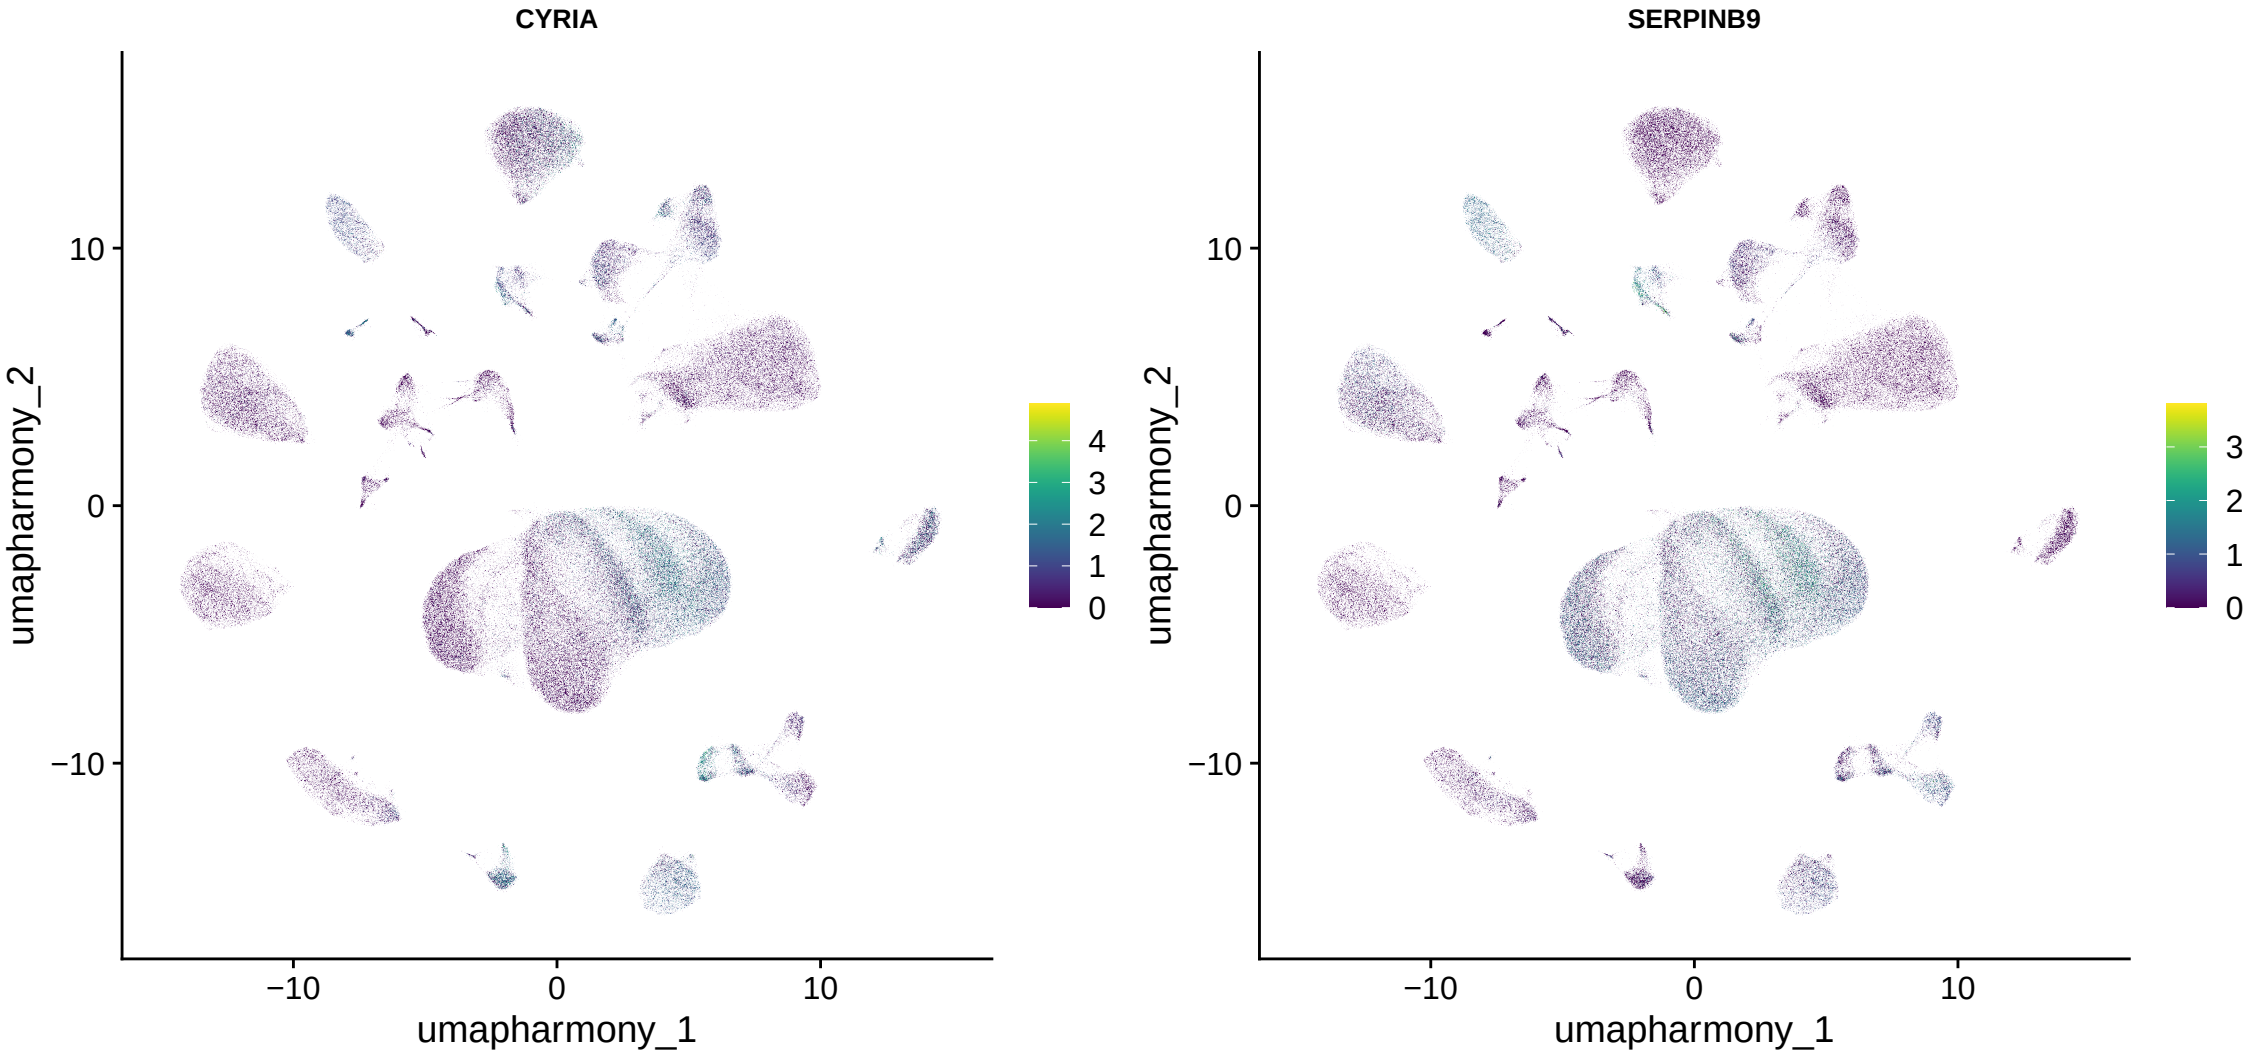

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Monocytes_inflammatory | harmony_snn_res.0.7

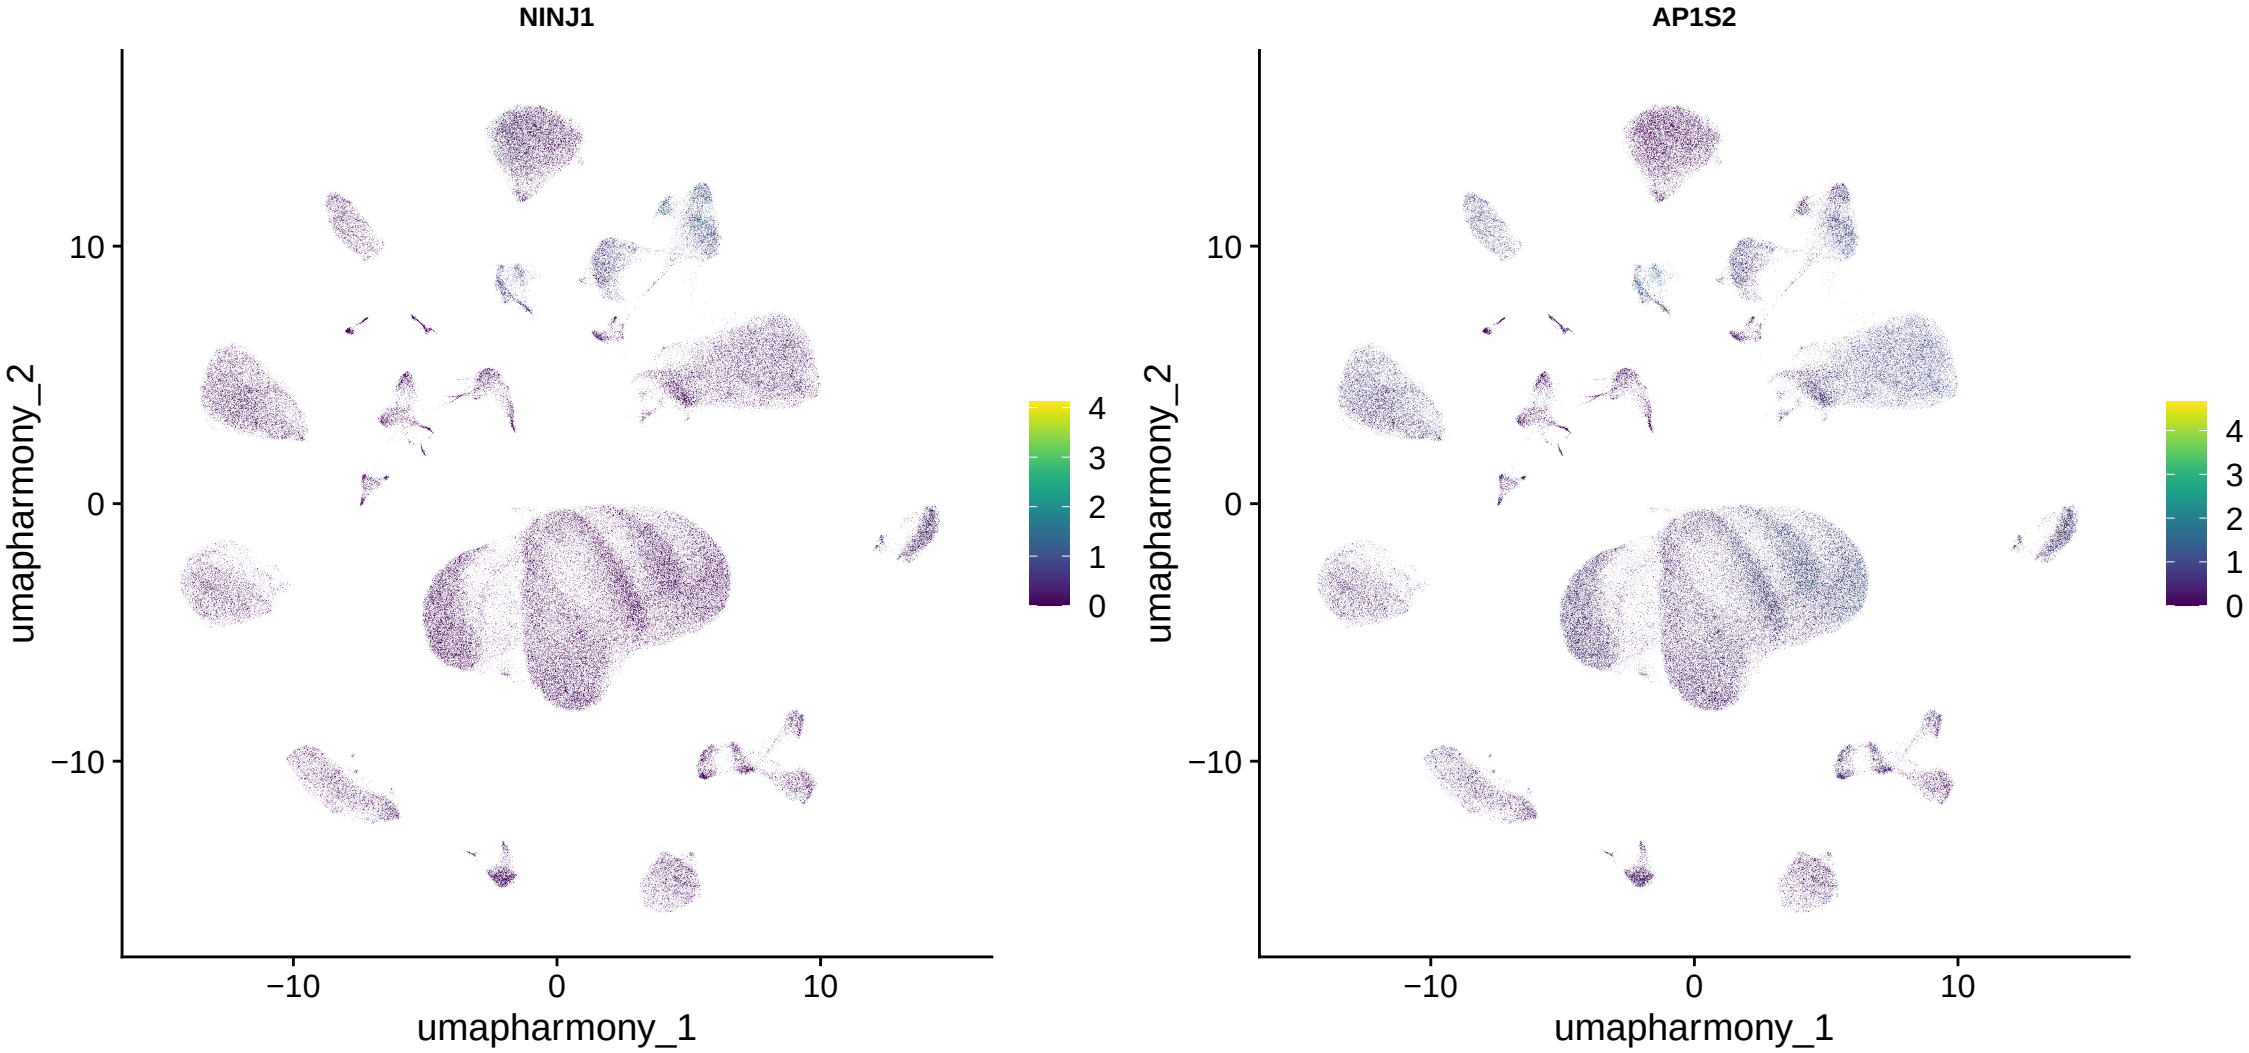

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Monocytes_inflammatory | harmony_snn_res.0.7

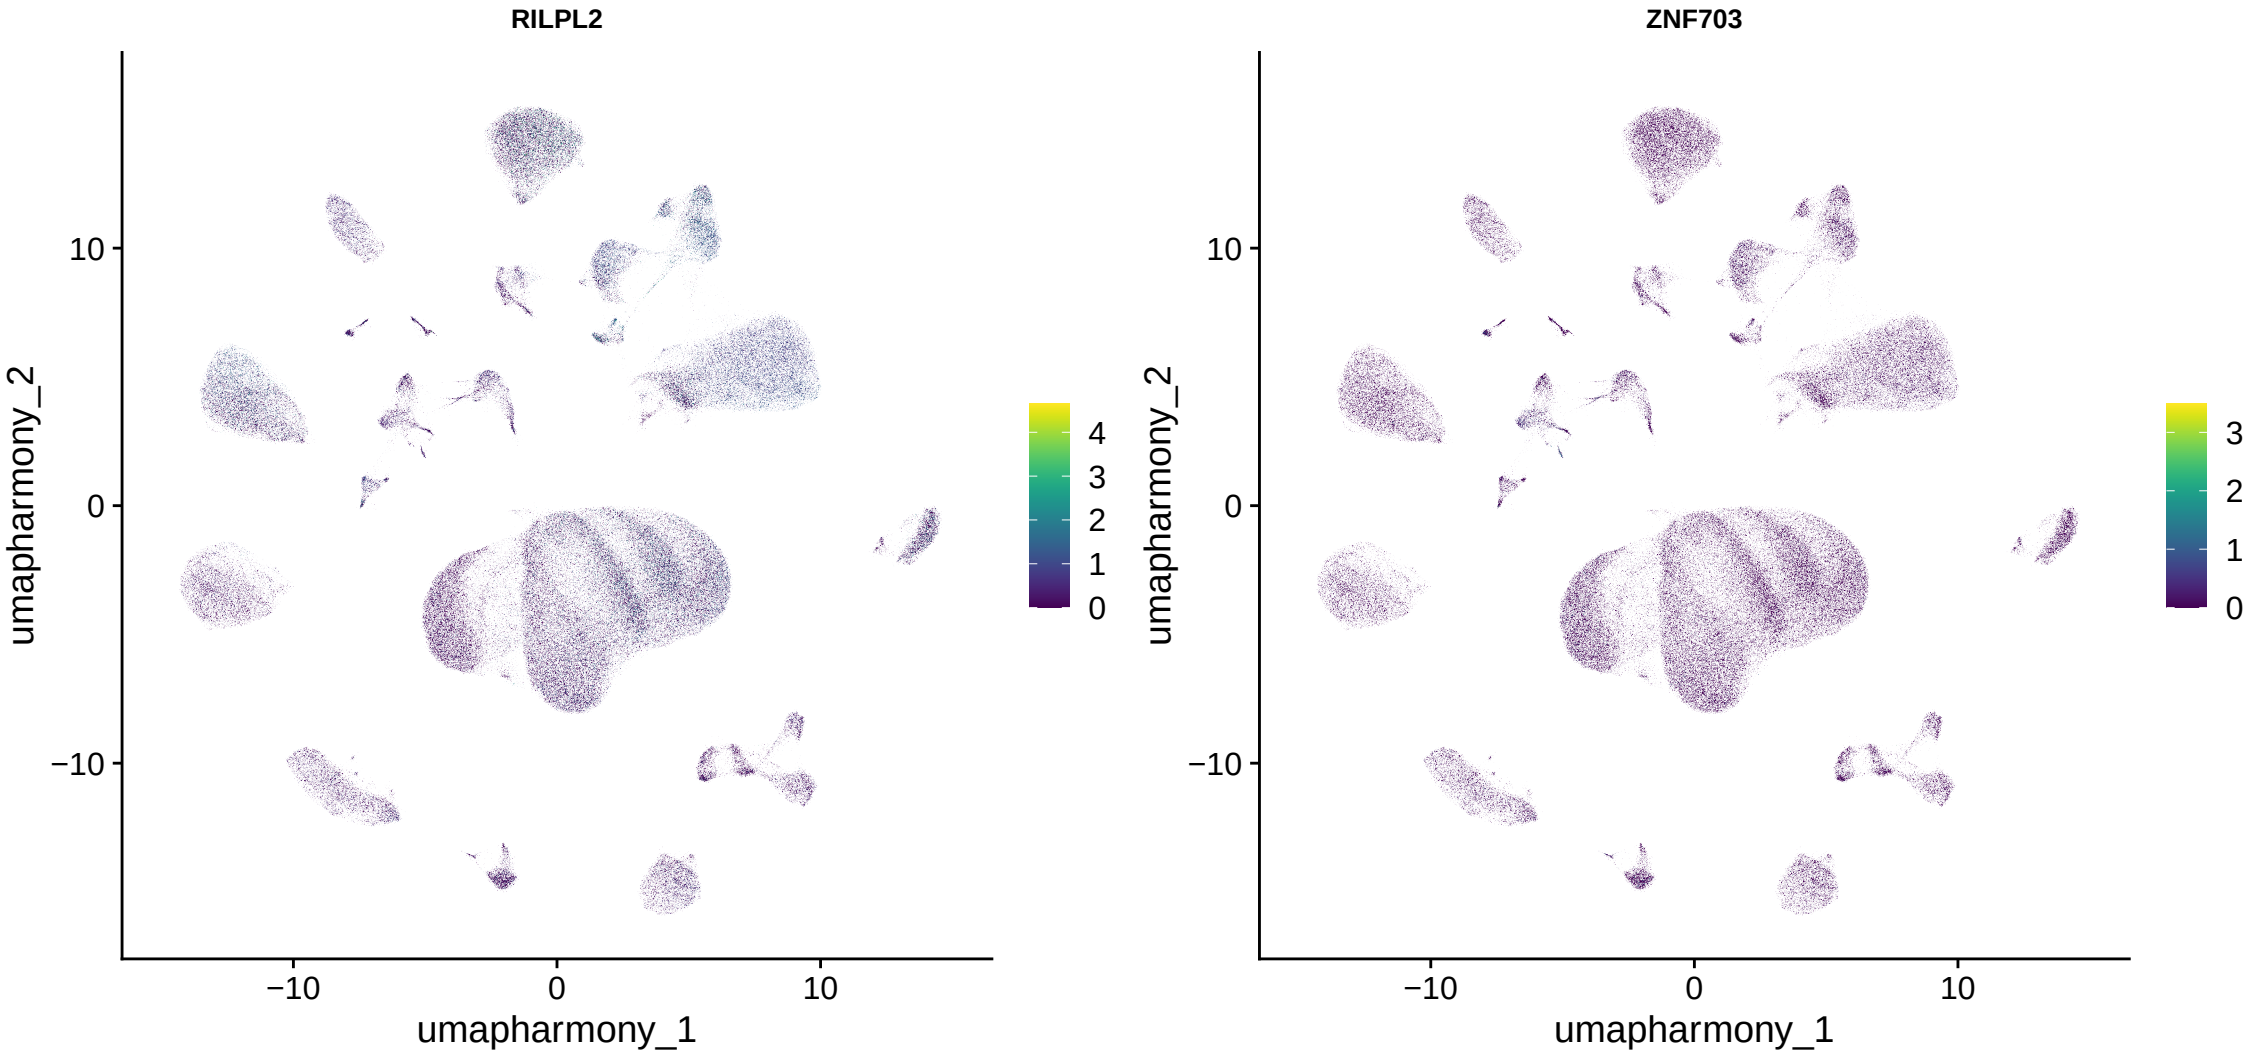

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Monocytes_inflammatory | harmony_snn_res.0.7

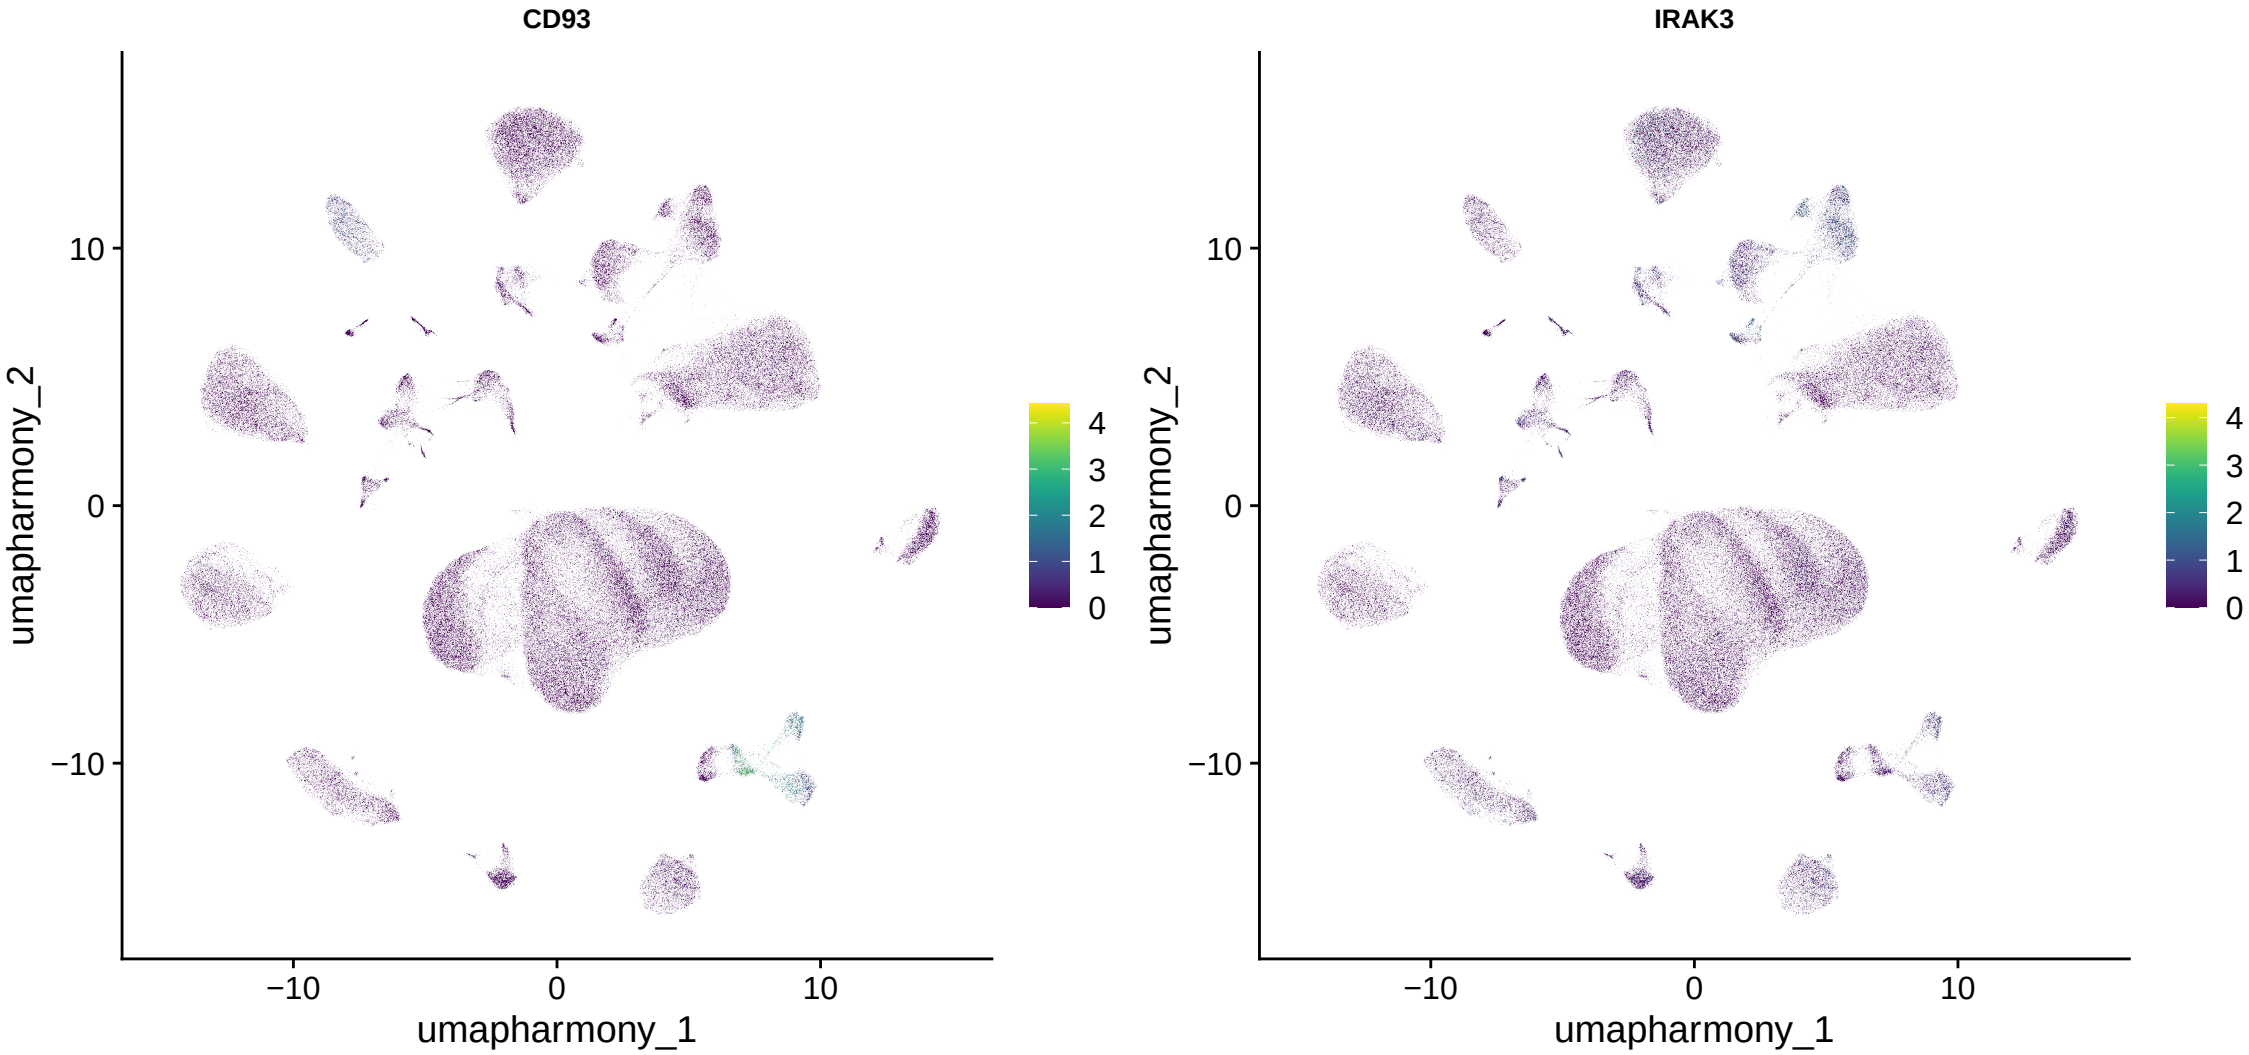

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Monocytes_inflammatory | harmony_snn_res.0.7

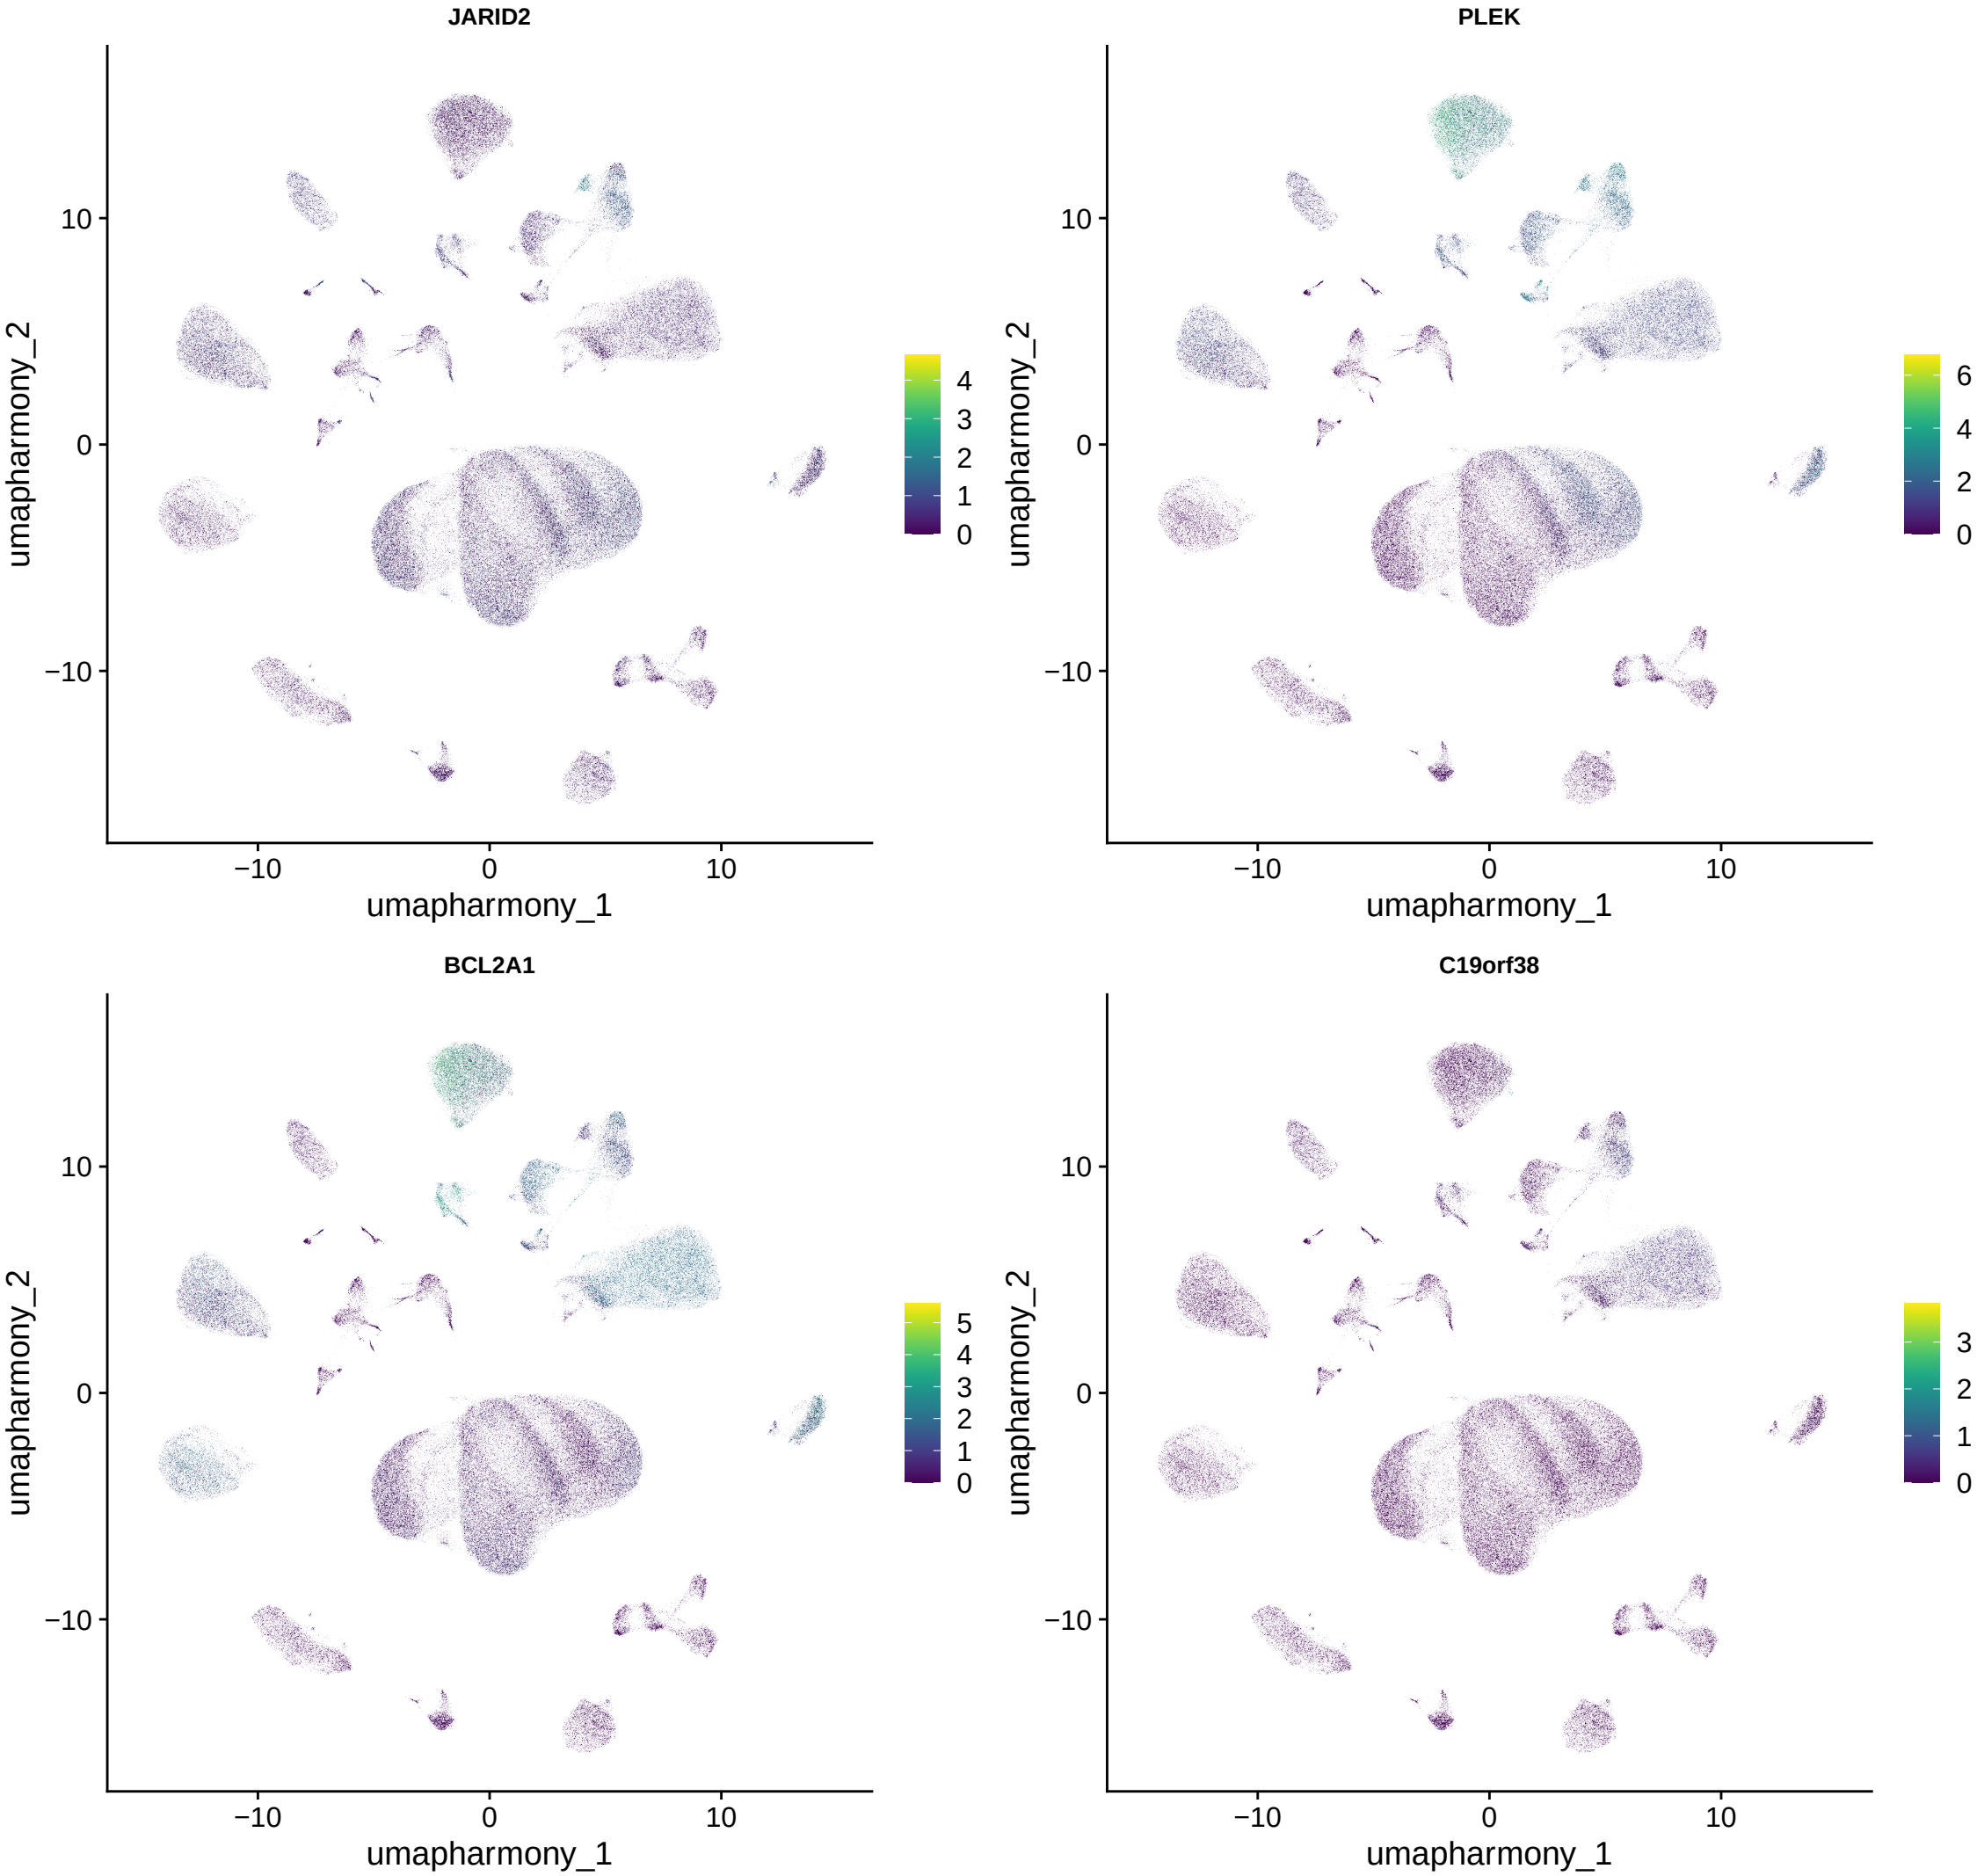

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Monocytes_inflammatory | harmony_snn_res.0.7

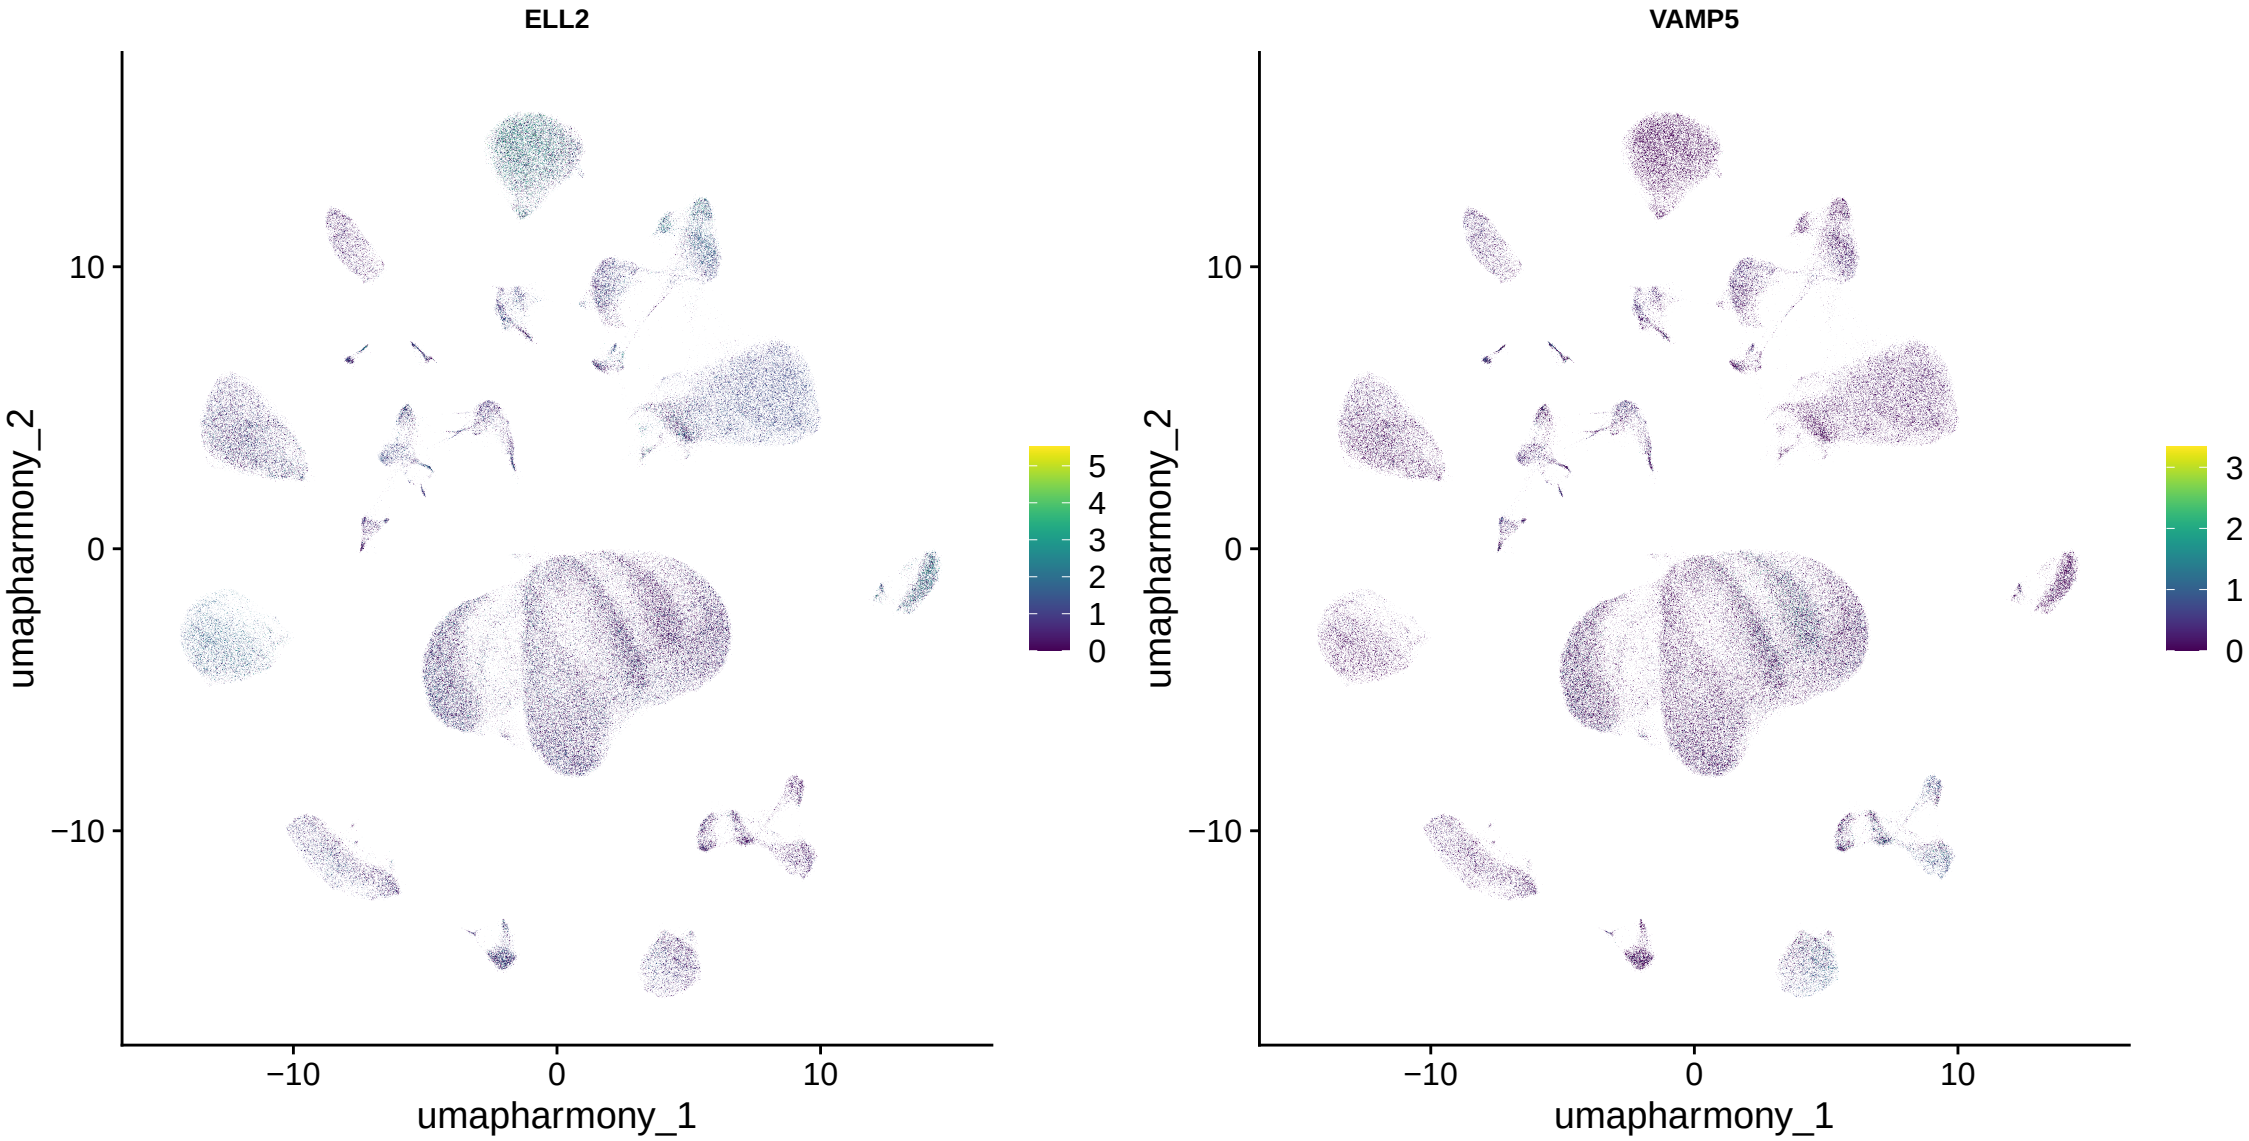

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.