

Plasma_cells_IgM_dominant | harmony_snn_res.0.7

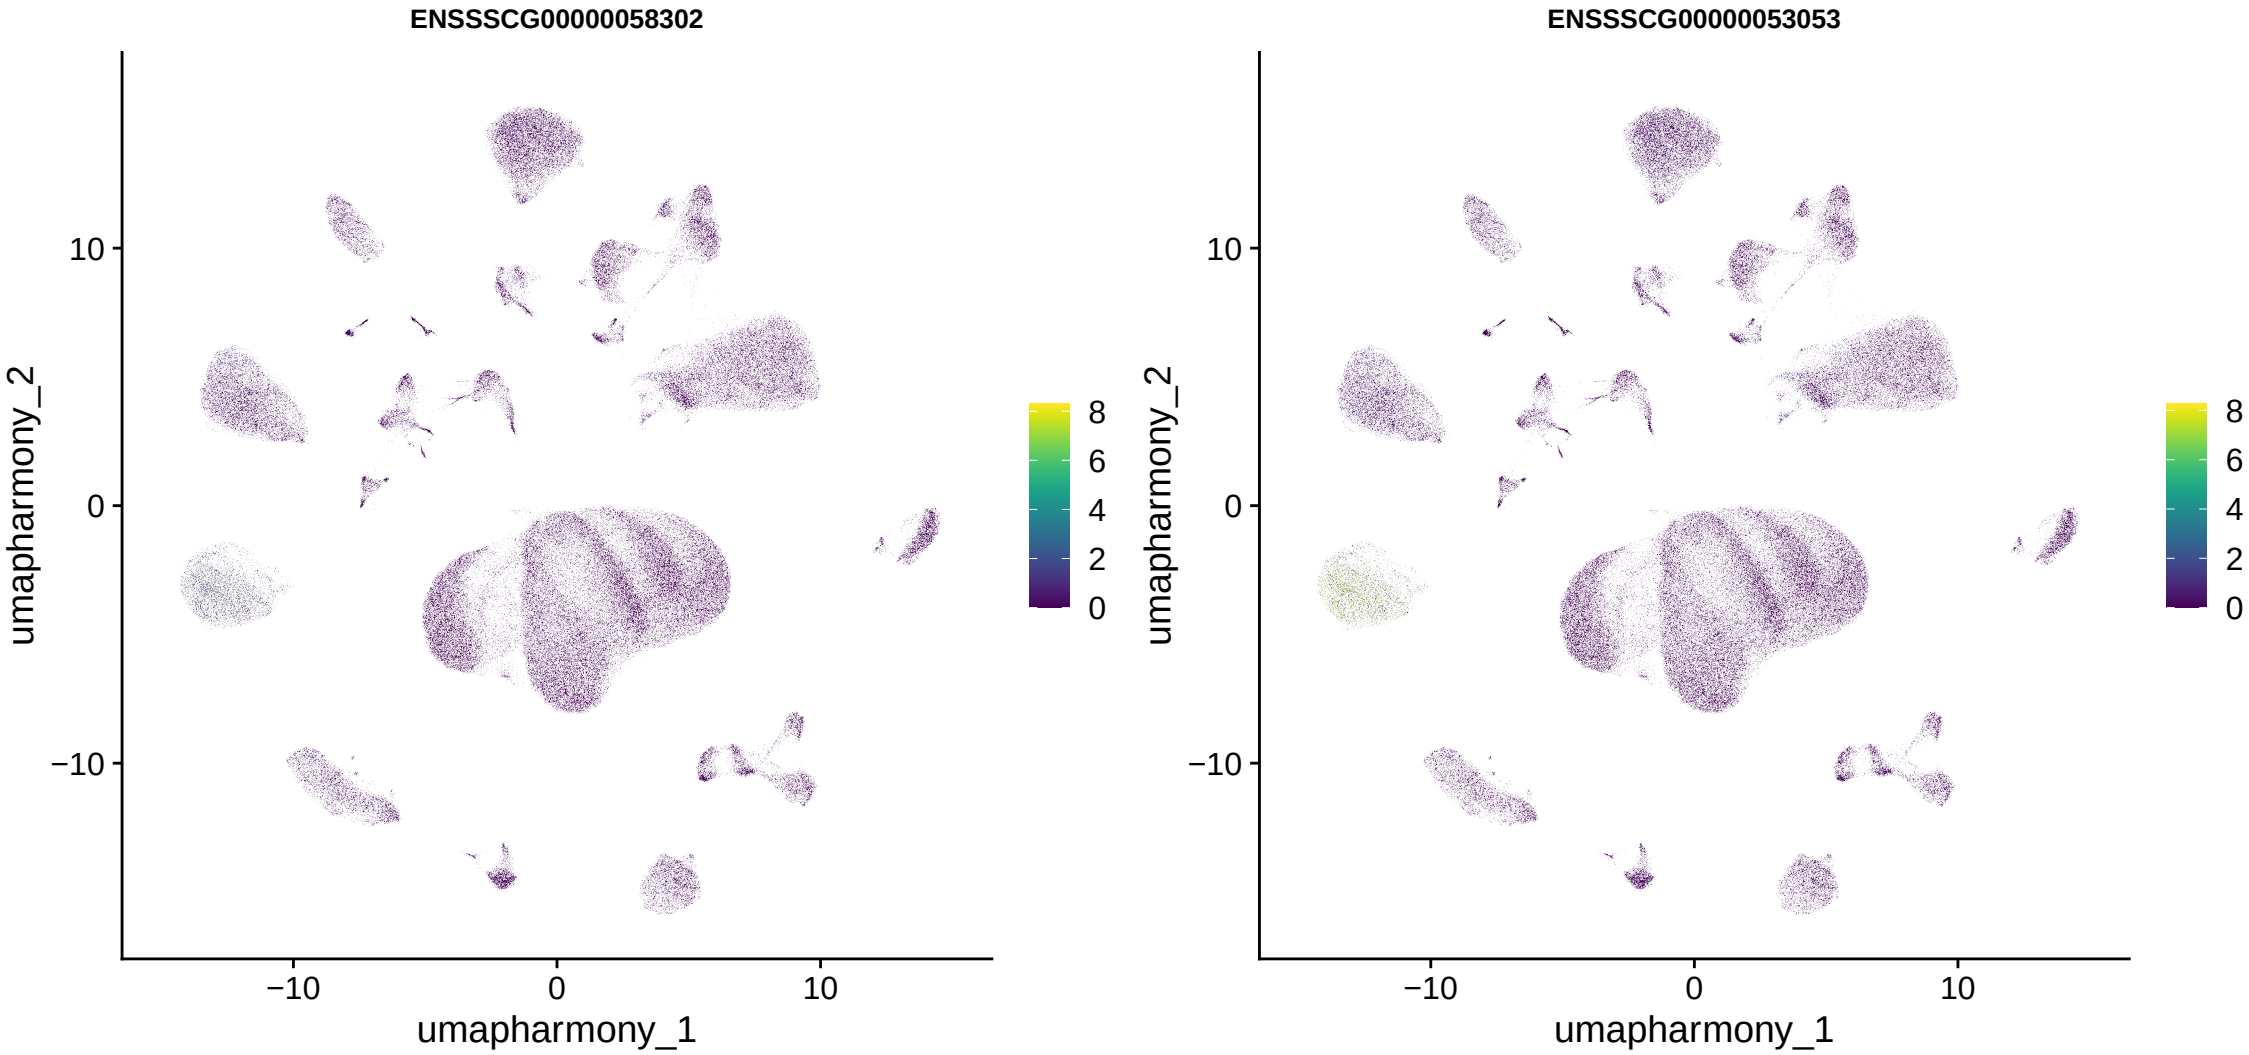


All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.


Plasma_cells_IgM_dominant | harmony_snn_res.0.7

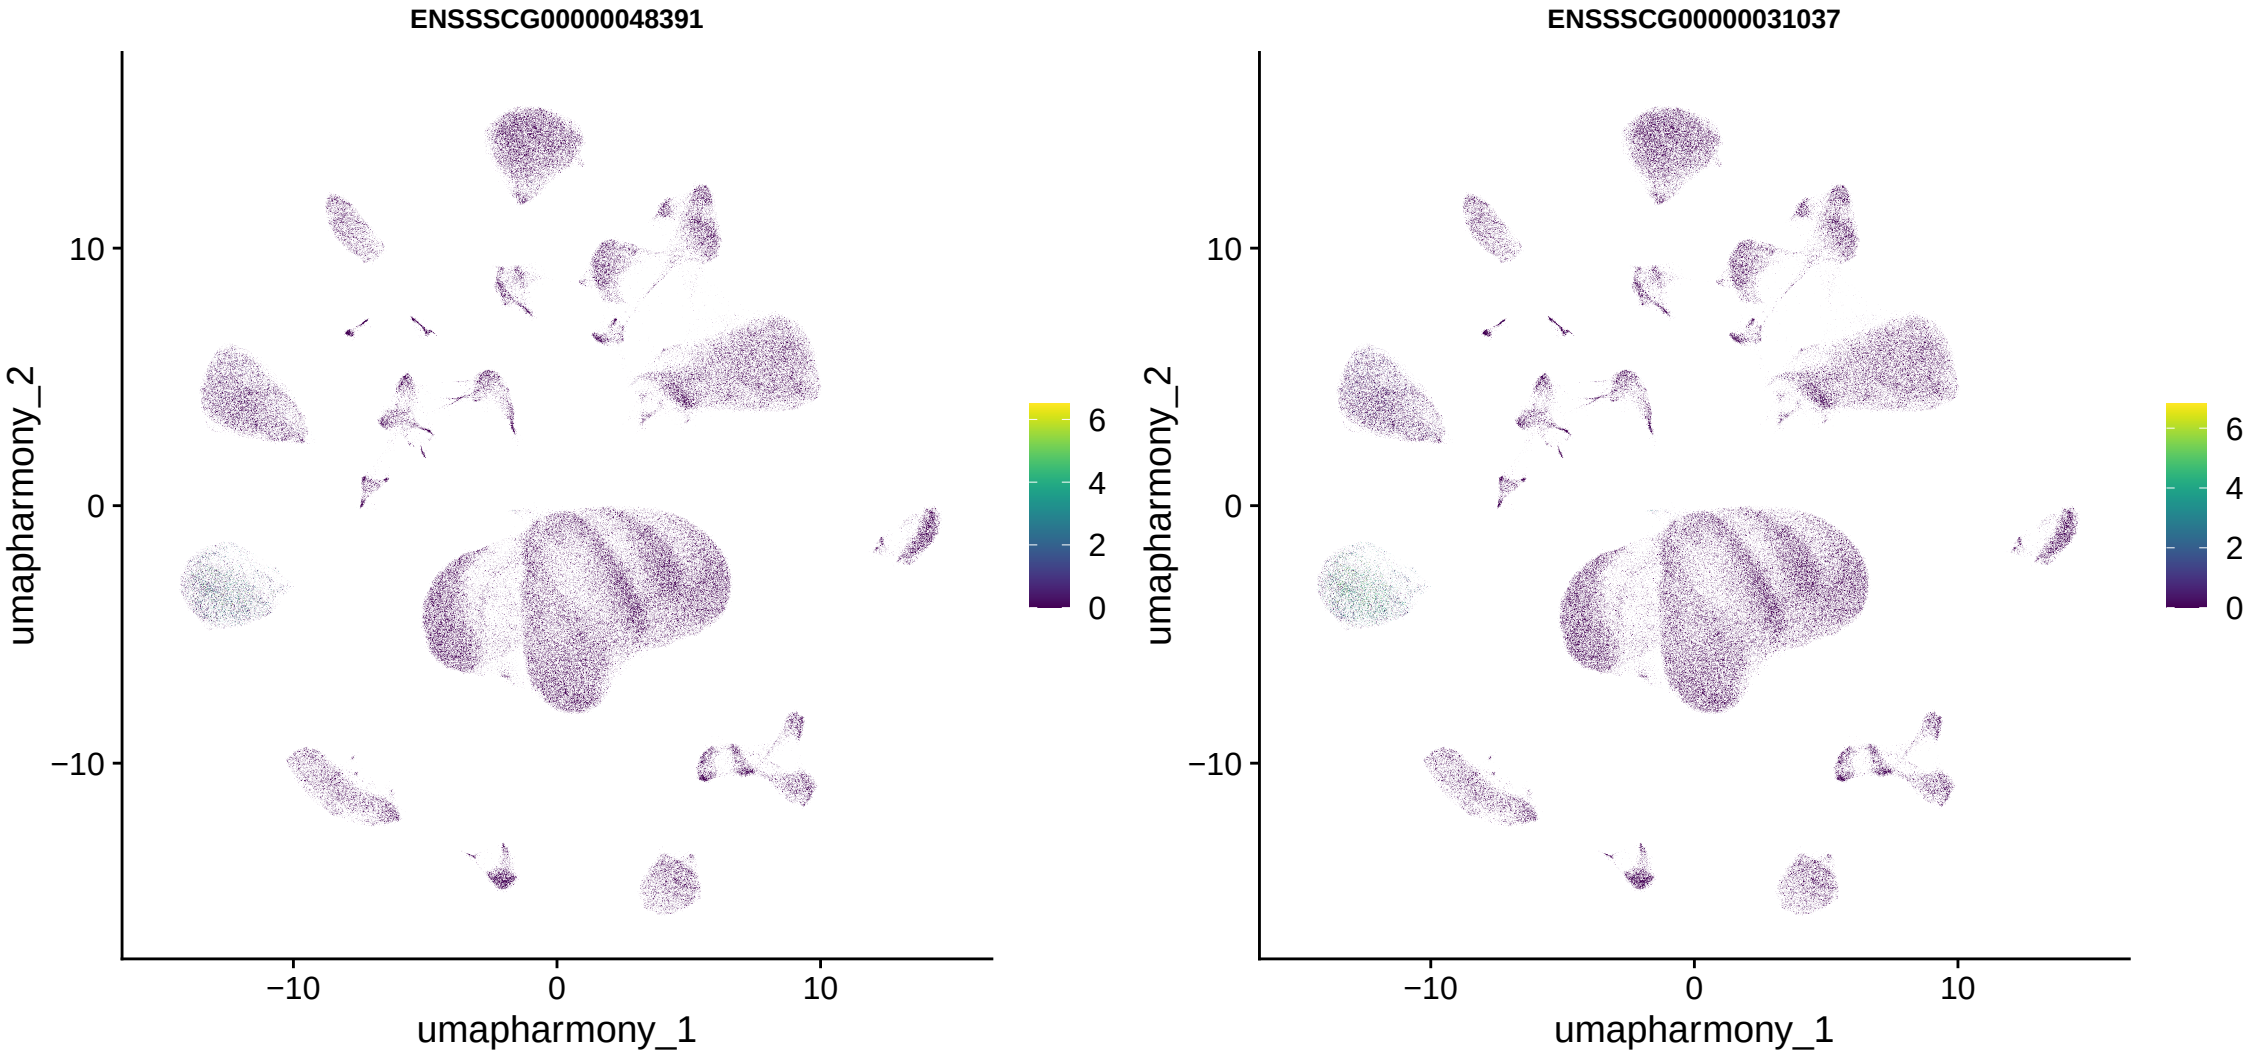



All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Plasma_cells_IgM_dominant | harmony_snn_res.0.7

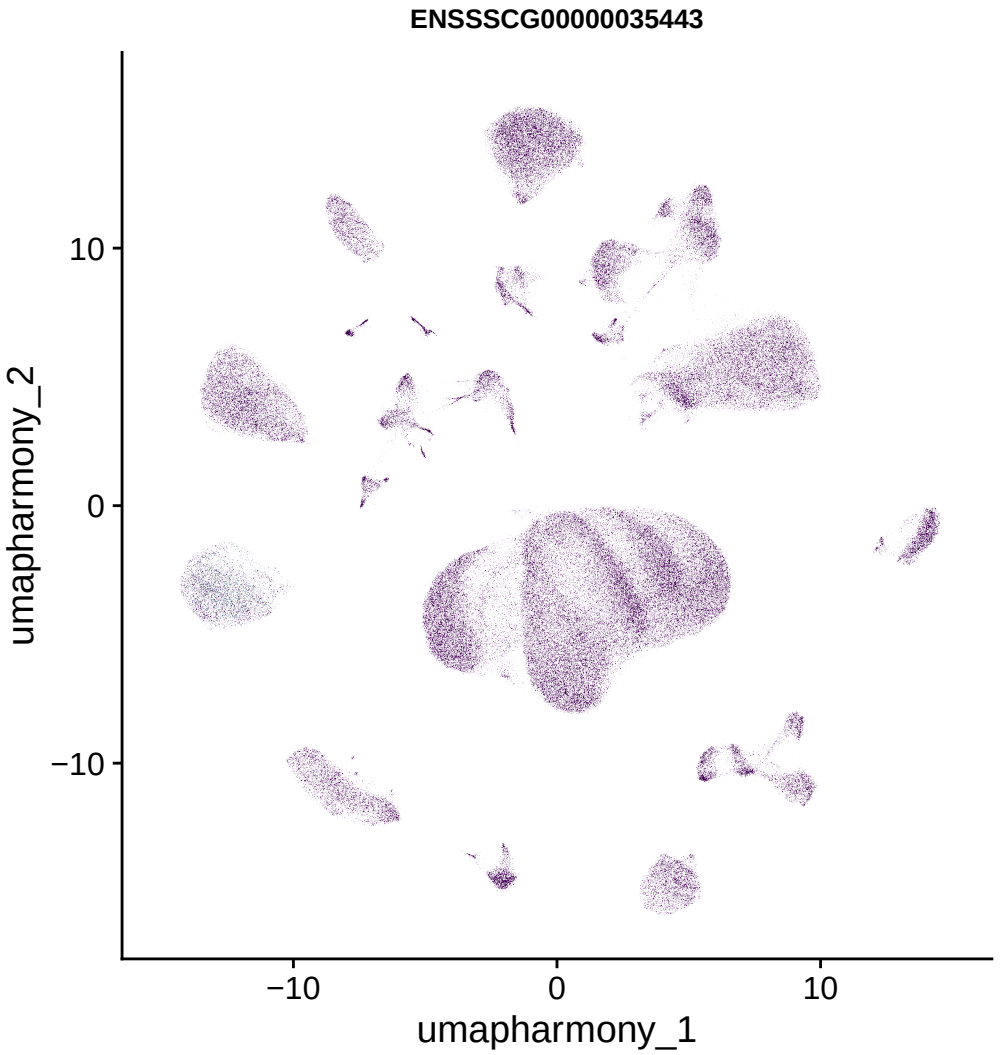

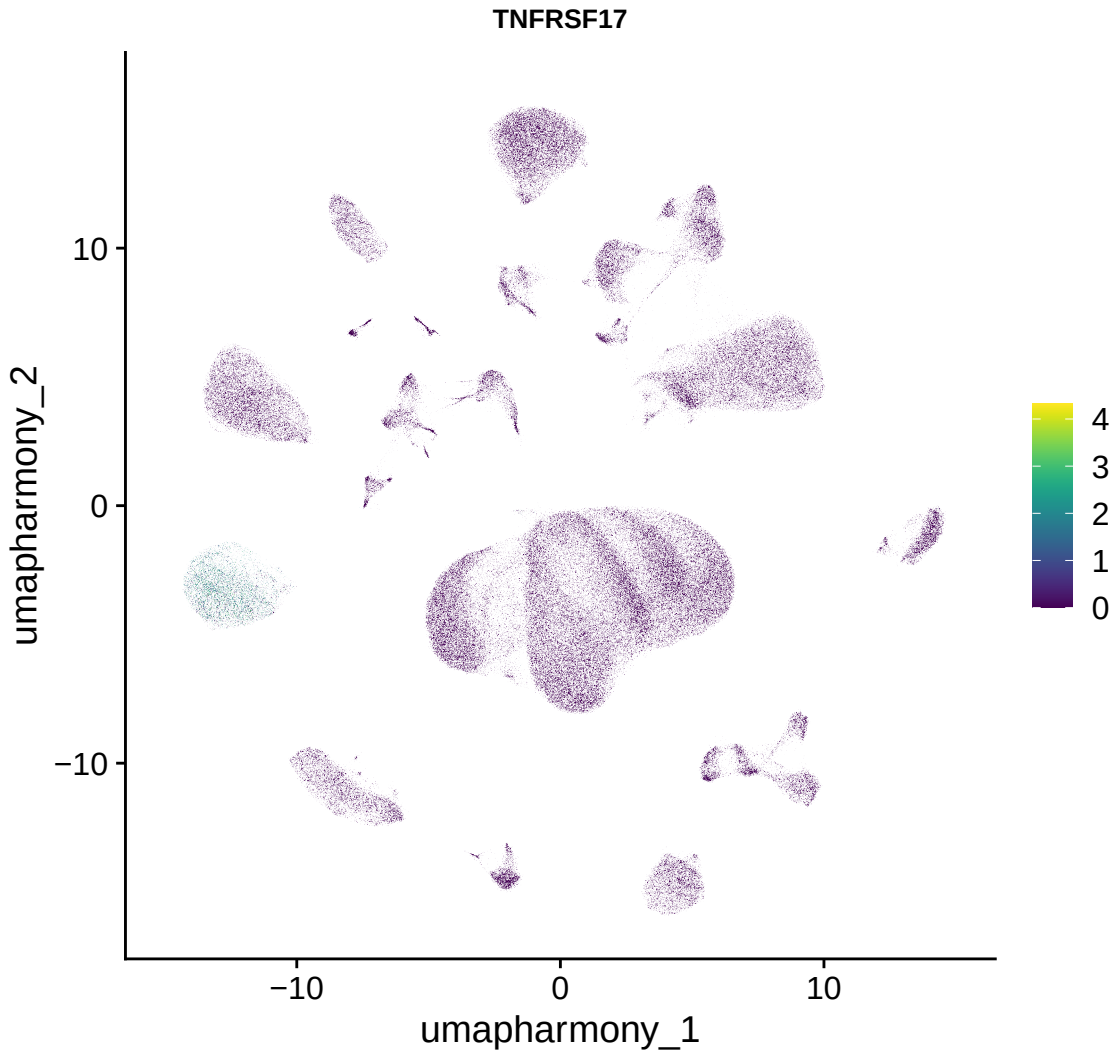


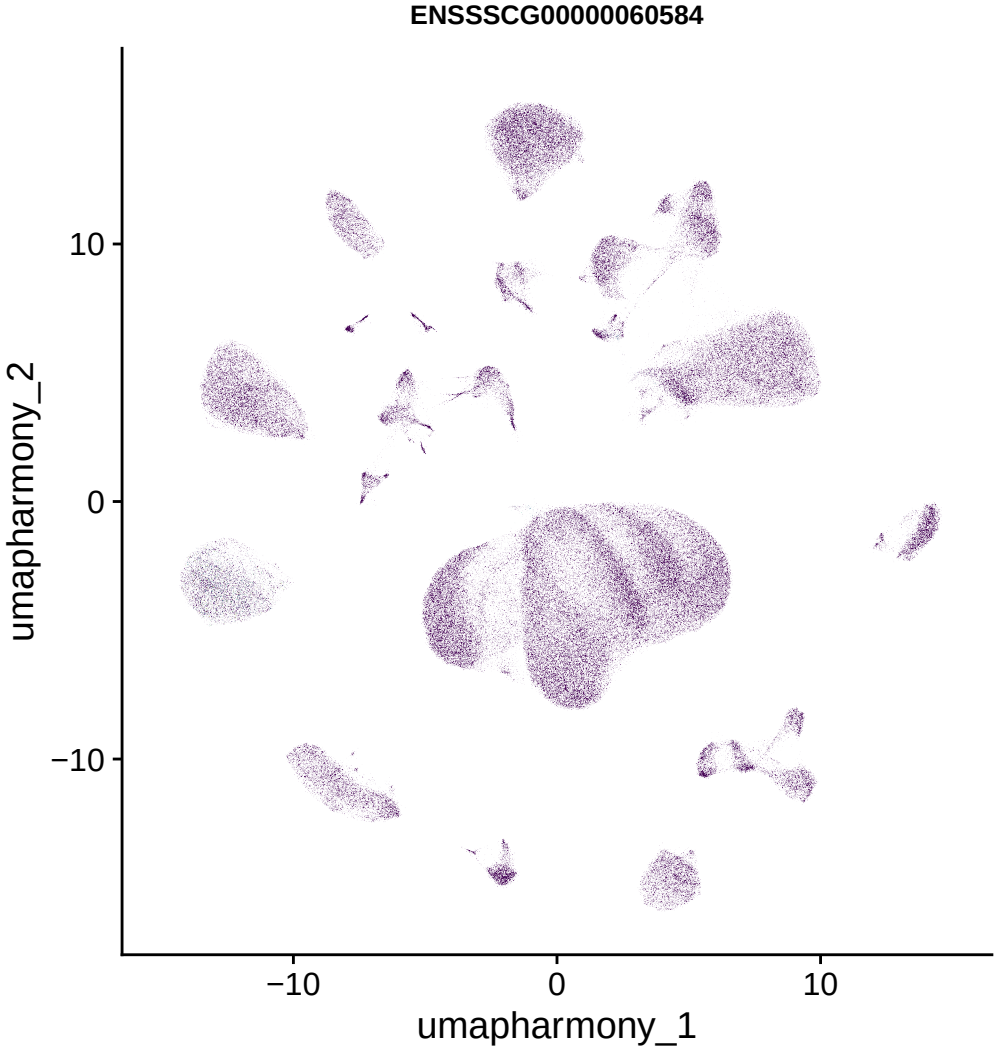

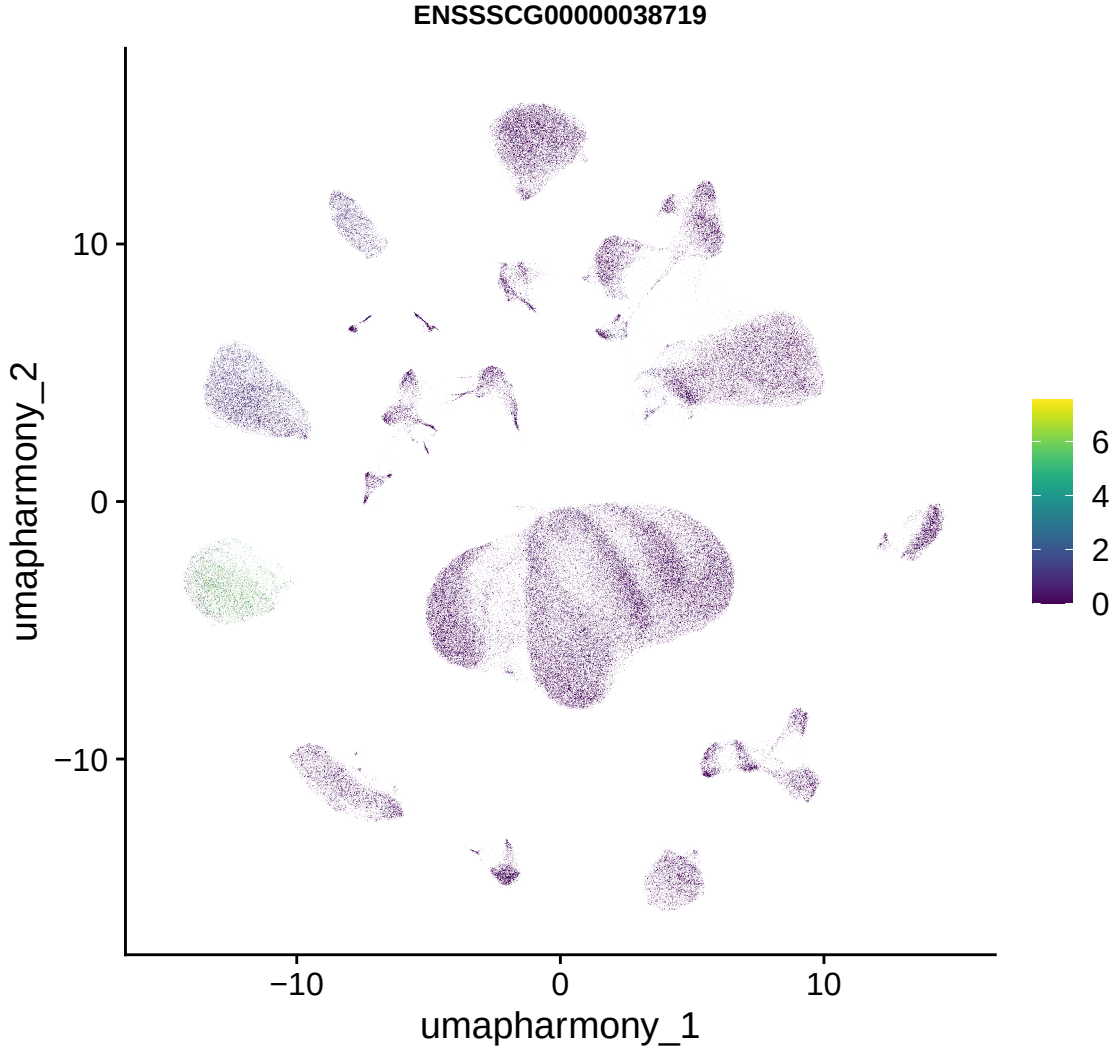


All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Plasma_cells_IgM_dominant | harmony_snn_res.0.7

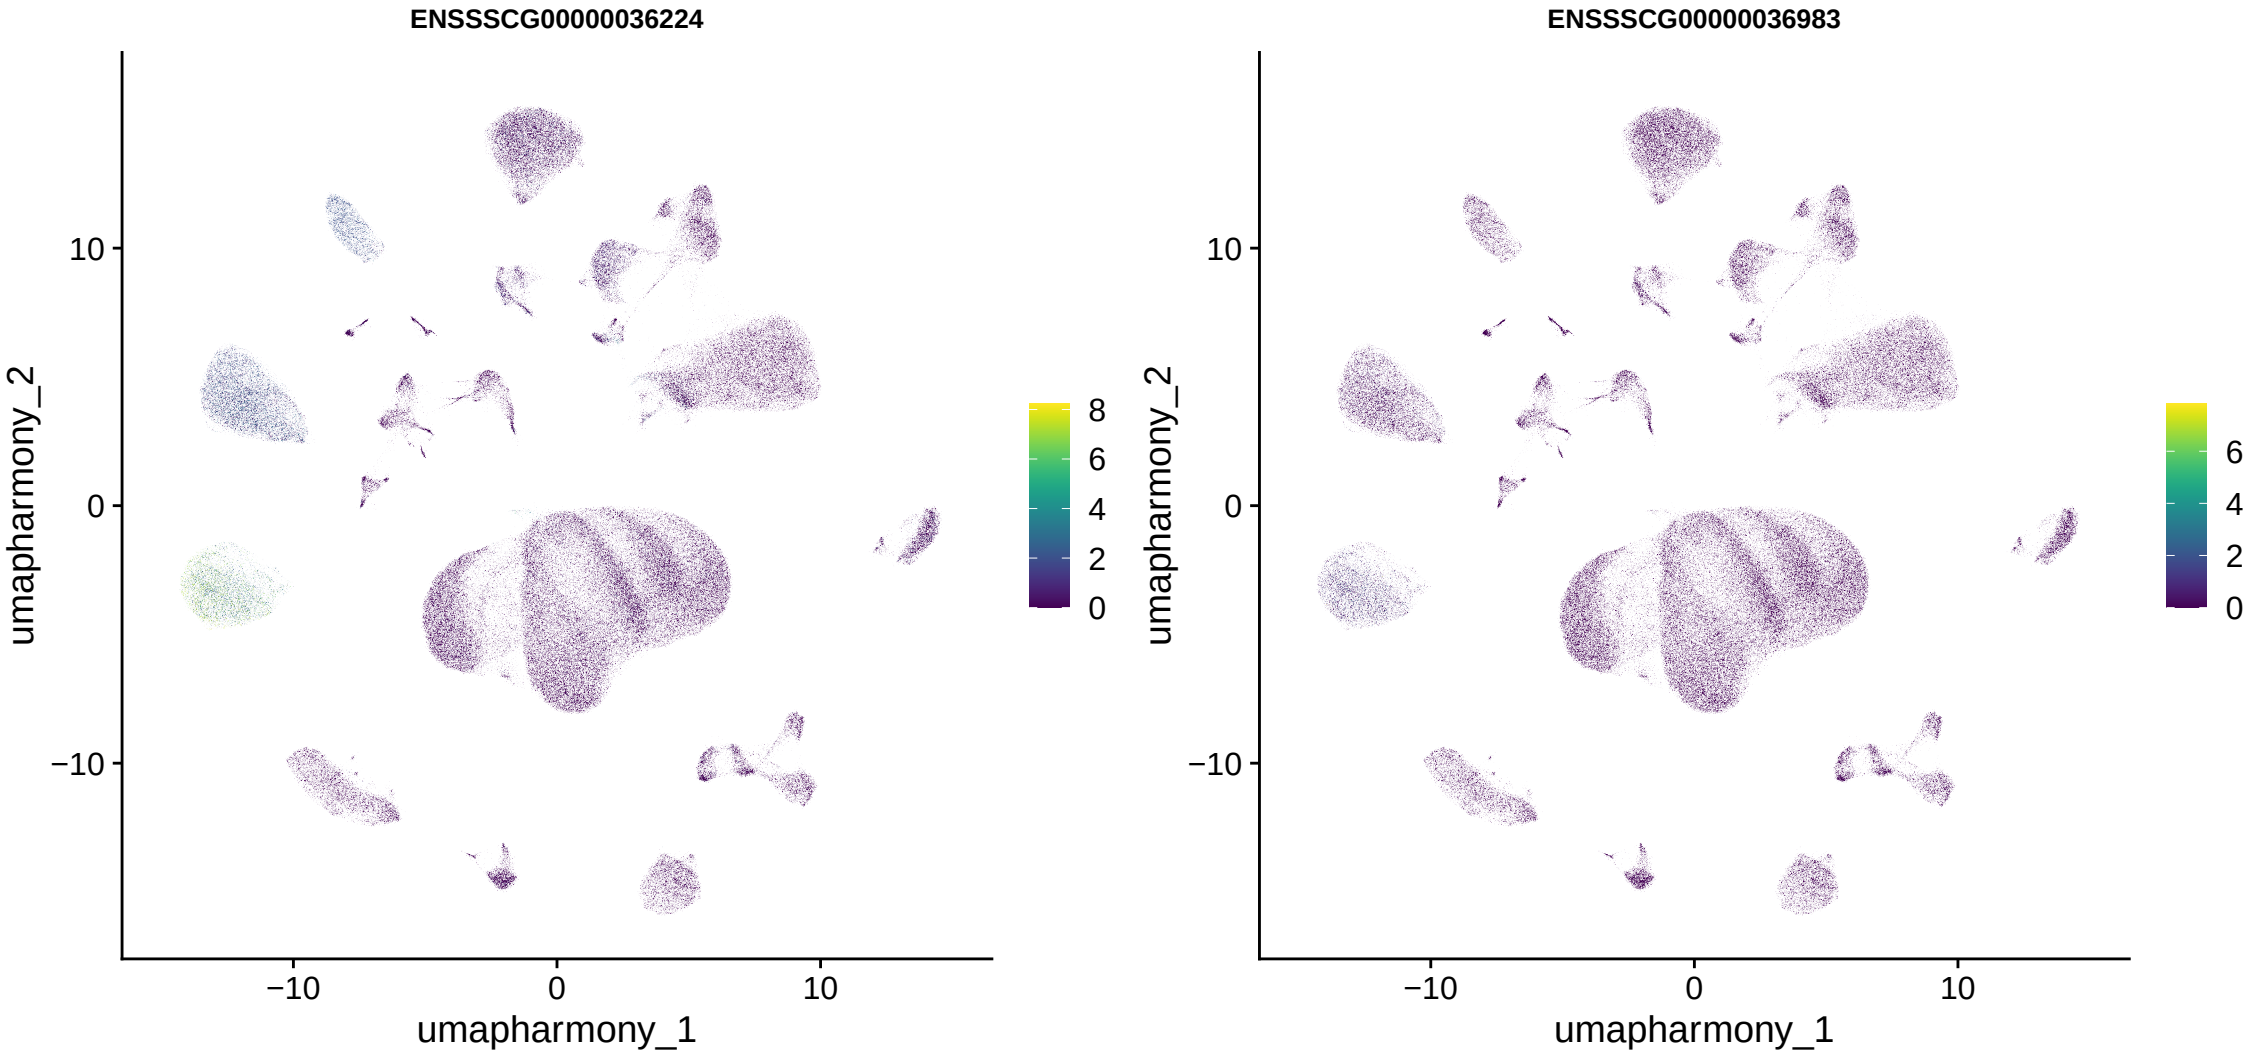


All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Plasma_cells_IgM_dominant | harmony_snn_res.0.7

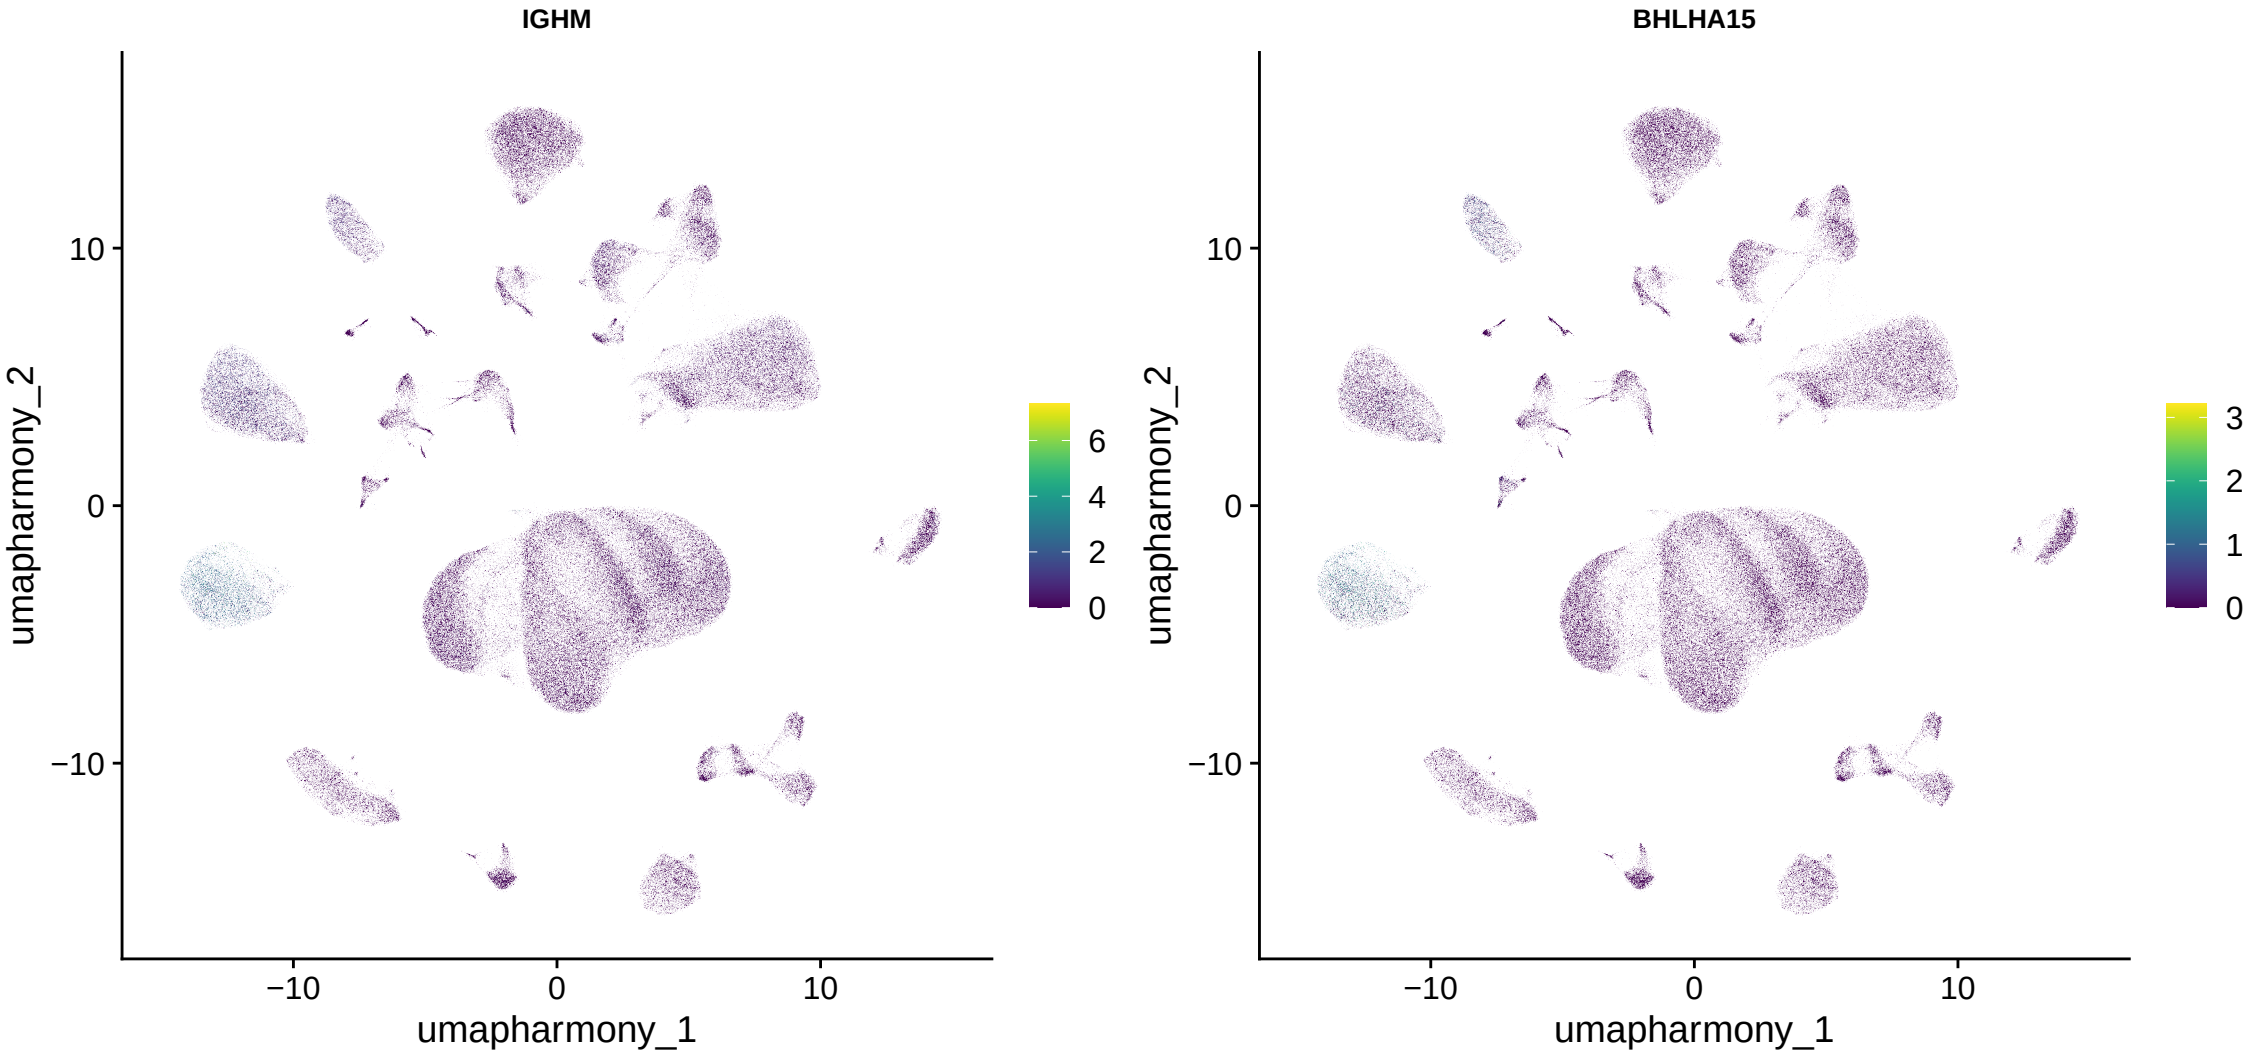


All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.


Plasma_cells_IgM_dominant | harmony_snn_res.0.7

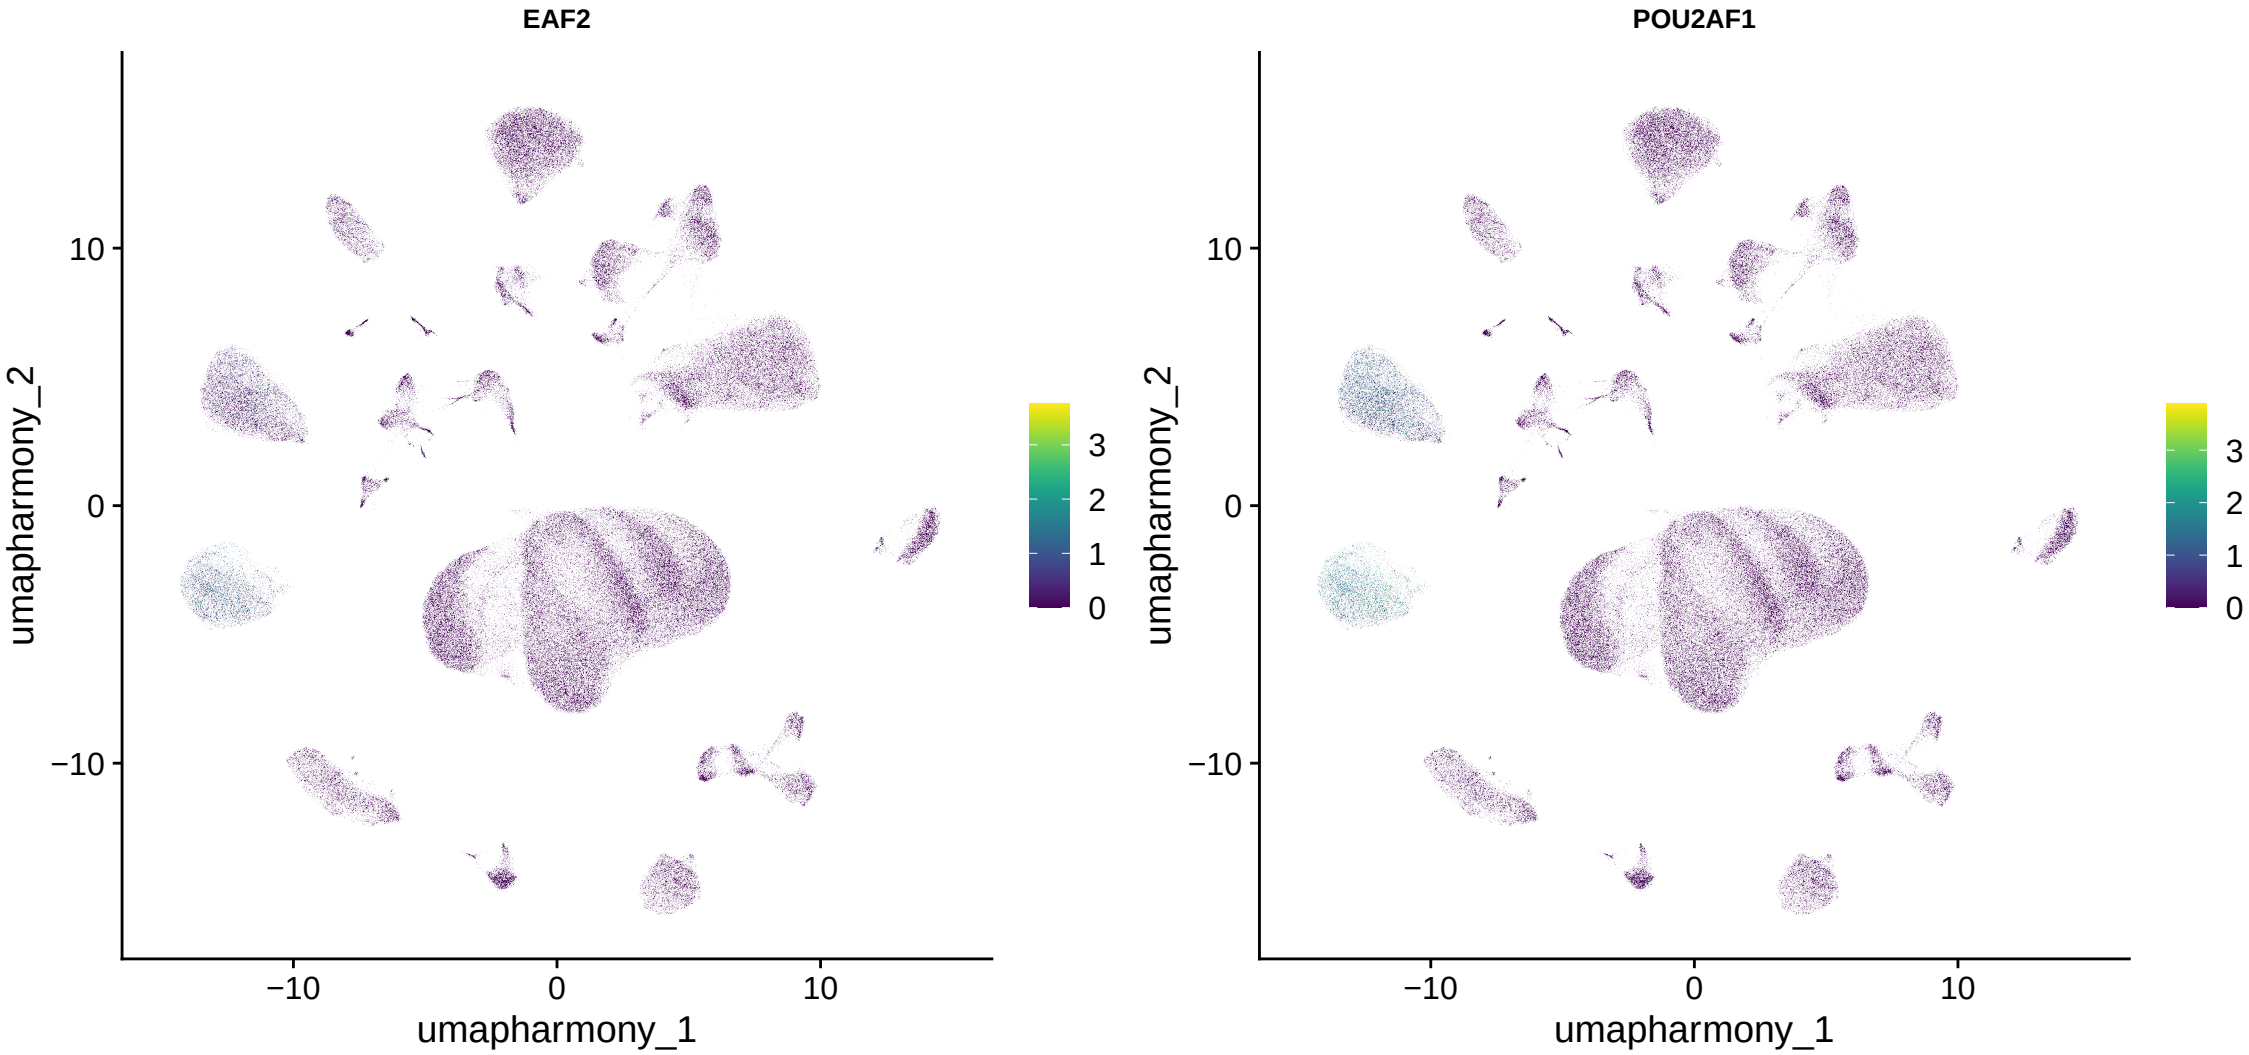


All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.

Plasma_cells_IgM_dominant | harmony_snn_res.0.7

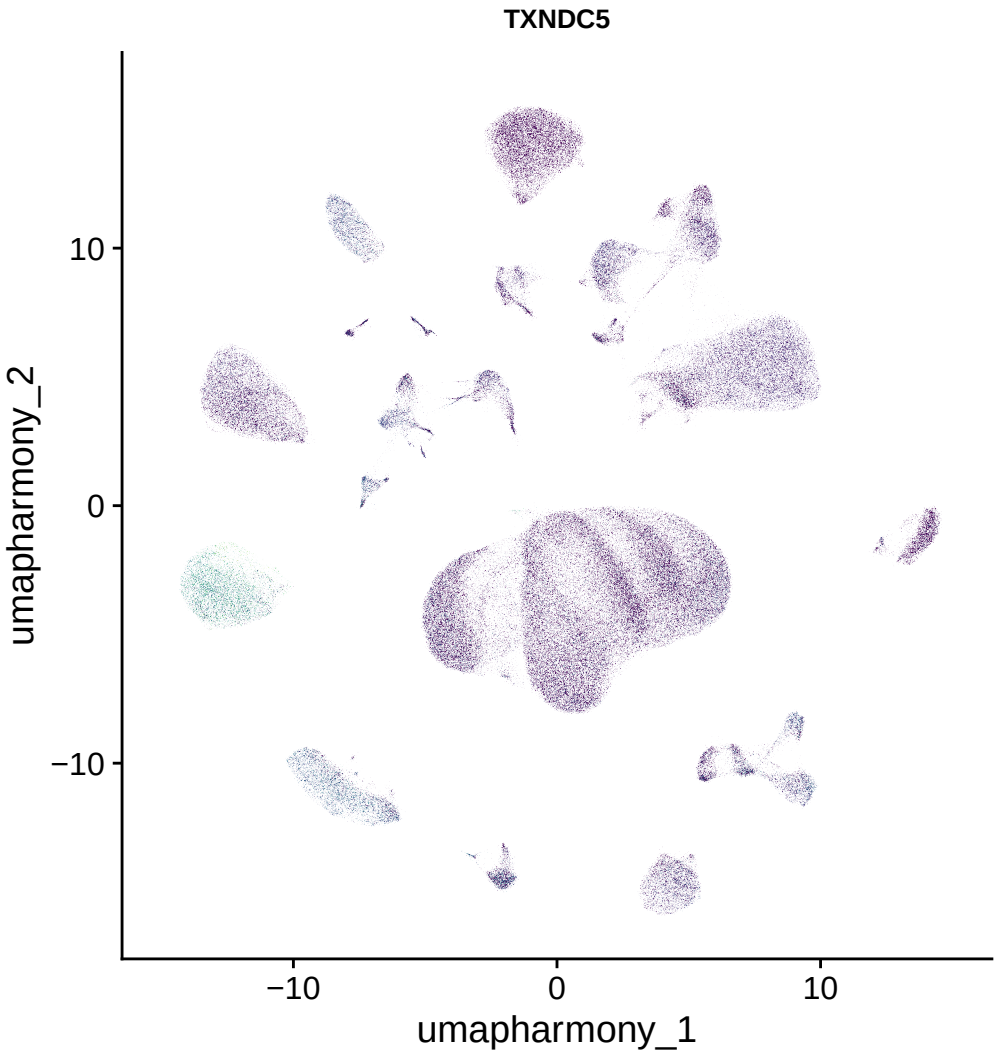

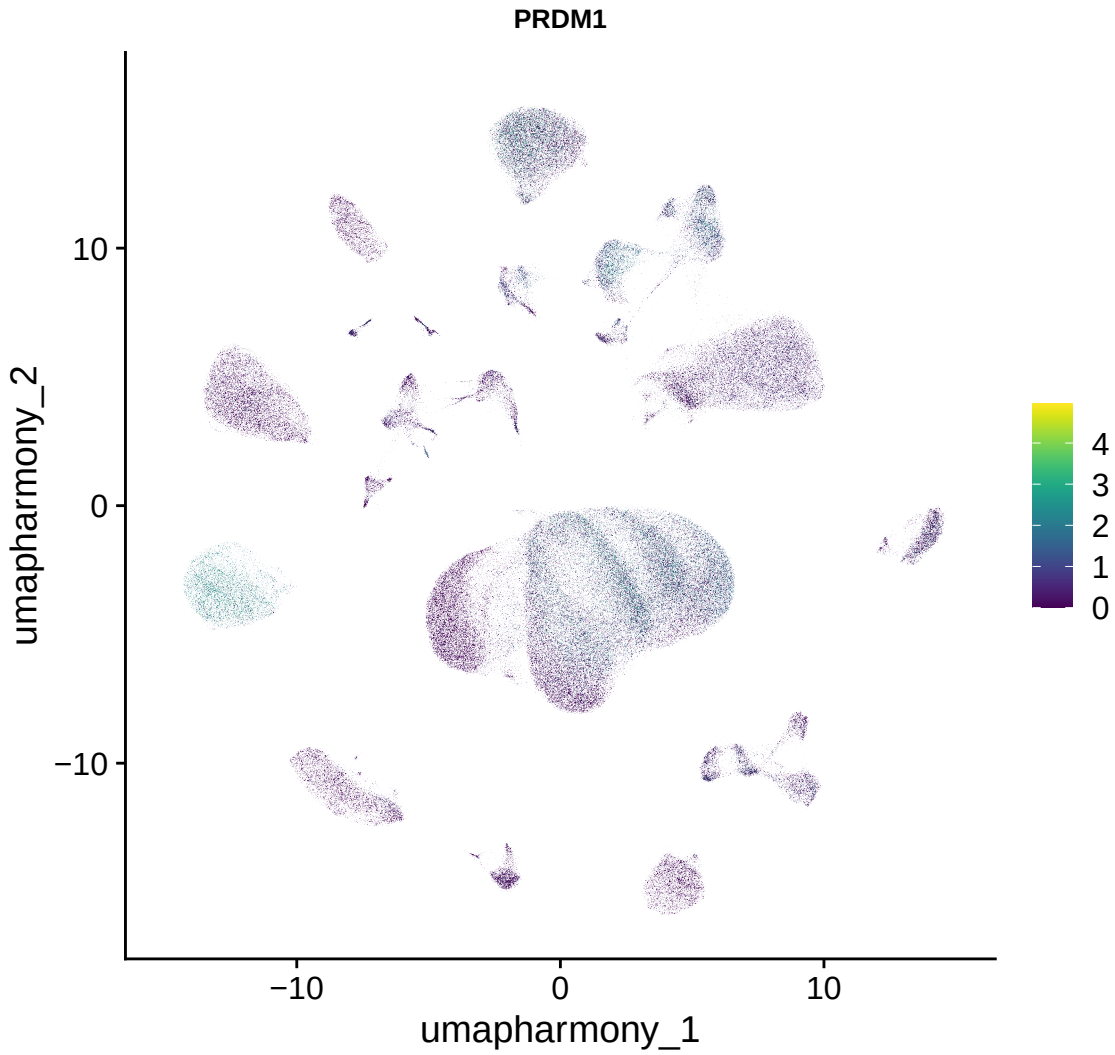

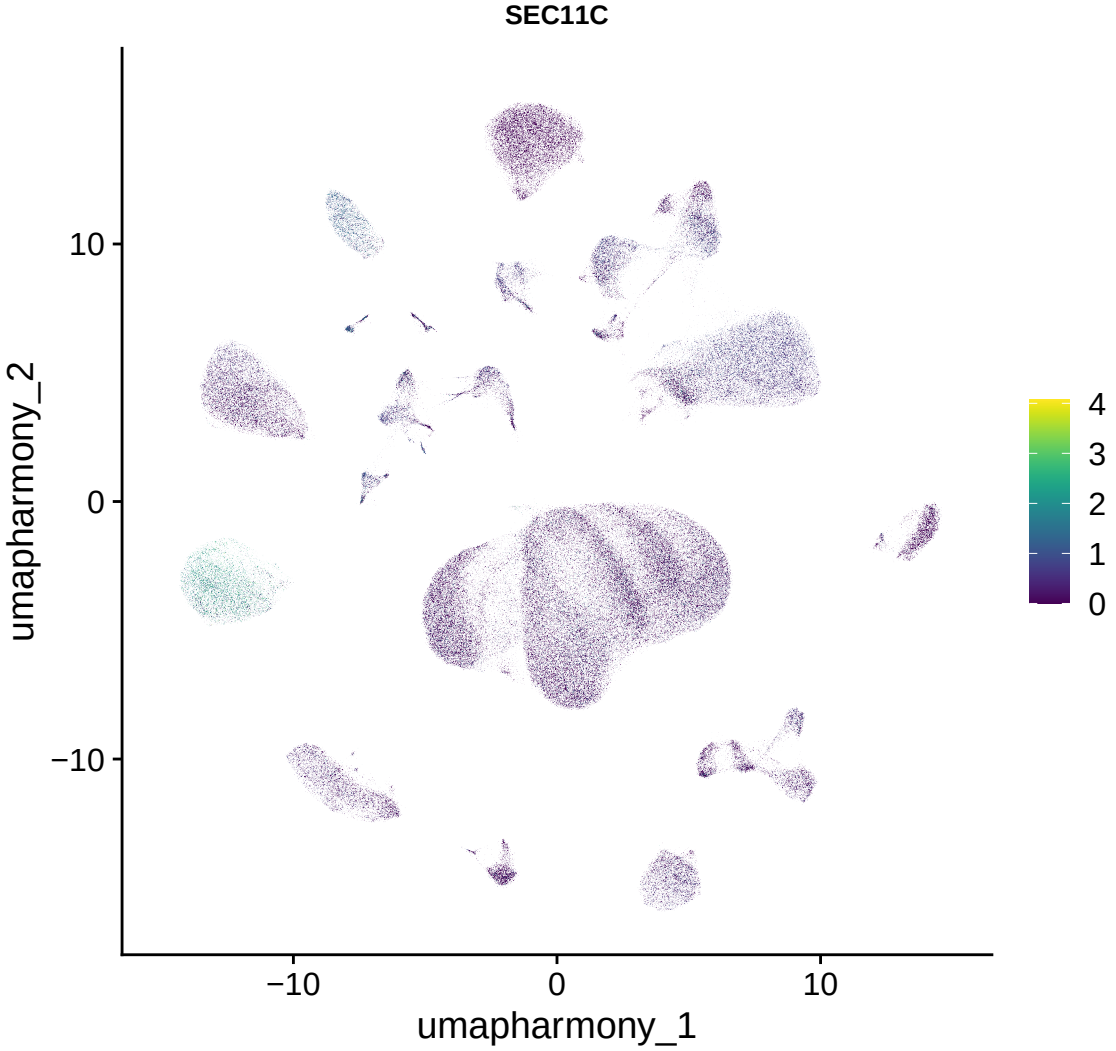

All cells; RNA LogNormalize data on umap_harmony (no z−scores); viridis, zero in low purple to high yellow. Unavailable sample features also plot as zero after layer joining. Configured panels, not cluster annotations.