


Alerts and Pop-ups



Contents

- Introduction
- Types of alert
- How to handle alert in selenium webdriver
- How to handle Pop-up windows using Selenium Webdriver

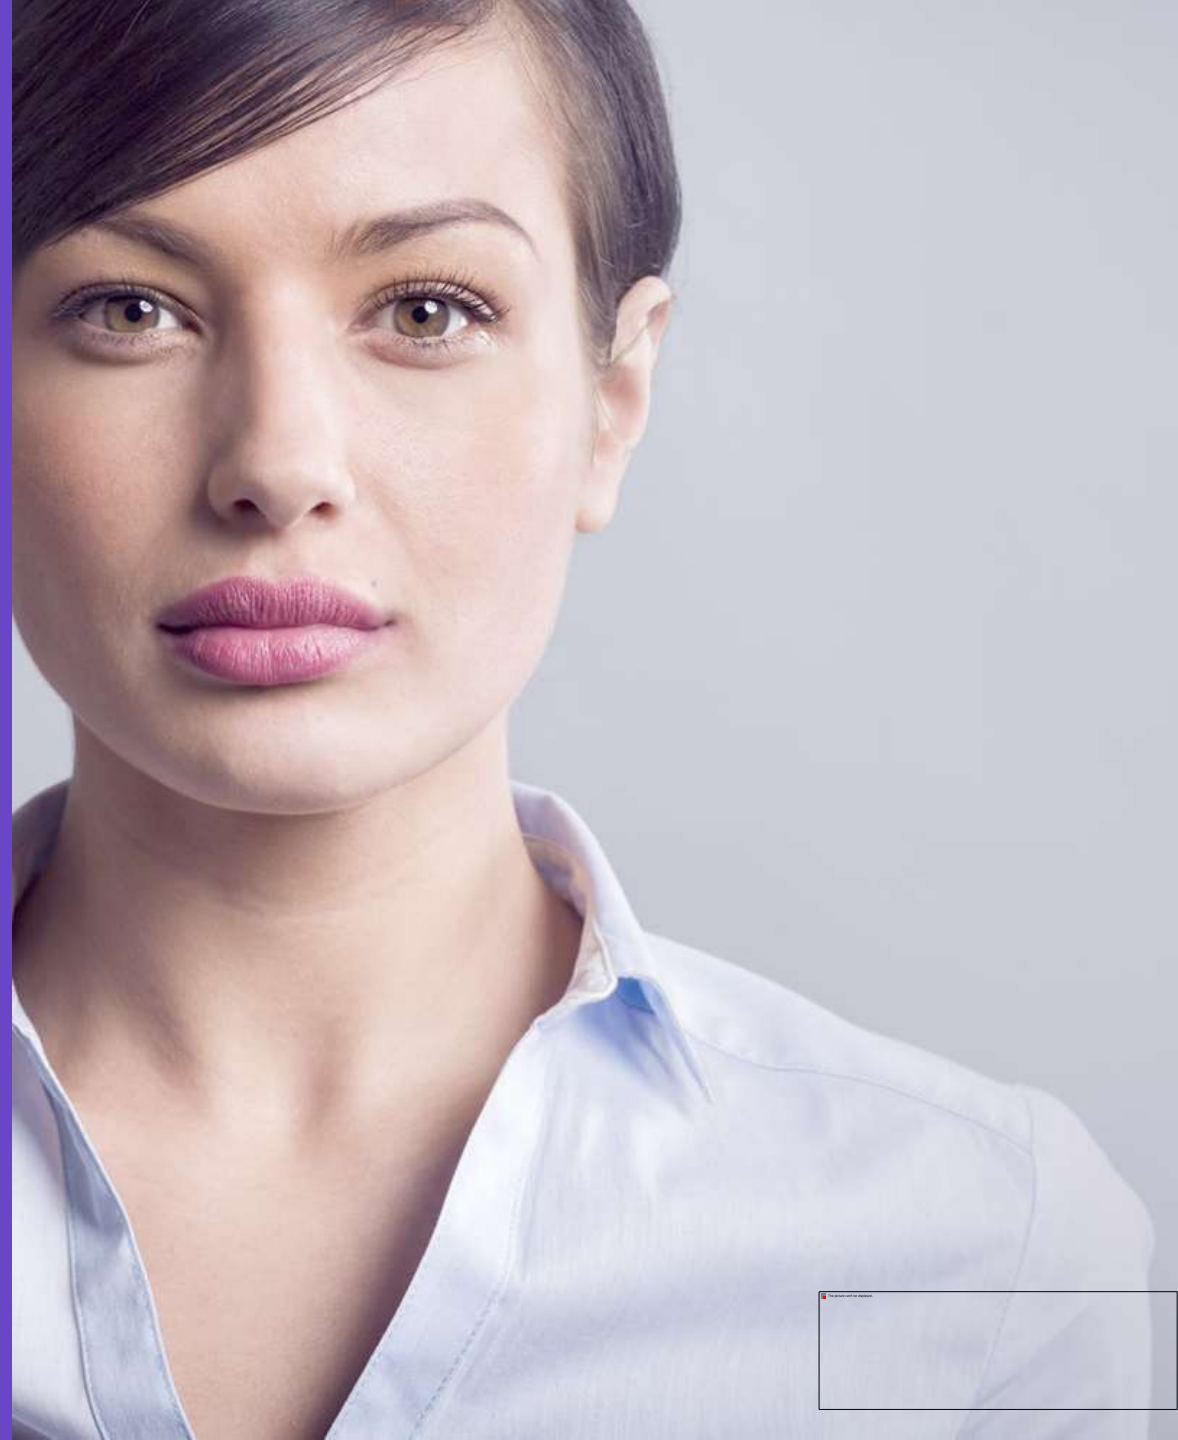

Introduction

- Handling popups and alerts is critical to testing web applications using Selenium.
- In Selenium, popups and alerts can be handled using the Alert interface, which allows you to switch to the popup window, accept or dismiss the alert, and retrieve its text.
- For handling popups in Selenium, you need to identify the type of popup, switch to the popup window, interact with its elements, and switch back to the parent window.
- Handling popups and alerts effectively in Selenium ensures that your tests run smoothly and your web application functions correctly.



Introduction

Introduction

- Alerts, pop-ups, and multiple windows are common elements on web pages and can interrupt the user's flow.
- Selenium WebDriver provides built-in methods to handle these elements to avoid errors in test scripts and ensure a smooth user experience.



Types of alert

Alert and its type

- Alert in Selenium is a message/notification box that notifies the user about some information or asks for permission to perform a certain kind of operation. It may be used for warning purposes as well.

Types of Alerts in Selenium

There are three types of Alert in Selenium, described as follows:

- 1.Simple Alert
- 2.Prompt Alert
- 3.Confirmation Alert



Types of alert

Alert and its type

1.Simple Alert


- A simple alert is a popup window that contains a message and a single button, usually labeled "OK."
- These alerts convey information or notify the user of an event. In Selenium, we can handle simple alerts using the Alert interface.



Types of alert

Alert and its type

1.Simple Alert

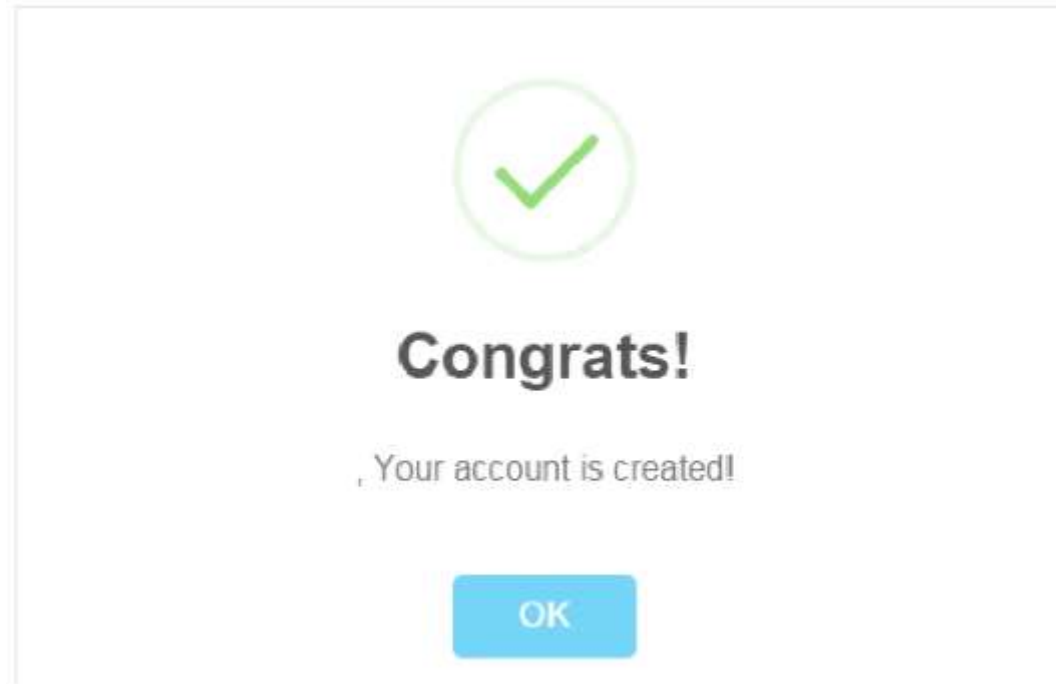

Types of alert

Alert and its type

2. Prompt Alert

- A prompt alert is similar to a simple alert but also includes a text box where the user can enter some input.
- These alerts are often used to get user input or to ask the user to confirm an action.
- In Selenium, we can handle prompt alerts using the Alert interface, just like simple alerts. We can also use the `sendKeys()` method to enter text into the prompt.



Types of alert

Alert and its type

2. Prompt Alert



Types of alert

Alert and its type

3. Confirmation Alert


- A confirmation alert is similar to a prompt alert but only has two buttons: "OK" and "Cancel."
- These alerts are often used to confirm an action or to give the user a choice.
- In Selenium, we can handle confirmation alerts using the Alert interface, just like simple and prompt alerts.
- We can use the `accept()` method to click the "OK" button or the `dismiss()` method to click the "Cancel" button.



Types of alert

Alert and its type

3. Confirmation Alert

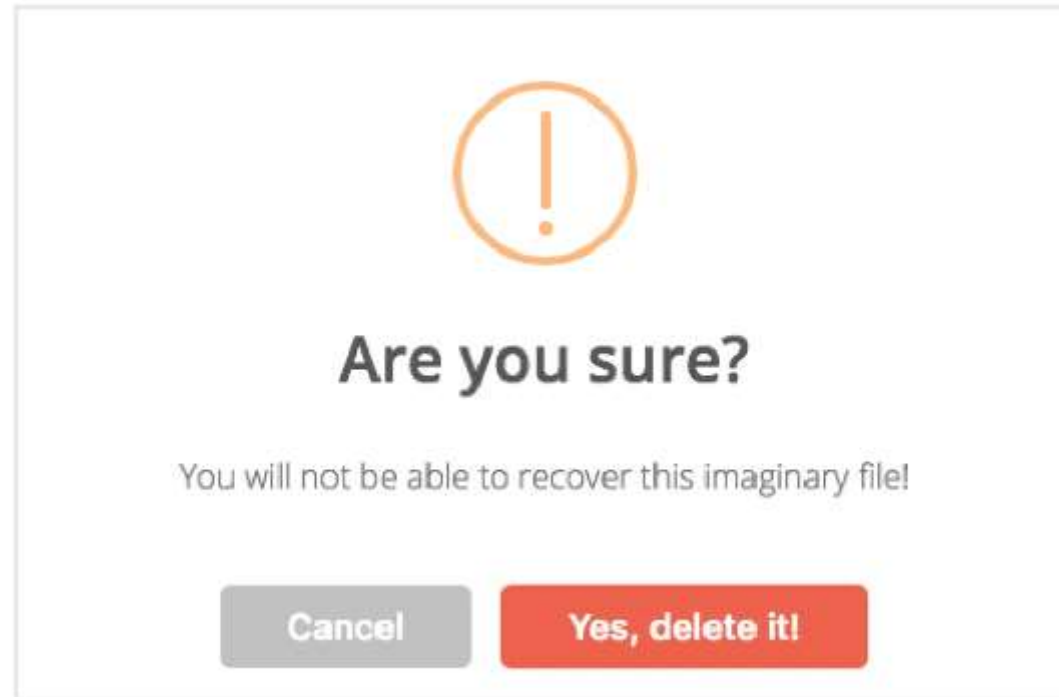

How to Handle Alert

The following methods are available to handle alerts in Selenium WebDriver:

Void dismiss()

- This method is used to dismiss or cancel an alert box.
- For example, if an alert box is displayed with the message "Are you sure you want to delete this item?" the dismiss() method can be used to cancel the action.

```
Alert alert = driver.switchTo().alert();  
alert().dismiss();
```



How to Handle Alert

The following methods are available to handle alerts in Selenium WebDriver:

Void accept()

- This method is used to accept or confirm an alert box.
- For example, if an alert box is displayed with the message "Are you sure you want to save changes?" the accept() method can be used to confirm the action.

```
Alert alert = driver.switchTo().alert();  
alert().accept();
```



How to Handle Alert

The following methods are available to handle alerts in Selenium WebDriver:

String getText()

- This method is used to get the text displayed in an alert box.
- For example, if an alert box displays "Please enter your name", the getText() method can retrieve the message.

```
Alert alert = driver.switchTo().alert();  
alert().getText();
```



How to Handle Alert

The following methods are available to handle alerts in Selenium WebDriver:

Void sendKeys(String stringToSend)

- This method is used to send text input to an alert box.
- For example, if an alert box is displayed with the message "Please enter your email", the sendKeys() method can be used to input the email address.
- To handle alerts in Selenium, the Alert interface is used.


`driver.switchTo().alert().sendKeys("Text");`



How to handle Pop-up windows using Selenium Webdriver

How to handle Pop-up windows

- A pop-up window is a secondary browser window that appears on top of the main browser window.
- Pop-up windows can display advertisements, login forms, alerts, or other types of content that require the user's attention.

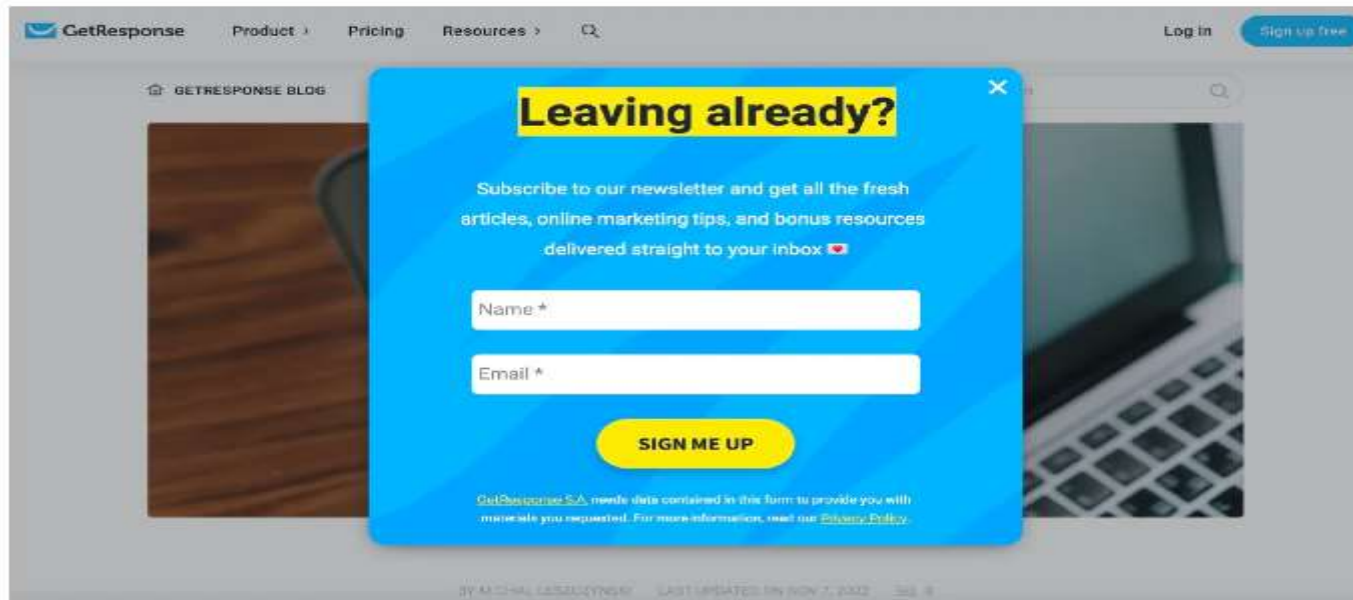

How to handle Pop-up windows

- Pop-up windows can be triggered by user actions, such as clicking on a link or button, or they can be triggered by the website itself using JavaScript or other scripting languages.
- For handling popup in Selenium, you can use the `getWindowHandles()` and `getWindowHandle()` methods.
- In Selenium, a robot class is used to handle the keyboard and mouse functions. It is used to close the pop-up window.



An Example Scenario

```
driver.findElement(By.id("PopUp")).click(); // Clicking on the popup button
Robot robot = new Robot();
robot.mouseMove(400,500); // Navigating through mouse hover. Note that the coordinates
might differ, kindly check the coordinates of x and y axis and update it accordingly.
robot.mousePress(InputEvent.BUTTON1_DOWN_MASK);
//Thread.sleep(2000);
robot.mouseRelease(InputEvent.BUTTON1_DOWN_MASK);
//Thread.sleep(2000);
```

