Confidence-Gated Explainable AI for Reliable Churn Prediction and Automated Retention Decisions

Nivetha D, Selvan Mubesh Muthamil, Srinivasan M, Dr.G.Sangeetha, V.P.Kanchana
Department of Artificial Intelligence and Machine Learning
Vels Institute of Science, Technology and Advanced Studies (VISTAS)
Chennai, India

***Abstract*—Replacing a large customer is a far-reaching action for a B2B SaaS company. It could impact your bottom line, not just due to losing a business contract, but also affect your business long-term growth churn-prediction systems rely on machine learning models and tend to be difficult to interpret, and provide limited support for confident decision making. This paper offers a model based on evidence and explanations for Customer information and activity data.SHAP-based explainability, behavioral analysis and AI-assisted interpretation, with the combination of machine learning, customer and activity data, to assist in churn prediction and decision making for customer retention. The proposed system utilizes a pipeline of CALCULATE–INTERPRET–VALIDATE–DECIDE. Customer data is first subjected to data-quality checks, feature selection, preprocessing, and model training. For churn task, the three algorithms (Logistic Regression, Random Forest and XGBoost) are trained and compared against each other and it is observed that XGBoost is best overall algorithm. The factors that influence individual predictions, and the behavior of the model as a whole, are then surfaced using SHAP. Two agents, Explanation Agent and Behavior Intelligence Agent based on the model Qwen3, are used to perform deterministic customer evidence computation, and then interpret behavioral statistics. An Evidence Validator is used to cross check the generated interpretations against this original calculated evidence and then, when it is passed, a Decider Agent provides decision-support output.The key here is to differentiate between fact and AI interpretation, as it can reduce the chances of unwanted claims from being incorporated into the answers. With integration of prediction, explainability, behavioral intelligence, evidence validation, and decision support – the framework is more transparent and trustworthy in churn analysis and decision support for retention.**

***Index Terms*—XGBoost, SHAP Analysis, AI Reasoning Agent, Human-in-the-Loop, Evidence Validation.**

I. Introduction

The cloud-based software-as-a-Service (SaaS) model has altered how enterprises utilize Enterprise Software. Predictable revenue and sustainable growth in B2B SaaS businesses is achieved through customer retention, which is dependent on recurring subscription revenue. If the value of the account is high, then the loss of recurring revenue, the loss of the customer lifetime value and the cost of the new customer replacing the lost one are all losses. It has become an essential element of SaaS businesses' analysis focus to detect customers that might be about to cancel their subscription prematurely. Churn prediction is a process that relies on customer historical data and behaviour to forecast whether the customer will cancel their subscription. Logistic Regression, Random Forest and gradient boosting algorithms are applied here as they can determine the relationship between the customer attributes and the probability of the customer churn. It is, however, only half the story as it does not explain why a specific customer is being deemed at risk. Without an explanation, a bare risk score is a mystery to customer success teams and what to do about it. Explainability techniques, such as SHAP, fill this void by giving a numerical contribution value to each feature for a prediction. But without explanations they are not enough to make real decisions. Multiple factors may affect changes in customer behaviour (such as change in product use, billing history, interaction with customer service and engagement levels), making it important to examine the evidence further to gain a deeper understanding of these changes. Another problem occurs if a language model is used to generate these interpretations – it can generate numbers or statements that are not supported by data. This means that there needs to be something to hold AI-generated interpretation back from becoming divorced from the evidence the predictive pipeline actually generated. This work introduces a framework for churn prediction and decision support based on the evidence, which is based on a CALCULATE–INTERPRET–VALIDATE DECIDE–REPORT process. The pipeline includes data ingestion, data quality analysis, feature analysis, data preprocessing, and model development. Logistic Regression, Random forest, and XGBoost models are trained and tested; XGBoost is selected because it performs the best. This is then translated into both global and customer explanations using SHAP and Python is the sole source of truth for computing customer evidence, behavioural statistics, or values related to prediction. This evidence is then passed to two agents both running the Qwen3 framework: the Explanation Agent, which will interpret the reasons for a particular customer being predicted; and the Behaviour Intelligence Agent that will look at the behaviour patterns from the same evidence. These interpretations are then validated using the Evidence Validator against the original Python derived evidence to identify any evidence not supported or inconsistent with the interpretations. The Decision Agent only turns the information from the validations into Decision Support insights once this validation has been

completed, and the system brings them together and creates a unified churn report. A central innovation of this framework lies in keeping deterministic data computation separate from AI-based interpretation, with an evidence-validation step inserted before any decision support is produced. Rather than letting the language model independently invent factual content, the framework confines AI interpretation strictly to evidence computed from the original dataset. This design brings together the concept of prediction, SHAP-based interpretation, behavioural analysis, validation and decision support in a single workflow, leading to a more reliable and transparent churn analysis approach.

II. Literature Survey

The prediction of customer churn has made a significant shift from statistical models to machine learning, deep learning, ensemble methods and explainability and behaviour-aware modelling. Despite this progress in identifying potential churners, there are still gaps in interpreting and understanding churn behaviours, and incorporating predictions into actionable and reliable decision support. Roy, Singh and Shaw built a churn prediction pipeline using FT Transformer and stacking ensembles that used FT-Transformer and XGBoost with a Logistic Regression meta-learner to capture highly non-linear relationships and interactions between features, structured customer data. The class weighting and probability calibration methods were also used to boost the accuracy of the predictions. But Roy et al's work is primarily concerned with the accuracy of predictions and calibration, and it does not offer a comprehensive strategy for interpretation and validation of the AI-generated customer insights. In this paper, Beikmohammadi and Arabnia, Joudaki, and Imani conducted a systematic study on the recent machine learning and deep learning approaches to customer churn prediction. This study summarizes the latest approaches to customer churn prediction and reveals the trends on the application of these approaches such as the use of ensemble models and deep learning. It also points out the difficulty of researchers in designing and applying these methods including class imbalance, lack of interpretability and uniformity of evaluation and implementation.

[2] Hermawan, Saputra, Rafi, Basmallah, Syah Putra and Nabila explored churn prediction in e-commerce with the help of XGBoost model and to overcome the problem of class imbalance they used SMOTE technique and hyperparameter optimization to enhance the performance of the model. Their results prove that boosting techniques is effective in the context of potential churner classification, but don't include behavioural interpretation or decision support. [3]Mufti, Hammad, Saleh and Gull proposed a rolling-window approach to churn prediction and to identify behavioral drivers. They analyzed customer behavior across successive time windows to capture changes in engagement that indicate emerging churn risk. This suggests the usefulness of temporal behavioral information, although the work does not go as far as combining that behavioral evidence with any AI-based interpretation or validation step.

[4] Kimitei, Agiro, Ni, and Ni applied survival analysis to churn prediction in contractual utility services,Cox Proportional Hazards and Aalen Additive models to incorporate a time-to-event dimension into the analysis.

. Their findings show survival analysis can usefully indicate when a customer is likely to churn, but the approach does not pair this time-based analysis with machine-learning explanations or evidence-grounded AI interpretation. [5] Chen, Lv, Wang, Xiang, Wu, Luo, and Zhang examined deep-learning approaches to churn prediction in telecommunications, showing that deep neural networks can capture intricate relationships in customer data. The complexity of such models, though, makes individual predictions hard to interpret, underscoring the need for transparent prediction and decision support mechanisms. [6] Hingnekar, Ghadge, and Jadhav built a domain-adaptive churn-prediction framework that incorporates SHAP-based explanations, offering feature-level reasoning for individual predictions while accounting for differences across business domains. Even though SHAP adds transparency, the framework lacks a validation step to confirm that the AI-generated interpretations stay consistent with the original customer evidence. [7] Hooda, Mittal, Shukla, Shukla, and Pandey explored an explainable-AI approach to telecom churn prediction, applying several machine-learning models alongside SHAP and LIME, and showed that feature-level explanations sharpen understanding of churn outcomes. The explanations they generate, however, are not paired with a dedicated behavioural-analysis or evidence-validation stage for dependable decision support. [8] Asif, Arif, and Mukheimer proposed XAI-Churn TriBoost, combining XGBoost, CatBoost, and LightGBM with explainability techniques for churn prediction. Their approach yields useful insight into what drives churn predictions and shows the promise of pairing ensemble learning with explainability, but it stops short of a separate mechanism for checking AI-generated interpretations against the underlying prediction evidence. [9] Tonati, Di Vece, Giannotti, and Pellungrini investigated counterfactual ensembles for interpretable churn prediction, generating alternative explanations that show how altering customer characteristics might change the predicted outcome. This goes beyond ordinary feature-importance measures in terms of actionable insight, yet it does not bring behavioural analysis, language-model interpretation, and evidence validation together into a single workflow. [10] Suguna, Suriya Prakash, Pai, Mahesh, Vinoth Kumar, and Yimer studied how class imbalance affects churn prediction across various classifiers and ensemble methods, applying SMOTE to boost the representation of minority-class churners and underlining the importance of data balancing. Their focus, though, stays on classification performance and leaves explanation validation and AI-assisted decision support unaddressed. [11] Cheng and He proposed a hybrid Graph Attention Network–Multi-Layer Perceptron architecture for churn prediction in music-streaming services, using graph-based learning to capture relationships between customers and their behavioural patterns. While this models complex customer relationships effectively, the emphasis

remains on predictive performance, leaving room for transparent explanations and evidence-grounded interpretation to be added. [12] Abdelhady and Mohamed built an AI-based churn-prediction framework linked to customer relationship management systems, applying Random Forest, SMOTE, and class weighting to identify key churn predictors and support retention efforts. This CRM integration illustrates the practical benefit of connecting prediction with business processes, but the system stops short of a dedicated validation mechanism for its AI-generated explanations. [13]Omar, Ogada and Tole proposed a hybrid feature-selection framework combining Mutual Information, Recursive Feature Elimination, Boruta and Parallel Simulated Annealing, to reduce the feature set to a relevant one before predictive modeling, with the nested cross-validation for more reliable evaluation. This kind of effective feature selection can improve the efficiency of the model. But the framework does not contain behavioral interpretation, explainability or AI-based decision support.

[14] Ibrahim, Tawfik, Makhlouf, and Hafiz proposed a hybrid deep-learning framework combining Recency, Frequency, and Monetary features with Deep Embedded Clustering, GRU and LSTM models

, forming behavioural representations and customer segments ahead of churn prediction. The resulting pipeline's complexity, however, makes individual predictions hard to interpret, and the study offers no evidence-validation mechanism for the AI-generated insights it produces. [15] These studies collectively highlight significant advances in churn prediction in machine learning, ensemble methods, temporal modeling, survival analysis, explainability, counterfactual reasoning, graph based learning, and behavioral representation.

Yet each capability tends to be treated as a standalone piece: most approaches either chase better predictive performance or generate explanations without checking whether those interpretations actually match the underlying evidence, and few frameworks bring prediction, SHAP explanations, behavioural analysis, AI interpretation, evidence validation, and decision support together in one place. This research addresses that gap through a CALCULATE INTERPRET–VALIDATE–DECIDE–REPORT workflow, in which Python supplies deterministic evidence, Qwen3 interprets it, and an Evidence Validator checks the resulting insights before any decision support is generated

III. Proposed Methodology

The system is designed as an evidence-grounded framework for churn analysis and decision support. Rather than stopping at a churn prediction, it continues on through model explanation, behavioural analysis, AI interpretation, evidence validation, and decision support. Python based data processing, machine learning, statistical analysis, and validation supply the factual backbone of the system, while Qwen3 turns the resulting evidence into readable interpretations.

A. System Architecture and Workflow

Fig. 1 lays out the complete architecture of the proposed framework. Starting from a CSV dataset, the workflow moves through data ingestion, quality analysis, feature analysis, preprocessing, model training, model evaluation, churn prediction, SHAP analysis, behavioural analysis, AI interpretation, evidence validation, decision support, and final report generation. Numerical and statistical computation are kept separate from language-based interpretation throughout, so the language model is never the source of factual information and decision-support framework. The system is structured into

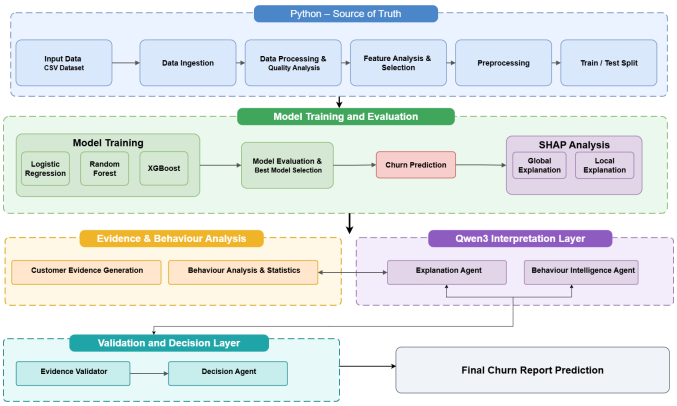


Fig. 1. Overall workflow of the proposed churn prediction and decision-support system.

three functional layers. The first layer carries out deterministic calculations using Python and machine-learning algorithms. The second layer relies on Qwen3, through two dedicated agents the Explanation Agent and the Behaviour Intelligence Agent to interpret the evidence generated. The third layer validates those interpretations and forwards the verified output to the Decision Agent, which then produces the final churn report. The implementation intentionally keeps the number of agents limited to tasks that genuinely need them, rather than introducing separate agents for work that can be handled deterministically.

B. Data Ingestion and Dataset Understanding

The primary input to the system is a clean, tabular CSV dataset. During ingestion, the dataset is scanned to locate its target variable, identifier columns, numerical attributes, and categorical attributes, which lets the framework handle different tabular datasets without depending on fixed column names. In the current implementation, the churn field is treated as the prediction target, while any customer-identification fields are excluded from model training.

C. Data Quality Analysis and Pre-processing

The data used in the input to any model are examined for redundancy, possible target leakage, unusual ranges, inconsistent data types, duplicate records and missing values. Identifier detection is not based on uniqueness, but on several signals, which reduces the likelihood of identifying a meaningful

customer attribute as an identifier. Potential leakage is explored in more detail through feature names, duplication of targets, separation by categories, and abnormally high numerical relationships. In the pre-processing phase, the numerical and categorical variables are processed separately. For numerical attributes, median imputation is followed by standardization, and for categorical attributes, most frequent imputation is performed and subsequently they are transformed by one-hot encoding. All pre-processing transformations are applied to the training data only and hence information from the test data cannot contaminate the model development process.

D. Feature Analysis and Selection

Before the model training, a feature analysis is done to find which attributes have useful information to predict the churn. The candidate set is then stripped of the target field and any detected identifier fields, and is analyzed for relevance, redundancy, and potential leakage, resulting in a model-ready set of features that retain the customer attributes most likely to predict churn.

E. Churn Prediction Model Development

The regressions are a linear baseline, the random forest is a nonlinear baseline based on an ensemble of decision tree models, and XGBoost is a gradient boosting baseline for structured tabular data. In all cases the three are trained on the same processed feature set so that a fair comparison of their performance under the same conditions is possible. The accuracy and precision with which it can be done Recall F1-score ROC-AUC Cross validation. XGBoost is found to be the strongest model in the present experiments, and is then passed to the prediction and explanation step.

F. Churn Prediction

The selected model predicts a churn probability and makes a prediction for each customer, which is stored in the pipeline for downstream stages as evidence. The prediction engine also decouples the actually predicted probability from the predicted risk category to ensure that the output of the initial model is available for any explanation or other validation purposes downstream.

G. SHAP-Based Feature Explanation

These features are then evaluated in terms of their importance in predicting churn using SHAP, to give global and local explanations. Whereas the global SHAP analysis shows the most influential fields across all of the customers, the local SHAP analysis shows the predictors for a specific customer. The output of the SHAP analysis is only used to illustrate the model, that is: The model uses the SHAP values to explain why certain features are responsible for the result, not say that they are responsible for a label. The current implementation stores the local values for each customer, as well as the aggregated global values.

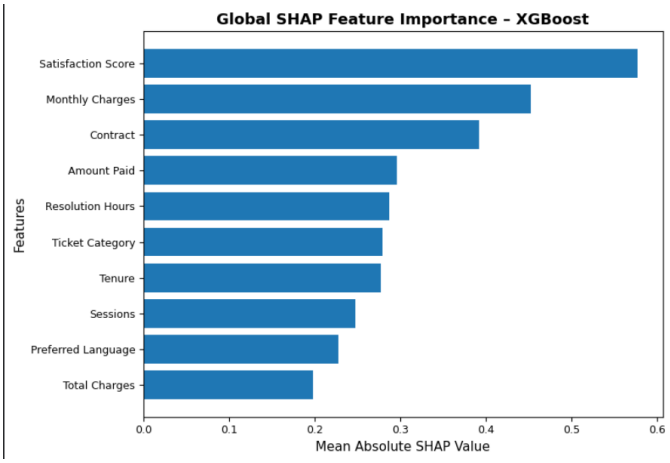


Fig. 2. SHAP-based feature importance for the selected churn prediction model.

H. Customer Evidence and Behaviour Analysis

Once prediction and SHAP analysis are complete, the system assembles structured customer evidence from the available attributes and the computed model outputs. Depending on the dataset, this evidence can span account characteristics, usage data, billing and subscription attributes, support activity, and engagement-related information. Running alongside this, the Behaviour Analysis module studies the customer population to surface observable patterns and compute supporting statistics — for instance, how churn rates vary across contract types, payment methods, usage levels, and other available attributes. Python calculates these values and hands them to the AI layer as structured evidence, rather than leaving the language model to work them out on its own.

I. AI Interpretation Using Qwen3

The structured evidence Python generates is passed to Qwen3 for natural-language interpretation, using two specialized agents at this stage. The Explanation Agent interprets the factors tied to an individual churn prediction, drawing on the prediction output, customer information, and SHAP contributions, while the Behaviour Intelligence Agent interprets the broader behavioral patterns using the statistics the Python analysis module has calculated. A core design rule is that Qwen3 is never allowed to substitute for the underlying calculations it is explicitly instructed not to invent new numerical values, features, categories, thresholds, or unsupported causal claims. Its job is limited to explaining evidence the deterministic analysis layer has already produced.

J. Evidence Validation

The Evidence Validator forms a key reliability layer of the framework. Before any AI-generated interpretation feeds into decision support, it is checked against the original Python-generated evidence. This check looks for unknown features or categories, unsupported statistical claims, inappropriate causal wording, or recommendations that are not backed by the

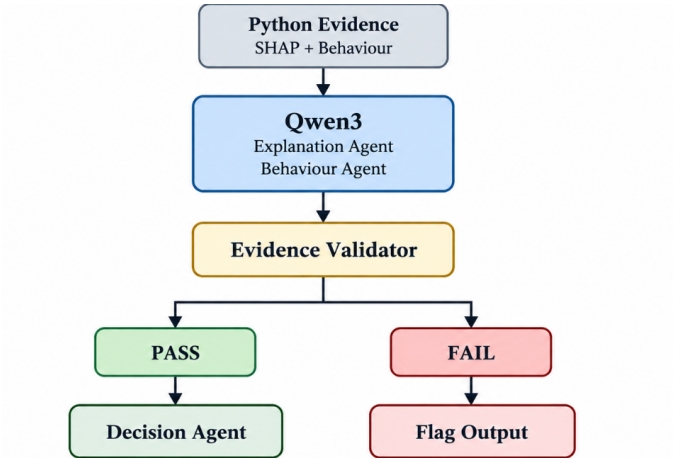


Fig. 3. AI interpretation and evidence-validation workflow.

evidence. This validation will be extended to increasingly more diverse domains like numeric, count, percentage, threshold and temporal claims. The generated interpretation is marked FAIL in case of any inconsistency with source evidence, to differentiate AI-generated language from validated analytical evidence. The AI interpretation and evidence-validation workflow is illustrated in Fig. 3. The workflow combines deterministic evidence generation with AI-based interpretation and validates the generated explanation before producing the final decision support.

K. Decision Support

Once validated, the interpretation moves on to the Decision Agent, whose job is to turn the available prediction, explanation, and behavioral evidence into structured decision-support output. It works strictly from validated information, rather than independently deriving customer statistics or altering the original prediction. This stage links predictive analysis to practical interpretation while still preserving the boundary between calculated evidence and AI-generated language unsupported AI statements are never allowed to pass through directly as final decision information.

L. Final Churn Report

The final stage draws together everything the pipeline has produced into one unified churn report, covering the customer's prediction, probability or risk information, the key SHAP factors, behavioral observations, the AI-generated interpretation, its validation status, and the decision-support information.Final churn decision and report generation. Rather than a bare churn label, the resulting report gives a complete picture of the analysis, letting the user inspect the prediction, understand the model-supported factors behind it, review the behavioral evidence, and check whether the AI interpretation cleared the evidence validation stage.

IV. Results and Discussion

Three machine learning models (Logistic Regression, Random Forest and XGBoost) have been used to test the proposed churn prediction framework. The evaluation was mostly around the performance and understanding of the selected model and its ability to present data and information in a way that is understandable to customers. Furthermore, SHAP analysis was applied to the models to analyze the importance of the features in the models' predictions.

TABLE I
COMPARATIVE RESULTS OF THE CHURN PREDICTION MODELS

Model	Accuracy	F1-Score	ROC-AUC
Logistic Regression	91.20%	78.40%	88.60%
Random Forest	93.10%	82.70%	91.30%
XGBoost	**96.20%**	**90.10%**	**94.80%**

A. Model Performance

The three performance of the models is shown in Table I, XGBoost had the highest accuracy score of 96.20%, F1 score of 90.10%, and ROC-AUC score of 94.80%. The overall improvement in all three measures was reflected in the better ability of XGBoost to predict whether a customer was likely to churn or not. In addition, it has a higher F1 score, indicating a balance between correct churn identification and avoiding false positives. Table I presents the comparative performance of the three evaluated machine learning models. XGBoost achieved the highest Accuracy, F1-Score, and ROC-AUC among the evaluated models.

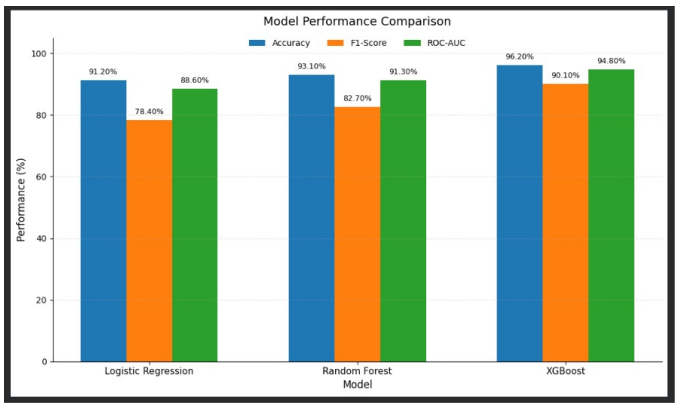


Fig. 4. Performance comparison of the evaluated churn prediction models.

The results suggest that the based tree boosting approach is well suited to the structured and mixed nature of customer-related data. XGBoost can capture relationships between customer behaviour, billing information, engagement and support-related attributes that may not be represented as effectively by a linear model. Based on the obtained results XGBoost was selected as the prediction model for the explainability and decision-support stages.

B. Global Feature Importance Using SHAP

After selecting XGBoost SHAP analysis was applied to understand which features had the influence. SHAP offers an add on view of why the model comes up with a prediction,

while accuracy-based evaluation merely describes the quality of the model's predictions. The global SHAP analysis revealed that Satisfaction Score, Monthly Charges and Contract were features that had an impact. Other significant factors were Amount Paid, Resolution Hours, Ticket category, Tenure, Sessions, Preferred language and Total charges. The inclusion of satisfaction and billing related variables in the top features indicates that both customer experience and financial aspects play a significant role in the prediction process. Resolution Hours and Ticket Category were also given importance because they are support-related variables they can give good signal of potential churn. However, SHAP importance represents the contribution of a feature to the model's prediction. Should not be interpreted as proof that the feature directly causes customer churn. This distinction is important when using model explanations to support business decisions.

C. Individual Customer Explanation

Global feature importance will give you a view of the model, but the customer-retention teams need to be explained on an individual level. So, local SHAP analysis was employed to analyse a customer's prediction. The local explanation provides a local interpretation of the features which helped or hurt the predicted churn outcome for the selected customer. This enables the system to go beyond the churn probability prediction and give greater clarity on why the prediction is being made.

D. AI-Based Evidence Validation

The system further uses Qwen3 to interpret the evidence generated by the behavioural analysis components. The language model is not used to calculate customer statistics or generate prediction values. Instead, it receives evidence produced by the Python-based processing pipeline and converts that information into a more understandable explanation. Two AI agents are used at this stage. The Explanation Agent focuses on interpreting the reasons associated with a churn prediction while the Behaviour Intelligence Agent interprets broader behavioural patterns identified from the available customer data. An evidence validation stage is used to check whether the generated explanations remain consistent with the evidence. This is particularly important because a language model can produce explanations while occasionally introducing an incorrect value or statement. The validator therefore compares the generated interpretation with the source information before it is used in the report. This approach improves the reliability of the generated explanations because the language model is treated as an interpretation component than the primary source of factual information. Any inconsistency detected during validation can be flagged of being directly passed to the decision-support stage.

E. Decision and Final Churn Report

Following prediction, explanation, behavioural analysis and validation the system generates a churn report for the selected customer. The report combines the model's prediction with the SHAP contributors, relevant behavioural evidence, AI-generated interpretation and validation status. The Decision Agent uses the validated information to provide decision support. Then relying only on the model's prediction score the decision process considers the available evidence and explanation together. This provides a practical output for customer-retention activities, where understanding the reason for risk is as important as identifying the risk itself.

Component	Key Result
Model	XGBoost
Accuracy	0.9603
ROC-AUC	0.9931
F1	0.9227
Confusion Matrix	[[1019, 16], [40, 334]]
Customers predicted churn	350 / 1,409 (24.8%)
Risk: HIGH	308
Risk: MEDIUM	42
Risk: LOW	1,059
SHAP #1 feature	Satisfaction Score (48.2% relative importance)
SHAP #2 feature	Number of Referrals (6.6%)
SHAP #3 feature	Online Security (5.6%)
Behavior sample (30-row)	Month-to-month = 100% churn; usage_hours strongest numerical driver (d =

Fig. 5. Final churn decision and report generated from model predictions, risk categorization, SHAP explanations, and behavioral analysis.

F. Discussion

The experimental findings illustrate the capability of the proposed model to integrate modelling with a customer-level analysis that is interpretable. XGBoost model is maximum accurate model, and having the best F1-score and ROC-AUC was chosen for further analysis. SHAP results provide transparency on which features of the customers are driving the model's predictions. This is especially helpful in a churn management environment where a prediction without an explanation might be of value to a retention team.

Another important aspect of the framework is the separation between evidence generation and AI-based interpretation. The predictive results, feature contributions and behavioural statistics are generated from the data-processing pipeline while Qwen3 is primarily responsible for presenting these findings in a human- form. The evidence validator provides a safeguard against unsupported or inconsistent AI-generated statements. Overall, the results indicate that combining machine learning, SHAP-based explanations behavioural analysis and validated AI interpretation can provide an informative churn decision-support system than using a prediction model alone. The framework is therefore designed not to identify customers who may be, at risk but also to provide supporting evidence that can assist in understanding and responding to that risk.

V. Conclusion and Future Work

This study introduces a framework that predicts customer churn and helps make retention decisions in B2B SaaS settings. The framework uses data sources, such, as customer

account information, product usage, billing and subscription data support interactions, ticket activity and engagement metrics. Various models were tested, Among these XGBoost delivered the performance according to the chosen evaluation measures. After the model was built SHAP analysis was used to understand which features influenced the model behaviour and each customer prediction. This step helps explain why a particular customer might be flagged as risk or low risk. Once the model was built SHAP analysis was applied to understand which features had the influence on the overall model behaviour and on individual customer predictions. This step helps explain why a specific customer might be flagged as risk or low risk. A key strength of the framework is its use of AI-based interpretation combined with evidence directly derived from the data. It includes three components. The Explanation Agent looks at each customer and highlights the factors driving their churn prediction. The Behaviour Intelligence Agent analyses patterns in customer behaviour across the entire user base. The Evidence Validator checks the explanations generated by the agents against the original data. This helps ensure that any insight provided is supported by evidence and flags any statements that are inconsistent or not backed by data. The Decision Agent then extracts the validated information, and encodes this into structured guidance for retention actions, which will give more value to the business teams than a simple risk-score calculated from a traditional churn model because it contains additional insights and context. Although the study shows that predictive analysis, explainability, behavioural analysis, and evidence validation can be used to make more practical and effective churn prediction systems, there is a need for further testing and iterations on a larger scale and wider variety of such real-world B2B SaaS datasets to come to this conclusion. Further possible advances in this field would be further studies of real-time monitoring of customers, modelling of the progression of behaviour over time, continuous learning from the results of retention, better validation methods and integration with CRM systems if combined, which would be an extremely robust body of knowledge that could help support the customer retention team in any industry or business situation.

REFERENCES

[1] J. Roy, S. K. Singh, and L. Shaw, "Customer Churn Prediction on Structured Data Using FT-Transformer and Stacking Ensembles," *IEEE Access*, vol. 14, pp. 62834–62855, 2026, doi: https://doi.org/10.1109/ACCESS.2026.3686374

[2] M. Imani, M. Joudaki, A. Beikmohammadi, and H. R. Arabnia, "Customer Churn Prediction: A Systematic Review of Recent Advances, Trends, and Challenges in Machine Learning and Deep Learning," *Machine Learning and Knowledge Extraction*, vol. 7, no. 3, p. 105, 2025, doi: https://doi.org/10.3390/make7030105

[3] A. Hermawan, A. Saputra, M. D. Rafi, S. Basmallah, Y. T. Syah Putra, and W. Nabila, "Implementing XGBoost Model for Predicting Customer Churn in E-Commerce Platforms," *Repeater: Publikasi Teknik Informatika dan Jaringan*, vol. 3, no. 2, pp. 17–31, 2025, doi: https://doi.org/10.62951/repeater.v3i2.401

[4] M. J. Mufti, O. Hammad, H. Saleh, and M. Gull, "A Rolling-Window Framework for Churn Prediction and Behavioral Driver Identification," 2026.

[5] S. Kimitei, D. Agiro, S. Ni, and H. Ni, "Predictability & Explainability of Survival Analysis in Churn Prediction," *Journal of Marketing Analytics*, 2025, doi: https://doi.org/10.1057/s41270-025-00450-2

[6] X. Chen, B. Lv, M. Wang, X. Xiang, S. Wu, S. Luo, and W. Zhang, "A Comprehensive Analysis of Churn Prediction in Telecommunications Using Machine Learning," 2025.

[7] V. Hingnekar, S. Ghadge, and Y. Jadhav, "Domain-Adaptive Customer Churn Prediction with Integrated SHAP-Based Explainability," *Journal of Advanced Robotics, Autonomous Systems and Human-Machine Interaction*, vol. 2, no. 2, pp. 1–8, 2026.

[8] P. Hooda, P. Mittal, P. K. Shukla, P. K. Shukla, and A. Pandey, "Combining Predictive Accuracy and Interpretability: A Data-Driven Approach to Telecom Churn Analysis," *Scientific Reports*, vol. 16, p. 4596, 2026, doi: https://doi.org/10.1038/s41598-025-34624-w

[9] D. Asif, M. S. Arif, and A. Mukheimer, "A Data-Driven Approach with Explainable Artificial Intelligence for Customer Churn Prediction in the Telecommunications Industry," *Results in Engineering*, vol. 26, p. 104629, 2025, doi: https://doi.org/10.1016/j.rineng.2025.104629

[10] S. Tonati, M. Di Vece, F. Giannotti, and R. Pellungrini, "Counterfactual Ensembles for Interpretable Churn Prediction: From Real-World to Privacy-Preserving Synthetic Data," *Machine Learning*, vol. 114, p. 230, 2025, doi: https://doi.org/10.1007/s10994-025-06880-4

[11] R. Suguna, J. Suriya Prakash, H. Aditya Pai, T. R. Mahesh, V. Vinoth Kumar, and T. E. Yimer, "Mitigating Class Imbalance in Churn Prediction with Ensemble Methods and SMOTE," *Scientific Reports*, vol. 15, p. 16256, 2025, doi: https://doi.org/10.1038/s41598-025-01031-0

[12] H. Cheng and J. He, "Advanced Customer Churn Prediction for a Music Streaming Digital Marketing Service Using Attention Graph-Based Deep Learning Approach," *Scientific Reports*, vol. 15, p. 45028, 2025, doi: https://doi.org/10.1038/s41598-025-28357-z

[13] M. G. Abdelhady and K. A. Mohamed, "Leveraging Artificial Intelligence for Predictive Customer Churn Modeling in Telecommunications: A Framework for Enhanced Customer Relationship Management," *Scientific Reports*, vol. 15, p. 43826, 2025, doi: https://doi.org/10.1038/s41598-025-30108-z

[14] A. S. Omar, K. Ogada, and K. Tole, "A Hybrid Feature Selection Framework for Dimensionality-Optimized Customer Churn Prediction," *Scientific Reports*, vol. 16, p. 25758, 2026, doi: https://doi.org/10.1038/s41598-026-52160-z

[15] S. Ibrahim, B. S. Tawfik, M. A. Makhlouf, et al., "A Novel Hybrid Deep Learning Framework for Customer Churn Prediction Using RFM and Embedding Clustering," *Scientific Reports*, vol. 16, p. 16563, 2026, doi: https://doi.org/10.1038/s41598-026-53220-0