

APPLICATION DEVELOPMENT

**Agricultural Cooperative and Farmer Producer
Organisation Management System**

FRONTEND DOCUMENTATION

VIVIDHAN L


727824TUIT258

III IT G

Agricultural Cooperative and Farmer Producer Organisation Management System

FRONTEND:

1. Folder Structure:

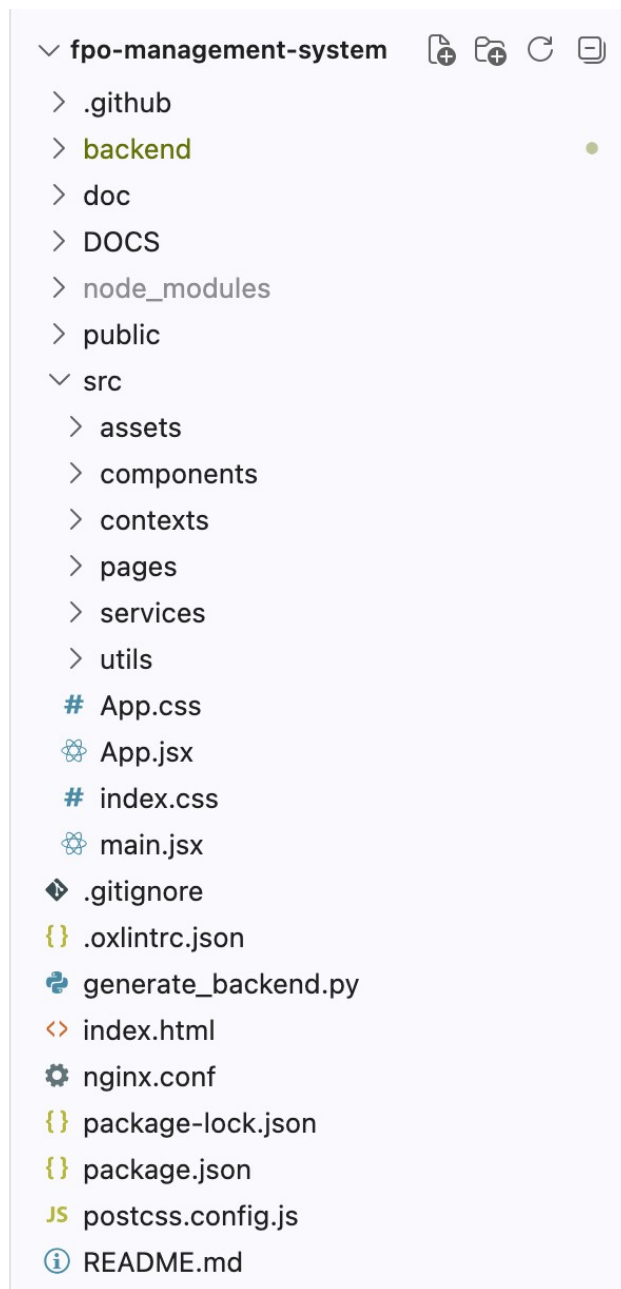

▼ fpo-management-system

- > .github
- > backend
- > doc
- > DOCS
- ▼ node_modules
 - > .bin
 - > .vite
 - > .vite-temp
 - > @alloc
 - > @jridgewell
 - > @oxc-project
 - > @oxlint
 - > @rolldown
 - > @tailwindcss
 - > @types
 - > @vitejs
 - > autoprefixer
 - > baseline-browser-mapping
 - > browserslist
 - > caniuse-lite
 - > cookie
 - > csstype
 - > detect-libc
 - > electron-to-chromium
 - > enhanced-resolve
 - > escalade
 - > fdir
 - > fraction.js
 - > fsevents
 - > graceful-fs
 - > jiti
 - > lightningcss
 - > lightningcss-darwin-arm64
 - > lucide-react
 - > magic-string
 - > nanoid
 - > node-releases
 - > oxlint
 - > picocolors
 - > picomatch
 - > postcss
 - > postcss-value-parser
 - > react
 - > react-dom
 - > react-router

▼ fpo-management-system


- > .github
- > backend
- > doc
- > DOCS
- > node_modules
- > public
- ▼ src
 - > assets
 - ▼ components
 - 🌀 ErrorBoundary.jsx
 - 🌀 Footer.jsx
 - 🌀 Header.jsx
 - # Navbar.css
 - 🌀 Navbar.jsx
 - 🌀 ProtectedRoute.jsx
 - # Sidebar.css
 - 🌀 Sidebar.jsx
 - 🌀 Toast.jsx
 - > contexts
 - > pages
 - > services
 - > utils
 - # App.css
 - 🌀 App.jsx
 - # index.css
 - 🌀 main.jsx
 - 🔒 .gitignore
 - { } .oxlintrc.json
 - 🔗 generate_backend.py
 - <> index.html
 - ⚙️ nginx.conf
 - { } package-lock.json
 - { } package.json
 - JS postcss.config.js

▼ fpo-management-system    

- > .github
- > backend
- > doc
- > DOCS
- > node_modules
- > public
- ▼ src
 - > assets
 - > components
 - > contexts
 - ▼ pages
 -  Analytics.jsx
 -  # Auth.css
 -  Compliance.jsx
 -  # Dashboard.css
 -  DashboardLayout.jsx
 -  DashboardOverview.jsx
 -  Finance.jsx
 -  # Home.css
 -  Home.jsx
 -  Login.jsx
 -  MemberPortal.jsx
 -  Members.jsx
 -  Procurement.jsx
 -  Register.jsx
 -  Sales.jsx
 -  Settings.jsx
 -  Warehouse.jsx
 - > services
 - > utils
 -  # App.css
 -  App.jsx
 -  # index.css
 -  main.jsx
- ◆ .gitignore
-  .oxlintrc.json
-  generate_backend.py
-  index.html
-  nginx.conf
-  package-lock.json
-  package.json
-  postcss.config.js
-  README.md

Source Code:


2. Components (frontend/src/components/..) Header.jsx, Footer.jsx.

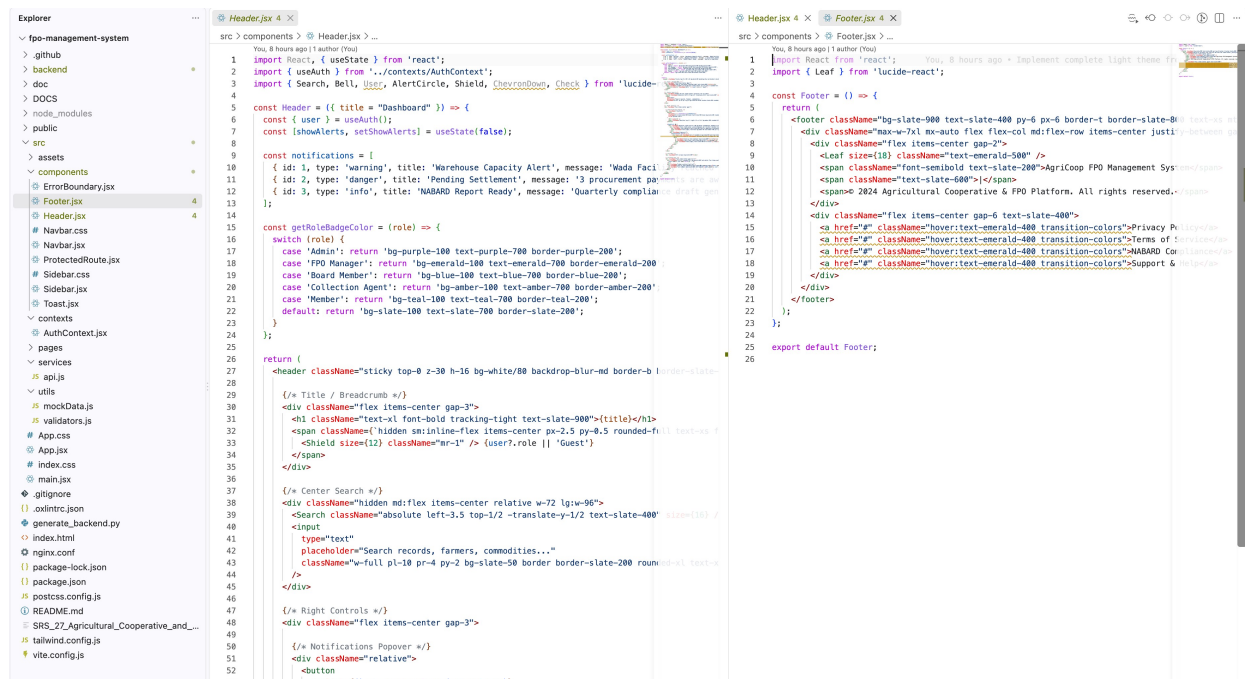

ErrorBoundary.jsx, ProtectedRoute.jsx




Toast.jsx, Navbar.jsx.

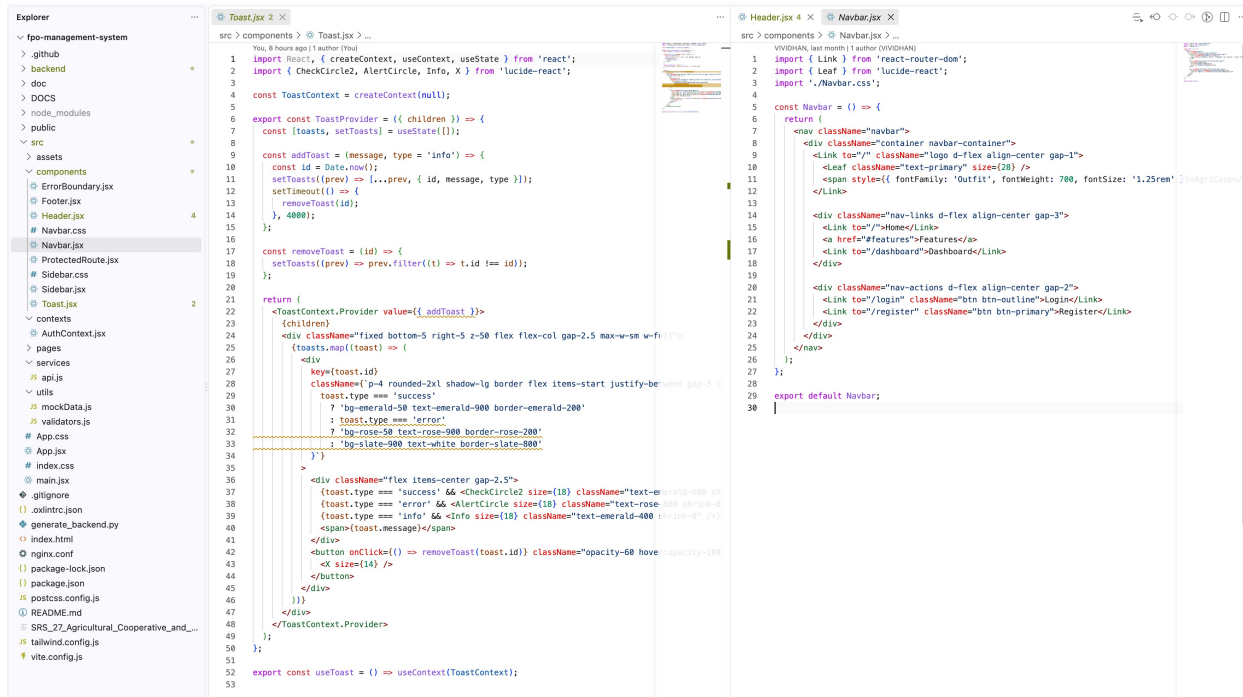

3. Pages(frontend/src/pages...)

Home.jsx, Login.jsx

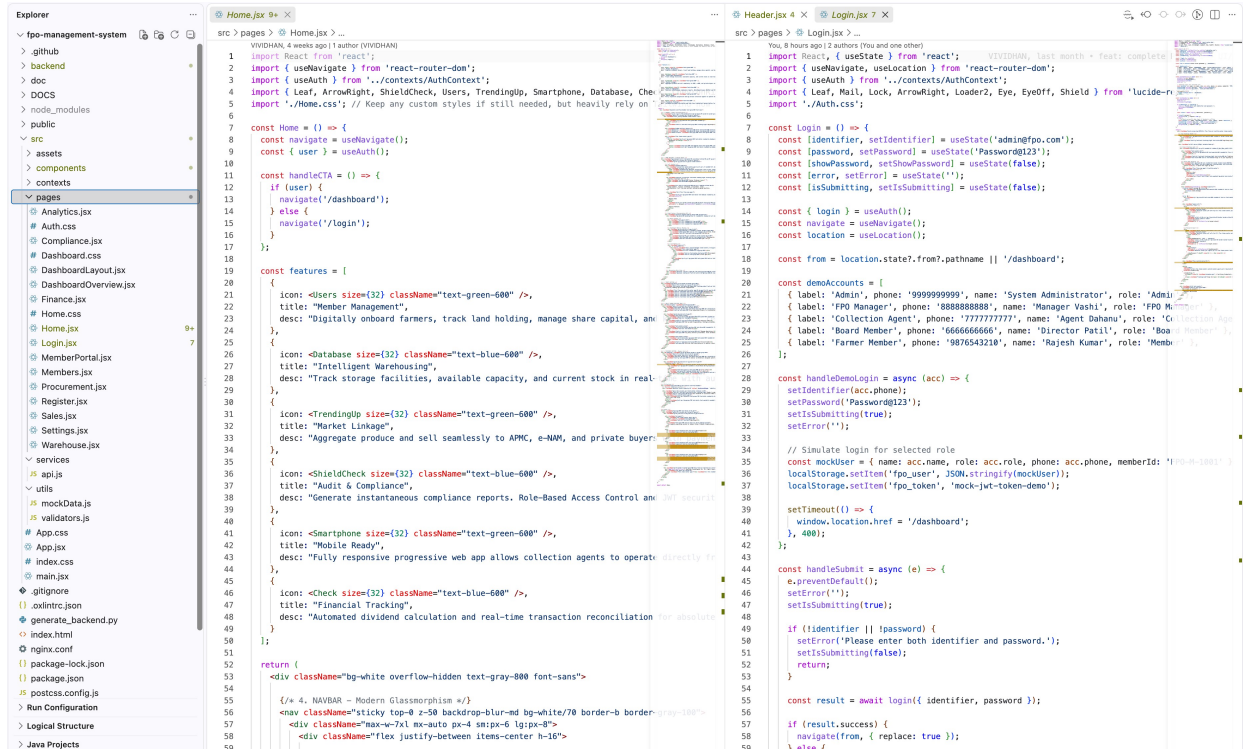

Register.jsx, Procurement.jsx

Register.jsx 9+ ×

src > pages > Register.jsx > ...

You, 8 hours ago | 2 authors (You and one other)
 1 import { useState } from 'react';
 2 import { useNavigate } from 'react-router-dom';
 3 import { Leaf, ArrowRight, Check, ArrowLeft, Loader2, ShieldCheck, Mail } from 'lucide-react';
 4 import { validateName, validateEmail, validatePhone, validatePassword } from './utils/validation';
 5
 6 const Register = () => {
 7 const navigate = useNavigate();
 8 const [step, setStep] = useState(1);
 9 const [formData, setFormData] = useState({
 10 name: '', email: '', role: 'Member', password: '', confirmPassword: '',
 11 });
 12 const [errors, setErrors] = useState({});
 13 const [isSubmitting, setIsSubmitting] = useState(false);
 14
 15 const handleChange = (e) => {
 16 const { name, value } = e.target;
 17 setFormData(prev => ({ ...prev, [name]: value }));
 18 if (errors[name]) setErrors(prev => ({ ...prev, [name]: null }));
 19 };
 20
 21 const handleNext = () => {
 22 const newErrors = {};
 23 if (step === 1) {
 24 newErrors.name = validateName(formData.name);
 25 newErrors.email = validateEmail(formData.email);
 26 newErrors.phone = validatePhone(formData.phone);
 27 }
 28
 29 const activeErrors = Object.fromEntries(Object.entries(newErrors).filter(([_, v]) => v !== null));
 30 if (Object.keys(activeErrors).length > 0) {
 31 setErrors(activeErrors);
 32 } else {
 33 setStep(step + 1);
 34 }
 35 };
 36
 37 const handleSendOtp = async (e) => {
 38 e.preventDefault();
 39 const newErrors = {};
 40 newErrors.password = validatePassword(formData.password);
 41 if (formData.password !== formData.confirmPassword) {
 42 newErrors.confirmPassword = "Passwords do not match";
 43 }
 44
 45 const activeErrors = Object.fromEntries(Object.entries(newErrors).filter(([_, v]) => v !== null));
 46 if (Object.keys(activeErrors).length > 0) {
 47 setErrors(activeErrors);
 48 return;
 49 }
 50
 51 setIsSubmitting(true);
 52
 53 setTimeout(() => {
 54 setIsSubmitting(false);
 55 setStep(3);
 56 }, 600);
 57 };
 58
 59 const handleRegister = async (e) => {
 60 e.preventDefault();
 61 const newErrors = {};
 62 newErrors.password = validatePassword(formData.password);
 63 if (formData.password !== formData.confirmPassword) {
 64 newErrors.confirmPassword = "Passwords do not match";
 65 }
 66
 67 const activeErrors = Object.fromEntries(Object.entries(newErrors).filter(([_, v]) => v !== null));
 68 if (Object.keys(activeErrors).length > 0) {
 69 setErrors(activeErrors);
 70 return;
 71 }
 72
 73 setIsSubmitting(true);
 74
 75 setTimeout(() => {
 76 setIsSubmitting(false);
 77 setStep(3);
 78 }, 600);
 79 };
 80 }
 81
 82 export default Register;

Procurement.jsx 9+ ×

src > pages > Procurement.jsx > ...

You, 8 hours ago | 2 authors (You and one other)
 1 import { useState } from 'react';
 2 import { useAuth } from './contexts/AuthContext';
 3 import { mockProcurements, mockMembers, mockWarehouses } from './utils/mockData';
 4 import { Plus, Search, CheckCircle, ShoppingBag, Filter } from 'lucide-react';
 5 import { validateQuantity } from './utils/validators';
 6 import { useToast } from './components/Toast';
 7
 8 const Procurement = () => {
 9 const { user } = useAuth();
 10 const [addToast] = useToast() || [addToast: console.log];
 11 const [procurements, setProcurements] = useState(mockProcurements);
 12 const [searchTerm, setSearchTerm] = useState('');
 13 const [gradeFilter, setGradeFilter] = useState('ALL');
 14 const [paymentFilter, setPaymentFilter] = useState('ALL');
 15 const [showAddModal, setShowAddModal] = useState(false);
 16
 17 const [formData, setFormData] = useState({
 18 memberId: 'FPO-M-1001',
 19 commodity: 'Wheat',
 20 quantityKg: '',
 21 grade: 'A',
 22 pricePerKg: '25.00',
 23 warehouseId: '301',
 24 });
 25 const [errors, setErrors] = useState({});
 26
 27 const filtered = procurements.filter(p => {
 28 const matchesSearch = p.memberName.toLowerCase().includes(searchTerm.toLowerCase()) ||
 29 p.commodity.toLowerCase().includes(searchTerm.toLowerCase()) ||
 30 p.memberId.toLowerCase().includes(searchTerm.toLowerCase());
 31 const matchesGrade = p.gradeFilter === 'ALL' || p.grade === gradeFilter;
 32 const matchesPayment = paymentFilter === 'ALL' || p.paymentStatus === paymentFilter;
 33 return matchesSearch && matchesGrade && matchesPayment;
 34 });
 35
 36 const handleAddSubmit = (e) => {
 37 e.preventDefault();
 38 const newErrors = {};
 39 quantityKg: validateQuantity(formData.quantityKg)
 40 });
 41
 42 if (formData.memberId || newErrors.memberId === "Member ID is required")
 43 if (formData.pricePerKg || !isNaN(parseFloat(formData.pricePerKg)) || newErrors.pricePerKg === "Price per kg must be a number")
 44
 45 const activeErrors = Object.fromEntries(Object.entries(newErrors).filter(([_, v]) => v !== null));
 46 if (Object.keys(activeErrors).length > 0) {
 47 setErrors(activeErrors);
 48 return;
 49 }
 50
 51 const member = mockMembers.find(m => m.memberId === formData.memberId) || { name: 'Rajesh Kumar',
 52 memberId: formData.memberId, commodity: formData.commodity, pricePerKg: formData.pricePerKg, grade: formData.grade, paymentStatus: 'Pending', warehouseId: formData.warehouseId };
 53 const qty = parseInt(formData.quantityKg);
 54 const price = parseFloat(formData.pricePerKg);
 55 const totalAmount = qty * price;
 56
 57 const newProc = {
 58 id: procurements.length + 101,
 59 memberId: formData.memberId, commodity: formData.commodity, pricePerKg: formData.pricePerKg, grade: formData.grade, paymentStatus: 'Pending', warehouseId: formData.warehouseId };
 60 setProcurements([...procurements, newProc]);
 61 setFormData({});
 62 addToast('Procurement added successfully');
 63 }
 64
 65 export default Procurement;

Sales.jsx, Warehouse.jsx

src > pages > Sales.jsx > ...

You, 8 hours ago | 2 authors (You and one other)

1 import React, { useState } from 'react';

2 import { useAuth } from '../contexts/AuthContext';

3 import { mockSalesOrders, mockWarehouses } from '../utils/mockData';

4 import { Plus, Search, CheckCircle, TrendingUp, DollarSign } from 'lucide-react';

5 import { validateQuantity, validateName } from '../utils/validators';

6 import { useToast } from '../components/Toast';

7

8 const Sales = () => {

9 const { user } = useAuth();

10 const { addToast } = useToast() || { addToast: console.log };

11 const [sales, setSales] = useState(mockSalesOrders);

12 const [searchTerm, setSearchTerm] = useState('');

13 const [buyerTypeFilter, setBuyerTypeFilter] = useState('ALL');

14 const [showAddModal, setShowAddModal] = useState(false);

15

16 const [formData, setFormData] = useState({

17 buyerName: '',

18 buyerType: 'APMC',

19 commodity: 'Wheat',

20 quantityKg: '',

21 pricePerKg: '',

22 warehouseId: '301'

23 });

24 const [errors, setErrors] = useState({});

25

26 const filtered = sales.filter(s => {

27 s.matchesSearch = s.buyerName.toLowerCase().includes(searchTerm.toLowerCase())

28 && s.commodity.toLowerCase().includes(searchTerm.toLowerCase())

29 && s.buyerType === buyerTypeFilter

30 });

31 return filtered.length > 0 ? filtered : [];

32

33 const handleAddSubmit = (e) => {

34 e.preventDefault();

35 const newErrors = {};

36 if (!buyerName) newErrors.buyerName = 'Required';

37 if (!quantityKg) newErrors.quantityKg = 'Required';

38 };

39

40 if (!formData.pricePerKg || isNaN(parseFloat(formData.pricePerKg))) newErrors.pricePerKg = 'Invalid';

41

42 const activeErrors = Object.fromEntries(Object.entries(newErrors).filter(([_, v]) => v !== null));

43

44 if (Object.keys(activeErrors).length > 0) {

45 setErrors(activeErrors);

46 }

47

48 const qty = parseFloat(formData.quantityKg);

49 const price = parseFloat(formData.pricePerKg);

50

51 const newSale = {

52 id: sales.length + 1,

53 buyerName: formData.buyerName,

54 buyerType: formData.buyerType,

55 commodity: formData.commodity,

56 quantityKg: qty,

57 date: new Date().toISOString().split('T')[0],

58

src > pages > Warehouse.jsx > ...

You, 8 hours ago | 2 authors (You and one other)

1 import React, { useState } from 'react';

2 import { useAuth } from '../contexts/AuthContext';

3 import { mockWarehouses } from '../utils/mockData';

4 import { Plus, Search, MapPin, Warehouse as WarehouseIcon, PackagePlus } from 'lucide-react';

5 import { validateQuantity, validateName } from '../utils/validators';

6 import { useToast } from '../components/Toast';

7

8 const Warehouse = () => {

9 const { user } = useAuth();

10 const { addToast } = useToast() || { addToast: console.log };

11 const [warehouses, setWarehouses] = useState(mockWarehouses);

12 const [searchTerm, setSearchTerm] = useState('');

13 const [showAddModal, setShowAddModal] = useState(false);

14 const [showDepositModal, setShowDepositModal] = useState(false);

15 const [selectedFacility, setSelectedFacility] = useState(null);

16

17 const [formData, setFormData] = useState({ location: '', capacityMt: '', currentStockMt: '' });

18 const [depositData, setDepositData] = useState({ stockMt: '', commodity: 'Wheat' });

19 const [errors, setErrors] = useState({});

20

21 const filtered = warehouses.filter(w => {

22 w.location.toLowerCase().includes(searchTerm.toLowerCase())

23 && w.commodity.toLowerCase().includes(searchTerm.toLowerCase())

24 });

25

26 const handleAddSubmit = (e) => {

27 e.preventDefault();

28 const newErrors = {};

29 if (!location) newErrors.location = 'Required';

30 if (!capacityMt) newErrors.capacityMt = 'Required';

31 };

32

33 const activeErrors = Object.fromEntries(Object.entries(newErrors).filter(([_, v]) => v !== null));

34 if (Object.keys(activeErrors).length > 0) {

35 setErrors(activeErrors);

36 }

37

38 const capacity = parseFloat(formData.capacityMt);

39 const stock = parseFloat(formData.currentStockMt) || 0;

40 const status = capacity > stock ? 'FULL' : 'ACTIVE';

41

42 const newWarehouse = {

43 id: warehouses.length + 1,

44 location: formData.location,

45 capacityMt: capacity,

46 currentStockMt: stock,

47 commodity: formData.commodity,

48 status: status

49 };

50

51 setWarehouses([...warehouses, newWarehouse]);

52 setShowAddModal(false);

53 setFormData({ location: '', capacityMt: '', currentStockMt: '', commodity: 'Mixed' });

54 setErrors({});

55 addToast('Warehouse facility at ' + newWarehouse.location + ' created!', 'success');

56

57 };

58

DashboardLayout.jsx

```
src > pages > DashboardLayout.jsx > ...
You, 8 hours ago | 2 authors (You and one other)
1 import React from 'react';
2 import { Outlet, useLocation } from 'react-router-dom';
3 import Sidebar from '../components/Sidebar';
4 import Header from '../components/Header';
5 import Footer from '../components/Footer';
6
7 const DashboardLayout = () => {
8   const location = useLocation();
9
10  const getPageTitle = (pathname) => {
11    if (pathname.includes('/members')) return 'Member Directory & Farmers';
12    if (pathname.includes('/member-portal')) return 'Digital Passbook';
13    if (pathname.includes('/procurement')) return 'Produce Aggregation & Procurement';
14    if (pathname.includes('/sales')) return 'B2B Sales Orders';
15    if (pathname.includes('/warehouse')) return 'Warehouse Inventory Facilities';
16    if (pathname.includes('/finance')) return 'Finance, Share Capital & Dividends';
17    if (pathname.includes('/analytics')) return 'Analytics & Compliance Reports';
18    if (pathname.includes('/compliance')) return 'Document Repository & Audit Logs';
19    if (pathname.includes('/settings')) return 'System Settings';
20    return 'Dashboard Overview';
21  };
22
23  return (
24    <div className="flex h-screen bg-[#f8fafc] overflow-hidden font-sans">
25
26      {/ Sidebar */}
27      <Sidebar />
28
29      {/ Main Content Area */}
30      <div className="flex-1 flex flex-col h-full overflow-hidden">
31
32        {/ Top Header Bar */}
33        <Header title={getPageTitle(location.pathname)} />
34
35        {/ Page Content Viewport */}
36        <main className="flex-1 overflow-y-auto p-6 md:p-8">
37          <div className="max-w-7xl mx-auto">
38            <Outlet />
39          </div>
40        </main>
41
42        {/ Footer */}
43        <Footer />
44      </div>
45    </div>
46  );
47
48  export default DashboardLayout;
49
50
```

Header.jsx 4

Analytics.jsx 7

```
src > pages > Analytics.jsx > ...
You, 8 hours ago | 1 author (You)
1 import React, { useState } from 'react';
2 import { mockKPIs, mockProcurements, mockSalesOrders } from '../utils/mockData';
3 import { BarChart3, TrendingUp, Download, Filter, ArrowUpRight, PieChart } from 'lucide-react';
4 import { useToast } from '../components/Toast';
5
6 const Analytics = () => {
7   const [addToast] = useToast() || { addToast: console.log };
8   const [dateRange, setDateRange] = useState('This Month');
9   const [commodityFilter, setCommodityFilter] = useState('ALL');
10
11   const handleExport = (format) => {
12     addToast?.('Exporting operational analytics report as ${format.toUpperCase()}...');
13     setTimeout(() => {
14       addToast?.('Report successfully exported to downloads folder as FPO_Analytics_...');
15     }, 1000);
16   };
17
18   const totalProcurementKg = mockProcurements.reduce((acc, curr) => acc + curr.quantityKg, 0);
19   const totalSalesKg = mockSalesOrders.reduce((acc, curr) => acc + curr.quantityKg, 0);
20   const totalSalesRevenue = mockSalesOrders.reduce((acc, curr) => acc + (curr.quantityKg * curr.pricePerKg), 0);
21   const totalProcurementCost = mockProcurements.reduce((acc, curr) => acc + curr.totalAmount, 0);
22   const grossMargin = totalSalesRevenue - totalProcurementCost;
23
24   return (
25     <div className="pb-10">
26
27       {/ Header Bar */}
28       <div className="flex flex-col md:flex-row md:items-end justify-between gap-4 md:gap-2">
29
30         <h1 className="text-2xl font-bold tracking-tight text-slate-900 mb-1">Analytics & Report
31         <p className="text-slate-500 text-xs font-medium">Real-time operational KPIs, market insights
32       </div>
33
34       {/ Parametric Export Controls */}
35       <div className="flex flex-wrap items-center gap-3">
36         <div className="flex items-center gap-2 bg-white border border-slate-200 rounded-xl px-3 py-2">
37           <Filter size={14} className="text-slate-400" />
38           <select value={dateRange} onChange={e => setDateRange(e.target.value)} className="bg-white border border-slate-200 rounded-md text-sm">
39             <option value="This Month">This Month</option>
40             <option value="Last Quarter">Last Quarter</option>
41             <option value="Year 2024">Year 2024</option>
42           </select>
43         </div>
44
45         <button onClick={() => handleExport('csv')} className="px-3.5 py-2 bg-white border border-slate-200 rounded-md text-sm">
46           CSV
47         </button>
48         <button onClick={() => handleExport('xlsx')} className="px-3.5 py-2 bg-white border border-slate-200 rounded-md text-sm">
49           Excel
50         </button>
51         <button onClick={() => handleExport('pdf')} className="flex items-center gap-1.5 px-4 py-2 bg-white border border-slate-200 rounded-md text-sm">
52           <Download size={14} /> PDF Report
53         </button>
54       </div>
55
56       {/ KPI Cards */}
57       <div className="grid grid-cols-1 sm:grid-cols-2 lg:grid-cols-4 gap-6 mb-8 animate-fade-up">
58         <div className="bg-white p-6 rounded-3xl border border-slate-200/80 shadow-2">
59
60
```

4. Routing Files(react-router-dom Setup)

Frontend/src/Main.jsx,App.jsx

fpo-management-system

```
src > App.jsx > ...
1 import { StrictMode } from 'react';
2 import './App.css';
3
4 function App() {
5   return (
6     <ErrorBoundary>
7       <AuthProvider>
8         <ToastProvider>
9         <Router>
10           {/ Public Routes */}
11           <Route path="/" element={<Home />} />
12           <Route path="/login" element={<Login />} />
13           <Route path="/register" element={<Register />} />
14
15           {/ Protected Dashboard Layout */}
16           <Route path="/dashboard" element={
17             <ProtectedRoute>
18               <DashboardLayout />
19             </ProtectedRoute>
20           } />
21
22           <Route index element={<DashboardOverview />} />
23
24           <Route path="member-portal" element={<MemberPortal />} />
25
26           <Route path="members" element={
27             <ProtectedRoute allowedRoles={['Admin', 'FPO Manager', 'Board Member', 'Collection Agent']} />
28             <Members />
29           </ProtectedRoute>
30
31           <Route path="procurement" element={
32             <ProtectedRoute allowedRoles={['Admin', 'FPO Manager', 'Collection Agent', 'Board Member']} />
33             <Procurement />
34           </ProtectedRoute>
35
36           <Route path="sales" element={
37             <ProtectedRoute allowedRoles={['Admin', 'FPO Manager', 'Board Member']} />
38             <Sales />
39           </ProtectedRoute>
40
41           <Route path="warehouse" element={
42             <ProtectedRoute allowedRoles={['Admin', 'FPO Manager', 'Board Member']} />
43             <Warehouse />
44           </ProtectedRoute>
45
46           <Route path="finance" element={
47             <ProtectedRoute allowedRoles={['Admin', 'FPO Manager', 'Board Member']} />
48             <Finance />
49           </ProtectedRoute>
50
51           <Route path="analytics" element={
52             <ProtectedRoute allowedRoles={['Admin', 'FPO Manager', 'Board Member']} />
53             <Analytics />
54           </ProtectedRoute>
55         </Router>
56       </ErrorBoundary>
57     </div>
58   );
59 }
60
61 export default App;
62
```

main.jsx

```
src > main.jsx
1 import { StrictMode } from 'react';
2 import { createRoot } from 'react-dom/client';
3 import './index.css';
4 import App from './App.jsx';
5
6 const root = createRoot(document.getElementById('root')).render(
7   <StrictMode>
8     <App />
9   </StrictMode>,
10 );
11
```

```
ExceptionHandler.java X User.java X main.jsx X NavBar.jsx 2 App.jsx X
frontend > src > main.jsx
You, 7 hours ago | 1 author (You)
1 import React from 'react';
2 import ReactDOM from 'react-dom/client';
3 import { BrowserRouter } from 'react-router-dom';
4 import { AuthProvider } from './context/AuthContext';
5 import { ReturnsProvider } from './context>ReturnsContext';
6 import App from './App';
7 import './index.css';
8
9 ReactDOM.createRoot(document.getElementById('root')).render(
10   <React.StrictMode>
11     <BrowserRouter>
12       <AuthProvider>
13         <ReturnsProvider>
14           <App />
15         </ReturnsProvider>
16       </AuthProvider>
17     </BrowserRouter>
18   </React.StrictMode>
19 );
20

frontend > src > App.jsx > ...
You, 7 hours ago | 1 author (You)
1 import React from 'react';
2 import { Routes, Route, Navigate } from 'react-router-dom';
3 import NavBar from './components/NavBar';
4 import Footer from './components/Footer';
5 import ChatWidget from './components/ChatWidget';
6 import Toast from './components/Toast';
7 import ProtectedRoute from './components/ProtectedRoute';
8
9 import HomePage from './pages/HomePage';
10 import CustomerReturnsPage from './pages/CustomerReturnsPage';
11 import ReturnTrackingPage from './pages/ReturnTrackingPage';
12 import SupportPortalPage from './pages/SupportPortalPage';
13 import QCInspectionPage from './pages/QCInspectionPage';
14 import RefundsPage from './pages/RefundsPage';
15 import AdminAnalyticsPage from './pages/AdminAnalyticsPage';
16 import LoginPage from './pages/LoginPage';
17 import NotFoundPage from './pages/NotFoundPage';
18
19 import { useAuth } from './context/AuthContext';
20 import './App.css';
21
22 export default function App() {
23   const { isAuthenticated } = useAuth();
24
25   // If unauthenticated, present ONLY the Sign In / Sign Up screen
26   if (!isAuthenticated) {
27     return (
28       <div className="auth-fullscreen-wrapper">
29         <LoginPage />
30         <Toast />
31       </div>
32     );
33   }
34
35   return (
36     <div className="app-wrapper">
37       </* Navigation Header */>
38       <NavBar />
39
40       </* Main Routed Page Content */>
41       <main className="main-content">
42         <Routes>
43           <Route path="/" element=<HomePage /> />
44           <Route path="/returns" element=<CustomerReturnsPage /> />
45           <Route path="/track" element=<ReturnTrackingPage /> />
46           <Route path="/track/:returnId" element=<ReturnTrackingPage /> />
47           <Route path="/login" element=<Navigate to="/" replace /> />
48
49           </* Role-Protected Routes */>
50           <Route
51             path="/support"
52             element={
53               <ProtectedRoute allowedRoles={['support', 'admin', 'customer', 'qc', 'finance']>
54                 <SupportPortalPage />
55               </ProtectedRoute>
56             }
57           />
58           <Route
59             path="/qc"

```

```
index.html X Header.jsx 4 index.css 1
index.html > ...
VIVIDHAN, last month | 1 author (VIVIDHAN)
1 <!doctype html>
2 <html lang="en">
3   <head>
4     <meta charset="UTF-8" />
5     <link rel="icon" type="image/svg+xml" href="/favicon.svg" />
6     <meta name="viewport" content="width=device-width, initial-scale=1.0" />
7     <title>srs-project</title>
8   </head>
9   <body>
10     <div id="root"></div>
11     <script type="module" src="/src/main.jsx"></script>
12   </body>
13 </html>
14

Header.jsx 4 index.css 1
src > # index.css > ...
VIVIDHAN, 4 weeks ago | 1 author (VIVIDHAN)
1 @import "tailwindcss";
2
3 /*
4  * If you are seeing a broken layout, please restart your Vite dev server!
5  * Stop it with Ctrl+C and run 'npm run dev' again.
6  */
7
8 @theme {
9   --color-primary: #10b981;
10 }
11
12 body {
13   font-family: 'Inter', -apple-system, sans-serif;
14   background-color: #f5f5f7;
15   color: #0f172a;
16   -webkit-font-smoothing: antialiased;
17 }
18
19 h1, h2, h3, h4, h5, h6 {
20   font-family: 'Outfit', -apple-system, sans-serif;
21 }
22
23 /* Custom Animations */
24 @keyframes fadeUp {
25   from { opacity: 0; transform: translateY(20px); }
26   to { opacity: 1; transform: translateY(0); }
27 }
28
29 @keyframes fadeIn {
30   from { opacity: 0; }
31   to { opacity: 1; }
32 }
33
34 @keyframes shake {
35   0%, 100% { transform: translateX(0); }
36   25% { transform: translateX(-4px); }
37   75% { transform: translateX(4px); }
38 }
39
40 .animate-fade-up {
41   animation: fadeUp 0.6s cubic-bezier(0.16, 1, 0.3, 1) forwards;
42 }
43
44 .animate-fade-in {
45   animation: fadeIn 0.4s ease-out forwards;
46 }
47
48 .animate-shake {
49   animation: shake 0.4s ease-in-out;
50 }
51
52 .delay-100 { animation-delay: 100ms; }
53 .delay-200 { animation-delay: 200ms; }
54 .delay-300 { animation-delay: 300ms; }
55
```

5. React Integration Files A.Axios Communication

Client frontend/src/services/api.js

```
Explorer
  fpo-management-system
    > github
    > backend
    > doc
    > DOCS
    > node_modules
    > public
    > src
    > assets
    > components
    > contexts
    > pages
    > services
    > .api.js
    > utils
      .js mockData.js
      .js validators.js
    # App.css
    # App.jsx
    # index.css
    # main.jsx
    .gitignore
    .oxlintrc.json
    generate_backend.py
    index.html
    nginx.conf
    package-lock.json
    package.json
    postcss.config.js
    README.md
    SRS_27_Agricultural_Cooperative_and...
    tailwind.config.js
    vite.config.js

  > Run Configuration
  > Logical Structure
  > Java Projects

Header.jsx 4 X JS api.js 4 X
src > services > JS api.js > ...
You, 8 hours ago | author (You)
1 //es You, 8 hours ago • Implement complete light theme front-end, role-
2 * React + Spring Boot + MySQL Axios API Integration Service
3 * Base URL: http://localhost:8080/api (or /api via proxy)
4 * Includes JWT Authentication, Interceptors, and Offline Mock Data Fallback.
5 */
6
7 import { mockMembers, mockProcurements, mockSalesOrders, mockWarehouses, mockKPIs, mockAudits, mockDocuments, mockShareCapital } from '../utils/mockData';
8
9 const API_BASE_URL = import.meta.env.VITE_API_BASE_URL || '/api';
10
11 // Native fetch / Axios-compatible wrapper
12 You, 8 hours ago | author (You)
13 class ApiClient {
14   constructor(baseUrl) {
15     this.baseUrl = baseUrl;
16   }
17
18   getHeaders() {
19     const token = localStorage.getItem('fpo_token');
20     const headers = {
21       'Content-Type': 'application/json',
22       'Accept': 'application/json',
23     };
24     if (token) {
25       headers['Authorization'] = `Bearer ${token}`;
26     }
27     return headers;
28   }
29
30   async request(endpoint, options = {}) {
31     const url = `${this.baseUrl}${endpoint}`;
32     const config = {
33       ...options,
34       headers: {
35         ...this.getHeaders(),
36         ...options.headers,
37       },
38     };
39
40     try {
41       const response = await fetch(url, config);
42       const data = await response.json().catch(() => ({}));
43
44       if (!response.ok) {
45         throw new Error(data.error || data.message || 'HTTP error! status: ${response.status}');
46       }
47       return { data, status: response.status, ok: true };
48     } catch (error) {
49       console.warn(`[API Client] Fallback mode active for ${endpoint}:`, error.message);
50       return this.handleFallback(endpoint, options, error);
51     }
52   }
53
54   get(endpoint) {
55     return this.request(endpoint, { method: 'GET' });
56   }
57
58   post(endpoint, body) {
59     return this.request(endpoint, {
60       method: 'POST',
61       body: JSON.stringify(body),
62     });
63   }
64
65   delete(endpoint) {
66     return this.request(endpoint, { method: 'DELETE' });
67   }
68
69   // Fallback simulator for seamless client operation when Spring Boot backend is offline
70   handleFallback(endpoint, options, error) {
71     const method = options.method || 'GET';
72
73     // Auth endpoints
74     if (endpoint === '/auth/login' && method === 'POST') {
75       const body = JSON.parse(options.body || '{}');
76       const mockUser = {
77         name: body.phone === '9876543210' ? 'Rajesh Kumar' : 'FPO Administrator',
78         role: body.phone === '9876543210' ? 'MEMBER' : 'ADMIN',
79         token: 'mock-jwt-token-xyz-12345'
80       };
81       return { data: mockUser, status: 200, ok: true, isFallback: true };
82     }
83
84     if (endpoint === '/auth/register' && method === 'POST') {
85       return { data: { message: 'User registered successfully.' }, status: 200, ok: true, isFallback: true };
86     }
87
88     if (endpoint === '/auth/send-otp' && method === 'POST') {
89       return { data: { message: 'OTP sent successfully to email.' }, status: 200, ok: true, isFallback: true };
90     }
91
92     // Members endpoints
93     if (endpoint.startsWith('/members')) {
94       if (method === 'GET') {
95         if (endpoint.includes('/passbook')) {
96           return { data: { procurements: mockProcurements, shareCapital: mockShareCapital }, status: 200, ok: true, isFallback: true };
97         }
98         return { data: mockMembers, status: 200, ok: true, isFallback: true };
99       }
100       if (method === 'POST') {
101         const body = JSON.parse(options.body || '{}');
102         const newMember = { ...body, id: Date.now(), memberId: `FPO-M-${Math.floor(1000 + Math.random() * 9000)}`, status: 'ACTIVE' };
103         return { data: newMember, status: 201, ok: true, isFallback: true };
104       }
105     }
106
107     // Procurements endpoints
108     if (endpoint.startsWith('/procurements')) {
109       if (method === 'GET') return { data: mockProcurements, status: 200, ok: true, isFallback: true };
110       if (method === 'POST') {
111         const body = JSON.parse(options.body || '{}');
112         const newProc = { ...body, id: Date.now(), paymentStatus: 'PENDING' };
113         return { data: newProc, status: 201, ok: true, isFallback: true };
114       }
115     }
116
117     // Sales Orders endpoints
118   }
119 }
```

```
Header.jsx 4 X JS api.js 4 X
src > services > JS api.js > ...
12 class ApiClient {
13   put(endpoint, body) {
14     return this.request(endpoint, {
15       method: 'PUT',
16       body: JSON.stringify(body),
17     });
18   }
19
20   delete(endpoint) {
21     return this.request(endpoint, { method: 'DELETE' });
22   }
23
24   // Fallback simulator for seamless client operation when Spring Boot backend is offline
25   handleFallback(endpoint, options, error) {
26     const method = options.method || 'GET';
27
28     // Auth endpoints
29     if (endpoint === '/auth/login' && method === 'POST') {
30       const body = JSON.parse(options.body || '{}');
31       const mockUser = {
32         name: body.phone === '9876543210' ? 'Rajesh Kumar' : 'FPO Administrator',
33         role: body.phone === '9876543210' ? 'MEMBER' : 'ADMIN',
34         token: 'mock-jwt-token-xyz-12345'
35       };
36       return { data: mockUser, status: 200, ok: true, isFallback: true };
37     }
38
39     if (endpoint === '/auth/register' && method === 'POST') {
40       return { data: { message: 'User registered successfully.' }, status: 200, ok: true, isFallback: true };
41     }
42
43     if (endpoint === '/auth/send-otp' && method === 'POST') {
44       return { data: { message: 'OTP sent successfully to email.' }, status: 200, ok: true, isFallback: true };
45     }
46
47     // Members endpoints
48     if (endpoint.startsWith('/members')) {
49       if (method === 'GET') {
50         if (endpoint.includes('/passbook')) {
51           return { data: { procurements: mockProcurements, shareCapital: mockShareCapital }, status: 200, ok: true, isFallback: true };
52         }
53         return { data: mockMembers, status: 200, ok: true, isFallback: true };
54       }
55       if (method === 'POST') {
56         const body = JSON.parse(options.body || '{}');
57         const newMember = { ...body, id: Date.now(), memberId: `FPO-M-${Math.floor(1000 + Math.random() * 9000)}`, status: 'ACTIVE' };
58         return { data: newMember, status: 201, ok: true, isFallback: true };
59       }
60     }
61
62     // Procurements endpoints
63     if (endpoint.startsWith('/procurements')) {
64       if (method === 'GET') return { data: mockProcurements, status: 200, ok: true, isFallback: true };
65       if (method === 'POST') {
66         const body = JSON.parse(options.body || '{}');
67         const newProc = { ...body, id: Date.now(), paymentStatus: 'PENDING' };
68         return { data: newProc, status: 201, ok: true, isFallback: true };
69       }
70     }
71
72     // Sales Orders endpoints
73   }
74 }
```

frontend/src/context/AuthContext.jsx,

Explorer

- fpo-management-system
 - .github
 - backend
 - doc
 - DOCS
 - node_modules
 - public
 - src
 - assets
 - components
 - contexts
 - AuthContext.jsx** 3
 - pages
 - services
 - api.js
 - utils
 - mockData.js
 - validators.js
 - App.css
 - App.jsx
 - index.css
 - main.jsx
 - .gitignore
 - .oxlintc.json
 - generate_backend.py
 - index.html
 - nginx.conf
 - package-lock.json
 - package.json
 - postcss.config.js
 - README.md
 - SRS_27_Agricultural_Cooperative_and_...
 - tailwind.config.js
 - vite.config.js

Header.jsx 4 x AuthContext.jsx 3 x

src > contexts > AuthContext.jsx > ...

```
VIVIDHAN, 4 weeks ago | 1 author (VIVIDHAN)
1 import React, { createContext, useState, useEffect, useContext } from 'react';
2 import { useNavigate } from 'react-router-dom';
3
4 const AuthContext = createContext(null);
5
6 export const AuthProvider = ({ children }) => {
7   const [user, setUser] = useState(null);
8   const [loading, setLoading] = useState(true);
9
10  useEffect(() => {
11    const storedUser = localStorage.getItem('fpo_user');
12    const token = localStorage.getItem('fpo_token');
13    if (storedUser && token) {
14      try {
15        setUser(JSON.parse(storedUser));
16      } catch (e) {
17        localStorage.removeItem('fpo_user');
18        localStorage.removeItem('fpo_token');
19      }
20    }
21    setLoading(false);
22  }, []);
23
24  const login = async (credentials) => {
25    setLoading(true);
26    const { identifier, password } = credentials;
27
28    try {
29      const response = await fetch('/api/auth/login', {
30        method: 'POST',
31        headers: {
32          'Content-Type': 'application/json',
33        },
34        body: JSON.stringify({ phone: identifier, password }),
35      });
36
37      const data = await response.json();
38
39      if (response.ok) {
40        const userData = { name: data.name, role: data.role, phone: identifier };
41        setUser(userData);
42        localStorage.setItem('fpo_user', JSON.stringify(userData));
43        localStorage.setItem('fpo_token', data.token);
44        setLoading(false);
45        return { success: true, user: userData };
46      } else {
47        setLoading(false);
48        return { success: false, message: data.error || 'Login failed' };
49      }
50    } catch (err) {
51      setLoading(false);
52      return { success: false, message: 'Network error connecting to backend' };
53    }
54  };
55
56  const logout = () => {
57    setUser(null);
58    localStorage.removeItem('fpo_user');
59    localStorage.removeItem('fpo_token');
```

Run Configuration

Logical Structure

Java Projects

Frontend/vite.config.js, package.json



The screenshot shows an IDE with two panels. The left panel displays the project structure:

- fpo-management-system
 - .github
 - backend
 - src/main
 - java/com/agricoop/backend
 - config
 - J SwaggerConfig.java**
 - controller
 - entity
 - repository
 - security
 - service
 - AgriCoopApplication.java
 - resources
 - target
 - .gitignore
 - pom.xml
 - doc
 - DOCS
 - node_modules
 - public
 - src
 - .gitignore
 - .oxlintrc.json
 - generate_backend.py
 - index.html
 - nginx.conf
 - package-lock.json
 - package.json

The right panel shows the code for `SwaggerConfig.java`:

```
VIVIDHAN, 4 weeks ago | 1 author (VIVIDHAN)
package com.agricoop.backend.config;

import io.swagger.v3.oas.models.Components;
import io.swagger.v3.oas.models.OpenAPI;
import io.swagger.v3.oas.models.info.Info;
import io.swagger.v3.oas.models.security.SecurityRequirement;
import io.swagger.v3.oas.models.security.SecurityScheme;
import org.springframework.context.annotation.Bean;
import org.springframework.context.annotation.Configuration;

@Configuration
public class SwaggerConfig {

    @Bean
    public OpenAPI customOpenAPI() {
        final String securitySchemeName = "bearerAuth";
        return new OpenAPI()
            .info(new Info().title("AgriCoop FPO Management API").version("1.0.0"))
            .addSecurityItem(new SecurityRequirement().addList(securitySchemeName))
            .components(
                new Components()
                    .addSecuritySchemes(securitySchemeName,
                        new SecurityScheme()
                            .name(securitySchemeName)
                            .type(SecurityScheme.Type.HTTP)
                            .scheme("bearer")
                            .bearerFormat("JWT"))
            );
    }
}
```

Backend/controller/AuthController.java , ReturnRequestController.java

```
Header.jsx 4 x J AuthController.java 9+ x J MemberController.java 9+ x
backend > src > main > java > com > agricoop > backend > controller > J AuthController.java > Language Support for Java
20 public class AuthController {
21     @Autowired
22     private UserRepository userRepository;
23     @Autowired
24     private PasswordEncoder passwordEncoder;
25     @Autowired
26     private EmailService emailService;
27
28     @PostMapping("/login")
29     public ResponseEntity<> createAuthenticationToken(@RequestBody Map<String, String> request) {
30         String identifier = request.get(key: "phone");
31         try {
32             authenticationManager.authenticate(
33                 new UsernamePasswordAuthenticationToken(identifier, request.get(key: "password"));
34             );
35         } catch (Exception e) {
36             return ResponseEntity.status(401).body(Map.of(k1: "error", v1: "Incorrect credentials"));
37         }
38
39         final UserDetails userDetails = userDetailsService.loadUserByUsername(identifier);
40         final String jwt = jwtUtil.generateToken(userDetails);
41         User user = userRepository.findById(userDetails.getUsername()).orElseThrow();
42
43         return ResponseEntity.ok(Map.of(k1: "token", jwt, k2: "role", user.getRole().name(), k3: "name", user.getName()));
44     }
45
46     @PostMapping("/send-otp")
47     public ResponseEntity<> sendOtp(@RequestBody Map<String, String> request) {
48         String email = request.get(key: "email");
49         if (userRepository.findByPhone(request.get(key: "phone")).isPresent()) {
50             return ResponseEntity.badRequest().body(Map.of(k1: "error", v1: "Phone already registered"));
51         }
52
53         try {
54             emailService.sendOtpEmail(email);
55             return ResponseEntity.ok(Map.of(k1: "message", "OTP sent to " + email));
56         } catch (Exception e) {
57             return ResponseEntity.internalServerError().body(Map.of(k1: "error", v1: "Failed to send OTP"));
58         }
59     }
60
61     @PostMapping("/register")
62     public ResponseEntity<> registerUser(@RequestBody Map<String, String> request) {
63         if (userRepository.findByPhone(request.get(key: "phone")).isPresent()) {
64             return ResponseEntity.badRequest().body(Map.of(k1: "error", v1: "Phone already registered"));
65         }
66
67         String email = request.get(key: "email");
68         String otp = request.get(key: "otp");
69
70         if (!emailService.verifyOtp(email, otp)) {
71             return ResponseEntity.badRequest().body(Map.of(k1: "error", v1: "Invalid or expired OTP"));
72         }
73
74         User user = new User();
75         user.setName(request.get(key: "name"));
76         user.setPhone(request.get(key: "phone"));
77         user.setEmail(email);
78         user.setPasswordHash(passwordEncoder.encode(request.get(key: "password")));
79         user.setRole(Role.valueOf(request.getOrDefault(key: "role", defaultValues: "MEMBER")));
80     }
81
82     @PostMapping("/logout")
83     public ResponseEntity<> logoutUser(@RequestBody Map<String, String> request) {
84         String token = request.get(key: "token");
85         if (token != null) {
86             jwtUtil.invalidateToken(token);
87         }
88     }
89 }
```

```
J AuthController.java 9+ x J MemberController.java 9+ x
backend > src > main > java > com > agricoop > backend > controller > J MemberController.java > Language Support for Java
7 import org.springframework.web.bind.annotation.*;
8
9 import java.util.List;
10
11 VIVIDHAN, 4 weeks ago | 1 author (VIVIDHAN)
12 @RestController
13 @RequestMapping("/api/members")
14 public class MemberController {
15
16     @Autowired
17     private MemberRepository memberRepository;
18
19     @GetMapping
20     public List<Member> getAllMembers() {
21         return memberRepository.findAll();
22     }
23
24     @GetMapping("/{id}")
25     public ResponseEntity<Member> getMemberById(@PathVariable Long id) {
26         return memberRepository.findById(id)
27             .map(ResponseEntity::ok)
28             .orElse(ResponseEntity.notFound().build());
29     }
30
31     @PostMapping
32     public Member createMember(@RequestBody Member member) {
33         return memberRepository.save(member);
34     }
35
36     @PutMapping("/{id}")
37     public ResponseEntity<Member> updateMember(@PathVariable Long id, @RequestBody Member member) {
38         return memberRepository.findById(id)
39             .map(member -> {
40                 member.setMemberIdStr(memberDetails.getMemberIdStr());
41                 member.setVillage(memberDetails.getVillage());
42                 member.setLandHolding(memberDetails.getLandHolding());
43                 member.setShareCapital(memberDetails.getShareCapital());
44                 member.setStatus(memberDetails.getStatus());
45                 return ResponseEntity.ok(memberRepository.save(member));
46             })
47             .orElse(ResponseEntity.notFound().build());
48     }
49
50     @DeleteMapping("/{id}")
51     public ResponseEntity<> deleteMember(@PathVariable Long id) {
52         return memberRepository.findById(id)
53             .map(member -> {
54                 memberRepository.delete(member);
55                 return ResponseEntity.ok().build();
56             })
57             .orElse(ResponseEntity.notFound().build());
58     }
59 }
```

8. Database Configuration Files:

Application.properties

```
Explorer
fpo-management-system
  > github
  > backend
  > src/main
  > java/com/agricoop/backend
  > config
  > J SwaggerConfig.java
  > controller
  > J AuthController.java
  > J MemberController.java
  > J ProcurementController.java
  > J UserController.java
  > entity
  > repository
  > security
  > service
  > J AgriCoopApplication.java
  > resources
  > application.yml
  > target
  > .gitignore
  > pom.xml
  > docs
  > node_modules
  > public
  > src
  > .gitignore
  > .oxlintrc.json
  > generate_backend.py
  > index.html
  > nginx.conf
  > package-lock.json
  > package.json
  > postcss.config.js
  > README.md
  > SRS_27_Agricultural_Cooperative_and_...
  > tailwind.config.js
  > vite.config.js

J AuthController.java 9+ x application.yml 3 X
backend > src > main > resources > application.yml > {} spring > {} mail
You, 8 hours ago | 2 authors (VIVIDHAN and one other)
1 spring:
2   # You, 8 hours ago | 2 authors (You and one other)
3   # H2 In-Memory Database for zero-config local running:
4   url: jdbc:h2:mem:agricoopdb;DB_CLOSE_DELAY=-1;DB_CLOSE_ON_EXIT=FALSE
5   driver-class-name: org.h2.Driver
6   username: sa
7   password: password
8   # MySQL Local Configuration (Uncomment to use local MySQL server):
9   # url: jdbc:mysql://localhost:3306/agricoop?useSSL=false&serverTimezone=UTC&allowPublicKeyRetrieval=true
10  # username: root
11  # password: rootpassword
12  # driver-class-name: com.mysql.cj.jdbc.Driver
13  h2:
14    # You, 8 hours ago | 2 authors (You and one other)
15    enabled: true
16    path: /h2-console
17  jpa:
18    # VIVIDHAN, 4 weeks ago | 1 author (VIVIDHAN)
19    hibernate:
20      ddl-auto: update
21      show-sql: true
22    properties:
23      # VIVIDHAN, 4 weeks ago | 1 author (VIVIDHAN)
24      hibernate:
25        format_sql: true
26  mail:
27    # VIVIDHAN, 4 weeks ago | 1 author (VIVIDHAN)
28    host: smtp.gmail.com
29    port: 587
30    username: vividhan07@gmail.com
31    password: j5ddgrgxfkhwa
32    properties:
33      # VIVIDHAN, 4 weeks ago | 1 author (VIVIDHAN)
34      mail:
35        smtp:
36          auth: true
37          starttls:
38            enabled: true
39  jwt:
40    # VIVIDHAN, 4 weeks ago | 1 author (VIVIDHAN)
41    secret: 4846E3526655A586E32735738782F413F4428472846E25864536756685970
42    expiration: 86400000
43  server:
44    # VIVIDHAN, 4 weeks ago | 1 author (VIVIDHAN)
45    port: 8080
```

9. OUTPUT

Login Page:



Welcome Back

Sign in to your AgriCoop portal

QUICK TEST LOGIN BY ROLE

Admin

FPO Manager

Collection Agent

Board Member

Farmer Member

Email, Phone, or Member ID

 admin@fpo.com 

Password

Forgot Password?

Sign In →

Don't have an account? [Register New Account](#)

AgriCoop 2.0 is now live

Digitally Transform Your Farmer Producer Organization

Manage members, finance, warehouse, procurement, sales, and analytics — all from one unified, enterprise-grade platform.

Request Demo

Explore Features



TRUSTED BY LEADING AGRICULTURAL COOPERATIVES

AgriCorp

KisanMandi

MahaFPO

GreenProduce

BharatFarm

Everything you need to scale

A modular architecture designed specifically for the unique challenges of modern FPOs.



Member Management

Digitally onboard farmers, track land holding, manage share capital, and keep KYC records centralized.



Intelligent Warehousing

Track storage facilities, available capacity, and current stock in real-time with automated alerts.



Market Linkage

Aggregate produce and sell seamlessly to APMC, e-NAM, and private buyers with payment tracking.



Audit & Compliance

Generate instantaneous compliance reports. Role-Based Access Control and JWT security built-in.



Mobile Ready

Fully responsive progressive web app allows collection agents to operate directly from the field.



Financial Tracking

Automated dividend calculation and real-time transaction reconciliation for absolute transparency.

Active Role: Collection Agent

Good Morning, Agent!

Here's a summary of your agricultural cooperative's operations today.

+12 new

TOTAL MEMBER FARMERS

1245

Share Capital

TOTAL SHARE CAPITAL

₹45.00L

+18.4% ↗

MONTHLY B2B SALES

₹125.00L

High Utilization

WAREHOUSE STOCK

78%

Recent Produce Deliveries

View All >

FARMER MEMBER	CROP	GRADE	TOTAL (₹)	STATUS
Rajesh Kumar FPO-M-1001	Wheat (1500kg)	A	₹36,750	PAID
Sita Devi FPO-M-1002	Rice (800kg)	B	₹25,600	PENDING
Vikram Singh FPO-M-1005	Soybean (2200kg)	A	₹98,000	PAID
Rajesh Kumar FPO-M-1001	Cotton (500kg)	REJECT	₹0	PENDING

Active Operational Alerts

Warehouse Capacity Warning

Wada Facility reached 97.5% capacity limit.

Pending Farmer Settlements

3 procurement payments exceeding ₹50k require manager approval.

Open Analytics & Reports

Official Member Digital Passbook

Rajesh Kumar

Member ID: FPO-M-1001 • Village: Palghar • Land: 4.5 Acres

Export Passbook PDF

PRODUCE SUBMISSIONS

2 Entries

Total aggregated deliveries

TOTAL RECEIVED

₹36,750

100% Reconciled

SHARE CAPITAL & DIVIDEND

₹5,000

Last Dividend: ₹450 (2023-12-31)

Produce Procurement Passbook

Complete chronological record of submitted crops, grades, prices, and payment status.

DATE	COMMODITY	GRADE	QUANTITY (KG)	PRICE / KG	TOTAL AMOUNT	PAYMENT STATUS
2024-04-10	Wheat	Grade A	1500 kg	₹24.5	₹36,750	PAID
2024-04-18	Cotton	Grade REJECT	500 kg	₹0	₹0	PENDING

Member Directory

Manage farmer registration, land holding records, share capital, and KYC documents.

Import CSV

+ Add Member

Search by name, ID, or mobile...

All Villages All Statuses

MEMBER ID	FARMER NAME	PHONE	VILLAGE	LAND (ACRES)	SHARE CAPITAL	STATUS	ACTIONS
FPO-M-1001	Rajesh Kumar	9876543210	Palghar	4.5 Acres	₹5,000	ACTIVE	
FPO-M-1002	Sita Devi	8765432109	Dahanu	2 Acres	₹1,000	ACTIVE	
FPO-M-1003	Anil Desai	7654321098	Wada	12.5 Acres	₹10,000	ACTIVE	
FPO-M-1004	Priya Patel	6543210987	Boisar	3.2 Acres	₹2,500	INACTIVE	
FPO-M-1005	Vikram Singh	5432109876	Palghar	8 Acres	₹7,500	ACTIVE	
FPO-M-1006	Sumita Sharma	9123456780	Wada	6 Acres	₹6,000	ACTIVE	

Produce Aggregation & Procurement

Record collection center crop deliveries, quality grading (A/R/C/REJECT), and payout settlements.

+ Record Procurement

Search by farmer name or commodity...

All Grades

All Payments

DATE	FARMER MEMBER	COMMODITY	QUALITY GRADE	QTY (KG)	PRICE / KG	TOTAL AMOUNT	PAYMENT STATUS	APPROVE
2024-04-10	Rajesh Kumar FPO-M-1001	Wheat	Grade A	1500 kg	₹24.5	₹36,750	PAID	
2024-04-12	Sita Devi FPO-M-1002	Rice	Grade B	800 kg	₹32	₹25,600	PENDING	
2024-04-15	Vikram Singh FPO-M-1003	Soybean	Grade A	2200 kg	₹45	₹99,000	PAID	
2024-04-18	Rajesh Kumar FPO-M-1001	Cotton	Grade REJECT	500 kg	₹0	₹0	PENDING	
2024-04-20	Anil Desai FPO-M-1003	Wheat	Grade A	3000 kg	₹25	₹75,000	PAID	

System Settings

Manage user profile details, password security, notification channels, and system configuration.

Profile Details

Authenticated user account

Name Agent Dahanu

Role Claim Collection Agent

Mobile Number 777777777

Account Security

Password policy & 2FA

Password policy enforces min 8 characters with uppercase, lowercase, digit, and special char.

Change Password

Notification Channels

Configure real-time alerts per SRS FRB

Email Notifications

Daily procurement summaries and dividend statements.

SMS Text Alerts

Instant SMS alerts for crop collection payouts.

HABARD & Regulatory Announcements

System notices and meeting broadcasts.

Good Morning, Manager!

Here's a summary of your agricultural cooperative's operations today.



+12 new

TOTAL MEMBER FARMERS

1245



Share Capital

TOTAL SHARE CAPITAL

₹45.00L



+18.4% ↗

MONTHLY B2B SALES

₹125.00L



High Utilization

WAREHOUSE STOCK

78%

Recent Produce Deliveries

View All >

FARMER MEMBER	CROP	GRADE	TOTAL (₹)	STATUS
Rajesh Kumar FPO-M-1001	Wheat (1500kg)	A	₹36,750	PAID
Sita Devi FPO-M-1002	Rice (800kg)	B	₹25,600	PENDING
Vikram Singh FPO-M-1003	Soybean (2200kg)	A	₹99,000	PAID
Rajesh Kumar FPO-M-1001	Cotton (500kg)	REJECT	₹0	PENDING

Active Operational Alerts

Warehouse Capacity Warning

Wada Facility reached 97.5% capacity limit.

Pending Farmer Settlements

3 procurement payments exceeding ₹50k require manager approval.

Open Analytics & Reports

Warehouse & Stock Inventory

Track storage facilities, capacity utilization %, commodity lot allocations, and maintenance states.

+ Add Warehouse Facility

Search warehouse location or commodity...

Palghar Central Hub

ACTIVE

Commodity	Mixed
Current Stock	320 MT
Total Capacity	500 MT
UTILIZATION	64.0%

Deposit Stock Lot

Wada Facility

FULL

Commodity	Rice, Wheat
Current Stock	195 MT
Total Capacity	200 MT
UTILIZATION	97.5%

Deposit Stock Lot

Dahanu Cold Storage

MAINTENANCE

Commodity	None
Current Stock	0 MT
Total Capacity	100 MT
UTILIZATION	0.0%

Deposit Stock Lot

Boisar Logistics Point

ACTIVE

Commodity	Soybean
Current Stock	140 MT
Total Capacity	350 MT
UTILIZATION	40.0%

Deposit Stock Lot

Analytics & Reporting Dashboard

Real-time operational KPIs, market margin analysis, and compliance benchmarks.

This Month CSV Excel PDF Report

TOTAL SALES REVENUE

+14.2%

₹11.46L

Across APMC, e-NAM, & Private Buyers

PROCUREMENT VOLUME

+8.5%

8.0 MT

Aggregated directly from member farmers

GROSS TRADE MARGIN

₹909.6k

FPO Net Profit Margin ~18.4%

WAREHOUSE UTILIZATION

78%

High Capacity Alert in Wada

Commodity Procurement vs Sales

Metric MT

Wheat (Grade A)	4.5 MT Procured / 5.0 MT Sold
Soybean (Grade A)	2.2 MT Procured / 18.0 MT Sold
Rice (Grade B)	0.8 MT Procured / 3.0 MT Sold

Predictive Demand & Risk Indicators

AI Insights

High Demand Forecast: Soybean

Market demand for Soybean is predicted to rise by 12% next month. Recommend increasing collection center allocations in Wada.

Inventory Holding Risk: Rice

Storage duration for Wada Facility Rice lots is approaching 45 days. Suggest initiating APMC auction before quality degradation.

Compliance & Audit Repository

Manage legal FPO documentation, regulatory filings, and immutable system audit logs.

Document Repository System Audit Trail Logs

Official FPO Documents

Repository of MOA, NABARD agreements, APMC licenses, and governance documents.

Upload Document

DOCUMENT TITLE	CATEGORY	VERSION	EXPIRY DATE	STATUS	ACTION
FPO Registration Certificate (FPC Act 2013)	Regulatory	v2.0	2028-12-31	VERIFIED	Download
NABARD Loan Linkage MOU 2024	Financial	v1.1	2025-06-30	VERIFIED	Download
APMC Market License	Compliance	v3.0	2024-11-15	EXPIRING_SOON	Download
Warehouse Storage Audit Report	Audit	v1.0	2025-01-20	VERIFIED	Download

10. DATABASE:

```
[> mysql -u root -p'Root@12345'  
mysql: [Warning] Using a password on the command line interface can be insecure.  
Welcome to the MySQL monitor.  Commands end with ; or \g.  
Your MySQL connection id is 19  
Server version: 9.7.1 Homebrew
```

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its affiliates. Other names may be trademarks of their respective owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

```
mysql> USE agricoop;  
Reading table information for completion of table and column names  
You can turn off this feature to get a quicker startup with -A
```

```
Database changed  
mysql> SHOW TABLES;
```

32 rows in set (0.021 sec)

```
[mysql> use agricoop ;  
Reading table information for completion of table and column names  
You can turn off this feature to get a quicker startup with -A
```

```
Database changed  
[mysql> show tables;
```

Tables_in_agricoop	
members	
procurements	
users	

3 rows in set (0.012 sec)

```
[mysql> SELECT id, name, email, role FROM users;
```

id	name	email	role
1	Vividhan	vividhan@test.com	ADMIN

1 row in set (0.001 sec)

```
[mysql> SELECT id, name, email, role FROM users;
```

id	name	email	role
1	Vividhan	vividhan@test.com	ADMIN

1 row in set (0.001 sec)

```
mysql> █
```