

Created the S3 user.

IAM > Users > Create user

Step 1
Specify user details

Step 2
Set permissions

Step 3
Review and create

Specify user details

User details

User name

S3TestUser

The user name can have up to 64 characters. Valid characters: A-Z, a-z, 0-9, and + = , @ _ - (hyphen)

☐ Provide user access to the AWS Management Console - optional

If you're providing console access to a person, it's a [best practice](#) to manage their access in IAM Identity Center.

[If you are creating programmatic access through access keys or service-specific credentials for AWS CodeCommit or Amazon Keyspaces, you can generate them after you create this IAM user. \[Learn more\]\(#\)](#)

Cancel Next

Granted the required permissions.

IAM > Users > Create user

Step 1
Specify user details

Step 2
Set permissions

Step 3
Review and create

Set permissions

Add user to an existing group or create a new one. Using groups is a best-practice way to manage user's permissions by job functions. [Learn more](#)

Permissions options

☐ Add user to group

Add user to an existing group, or create a new group. We recommend using groups to manage user permissions by job function.

☐ Copy permissions

Copy all group memberships, attached managed policies, and inline policies from an existing user.

☒ Attach policies directly

Attach a managed policy directly to a user. As a best practice, we recommend attaching policies to a group instead. Then, add the user to the appropriate group.

Permissions policies (1/1389)

Choose one or more policies to attach to your new user.

Filter by Type

AmazonS3FullAccess 1 match

☒	Policy name	Type	Attached entities
☒	AmazonS3FullAccess	AWS managed	0

[Create policy](#)

► Set permissions boundary - optional

Generated access keys for S3 user.

IAM > Users > S3TestUser

Identity and Access Management (IAM)

Search IAM

Dashboard

Access management

User groups

Users

Roles

Policies

Identity providers

Account settings

Root access management

Access reports

Access Analyzer

Resource analysis

Unused access

Analyzer settings

Credential report

Organization activity

S3TestUser

Info

Delete

Summary

ARN
arn:aws:iam::989367328520:user/S3TestUser

Console access
Disabled

Access key 1
[Create access key](#)

Created
September 15, 2025, 00:12 (UTC-04:00)

Last console sign-in
-

Permissions

Groups

Tags

Security credentials

Last Accessed

Permissions policies (1)

Permissions are defined by policies attached to the user directly or through groups.

Search

Filter by Type
All types

☐

Policy name

☐

AmazonS3FullAccess

Type

AWS managed

Attached via

Directly

Permissions boundary (not set)

RWS

Search

[Option+S]

Account ID: 9893-6732-8520

Lasya Raghavendra

IAM > Users > S3TestUser

Create access key

alternatives

Step 2 - optional

Set description tag

Step 3

Retrieve access keys

Avoid using long-term credentials like access keys to improve your security. Consider the following use cases and alternatives.

Use case

☐ Command Line Interface (CLI)
You plan to use this access key to enable the AWS CLI to access your AWS account.

☐ Local code
You plan to use this access key to enable application code in a local development environment to access your AWS account.

☐ Application running on an AWS compute service
You plan to use this access key to enable application code running on an AWS compute service like Amazon EC2, Amazon ECS, or AWS Lambda to access your AWS account.

☐ Third-party service
You plan to use this access key to enable access for a third-party application or service that monitors or manages your AWS resources.

☐ Application running outside AWS
You plan to use this access key to authenticate workloads running in your data center or other infrastructure outside of AWS that needs to access your AWS resources.

☒ Other
Your use case is not listed here.

☒ It's okay to use an access key for this use case, but follow the best practices:


- Never store your access key in plain text, in a code repository, or in code.
- Disable or delete access keys when no longer needed.
- Enable least-privilege permissions.
- Rotate access keys regularly.

For more details about managing access keys, see the [best practices for managing AWS access keys](#).


Cancel

Next

Created a user group.

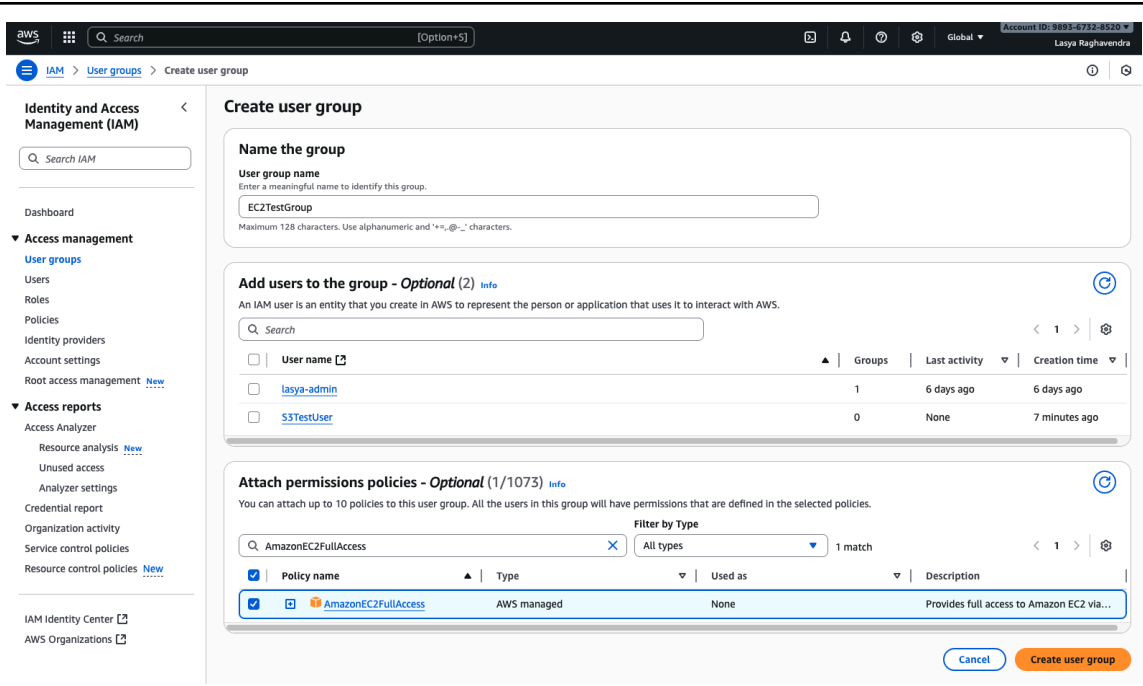

Created the EC2Test User.

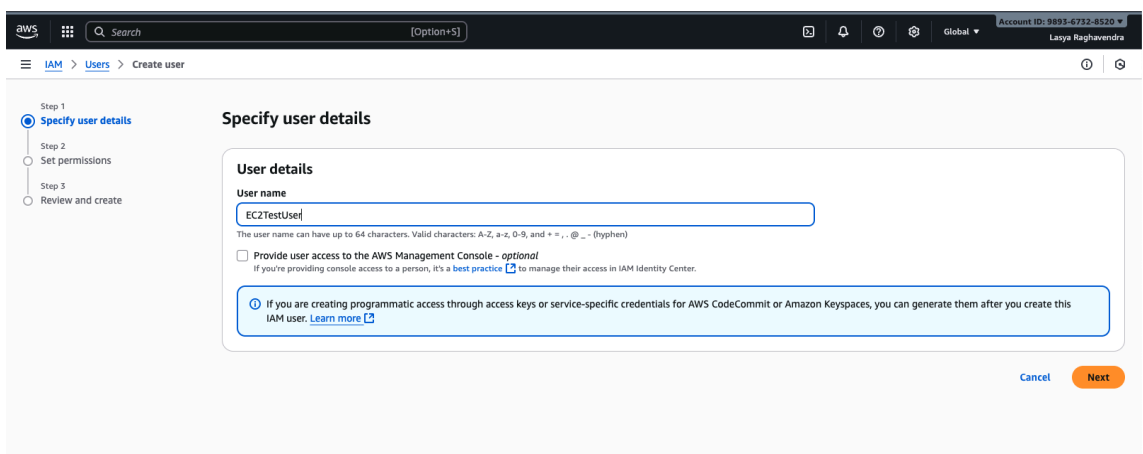

Generated access key for EC2TestUser.

Identity and Access Management (IAM)

Search IAM

Dashboard

Access management

- User groups
- Users**
- Roles
- Policies
- Identity providers
- Account settings
- Root access management

Access reports

- Access Analyzer
 - Resource analysis
 - Unused access
 - Analyzer settings
- Credential report
- Organization activity
- Service control policies
- Resource control policies

IAM Identity Center

AWS Organizations

EC2TestUser

Summary

ARN
arn:aws:iam::989367328520:user/EC2TestUser

Console access
Disabled

Access key 1
[Create access key](#)

Created
September 15, 2025, 00:22 (UTC-04:00)

Last console sign-in
-

Permissions | Groups | Tags | Security credentials | Last Accessed

Permissions policies (0)
Permissions are defined by policies attached to the user directly or through groups.

Search

Filter by Type
All types

Policy name | Type | Attached via

No resources to display

Permissions boundary (not set)

Generate policy based on CloudTrail events
You can generate a new policy based on the access activity for this role, then customize, create, and attach it to this role. AWS uses your CloudTrail events to identify the services and actions used and generate a policy.
[Generate policy](#)
No requests to generate a policy in the past 7 days.

Access key created
This is the only time that the secret access key can be viewed or downloaded. You cannot recover it later. However, you can create a new access key any time.

Step 1
Access key best practices & alternatives

Step 2 - optional
Set description tag

Step 3
Retrieve access keys

Retrieve access keys

Access key

If you lose or forget your secret access key, you cannot retrieve it. Instead, create a new access key and make the old key inactive.

Access key
AKIA6MWXDL4E8CE6TOZR

Secret access key

[Show](#)

Access key best practices

- Never store your access key in plain text, in a code repository, or in code.
- Disable or delete access key when no longer needed.
- Enable least-privilege permissions.
- Rotate access keys regularly.

For more details about managing access keys, see the [best practices for managing AWS access keys](#).

[Download .csv file](#) [Done](#)

Created a role.

IAM

Roles

Create role

Step 1
Select trusted entity

Step 2
Add permissions

Step 3
Name, review, and create

Add permissions

Permissions policies (1/1073)
Choose one or more policies to attach to your new role.

Search AmazonEC2ReadOnlyAccess

Filter by Type
All types 1 match

Policy name | Type | Description

☒ [AmazonEC2ReadOnlyAccess](#) AWS managed Provides read only access to Amazon EC2...

Set permissions boundary - optional

[Cancel](#) [Previous](#) [Next](#)

Added EC2Test User to the usergroup.

aws

Account ID: 9893-6732-8520

Lasya Raghavendra

Search [Option+S]

iam

User groups

Create user group

Identity and Access Management (IAM)

Search IAM

Dashboard

Access management

User groups

Users

Roles

Policies

Identity providers

Account settings

Root access management

Access reports

Access Analyzer

Resource analysis

Unused access

Analyzer settings

Credential report

Organization activity

Service control policies

Resource control policies

IAM Identity Center

AWS Organizations

Create user group

Name the group

User group name

Enter a meaningful name to identify this group.

EC2TestGroup

Maximum 128 characters. Use alphanumeric and "+,=,@,-,_" characters.

Add users to the group - Optional (1/3)

An IAM user is an entity that you create in AWS to represent the person or application that uses it to interact with AWS.

Search

User name	Groups	Last activity	Creation time
☒ EC2TestUser	0	None	9 minutes ago
☐ lasya-admin	1	6 days ago	6 days ago
☐ S3TestUser	0	None	18 minutes ago

Attach permissions policies - Optional (1/1073)

You can attach up to 10 policies to this user group. All the users in this group will have permissions that are defined in the selected policies.


Filter by Type

Search AmazonEC2FullAccess


All types 1 match

Policy name	Type	Used as	Description
☒ AmazonEC2FullAccess	AWS managed	None	Provides full access to Amazon EC2 via...



Set a strong password for S3 user.

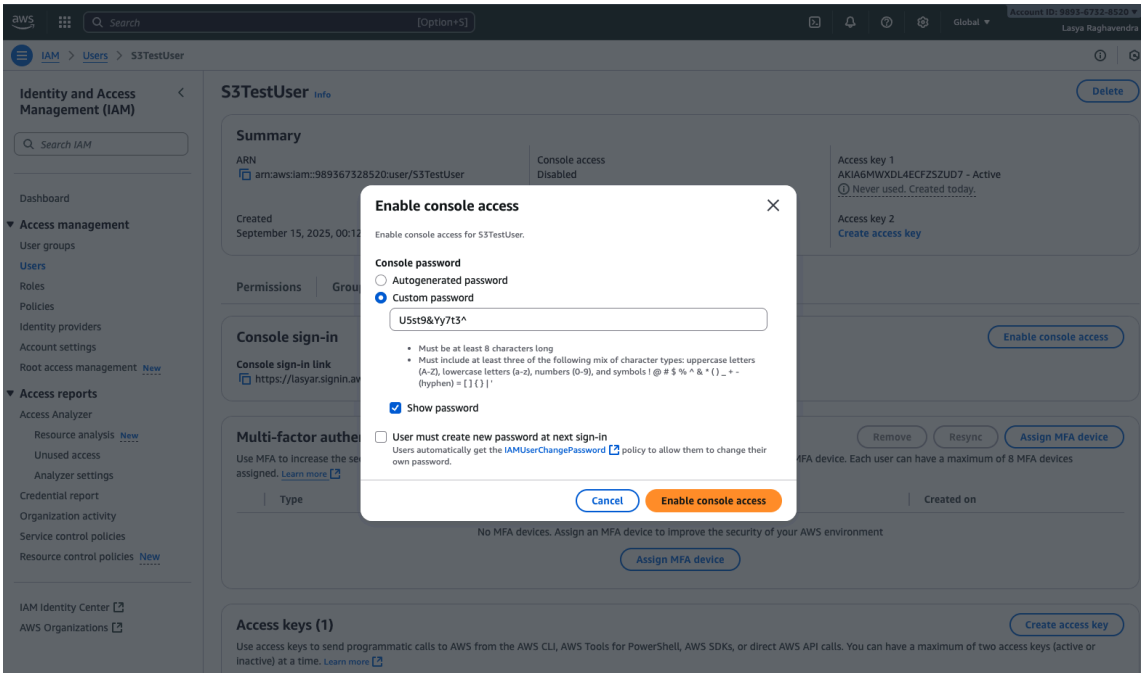

Created a bucket using S3TestUser.

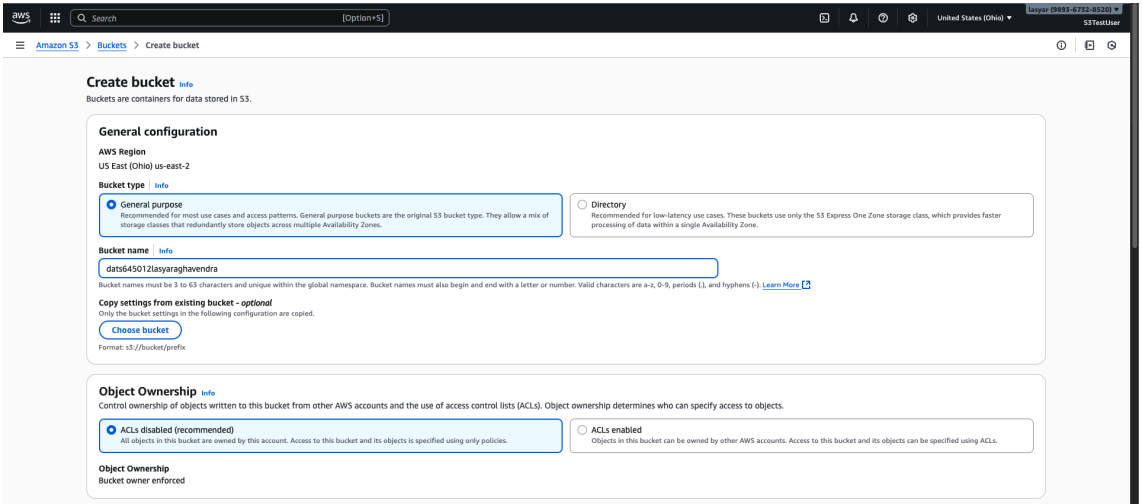

Created a password for EC2TestUser.

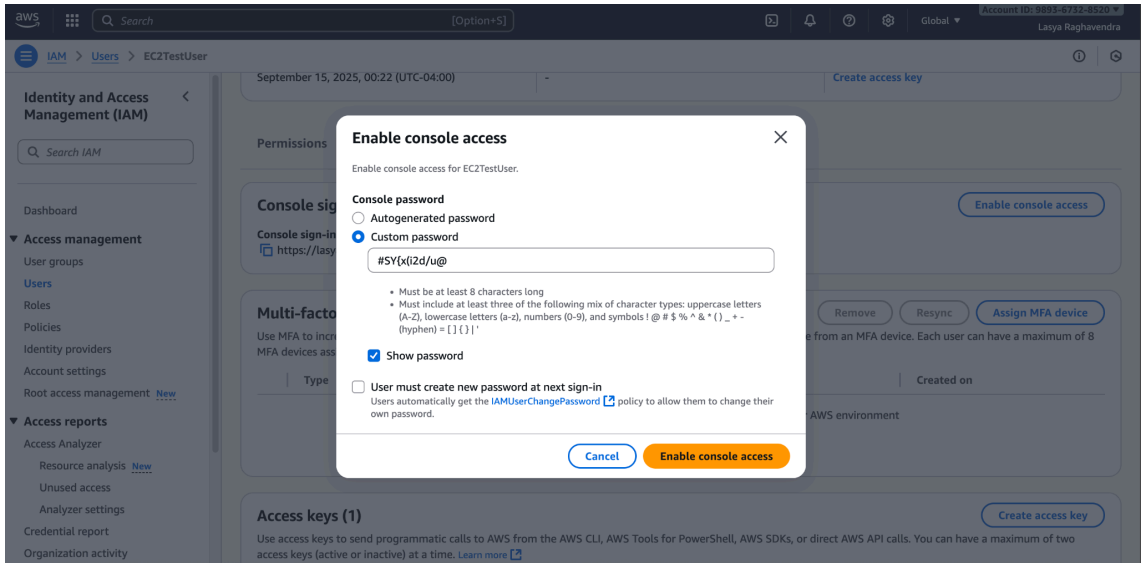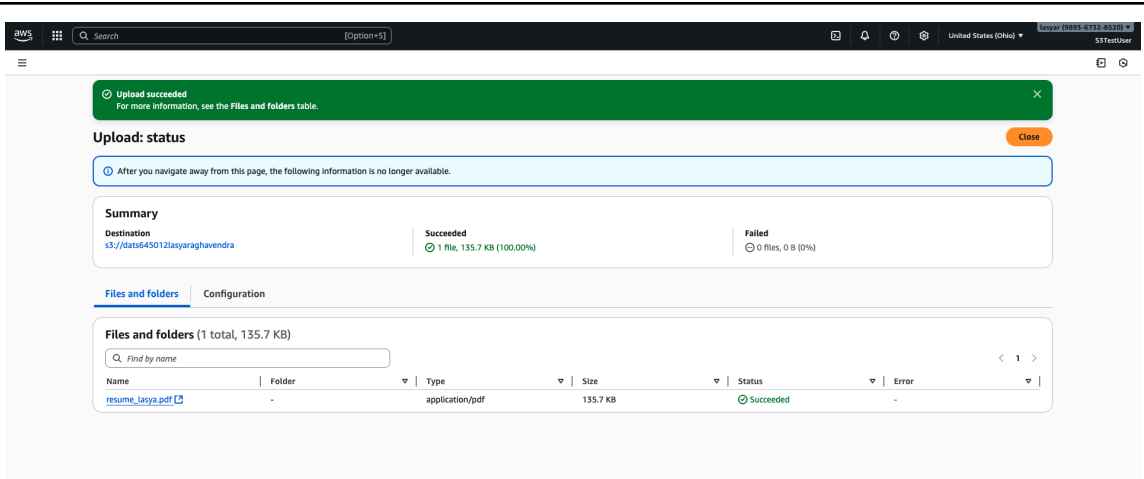

Verified that EC2Test User cannot access S3 uploads.

