


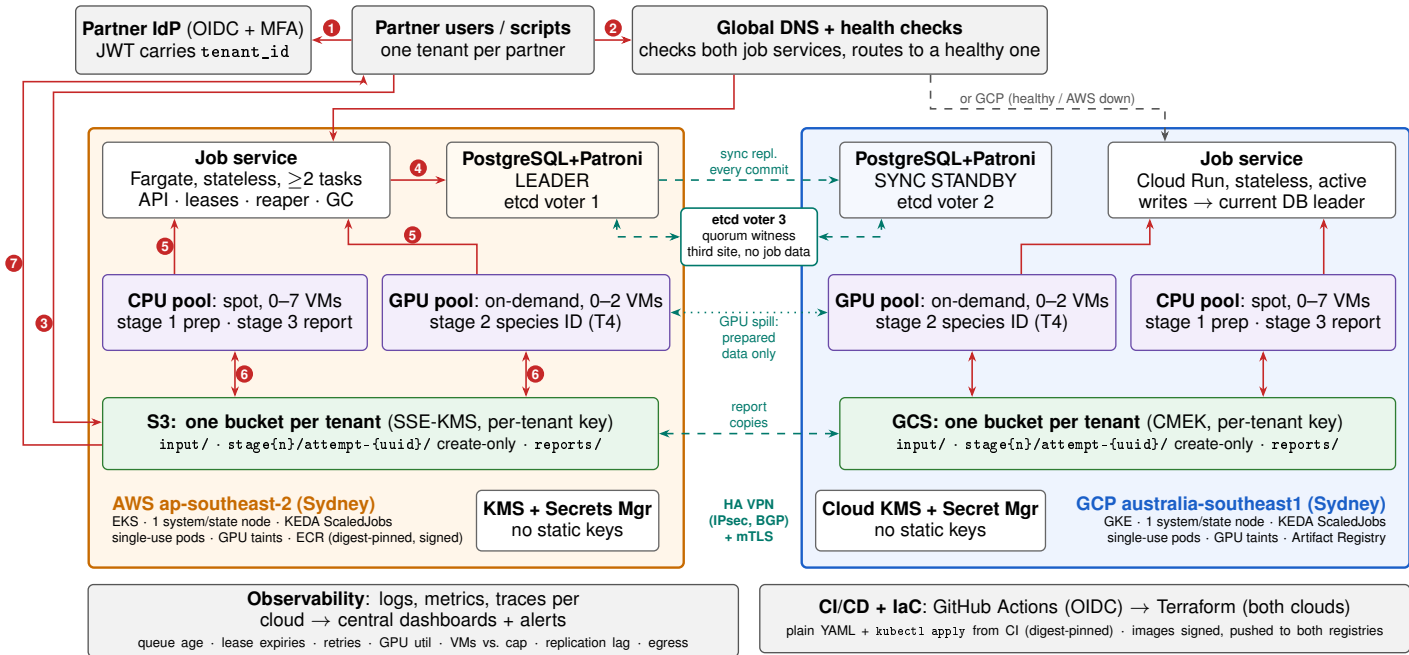

Job lifecycle (steps 5–6 run the same way in GCP): (1) log in at the partner IdP; (2) `POST /jobs`; DNS sends it to a healthy job service (here AWS); (3) upload to presigned URLs in the home cloud; (4) `submit`: SHA-256 verified, ACCEPTED committed synchronously in *both* clouds, 202; (5) runners pull a lease; (6) read the published input, write a create-only attempt, fenced commit; (7) once COMPLETED, download the report via a presigned URL. Job services validate JWTs locally with the IdP's cached keys (JWKS). **Teal**: cross-cloud traffic; etcd voters 1–3 elect one DB leader. VM cap: 2 system/state + 14 CPU + 4 GPU = 20.