RUST PROGRAMMING

Presentation by

Surendra Varma Pericherla

Boolean Type

In Rust, a boolean data type can have two possible values:

Boolean Type

```rust
// boolean value true
let flag1: bool = true;

// boolean value false
let flag2: bool = false;
```

Example: Boolean Type

```rust
fn main() {
    // boolean type
    let flag1: bool = true;
    let flag2: bool = false;

    println!("flag1 = {}", flag1);
    println!("flag2 = {}", flag2);
}
```

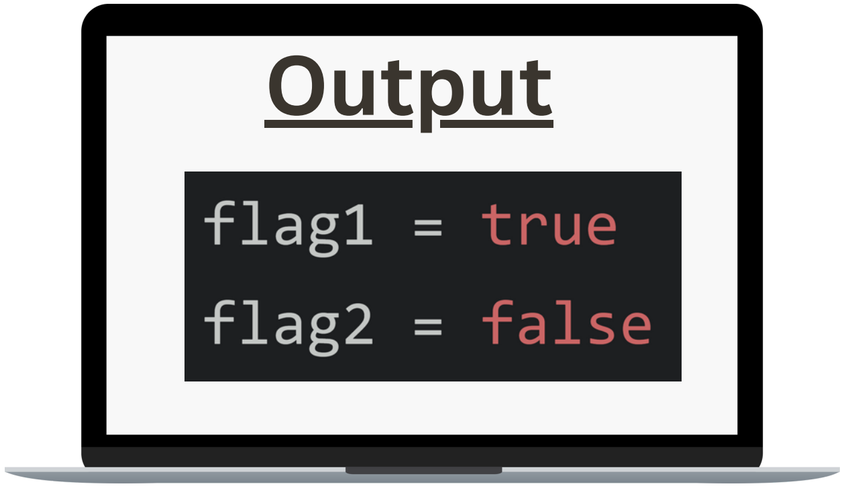

Character Type

The character data type in Rust is used to store a character.

```
let character: char = 'z';
```

Example: Character Type

```rust
fn main() {
    let spl_character: char = '@';

    println!("special character = {}", spl_character);
}
```