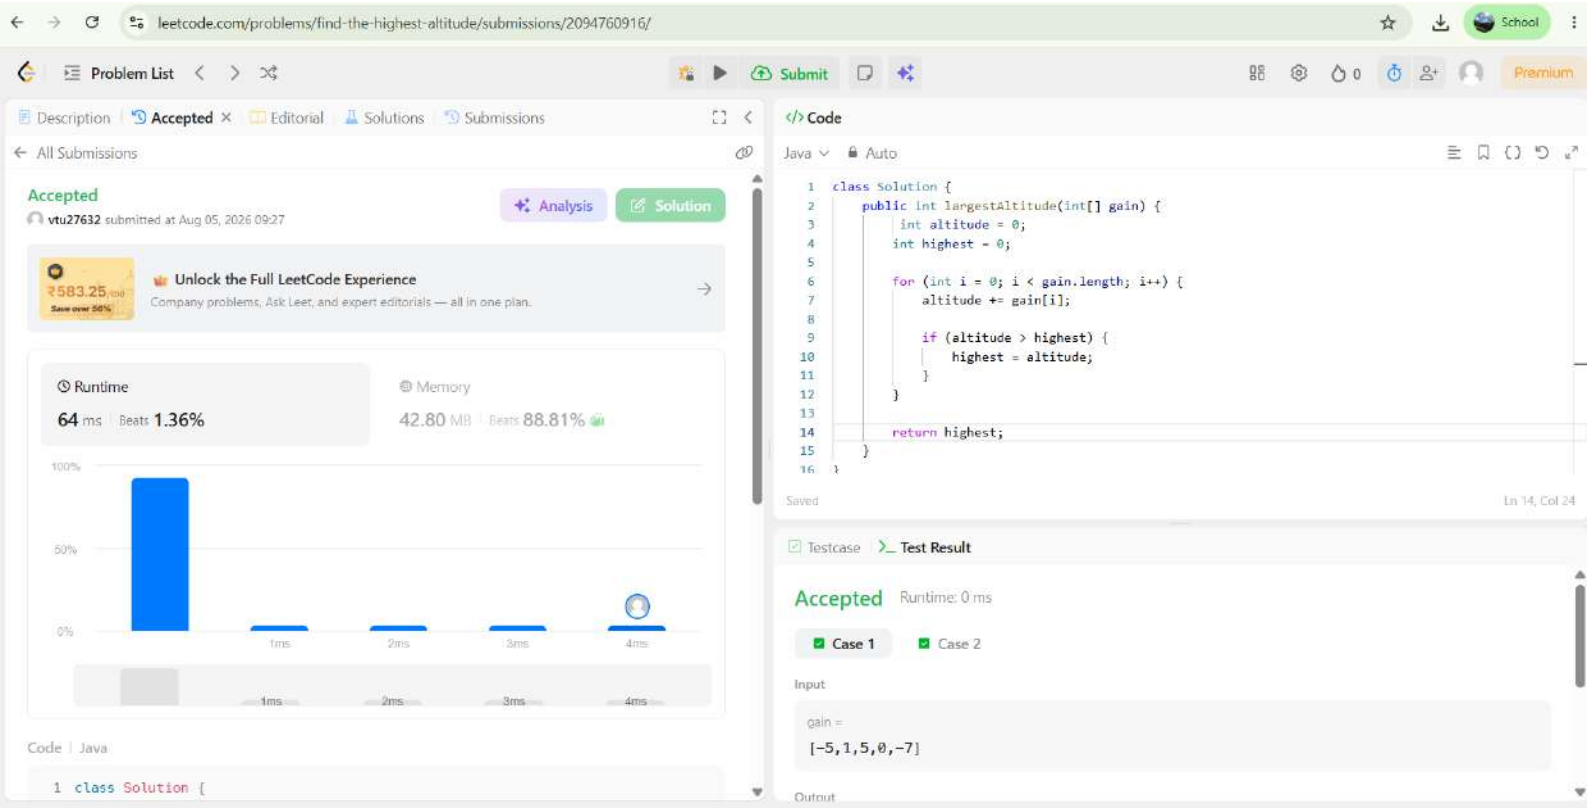
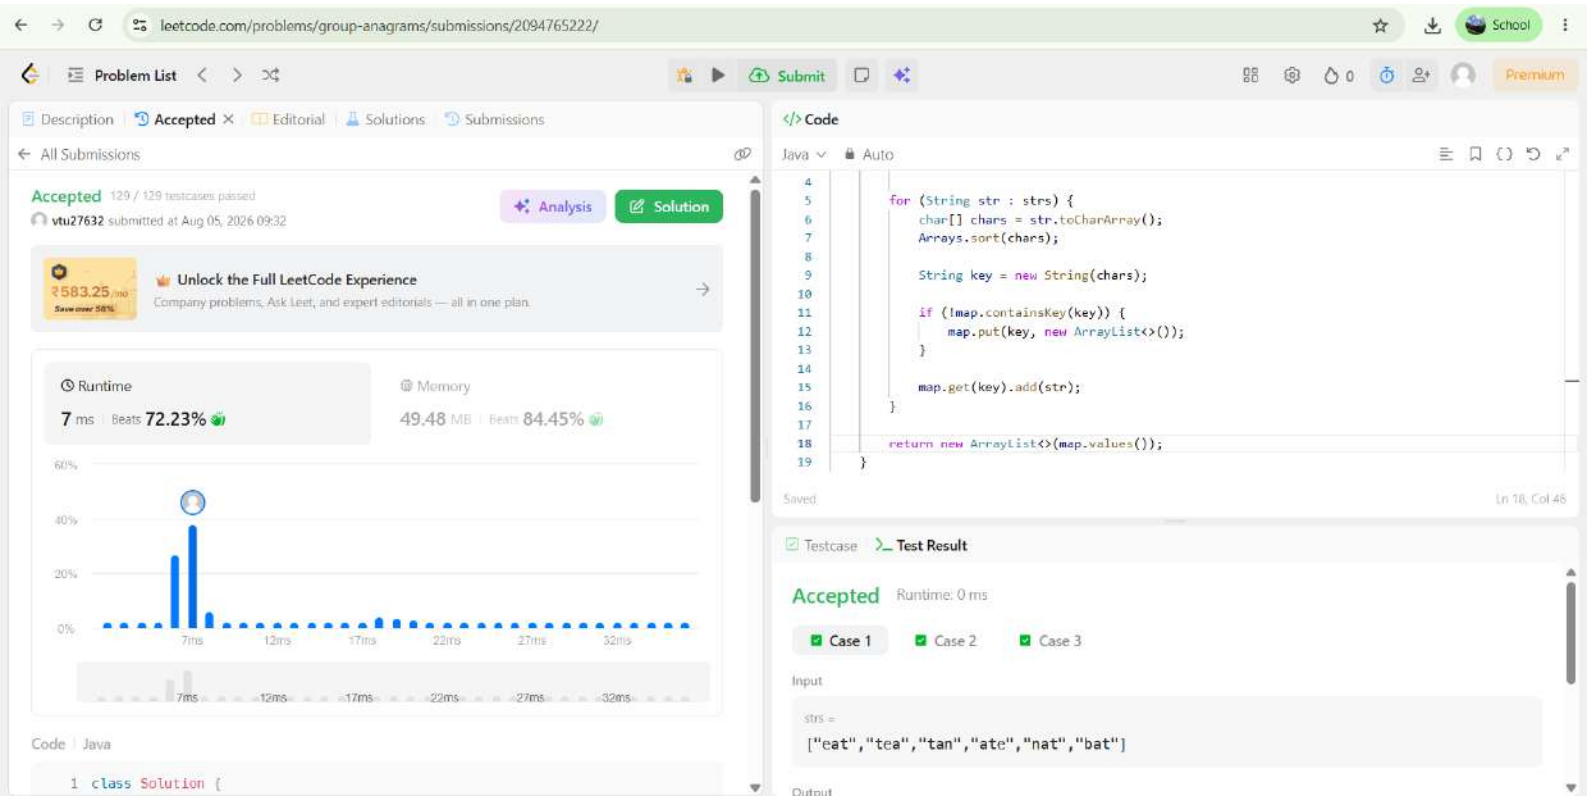
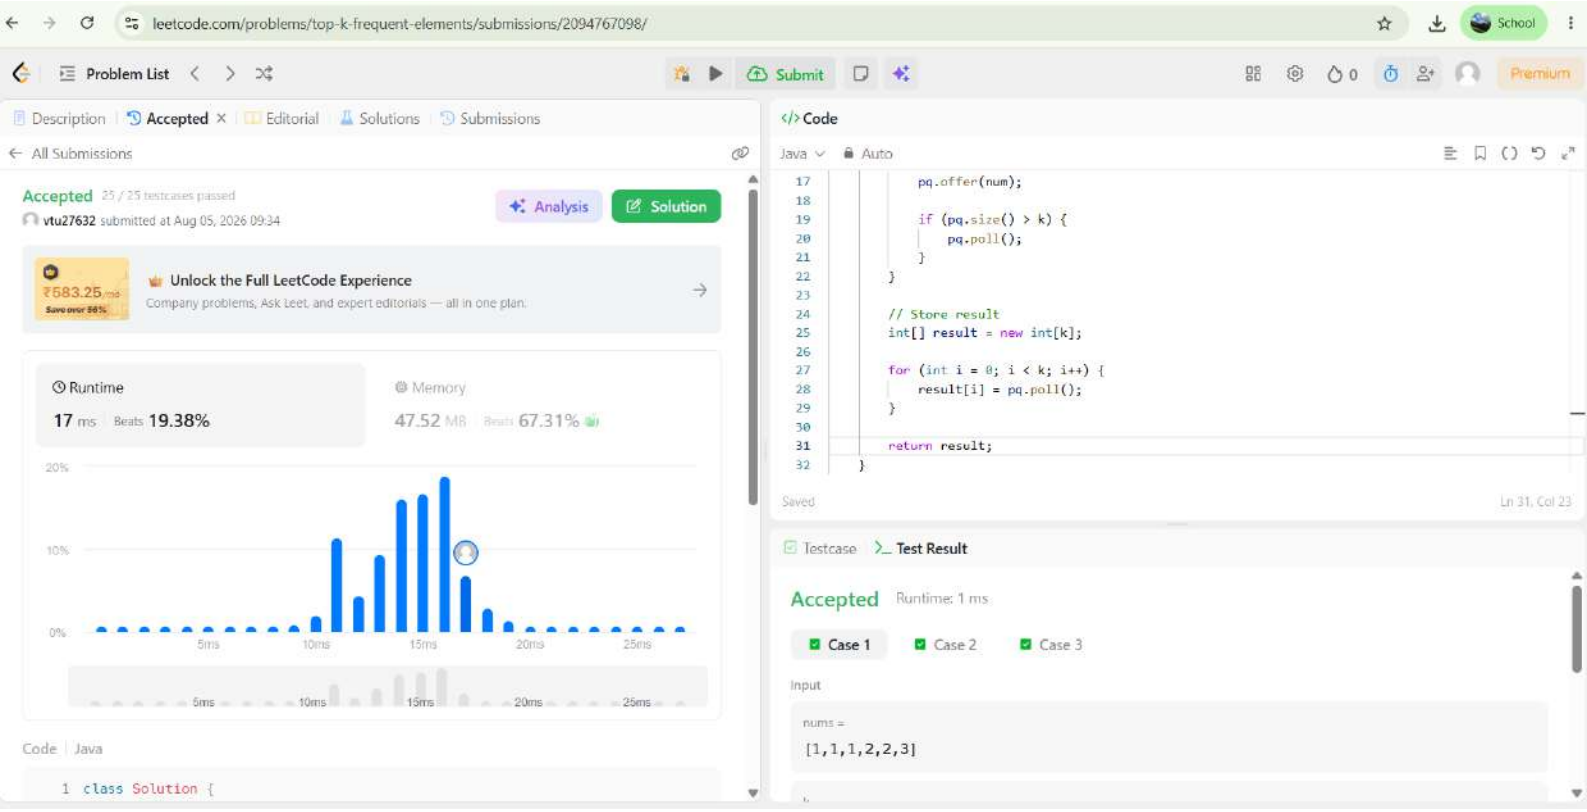

leetcode.com/problems/find-the-highest-altitude/submissions/2094760916/
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted
vtu27632 submitted at Aug 05, 2026 09:27
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
64 ms | Beats 1.36%
Memory
42.80 MB | Beats 88.81%
100%
50%
0%
1ms
2ms
3ms
4ms
Code | Java
1 class Solution {
Code
Java
Auto
class Solution {
public int largestAltitude(int[] gain) {
int altitude = 0;
int highest = 0;
for (int i = 0; i < gain.length; i++) {
altitude += gain[i];
if (altitude > highest) {
highest = altitude;
}
}
return highest;
}
}
Saved
Ln 14, Col 24
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
gain =
[-5,1,5,0,-7]
Output


leetcode.com/problems/group-anagrams/submissions/2094765222/
School
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 129 / 129 testcases passed
vtu27632 submitted at Aug 05, 2026 09:32
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
7 ms | Beats 72.23%
Memory
49.48 MB | Beats 84.45%
60%
40%
20%
0%
7ms
12ms
17ms
22ms
27ms
32ms
Code | Java
1 class Solution {
Code
Java
Auto
4
5 for (String str : strs) {
6 char[] chars = str.toCharArray();
7 Arrays.sort(chars);
8
9 String key = new String(chars);
10
11 if (!map.containsKey(key)) {
12 map.put(key, new ArrayList<>());
13 }
14
15 map.get(key).add(str);
16 }
17
18 return new ArrayList<>(map.values());
19 }
Saved
Ln 18, Col 46
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
strs =
["eat","tea","tan","ate","nat","bat"]
Output


leetcode.com/problems/top-k-frequent-elements/submissions/2094767098/
School
Problem List
Submit
0
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 25 / 25 testcases passed
vtu27632 submitted at Aug 05, 2026 09:34
Analysis
Solution
₹583.25/mo
Save over 86%
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
17 ms | Beats 19.38%
Memory
47.52 MB | Beats 67.31%
20%
10%
0%
5ms
10ms
15ms
20ms
25ms
Code | Java
1 class Solution {
Code
Java
Auto
17 pq.offer(num);
18
19 if (pq.size() > k) {
20 pq.poll();
21 }
22 }
23
24 // Store result
25 int[] result = new int[k];
26
27 for (int i = 0; i < k; i++) {
28 result[i] = pq.poll();
29 }
30
31 return result;
32 }
Saved
Ln 31, Col 23
Testcase
Test Result
Accepted
Runtime: 1 ms
Case 1
Case 2
Case 3
Input
nums =
[1,1,1,2,2,3]

Congratulations!

You have passed the sample test cases. Click the submit button to run your code against all the test cases.

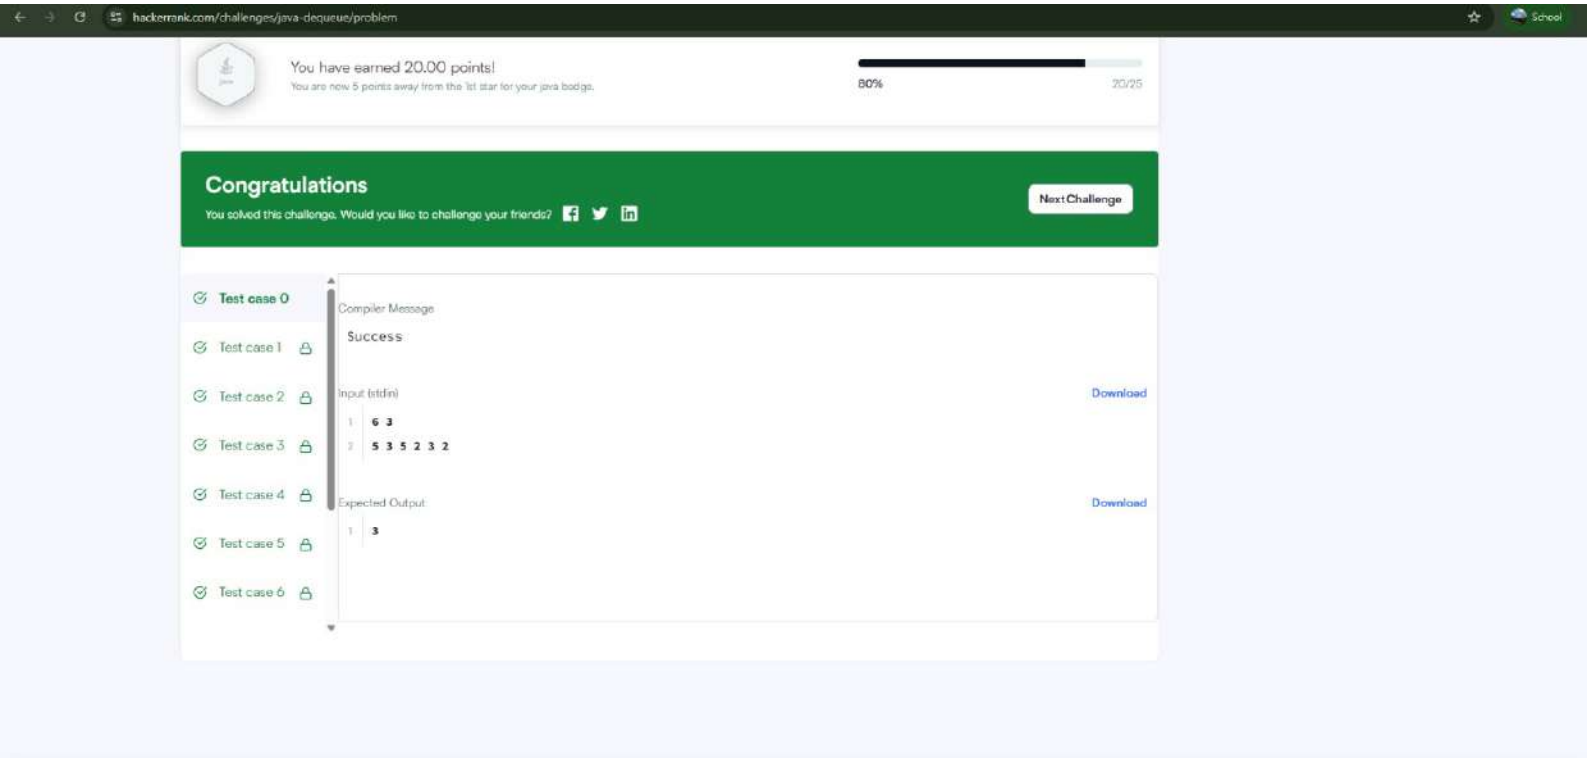
Sample Test case 0

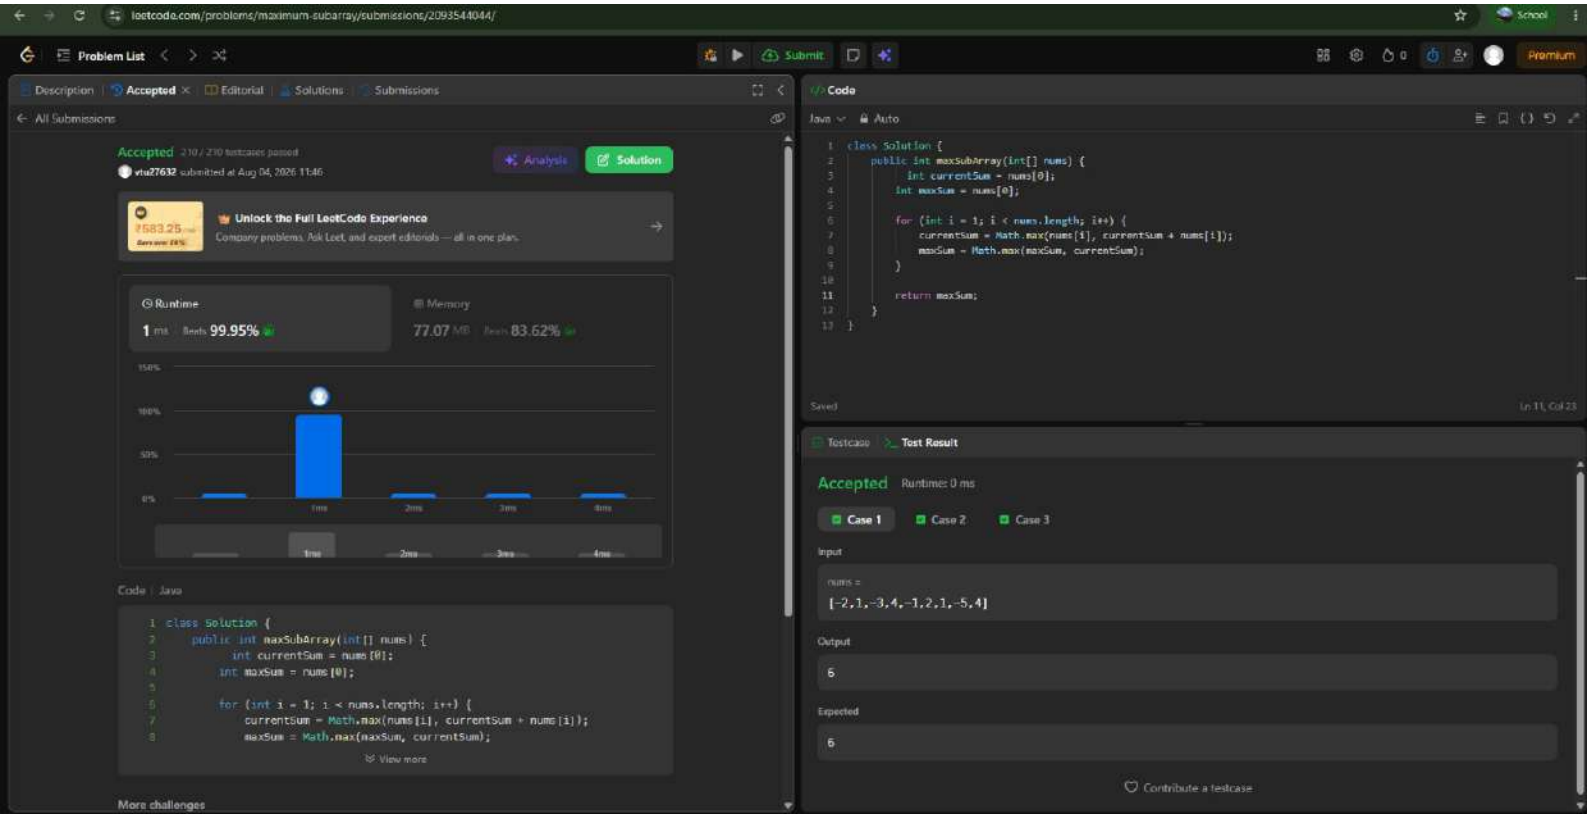
Input (stdin) Download

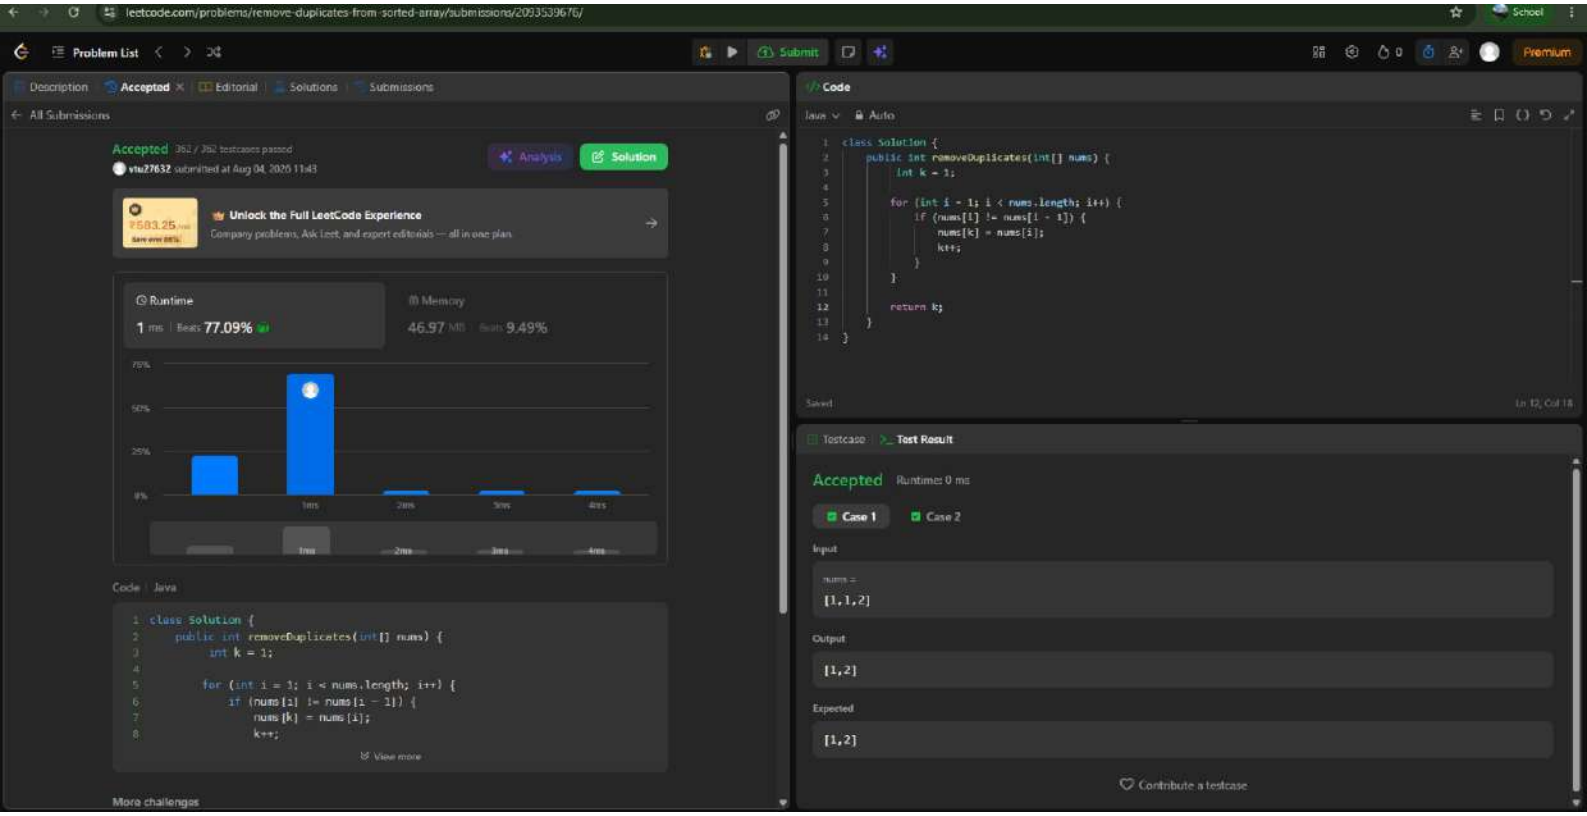
```
5
john tom
john mary
john tom
mary anna
mary anna
```

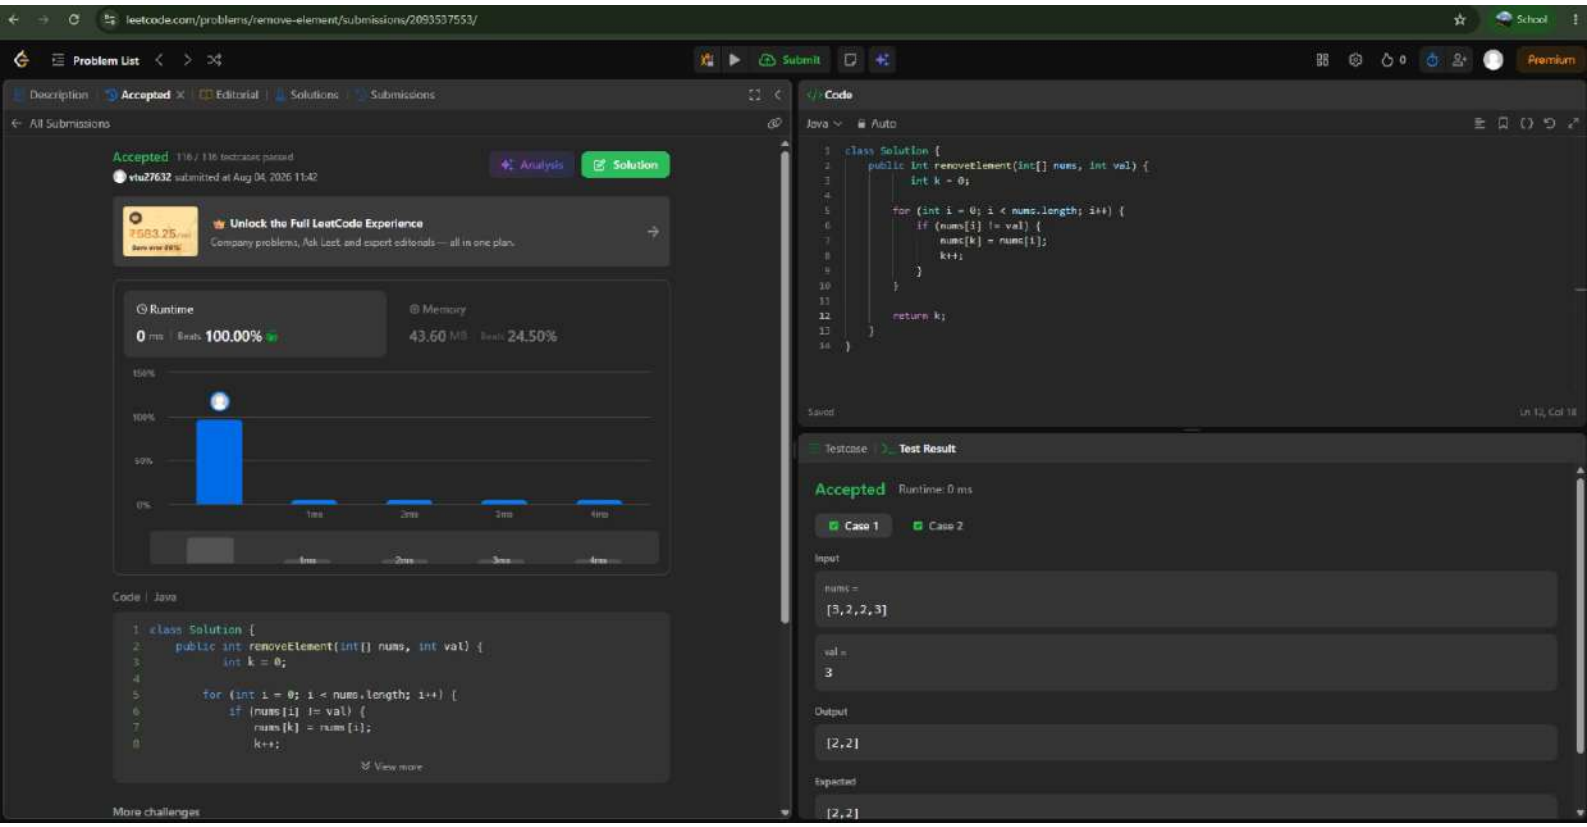
Your Output (stdout)

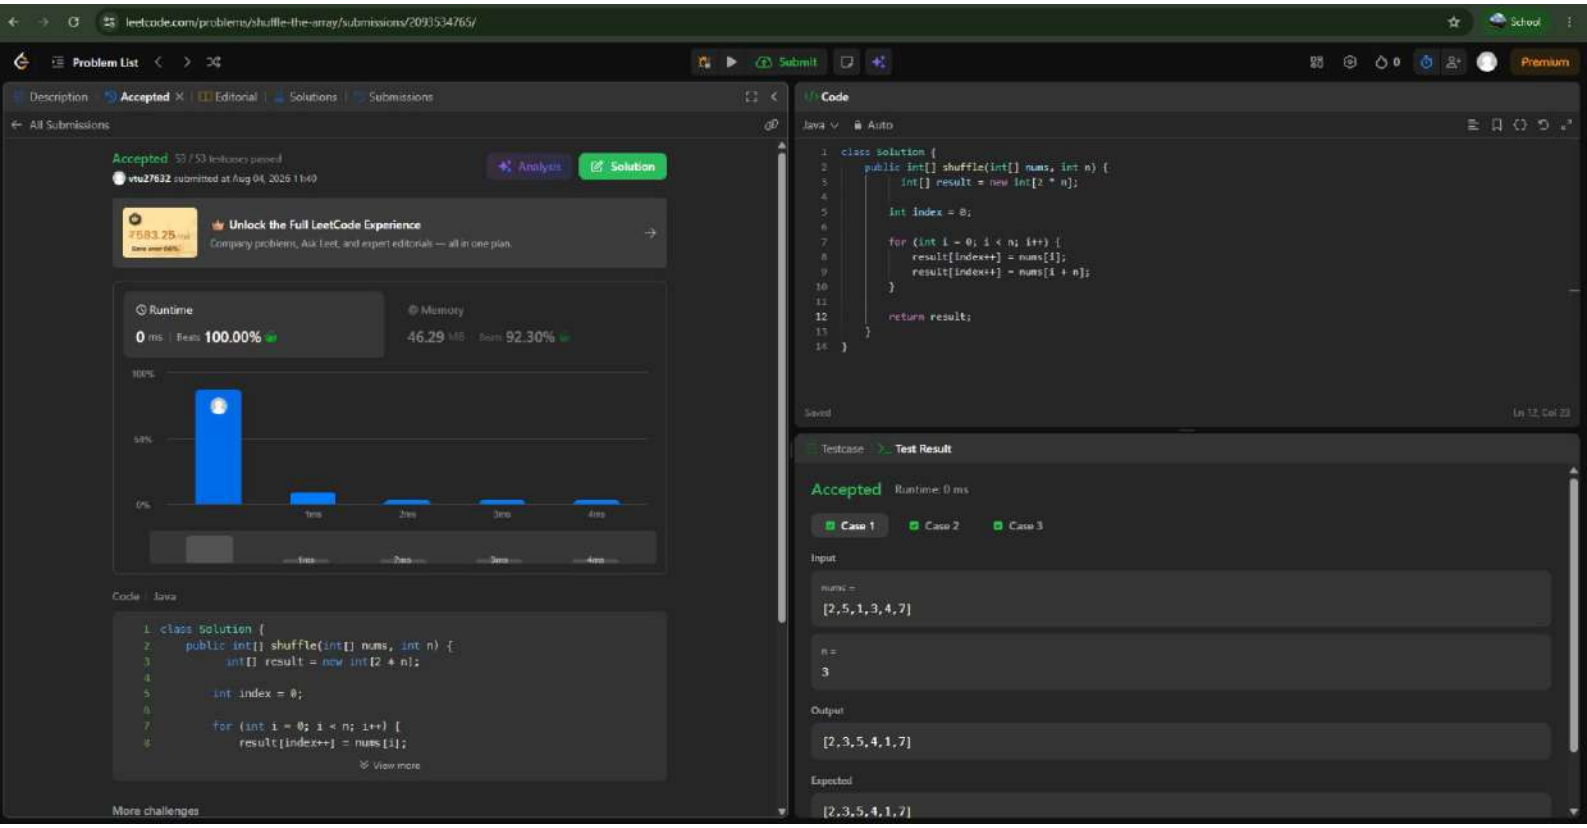
```
1
2
2
```

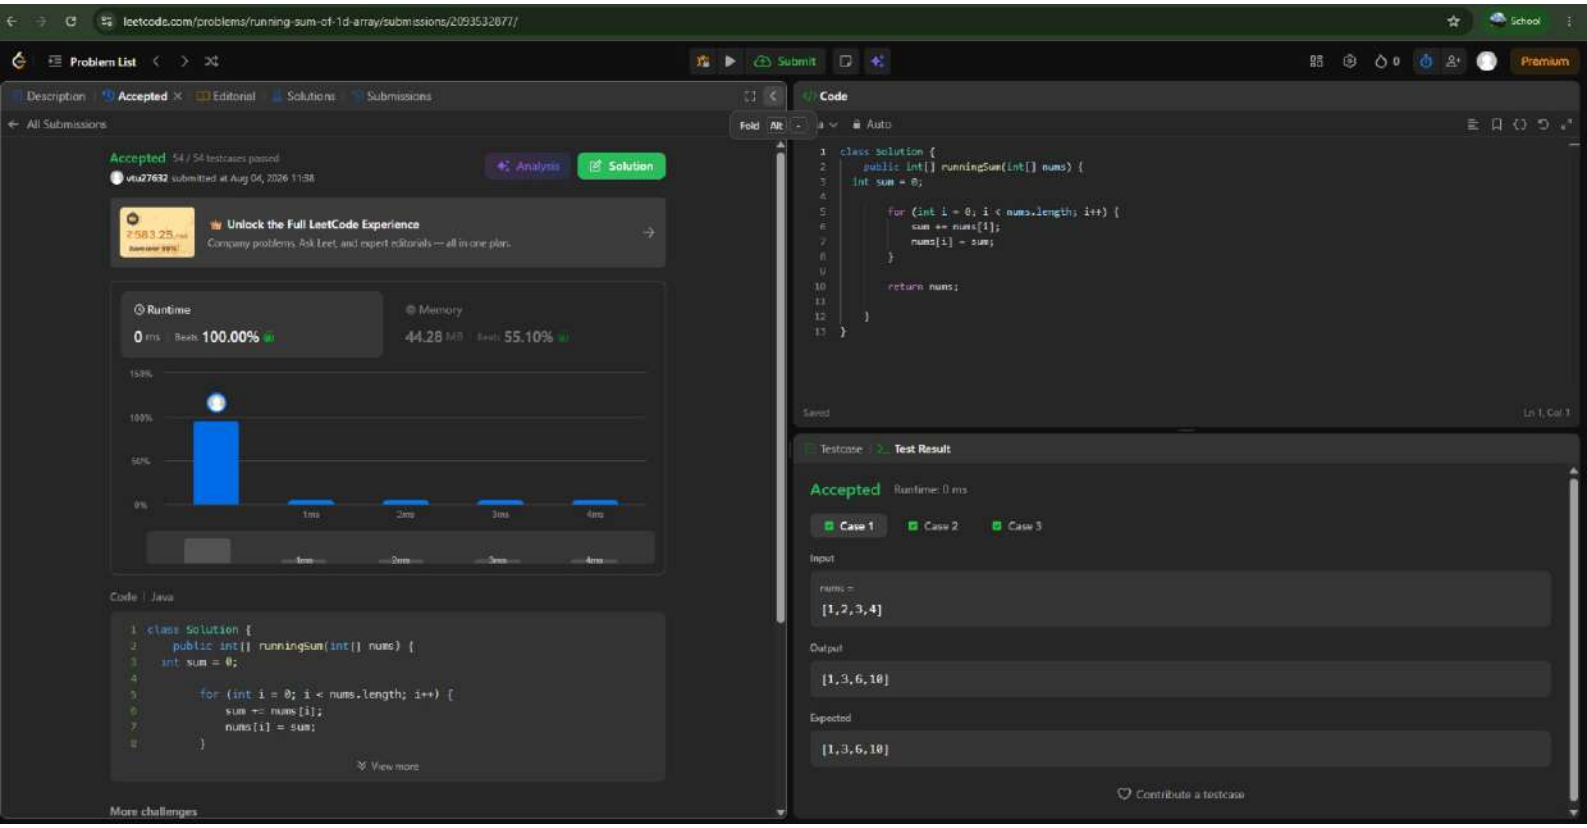

hackerrank.com/challenges/java-dequeue/problem
School
You have earned 20.00 points!
You are now 5 points away from the 1st star for your java badge.
80%
20/25
Congratulations
You solved this challenge. Would you like to challenge your friends?
Next Challenge
Test case 0
Test case 1
Test case 2
Test case 3
Test case 4
Test case 5
Test case 6
Compiler Message
Success
Input (stdin)
Download
1 6 3
2 5 3 5 2 3 2
Expected Output
Download
1 3


leetcode.com/problems/maximum-subarray/submissions/2093544044/
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 210 / 210 testcases passed
vtu27632 submitted at Aug 04, 2026 11:46
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
1 ms Beats 99.95%
Memory
77.07 MB Beats 83.62%
Code | Java
class Solution {
public int maxSubArray(int[] nums) {
int currentSum = nums[0];
int maxSum = nums[0];
for (int i = 1; i < nums.length; i++) {
currentSum = Math.max(nums[i], currentSum + nums[i]);
maxSum = Math.max(maxSum, currentSum);
View more
More challenges
Code
Java
Auto
class Solution {
public int maxSubArray(int[] nums) {
int currentSum = nums[0];
int maxSum = nums[0];
for (int i = 1; i < nums.length; i++) {
currentSum = Math.max(nums[i], currentSum + nums[i]);
maxSum = Math.max(maxSum, currentSum);
return maxSum;
Saved
Ln 11, Col 23
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
nums =
[-2,1,-3,4,-1,2,1,-5,4]
Output
6
Expected
6
Contribute a testcase


leetcode.com/problems/remove-duplicates-from-sorted-array/submissions/2093539676/
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 362 / 362 testcases passed
vtu27632 submitted at Aug 04, 2026 11:43
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan
Runtime
1 ms | Beats 77.09%
Memory
46.97 MB | Beats 9.49%
Code | Java
class Solution {
public int removeDuplicates(int[] nums) {
int k = 1;
for (int i = 1; i < nums.length; i++) {
if (nums[i] != nums[i - 1]) {
nums[k] = nums[i];
k++;
View more
More challenges
Code
Java
Auto
Saved
Ln 12, Col 18
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
nums =
[1,1,2]
Output
[1,2]
Expected
[1,2]
Contribute a testcase


leetcode.com/problems/remove-element/submissions/2093537553/
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 116 / 116 testcases passed
vtu27632 submitted at Aug 04, 2026 11:42
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet and expert editorials — all in one plan.
Runtime
0 ms | Beats 100.00%
Memory
43.60 MB | Beats 24.50%
Code | Java
class Solution {
public int removeElement(int[] nums, int val) {
int k = 0;
for (int i = 0; i < nums.length; i++) {
if (nums[i] != val) {
nums[k] = nums[i];
k++;
}
}
return k;
}
}
View more
More challenges
Code
Java
Auto
Saved
Ln 12, Col 18
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
nums =
[3,2,2,3]
val =
3
Output
[2,2]
Expected
[2,2]


leetcode.com/problems/shuffle-the-array/submissions/2093534765/
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 53 / 53 testcases passed
vtu27632 submitted at Aug 04, 2026 11:40
Analyze Complexity
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
0 ms | Beats 100.00%
Memory
46.29 MB | Beats 92.30%
Code | Java
class Solution {
public int[] shuffle(int[] nums, int n) {
int[] result = new int[2 * n];
int index = 0;
for (int i = 0; i < n; i++) {
result[index++] = nums[i];
View more
More challenges
Code
Java
Auto
class Solution {
public int[] shuffle(int[] nums, int n) {
int[] result = new int[2 * n];
int index = 0;
for (int i = 0; i < n; i++) {
result[index++] = nums[i];
result[index++] = nums[i + n];
}
return result;
}
}
Saved
Ln 12, Col 23
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
nums =
[2,5,1,3,4,7]
n =
3
Output
[2,3,5,4,1,7]
Expected
[2,3,5,4,1,7]


leetcode.com/problems/running-sum-of-1d-array/submissions/2093532877/
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 54 / 54 testcases passed
vtu27632 submitted at Aug 04, 2026 11:58
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
0 ms | Beats 100.00%
Memory
44.28 MB | Beats 55.10%
Code | Java
class Solution {
public int[] runningSum(int[] nums) {
int sum = 0;
for (int i = 0; i < nums.length; i++) {
sum += nums[i];
nums[i] = sum;
}
View more
More challenges
Code
Fold Alt -
Auto
class Solution {
public int[] runningSum(int[] nums) {
int sum = 0;
for (int i = 0; i < nums.length; i++) {
sum += nums[i];
nums[i] = sum;
}
return nums;
}
}
Saved
Ln 1, Col 1
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
nums =
[1,2,3,4]
Output
[1,3,6,10]
Expected
[1,3,6,10]
Contribute a testcase