Congratulations!

You have passed the sample test cases. Click the submit button to run your code against all the test cases.

Sample Test case 0

Input (stdin) Download

```
5
1 4
2 5
3 898
1 3
2 12
```

Your Output (stdout)

```
EVEN
PRIME
PALINDROME
ODD
```

Congratulations!

You have passed the sample test cases. Click the submit button to run your code against all the test cases.

Sample Test case 0

Input (stdin) Download

```
5
amy 100
david 100
heraldo 50
aakansha 75
aleksa 150
```

Your Output (stdout)

```
aleksa 150
amy 100
david 100
aakansha 75
```

Congratulations!

You have passed the sample test cases. Click the submit button to run your code against all the test cases.

Sample Test case 0

Input (stdin) Download

```
5
33 Rumpa 3.68
85 Ashis 3.85
56 Samiha 3.75
19 Samara 3.75
22 Fahim 3.76
```

Your Output (stdout)

```
Ashis
Fahim
Samara
Samiha
```

Congratulations!

You have passed the sample test cases. Click the submit button to run your code against all the test cases.

- Sample Test case 0
- Sample Test case 1
- Sample Test case 2

Input (stdin) Download

```
5
amy 100
david 100
heraldo 50
aakansha 75
aleksa 150
```

Your Output (stdout)

```
aleksa 150
amy 100
david 100
aakansha 75
```

Congratulations!

You have passed the sample test cases. Click the submit button to run your code against all the test cases.

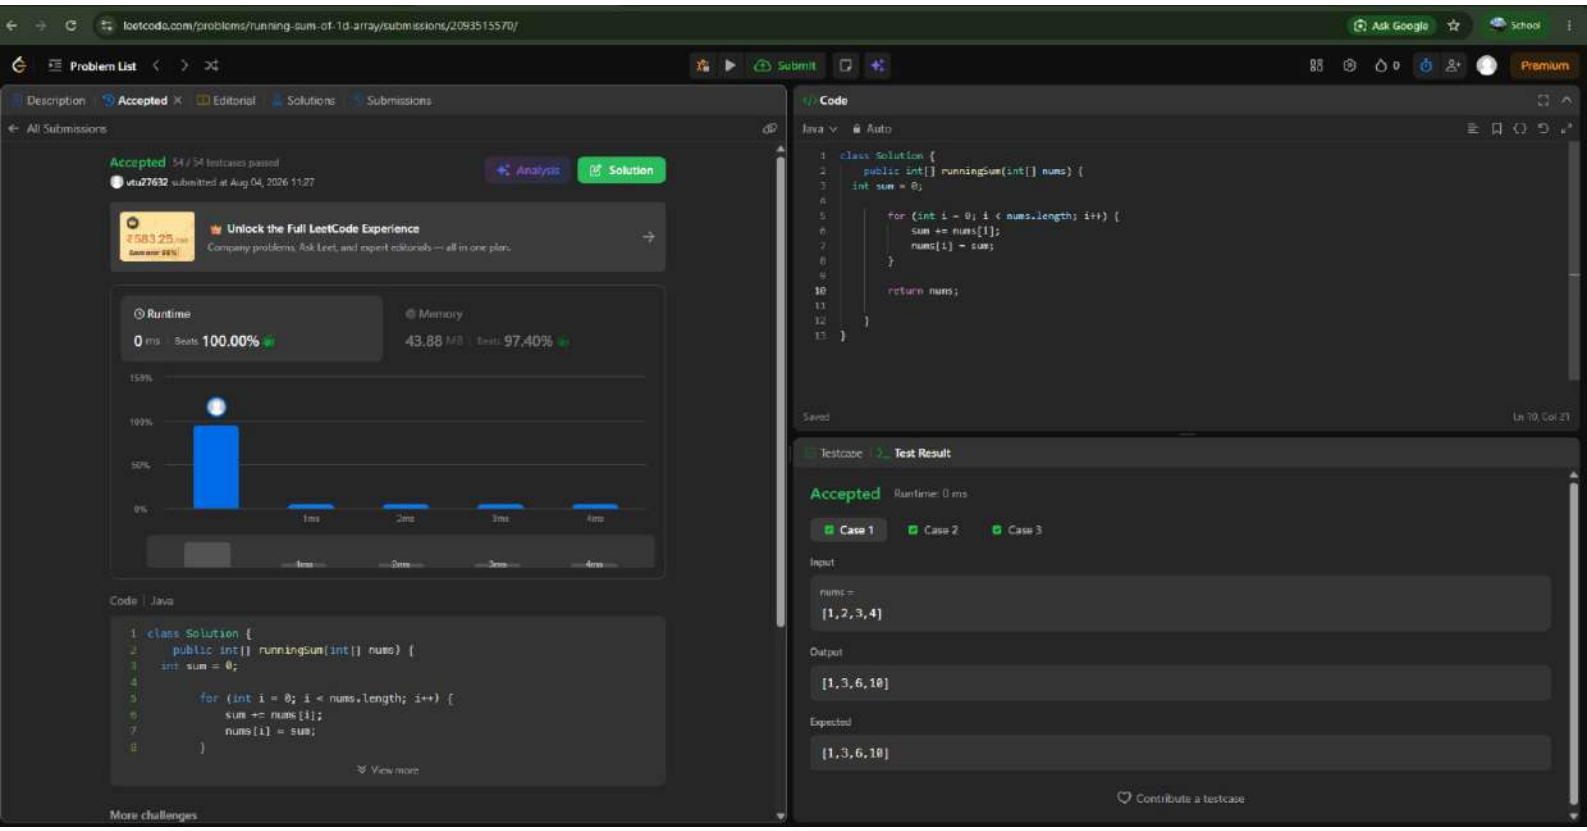
Sample Test case 0

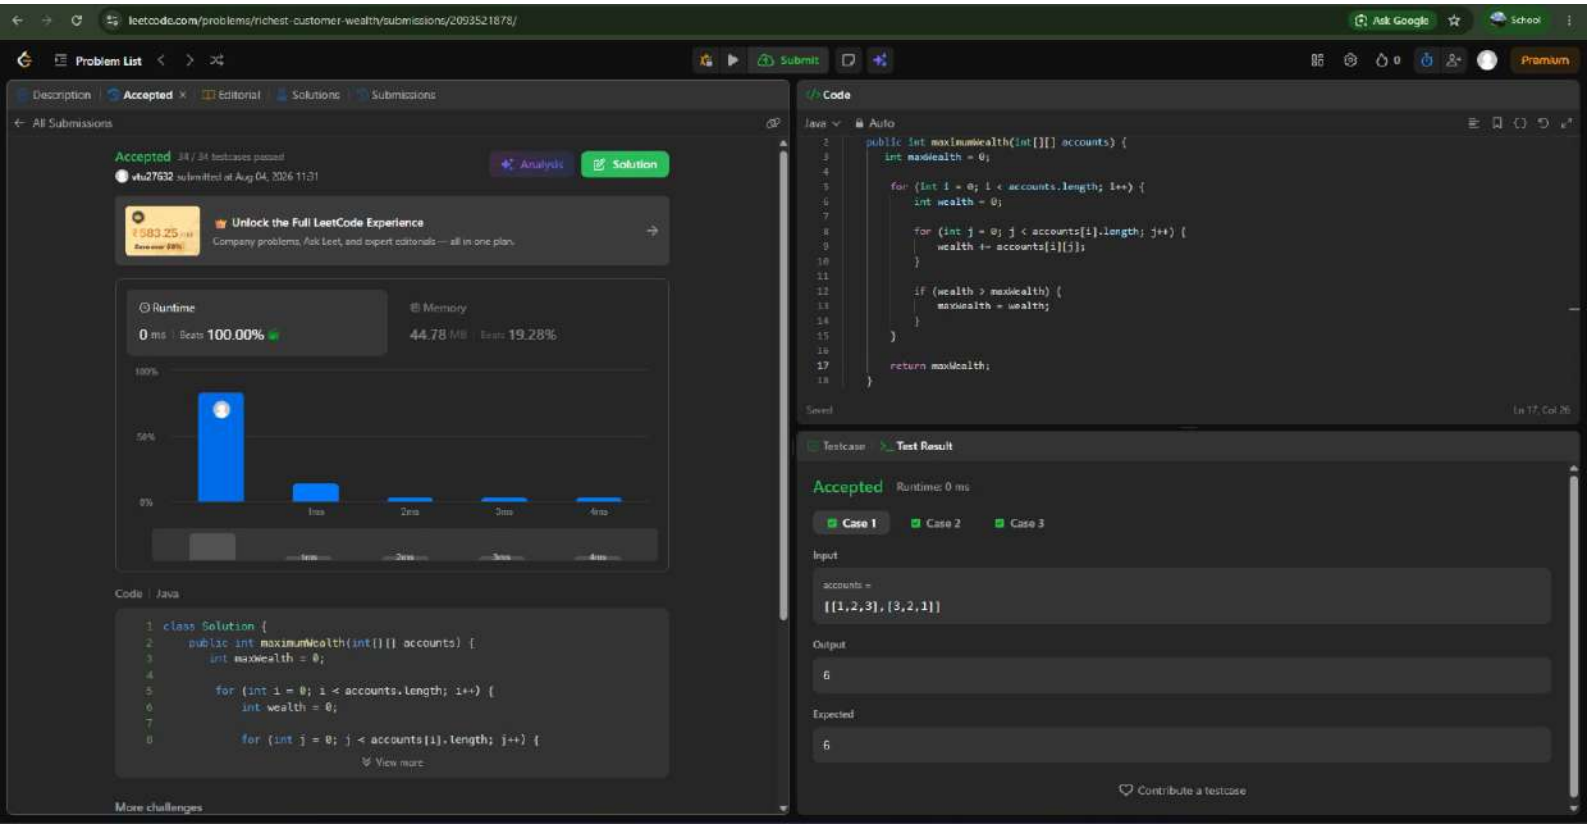
Input (stdin) Download

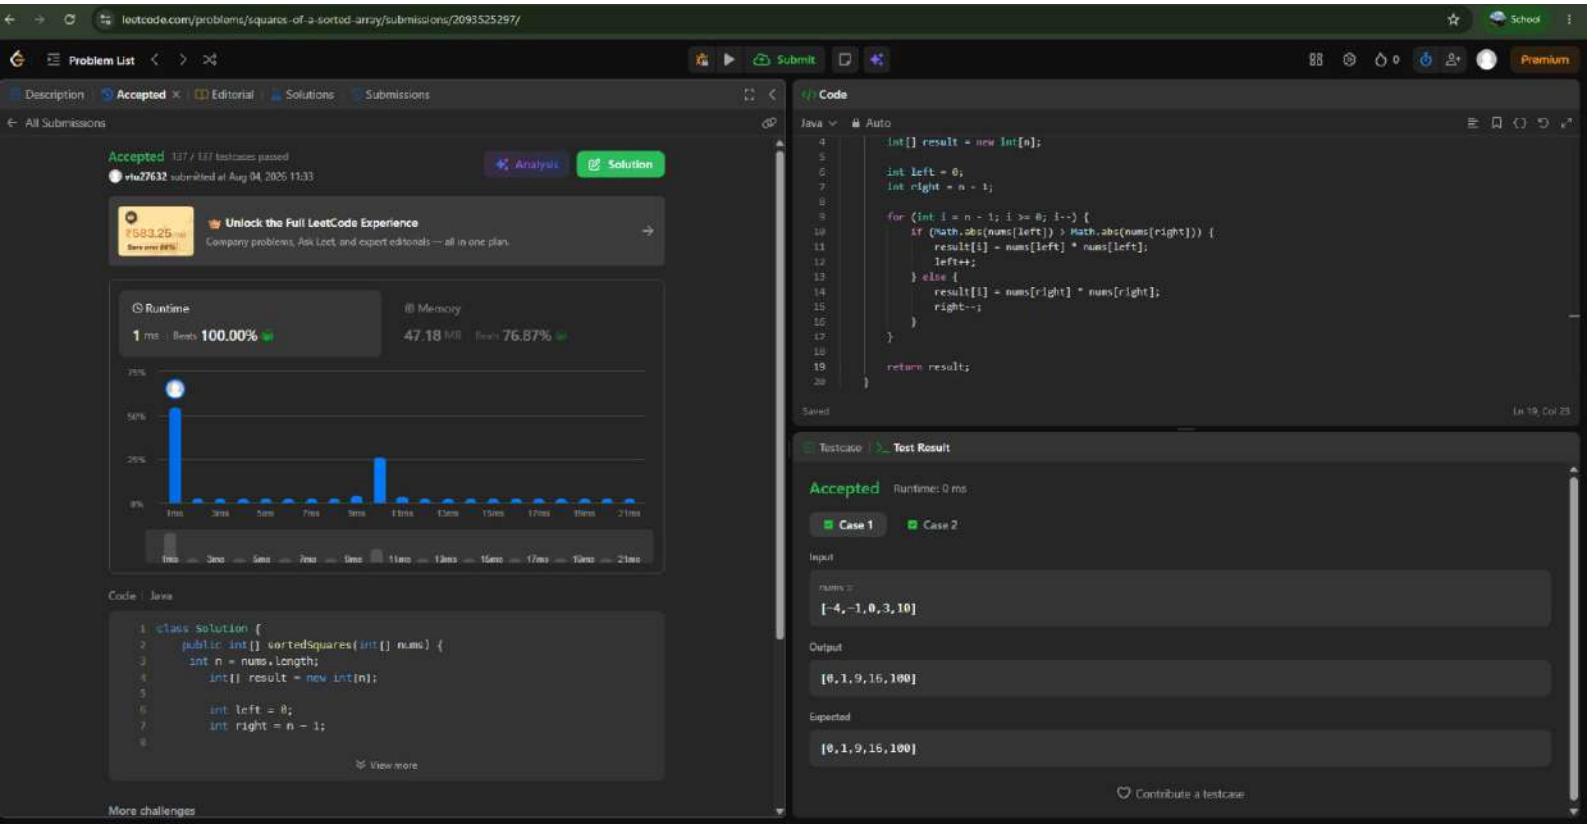
```
5
amy 100
david 100
heraldo 50
aakansha 75
aleksa 150
```

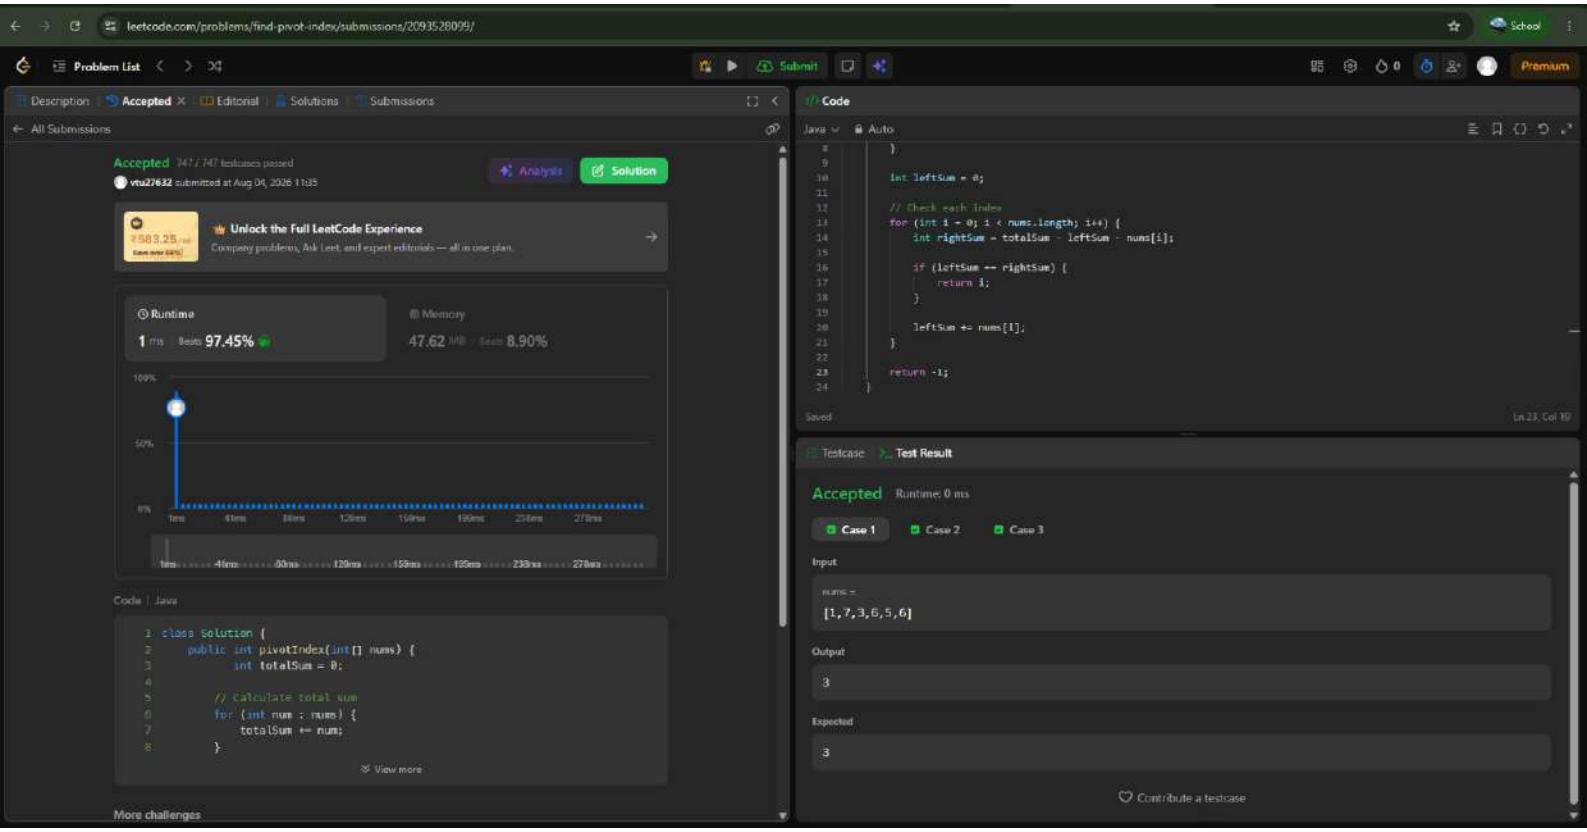
Your Output (stdout)

```
aleksa 150
amy 100
david 100
aakansha 75
```


leetcode.com/problems/running-sum-of-1d-array/submissions/2093515570/
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 54 / 54 testcases passed
vtu27632 submitted at Aug 04, 2026 11:27
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
0 ms | Beats 100.00%
Memory
43.88 MB | Beats 97.40%
Code | Java
class Solution {
public int[] runningSum(int[] nums) {
int sum = 0;
for (int i = 0; i < nums.length; i++) {
sum += nums[i];
nums[i] = sum;
}
View more
More challenges
Code
Java
Auto
Saved
Ln 10, Col 21
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
nums =
[1,2,3,4]
Output
[1,3,6,10]
Expected
[1,3,6,10]
Contribute a testcase


leetcode.com/problems/richest-customer-wealth/submissions/2093521878/
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 34 / 34 testcases passed
vhu27632 submitted at Aug 04, 2026 11:31
Analyze Complexity
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
0 ms | Beats 100.00%
Memory
44.78 MB | Beats 19.28%
100%
50%
0%
1ms
2ms
3ms
4ms
Code | Java
class Solution {
public int maximumWealth(int[][] accounts) {
int maxWealth = 0;
for (int i = 0; i < accounts.length; i++) {
int wealth = 0;
for (int j = 0; j < accounts[i].length; j++) {
View more
More challenges
Code
Java
Auto
public int maximumWealth(int[][] accounts) {
int maxWealth = 0;
for (int i = 0; i < accounts.length; i++) {
int wealth = 0;
for (int j = 0; j < accounts[i].length; j++) {
wealth += accounts[i][j];
}
if (wealth > maxWealth) {
maxWealth = wealth;
}
}
return maxWealth;
}
Saved
Ln 17, Col 26
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Case 3
Input
accounts =
[[1,2,3],[3,2,1]]
Output
6
Expected
6
Contribute a testcase


leetcode.com/problems/squares-of-a-sorted-array/submissions/2093525297/
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 137 / 137 testcases passed
vtu27632 submitted at Aug 04, 2026 11:33
Analyze Complexity
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
1 ms | Beats 100.00%
Memory
47.18 MB | Beats 76.87%
Code | Java
class Solution {
public int[] sortedSquares(int[] nums) {
int n = nums.length;
int[] result = new int[n];
int left = 0;
int right = n - 1;
View more
More challenges
Code
Java
Auto
int[] result = new int[n];
int left = 0;
int right = n - 1;
for (int i = n - 1; i >= 0; i--) {
if (Math.abs(nums[left]) > Math.abs(nums[right])) {
result[i] = nums[left] * nums[left];
left++;
} else {
result[i] = nums[right] * nums[right];
right--;
}
}
return result;
}
Saved
Ln 19, Col 23
Testcase
Test Result
Accepted
Runtime: 0 ms
Case 1
Case 2
Input
nums =
[-4,-1,0,3,10]
Output
[0,1,9,16,100]
Expected
[0,1,9,16,100]
Contribute a testcase


leetcode.com/problems/find-pivot-index/submissions/2093528099/
Problem List
Submit
Premium
Description
Accepted
Editorial
Solutions
Submissions
All Submissions
Accepted 747 / 747 testcases passed
vtu27632 submitted at Aug 04, 2026 11:35
Analysis
Solution
Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.
Runtime
1 ms Beats 97.45%
Memory
47.62 MB Beats 8.90%
Code | Java
class Solution {
public int pivotIndex(int[] nums) {
int totalSum = 0;
// Calculate total sum
for (int num : nums) {
totalSum += num;
}
View more
More challenges
Code
Java
Auto
int leftSum = 0;
// Check each index
for (int i = 0; i < nums.length; i++) {
int rightSum = totalSum - leftSum - nums[i];
if (leftSum == rightSum) {
return i;
}
leftSum += nums[i];
}
return -1;
}
Saved
Ln 23, Col 19
Testcase
Test Result
Accepted Runtime: 0 ms
Case 1
Case 2
Case 3
Input
nums =
[1,7,3,6,5,6]
Output
3
Expected
3
Contribute a testcase