


Session-6

1. Running Sum of 1D Array:

```
class Solution {
    public int[] runningSum(int[] nums) {
        int[] newArray=new int[nums.length];
        newArray[0]=nums[0];
        for (int i=1;i<nums.length;i++){
            newArray[i]=nums[i]+newArray[i-1];
        }
        return newArray;
    }
}
```

Output:

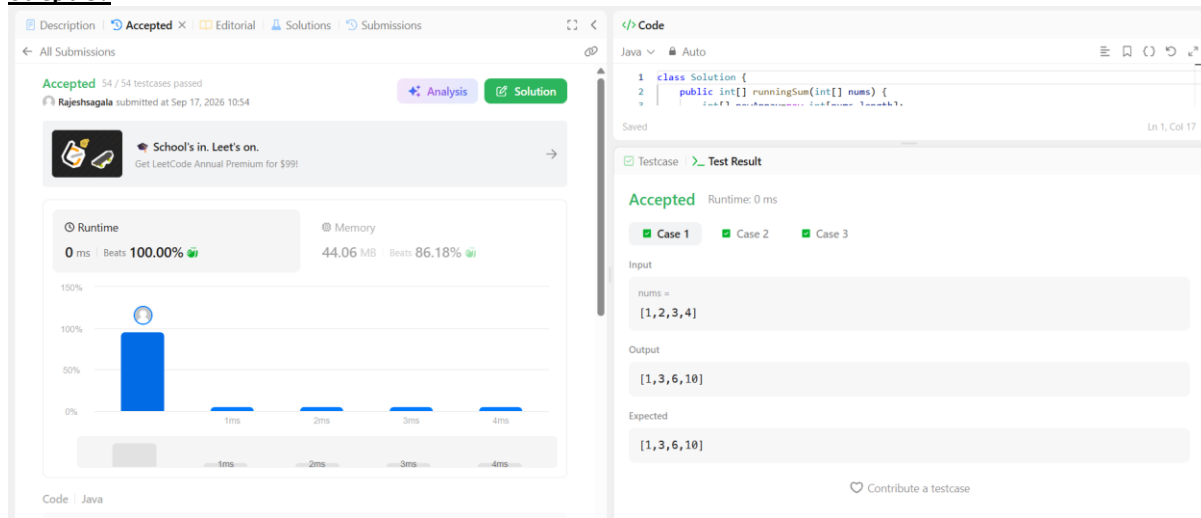

2. Shuffle the Array:

```
class Solution {
    public int[] shuffle(int[] nums, int n) {
        int[] newArray=new int[2*n];
        int j=0;
        for(int i=0;i<n;i++){
            newArray[j++]=nums[i];
            newArray[j++]=nums[i+n];
        }
        return newArray;
    }
}
```

Output:

Problem List

Submit

06:38:46

Premium

Description

Pending...

Editorial

Solutions

Submissions

All Submissions

Accepted

Rajeshsagala submitted at Sep 17, 2026 10:52

Analysis

Solution

School's in. Leet's on.

Get LeetCode Annual Premium for \$99!

Runtime

0 ms | Beats -%

Memory

0.00 MB | Beats -%

100%

50%

0%

1ms

2ms

3ms

4ms

Code | Java

1 class Solution {

Code

Java

Auto

1 class Solution {

2 public int[] shuffle(int[] nums, int n) {

3 // Left to Right Shuffle

Saved

Ln 1, Co

Testcase

Test Result

Accepted

Runtime: 0 ms

Case 1

Case 2

Case 3

Input

nums =

[2,5,1,3,4,7]

n =

3

Output

[2,3,5,4,1,7]

Expected

[2,3,5,4,1,7]