


Session-5

1. Squares of a Sorted Array:

```
class Solution {  
    public int[] sortedSquares(int[] nums) {  
        int n = nums.length;  
        int[] square_nums = new int[n];  
        int first = 0, last = n - 1;  
        int pos = n - 1;  
        while (first <= last) {  
            int firstsq = nums[first] * nums[first];  
            int lastsq = nums[last] * nums[last];  
            if (firstsq > lastsq) {  
                square_nums[pos] = firstsq;  
                first++;  
            } else {  
                square_nums[pos] = lastsq;  
                last--;  
            }  
            pos--;  
        }  
        return square_nums;  
    }  
}
```

Output:

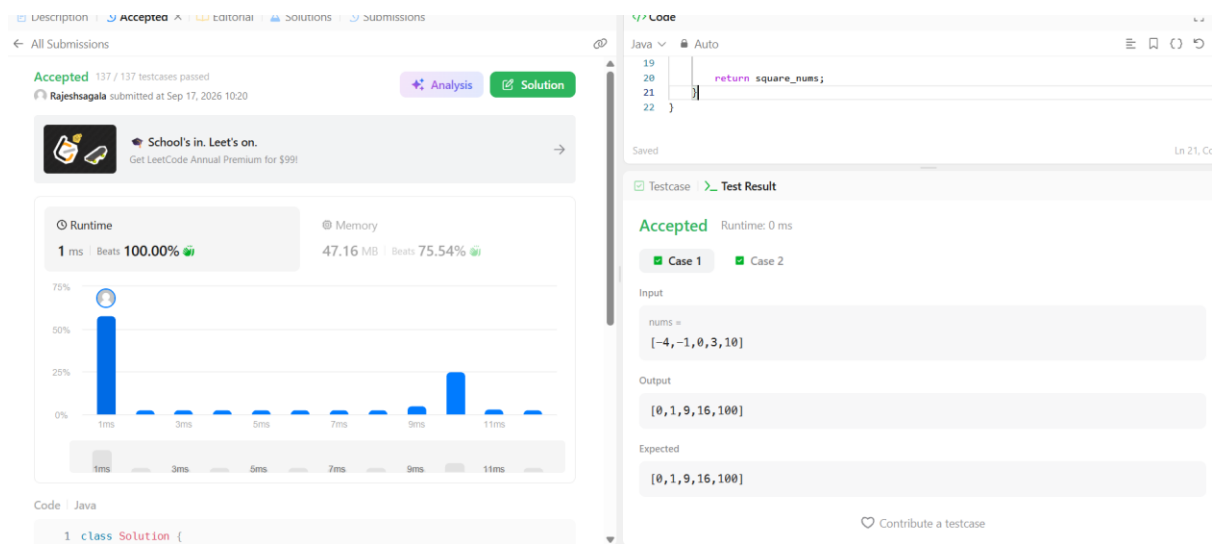

2. Find Pivot Index:

```
class Solution {  
  
    public int pivotIndex(int[] nums) {  
  
        int totalSum = 0;  
  
        for (int num : nums) {  
  
            totalSum += num;  
  
        }  
  
        int leftSum = 0;  
  
        for (int i = 0; i < nums.length; i++) {  
  
            int rightSum = totalSum - leftSum - nums[i];  
  
            if (leftSum == rightSum) {  
  
                return i;  
  
            }  
  
            leftSum += nums[i];  
  
        }  
  
        return -1;  
  
    }  
}
```

Output:

Description | Accepted x Editorial Solutions Submissions

← All Submissions

Accepted 747 / 747 testcases passed

Rajeshsagala submitted at Sep 17, 2026 10:22

Analysis Solution

School's in. Leet's on.


Get LeetCode Annual Premium for \$99!

Runtime

1 ms Beats 96.25%

Memory

46.89 MB Beats 98.18%

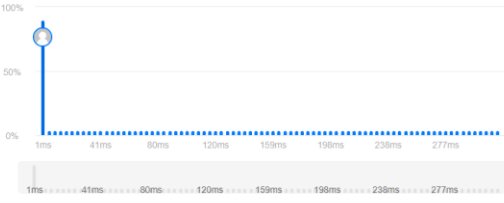

Code | Java

1 class Solution {

Code

Java Auto

```
1 class Solution {
2     public int pivotIndex(int[] nums) {
3         int totalSum = 0;
4         for (int num : nums) {
5             totalSum += num;
6         }
7     }
8 }
```

Saved Ln 2, Col

Testcase Test Result

Accepted Runtime: 0 ms

Case 1 Case 2 Case 3

Input

nums = [1,7,3,6,5,6]

Output

3

Expected

3

Contribute a testcase