

Problem List

Submit

Settings

0

Profile

Premium

Description

Accepted

Editorial

Solutions

Submissions

All Submissions

Accepted

113 / 113 testcases passed

Analysis

Solution

jaswanthbalualepati

submitted at Aug 11, 2026 11:30

₹583.25/mo

Save over 56%

Unlock the Full LeetCode Experience

Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

3 ms | Beats 94.12%

Memory

43.10 MB | Beats 54.16%

Code

Java

```
1 class Solution {
2     public boolean halvesAreAlike(String s) {
3         int n = s.length();
4         int mid = n / 2;
5         int vowelCountA = 0;
6         int vowelCountB = 0;
7         for (int i = 0; i < mid; i++) {
8             if (isVowel(s.charAt(i))) {
9                 vowelCountA++;
10            }
11            if (isVowel(s.charAt(mid + i))) {
12                vowelCountB++;
13            }
14        }
15        return vowelCountA == vowelCountB;
16    }
17    private boolean isVowel(char c) {
18        return "aeiouAEIOU".indexOf(c) != -1;
19    }
20 }
```

Testcase

Test Result

Accepted

Runtime: 0 ms

Case 1

Case 2

Input

s = "book"

Output

true

Expected

true

←

✓

Difficulty: 1159

☀

Expand

🔖

Prev Problem

Next Problem

StatementHintsSubmissionsSolutionHelp

Lapindromes

Lapindrome is defined as a string which when split in the middle, gives two halves having the same characters and same frequency of each character. If there are odd number of characters in the string, we ignore the middle character and check for lapindrome. For example **gaga** is a lapindrome, since the two halves **ga** and **ga** have the same characters with same frequency. Also, **abccab**, **rotor** and **xyzyx** are a few examples of lapindromes. Note that **abbaab** is NOT a lapindrome. The two halves contain the same characters but their frequencies do not match.
Your task is simple. Given a string, you need to tell if it is a lapindrome.

Input:

First line of input contains a single integer **T**, the number of test cases.
Each test is a single line containing a string **S** composed of only lowercase English alphabet.

Output:

For each test case, output on a separate line: "YES" if the string is a lapindrome and "NO" if it is not.

Constraints:

- 1 ≤ T ≤ 100
- 2 ≤ |S| ≤ 1000, where |S| denotes the length of S

Sample 1:

Input

Output

Java

✓ Correct Answer

Submission ID: [1338240404](#)

Sub-Task	Task #	Result (time)
1	0	Correct (0.09)
Subtask Score: 20%		Result - Correct
2	1	Correct (0.09)
Subtask Score: 20%		Result - Correct
3	2	Correct (0.09)
Subtask Score: 20%		Result - Correct
4	3	Correct (0.14)
Subtask Score: 20%		Result - Correct
5	4	Correct (0.12)
Subtask Score: 20%		Result - Correct
		Total Score = 100%

```

43 List<Integer> b = Stream.of(bufferedReader.readLine().replaceAll("\\s+", "").split(" "))
44     .map(Integer::parseInt)
45     .collect(toList());
46
47 List<Integer> result = Result.compareTriplets(a, b);
48
49 bufferedWriter.write(
50     result.stream()
51         .map(Object::toString)
52         .collect(joining(" "))
53         + "\n"
54 );
55
56 bufferedReader.close();
57 bufferedWriter.close();
58
59 }
60

```

Line: 28 Col: 52

Upload Code as File

☐ Test against custom input

Run Code

Submit Code



You have earned 10.00 points!

You are now 20 points away from the 1st star for your problem solving badge.

33%

10/30

Congratulations

You solved this challenge. Would you like to challenge your friends?



Next Challenge

Test case 0

Test case 1

Test case 2

Test case 3

Test case 4

Test case 5

Test case 6

Compiler Message

Success

Input (stdin)

1 5 6 7
2 3 6 10

Download

Expected Output

1 1 1

Download

DescriptionAccepted ×EditorialSolutionsSubmissions

← All Submissions


Accepted79 / 79 testcases passedjaswanthbalalapati submitted at Aug 11, 2025 11:46AnalysisSolution

₹ 583.25/moSave over 56%

Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime14 ms | Beats 91.32%

Memory108.90 MB | Beats 12.06%

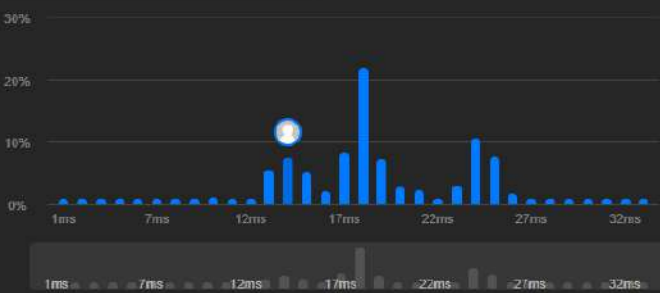

Code | Java

```
1 class Solution {
2     public boolean containsDuplicate(int[] nums) {
3         Set<Integer> seen = new HashSet<>();
4         for (int num : nums) {
5             if (!seen.add(num)) {
6                 return true;
7             }
8         }
9     }
10 }
```

View more

</> Code

JavaAuto

```
1 class Solution {
2     public boolean containsDuplicate(int[] nums) {
3         Set<Integer> seen = new HashSet<>();
4         for (int num : nums) {
5             if (!seen.add(num)) {
6                 return true;
7             }
8         }
9         return false;
10    }
11 }
```

SavedIn 3, Col

TestcaseTest Result

AcceptedRuntime: 0 ms

Case 1

Case 2

Case 3

Input

nums =
[1,1,1,3,3,4,3,2,4,2]

Output

true

Expected

true

```

35 public class Solution {
36     public static void main(String[] args) throws IOException {
37         BufferedReader bufferedReader = new BufferedReader(new InputStreamReader(System.in));
38         BufferedWriter bufferedWriter = new BufferedWriter(new FileWriter(System.getenv("OUTPUT_PATH")));
39
40         String s = bufferedReader.readLine();
41
42         String result = Result.timeConversion(s);
43
44         bufferedWriter.write(result);
45         bufferedWriter.newLine();
46
47         bufferedReader.close();
48         bufferedWriter.close();
49     }
50 }
51

```

Line: 30 Col: 50

 Upload Code as File

☐ Test against custom input

Run Code

Submit Code



You have earned 15.00 points!

You are now 5 points away from the 1st star for your problem-solving badge.

88%

25/30

Congratulations

You solved this challenge. Would you like to challenge your friends?



Next Challenge

Test case 0

Test case 1

Test case 2

Test case 3

Test case 4

Test case 5

Compiler Message

Success

Input (stdin)

1 07:05:45PM

Download

Expected Output

1 19:05:45

Download

Problem List

Submit

Auto

Description

Accepted

Editorial

Solutions

Submissions

All Submissions

Accepted 75 / 75 testcases passed

Analysis

Solution

jaswanthbelualapati submitted at Aug 11, 2026 11:31

Unlock the Full LeetCode Experience


Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime

2 ms | Beats 92.06%

Memory

48.08 MB | Beats 6.97%

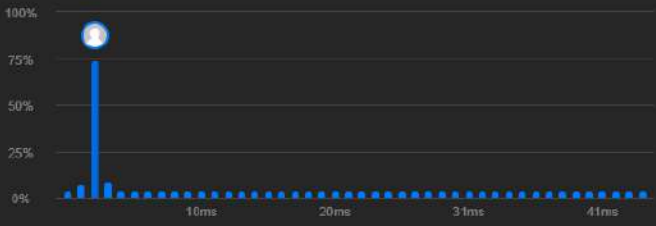

100%
75%
50%
25%
0%

0ms 10ms 20ms 30ms 40ms

Code

Java

```
1 class Solution {
2     public void moveZeroes(int[] nums) {
3         int lastNonZeroFoundAt = 0;
4         for (int i = 0; i < nums.length; i++) {
5             if (nums[i] != 0) {
6                 int temp = nums[lastNonZeroFoundAt];
7                 nums[lastNonZeroFoundAt] = nums[i];
8                 nums[i] = temp;
9                 lastNonZeroFoundAt++;
10            }
11        }
12    }
13 }
14 }
```

Testcase

Test Result

Accepted

Runtime: 0 ms

Case 1

Case 2

Input

nums = [0, 1, 0, 3, 12]

Output

[1, 3, 12, 0, 0]

Expected

[1, 3, 12, 0, 0]

View more

Contribute a testcase

```
49  
50     int result = Result.diagonalDifference(arr);  
51  
52     bufferedWriter.write(String.valueOf(result));  
53     bufferedWriter.newLine();  
54  
55     bufferedReader.close();  
56     bufferedWriter.close();  
57 }  
58  
59
```

Line: 14 Col: 68

 Upload Code as File

☐ Test against custom input

Run Code

Submit Code



You have earned 10.00 points!

You are now 85 points away from the 2nd star for your problem solving badge.

7%

35/400

Congratulations

You solved this challenge. Would you like to challenge your friends?   

Next Challenge

☒ Test case 0

☒ Test case 1

☒ Test case 2

☒ Test case 3

☒ Test case 4

☒ Test case 5

☒ Test case 6

Compiler Message

Success

Input (stdin)

```
1 3  
2 11 2 4  
3 4 5 6  
4 10 8 -12
```

Download

Expected Output

```
1 15
```


Download

867. Transpose Matrix

Easy Topics Companies Hint

Given a 2D integer array `matrix`, return the **transpose** of `matrix`.

The **transpose** of a matrix is the matrix flipped over its main diagonal, switching the matrix's row and column indices.

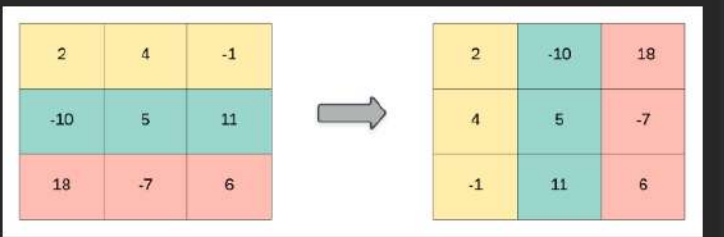

Example 1:

Input: `matrix = [[1,2,3],[4,5,6],[7,8,9]]`

Output: `[[1,4,7],[2,5,8],[3,6,9]]`

Example 2:

Input: `matrix = [[1,2,3],[4,5,6]]`

Output: `[[1,4],[2,5],[3,6]]`

- Constraints:**
- `m == matrix.length`
 - `n == matrix[i].length`
 - `1 <= m, n <= 1000`

Code

```
Java Auto
1 class Solution {
2     public int[][] transpose(int[][] matrix) {
3         int rows = matrix.length;
4         int cols = matrix[0].length;
5         int[][] transposed = new int[cols][rows];
6         for (int i = 0; i < rows; i++) {
7             for (int j = 0; j < cols; j++) {
8                 transposed[j][i] = matrix[i][j];
9             }
10        }
11        return transposed;
12    }
13 }
```

Testcase Test Result

Accepted Runtime: 0 ms

Case 1 Case 2

Input

matrix =
[[1,2,3],[4,5,6],[7,8,9]]

Output

[[1,4,7],[2,5,8],[3,6,9]]

Expected

[[1,4,7],[2,5,8],[3,6,9]]

DescriptionAccepted × EditorialSolutionsSubmissions

All Submissions


Accepted12 / 12 testcases passedjaswanthbalualapati submitted at Aug 11, 2026 11:57AnalysisSolution

₹583.25/moSave over 56%

Unlock the Full LeetCode Experience
Company problems, Ask Leet, and expert editorials — all in one plan.

Runtime7 msBeats 64.58%

Memory46.61 MBBeats 61.57%

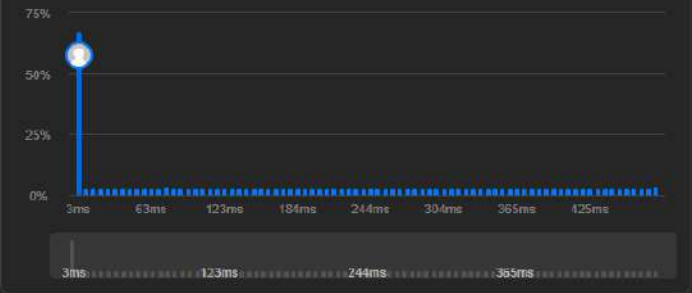

3ms63ms123ms184ms244ms304ms365ms425ms

3ms.....123ms.....244ms.....365ms.....

CodeJava

```
1 class Solution {
2     public int[][] matrixBlockSum(int[][] mat, int k) {
3         int m = mat.length;
4         int n = mat[0].length;
5         int[][] pref = new int[m + 1][n + 1];
6         for (int r = 0; r < m; r++) {
7             for (int c = 0; c < n; c++) {
8                 pref[r + 1][c + 1] = mat[r][c]
```

View more

More challenges

Code

JavaAuto

```
1 class Solution {
2     public int[][] matrixBlockSum(int[][] mat, int k) {
3         int m = mat.length;
4         int n = mat[0].length;
5         int[][] pref = new int[m + 1][n + 1];
6         for (int r = 0; r < m; r++) {
7             for (int c = 0; c < n; c++) {
8                 pref[r + 1][c + 1] = mat[r][c]
9                     + pref[r][c + 1]
10                    + pref[r + 1][c]
11                    - pref[r][c];
12             }
13         }
14         int[][] answer = new int[m][n];
15         for (int i = 0; i < m; i++) {
16             for (int j = 0; j < n; j++) {
```

SavedLn 4, Col 31

TestcaseTest Result

AcceptedRuntime: 0 ms

Case 1Case 2

Input

mat =
[[1,2,3],[4,5,6],[7,8,9]]

k =
1

Output

[[12,21,16],[27,45,33],[24,39,28]]

Expected

[[12,21,16],[27,45,33],[24,39,28]]

```

126         .map(Integer::parseInt)
127         .collect(toList())
128     );
129     } catch (IOException ex) {
130         throw new RuntimeException(ex);
131     }
132 }
133
134 Result.matrixRotation(matrix, r);
135
136 bufferedReader.close();
137
138

```

Line: 138 Col: 2

 Upload Code as File

☐ Test against custom input

Run Code

Submit Code



You have earned 80,00 points!

You are now 80 points away from the 3rd star for your problem-solving badge.

15%

115,000

Congratulations

You solved this challenge. Would you like to challenge your friends?



Next Challenge

 Test case 0

 Test case 1

 Test case 2

 Test case 3

 Test case 4

 Test case 5

 Test case 6

Input (stdin)

```

1 4 4 1
2 1 2 3 4
3 5 6 7 8
4 9 10 11 12
5 13 14 15 16

```

Download

Expected Output

```

1 2 3 4 8
2 1 7 11 12
3 5 6 10 16
4 9 13 14 15

```

Download