



React

1. ReactJS-HOL

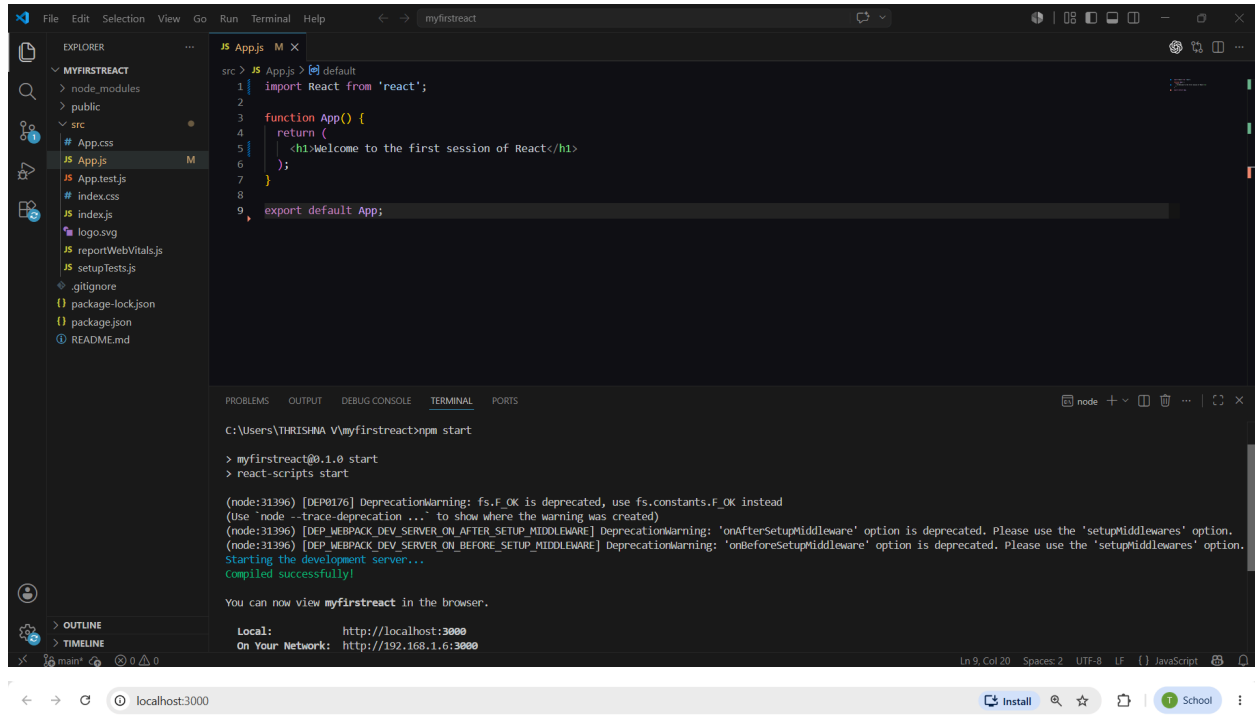

Welcome to the first session of React

2. ReactJS-HOL

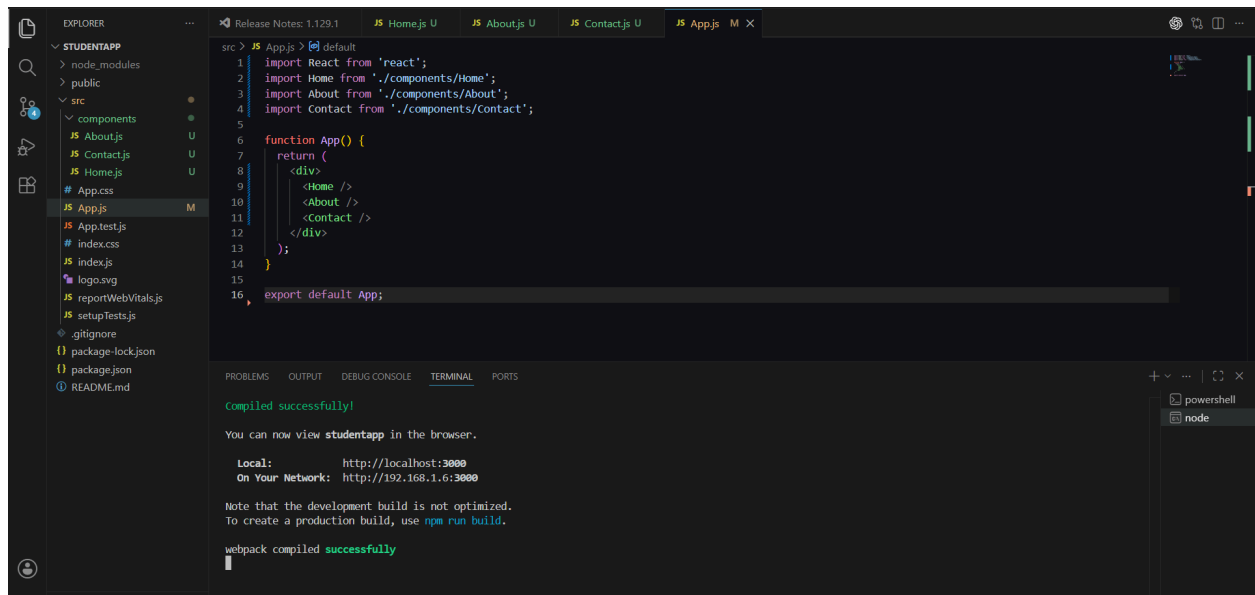


The screenshot shows the Visual Studio Code editor with the 'App.js' file open. The file contains the following code:

```
1 import React from 'react';
2 import Home from './components/Home';
3 import About from './components/About';
4 import Contact from './components/Contact';
5
6 function App() {
7   return (
8     <div>
9       <Home />
10      <About />
11      <Contact />
12    </div>
13  );
14 }
15
16 export default App;
```

The terminal at the bottom shows the following output:

```
Compiled successfully!
You can now view studentapp in the browser.
Local:      http://localhost:3000
On Your Network:  http://192.168.1.6:3000
Note that the development build is not optimized.
To create a production build, use npm run build.
webpack compiled successfully
```




Welcome to the Home page of Student Management Portal

Welcome to the About page of the Student Management Portal

Welcome to the Contact page of the Student Management Portal

3. ReactJS-HOL

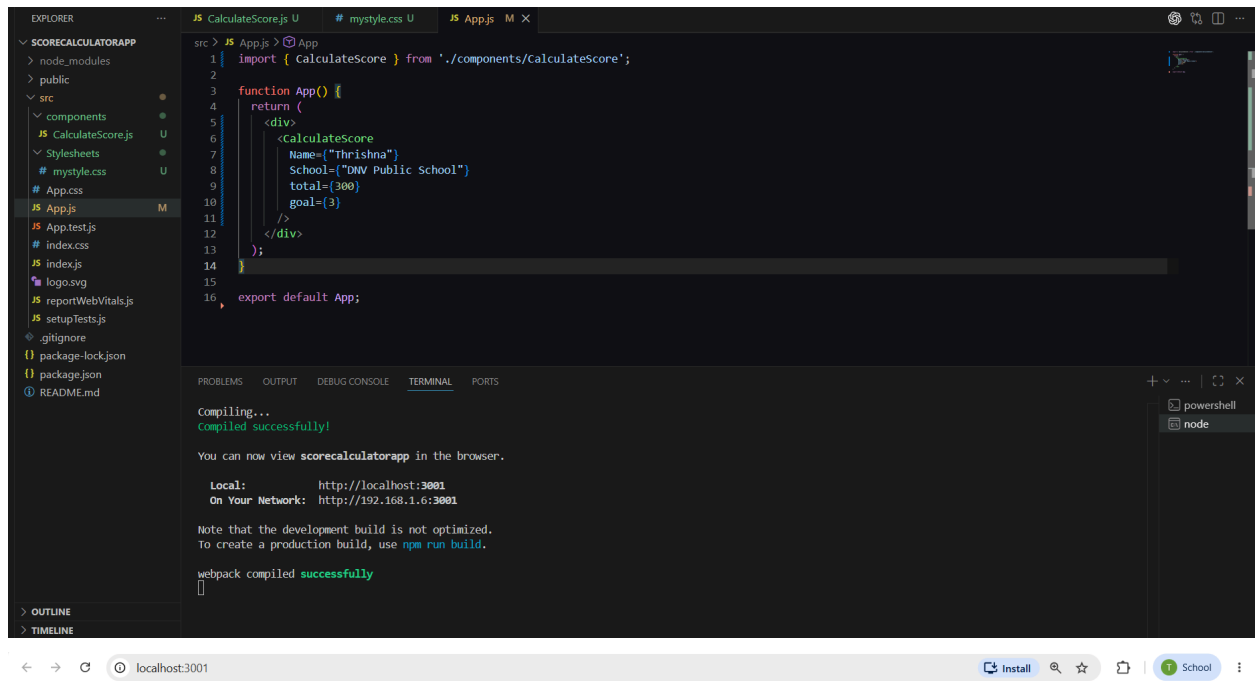

Student Details:


Name: Thrishna

School: DNV Public School

Total: 300 Marks

Score: 100.00%

4. ReactJS-HOL

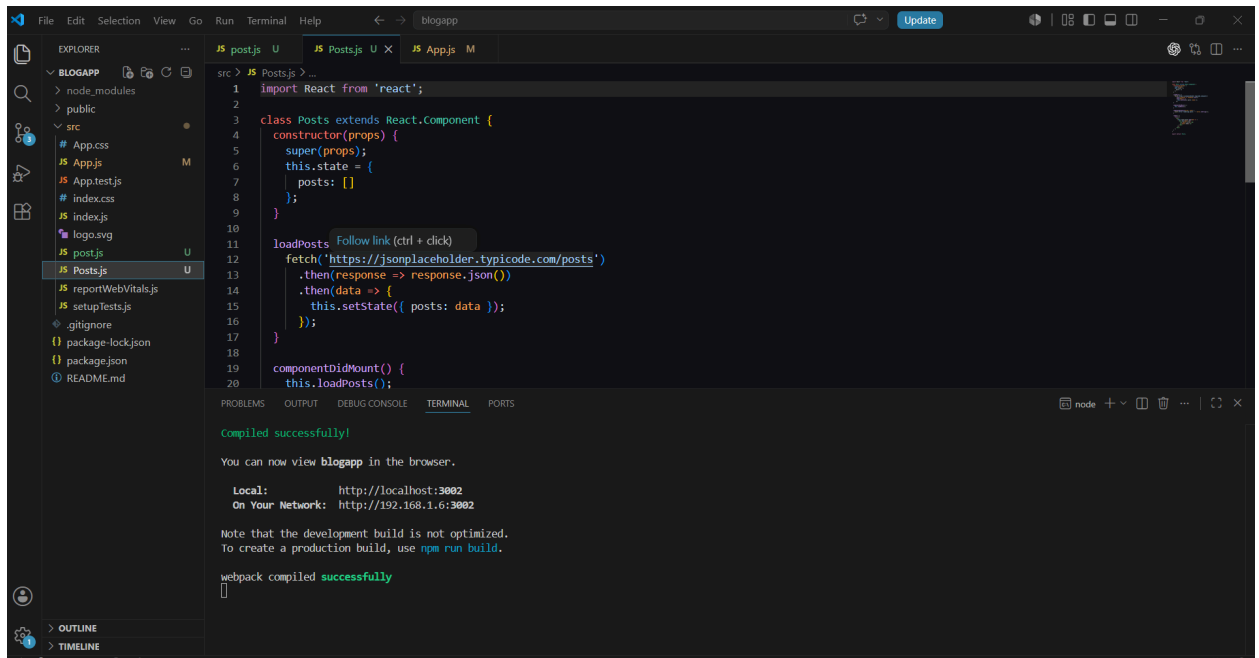

```
1 import React from 'react';
2
3 class Posts extends React.Component {
4   constructor(props) {
5     super(props);
6     this.state = {
7       posts: []
8     };
9   }
10
11   loadPosts() {
12     fetch('https://jsonplaceholder.typicode.com/posts')
13       .then(response => response.json())
14       .then(data => {
15         this.setState({ posts: data });
16       });
17   }
18
19   componentDidMount() {
20     this.loadPosts();
21   }
22 }
```

Compiled successfully!

You can now view blogapp in the browser.

Local: http://localhost:3002
On Your Network: http://192.168.1.6:3002

Note that the development build is not optimized.
To create a production build, use `npm run build`.

webpack compiled successfully

sunt aut facere repellat provident occaecati excepturi optio reprehenderit

quia et suscipit suscipit recusandae consequuntur expedita et cum reprehenderit molestiae ut ut quas totam nostrum rerum est autem sunt rem eveniet architecto

qui est esse

est rerum tempore vitae sequi sint nihil reprehenderit dolor beatae ea dolores neque fugiat blanditiis voluptate porro vel nihil molestiae ut reiciendis qui aperiam non debitis possimus qui neque nisi nulla

ea molestias quasi exercitationem repellat qui ipsa sit aut

et iusto sed quo iure voluptatem occaecati omnis eligendi aut ad voluptatem doloribus vel accusantium quis pariatur molestiae porro eius odio et labore et velit aut

eum et est occaecati

ullam et saepe reiciendis voluptatem adipisci sit amet autem assumenda provident rerum culpa quis hic commodi nesciunt rem tenetur doloremque ipsam iure quis sunt voluptatem rerum illo velit

nesciunt quas odio

repudiandae veniam quaerat sunt sed alias aut fugiat sit autem sed est voluptatem omnis possimus esse voluptatibus quis est aut tenetur dolor neque

dolorem eum magni eos aperiam quia

5. ReactJS-HOL

```
src > JS App.js > default
1 import React from 'react';
2 import CohortDetails from './components/CohortDetails';
3
4 function App() {
5   return (
6     <div>
7       <CohortDetails />
8     </div>
9   );
10 }
11
12 export default App;
```

compiled successfully!

You can now view cohortdetailsapp in the browser.

Local: http://localhost:3000
On Your Network: http://192.168.1.6:3000


Note that the development build is not optimized.
To create a production build, use `npm run build`.

webpack compiled successfully

Cohorts Details

INTADMDF10 -.NET FSD	ADM21JF014 -Java FSD	CDBJF21025 -Java FSD
Started On 22-Feb-2022	Started On 10-Sep-2021	Started On 24-Dec-2021
Current Status Scheduled	Current Status Ongoing	Current Status Ongoing
Coach Aathma	Coach Apoorv	Coach Aathma
Trainer Jojo Jose	Trainer Elisa Smith	Trainer John Doe

9. ReactJS-HOL

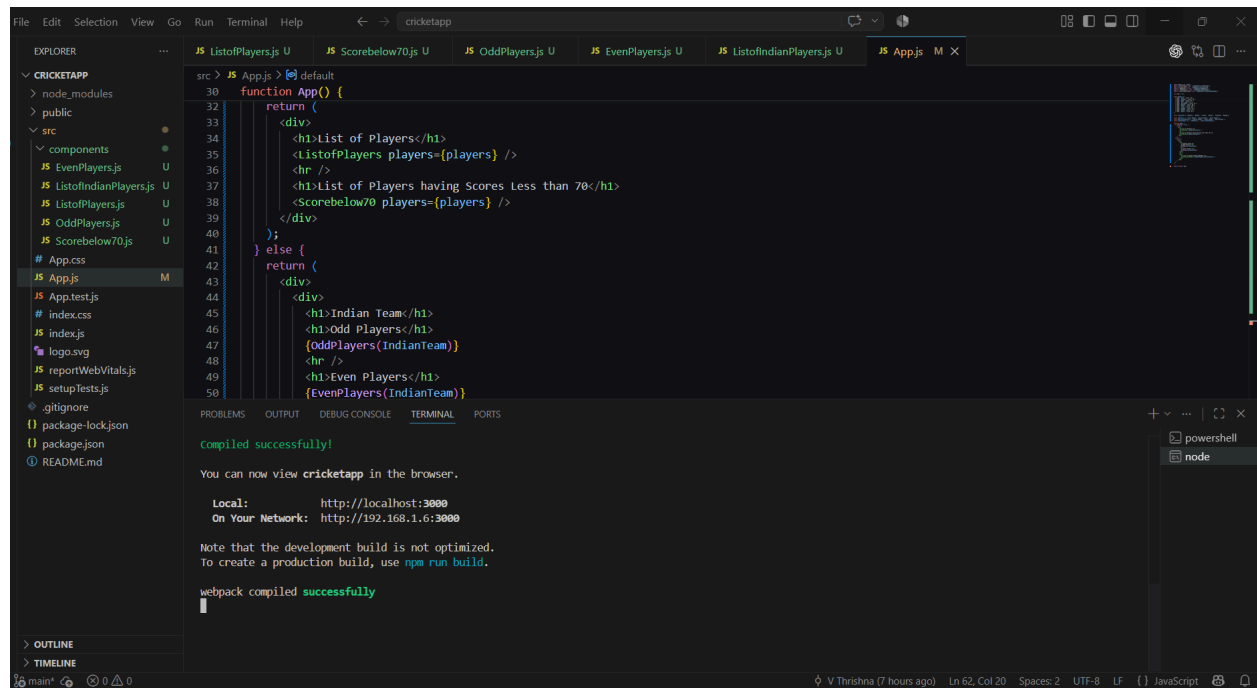

The screenshot shows the VS Code editor with the `App.js` file open. The file contains the following code:

```
src > JS Appjs > default
30 function App() {
31   return (
32     <div>
33       <h1>List of Players</h1>
34       <ListofPlayers players={players} />
35       <hr />
36       <h1>List of Players having Scores Less than 70</h1>
37       <Scorebelow70 players={players} />
38     </div>
39   );
40 }
41
42 } else {
43   return (
44     <div>
45       <h1>Indian Team</h1>
46       <h1>Odd Players</h1>
47       <OddPlayers(IndianTeam)>
48       <hr />
49       <h1>Even Players</h1>
50       <EvenPlayers(IndianTeam)>
51     </div>
52   );
53 }
```

The terminal output shows the following messages:

```
Compiled successfully!
You can now view cricketapp in the browser.
Local: http://localhost:3000
On Your Network: http://192.168.1.6:3000
Note that the development build is not optimized.
To create a production build, use npm run build.
webpack compiled successfully
```


List of Players

Mr. Jack 50
Mr. Michael 70
Mr. John 40
Mr. Ann 61
Mr. Elisabeth 61
Mr. Sachin 95
Mr. Dhoni 100
Mr. Virat 84
Mr. Jadeja 64
Mr. Raina 75
Mr. Rohit 80

List of Players having Scores Less than 70

Mr. Jack 50
Mr. Michael 70
Mr. John 40
Mr. Ann 61
Mr. Elisabeth 61
Mr. Jadeja 64

10. ReactJS-HOL



Office Space, at Affordable Range



Name: DBS

Rent: Rs. 50000


Address: Chennai

Name: Tidel Park

Rent: Rs. 75000

Address: Coimbatore

11. ReactJS-HOL

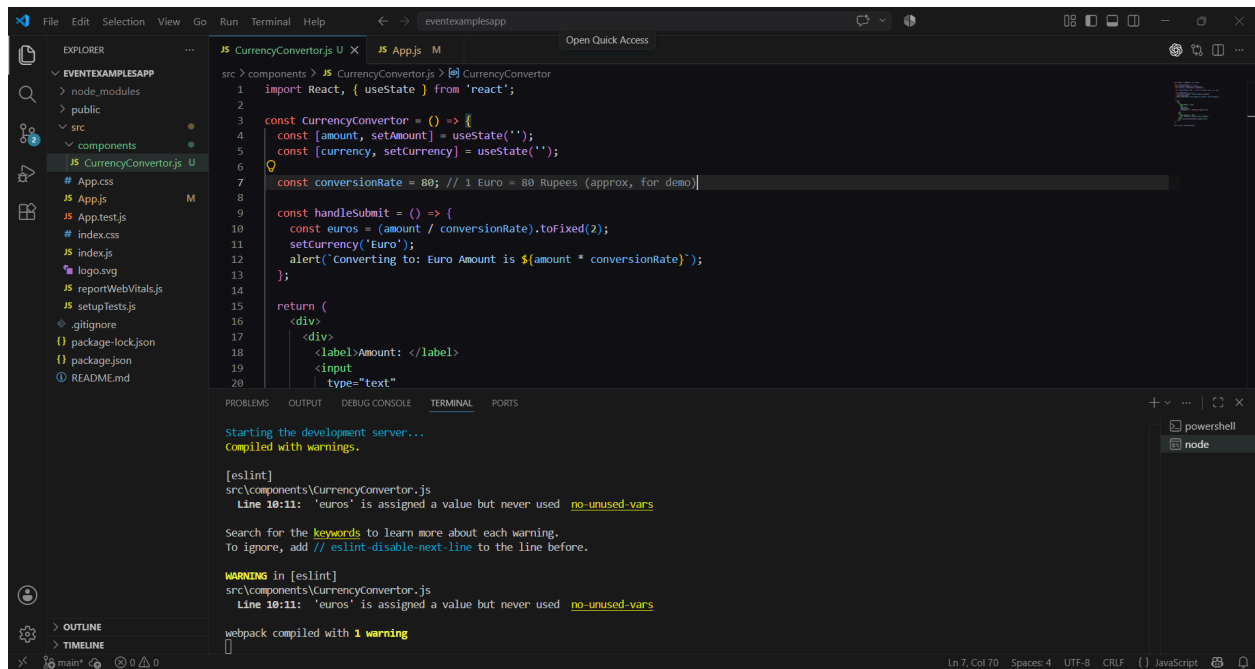

```
1 import React, { useState } from 'react';
2
3 const CurrencyConverter = () => {
4   const [amount, setAmount] = useState('');
5   const [currency, setCurrency] = useState('');
6
7   const conversionRate = 80; // 1 Euro = 80 Rupees (approx, for demo)
8
9   const handleSubmit = () => {
10     const euros = (amount / conversionRate).toFixed(2);
11     setCurrency('Euro');
12     alert('Converting to: Euro Amount is ${amount * conversionRate}');
13   };
14
15   return (
16     <div>
17       <label>Amount: </label>
18       <input
19         type="text"
```


Starting the development server...
Compiled with warnings.

[eslint]
src\components\CurrencyConverter.js
Line 10:11: 'euros' is assigned a value but never used [no-unused-vars](#)

Search for the [keywords](#) to learn more about each warning.
To ignore, add `// eslint-disable-next-line` to the line before.

WARNINGS in [eslint]
src\components\CurrencyConverter.js
Line 10:11: 'euros' is assigned a value but never used [no-unused-vars](#)

webpack compiled with 1 **warning**



5

Increment Decrement Say welcome Click on me

Currency Converter!!!

Amount:

Currency:

12. ReactJS-HOL

```
src > JS App.js > App > render
5 class App extends React.Component {
6   constructor(props) {
7     this.state = {
8       isLoggedIn: false
9     };
10    this.handleLogin = this.handleLogin.bind(this);
11    this.handleLogout = this.handleLogout.bind(this);
12  }
13  handleLogin() {
14    this.setState({ isLoggedIn: true });
15  }
16  handleLogout() {
17    this.setState({ isLoggedIn: false });
18  }
19  render() {
20    return (
21      <div className="App">
22        <h1>Flight Ticket Booking</h1>
23        <button onClick={this.handleLogout}>Logout</button>
24        : (
25          <button onClick={this.handleLogin}>Login</button>
26        )
27        {this.state.isLoggedIn ? <UserPage /> : <GuestPage />}
28      </div>
29    );
30  }
31}
```

The terminal at the bottom shows the following output:

```
On Your Network: http://192.168.1.6:3003
Note that the development build is not optimized.
To create a production build, use npm run build.
webpack compiled successfully
```

Flight Ticket Booking

Login

Available Flights

Chennai → Bangalore : Rs. 3500


Chennai → Mumbai : Rs. 5200

Chennai → Delhi : Rs. 6800

Login to book a ticket.



13. ReactJS-HOL

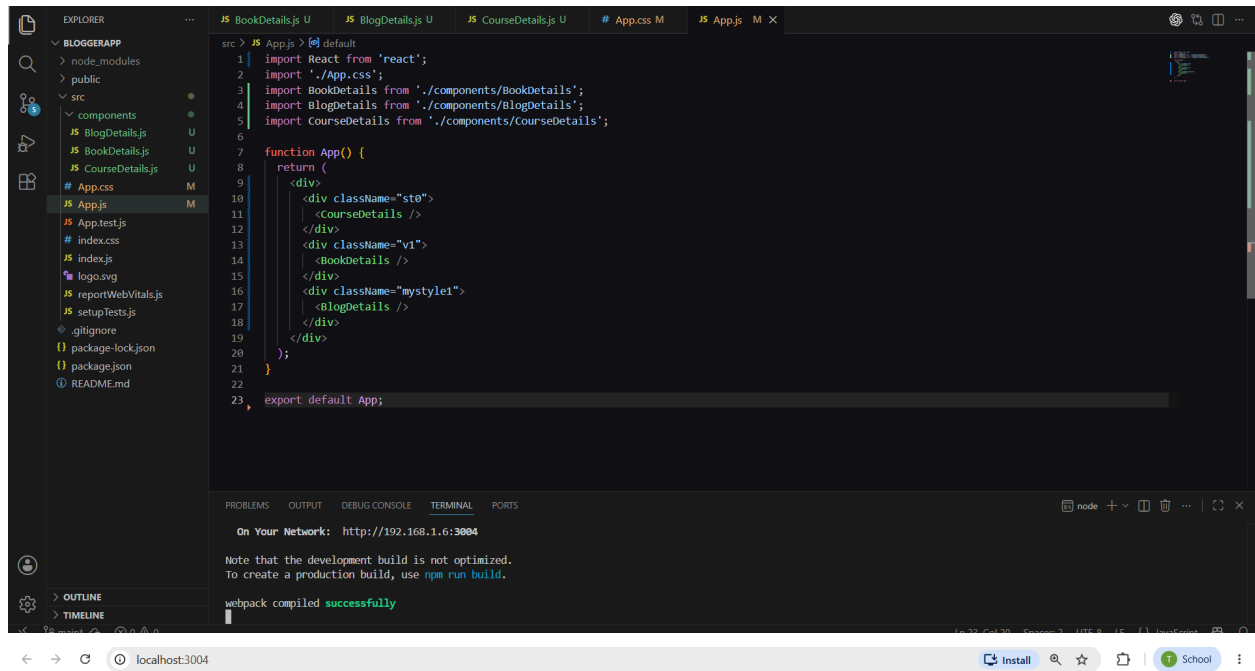

Course Details

Angular

4/5/2021

React

6/1/2020

Book Details

Master React

670

Deep Dive into Angular 11

800

Mongo Essentials

450

Blog Details

React Learning

Stephen Bo

Welcome to learning React!

Installation

Schwarzdenier

You can install React from npm.