

```
import cv2
import numpy as np
from google.colab.patches import cv2_imshow

# Open the video
cap = cv2.VideoCapture("/content/demonslayer.mp4")

# Define ROI and target points
roi_points = np.float32([
    [150, 200],
    [450, 200],
    [550, 500],
    [50, 500]
])

target_points = np.float32([
    [0, 0],
    [400, 0],
    [400, 600],
    [0, 600]
])

# Perspective transformation matrix
M = cv2.getPerspectiveTransform(roi_points, target_points)

while True:
    ret, frame = cap.read()

    if not ret:
        print("Video Finished!")
        break

    # Apply perspective transformation
    dst = cv2.warpPerspective(frame, M, (400, 600))

    # Display original frame
    print("Original Frame")
    cv2_imshow(frame)

    # Display transformed frame
    print("Transformed Frame")
    cv2_imshow(dst)

    # Stop after first frame in Colab
    break


cap.release()

print("Perspective transformation completed successfully!")
```

Original Frame



Transformed Frame

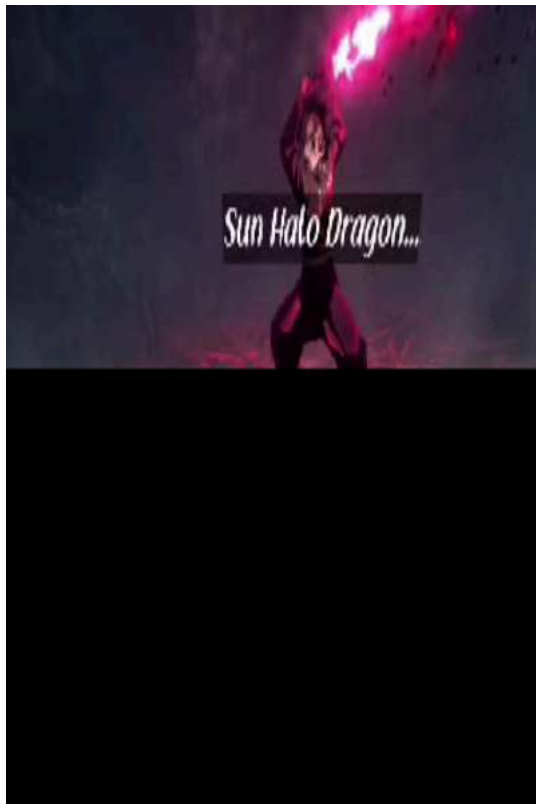

Perspective transformation completed successfully!

