


Basic egress gateway




The cluster has dedicated nodes with public IP addresses. These addresses are registered in the list of allowed addresses on the external service.

Basic egress gateway

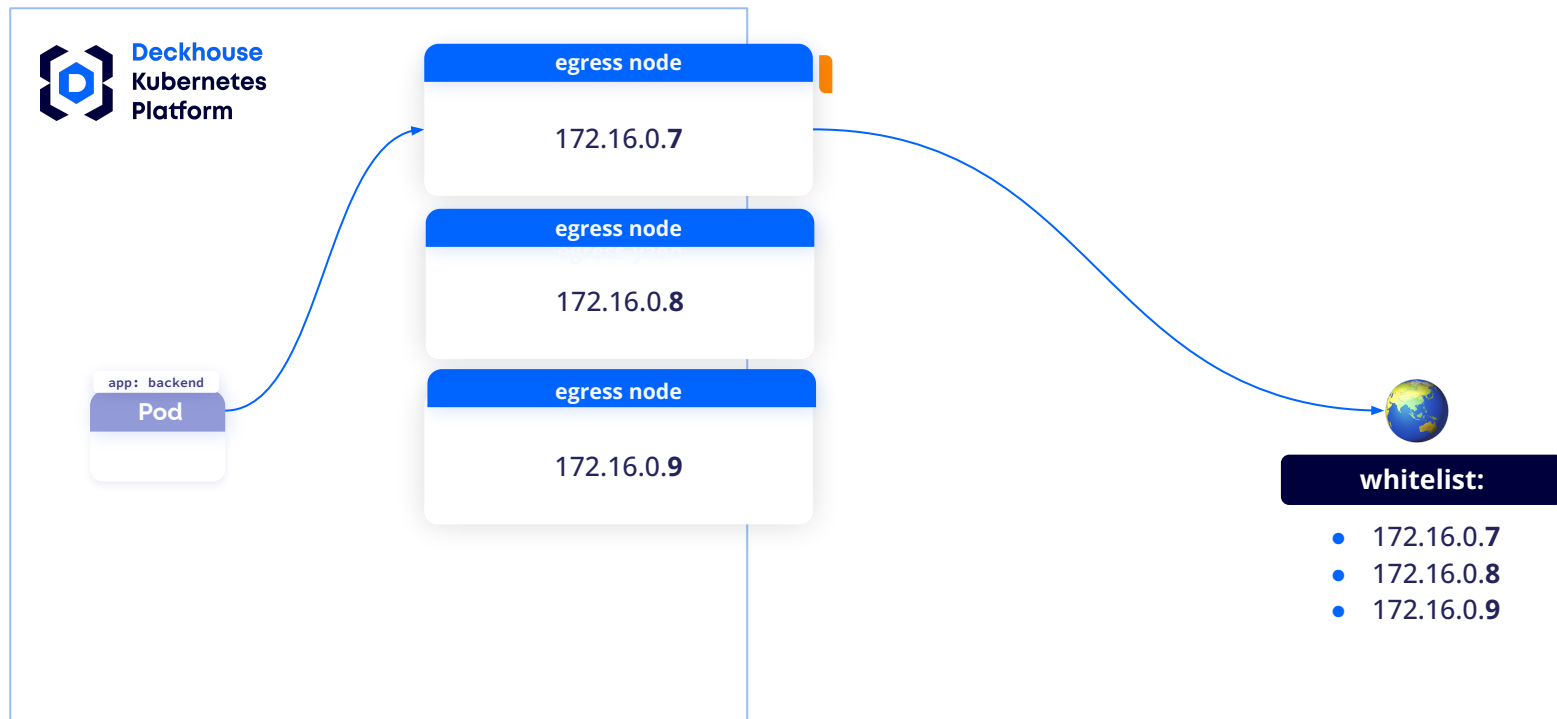


The platform assigns a master node. Outgoing requests to an external service are routed through this node.

Basic egress gateway

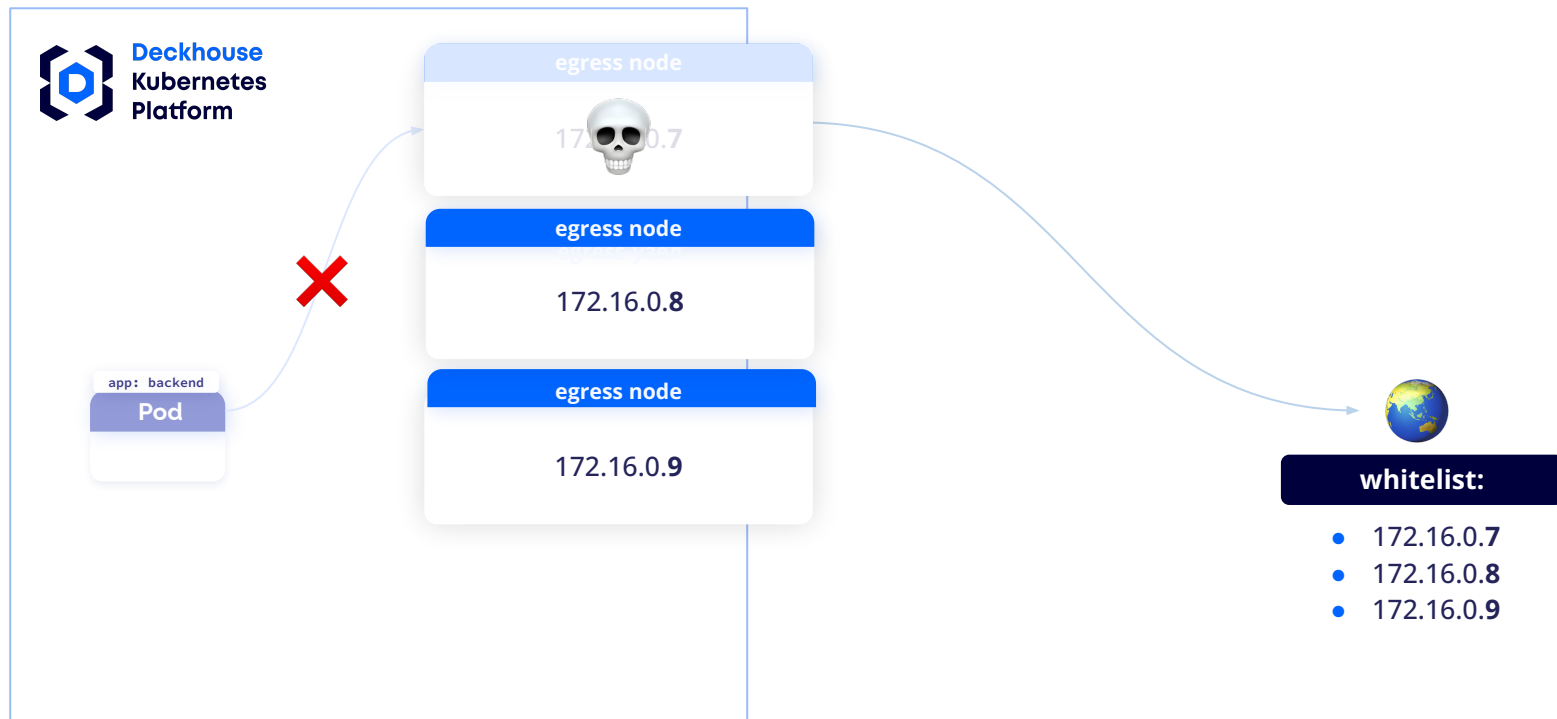


If the main node fails, all current connections are interrupted

Basic egress gateway

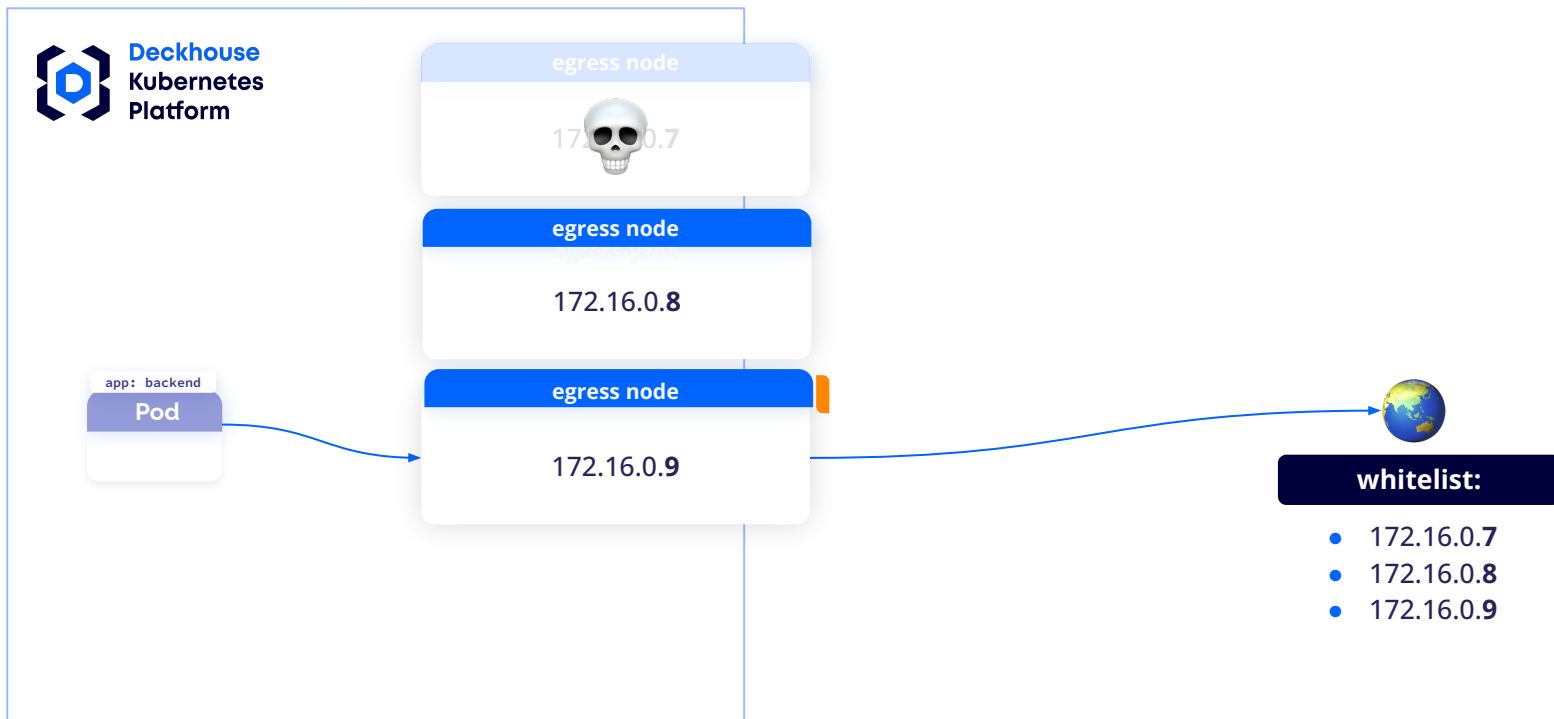

... and a new master node will be elected among the remaining worker nodes through which traffic will flow.

Basic egress gateway

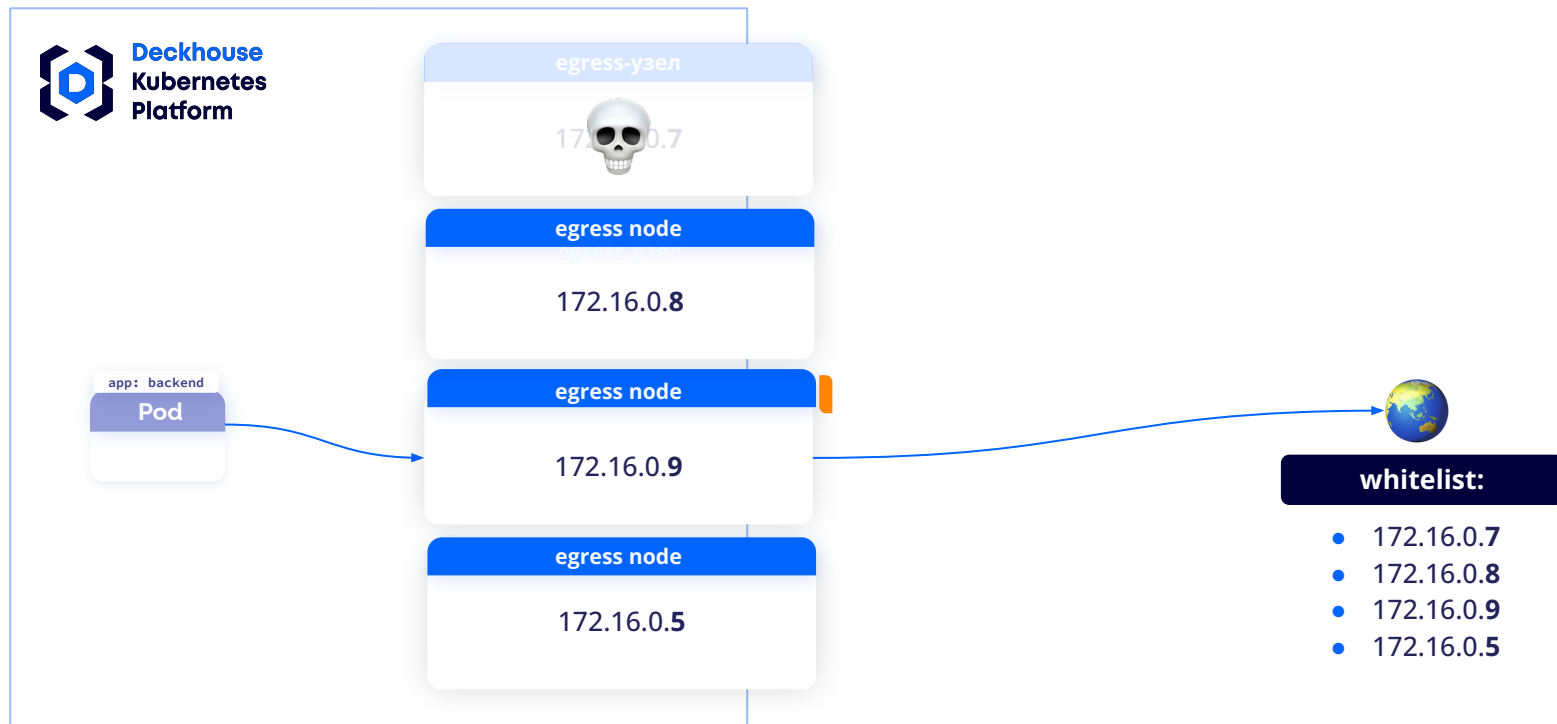

If a new egress node is to be added, its public address must be added to the whitelist on the external service.