Vadim Procik – B0013224 - Task 4: GraphQL implementations

Example 1: Two components that are printed to the console is first all the result, and then a subset of the result where we extract the patron.

```python
class Patron(graphene.ObjectType):
        name = graphene.String()
        age = graphene.Int()

class Query(graphene.ObjectType):
        patron = graphene.Field(Patron)
        def resolve_patron(root, info):
                return Patron(id=1, name="Syrus", age=27)

schema = graphene.Schema(query=Query)
query = """
        query something{
        patron {
            id
            name
            age
}
}
"""

result = schema.execute(query)
print(result)
print(result.data["patron"])
```

OUTPUT DEBUG CONSOLE TERMINAL 1 PORTS SEARCH ERROR

TERMINAL

```
ExecutionResult(data={'patron': {'id': '1', 'name': 'Syrus', 'age': 27}}, errors=None)
{'id': '1', 'name': 'Syrus', 'age': 27}
```

Example 2: Query does not have a name like, we want product3 and only the title and the id from it.

example2.py > ...

```python
# Mapping values to Products
class Query(graphene.ObjectType):
        product = graphene.Field(Product)
        def resolve_product1(root, info):
                return Product(id=1, title="Apple", cost="2.0")
        product2 = graphene.Field(Product)
        def resolve_product2(root, info):
                return Product(id=2, title="Ham", cost="1.0")
        product3 = graphene.Field(Product)
        def resolve_product3(root, info):
                return Product(id=3, title="Juice", cost="4.2")

schema = graphene.Schema(query=Query)
query = """
    {
        product3 {
        id
        title
    }
}
"""
result = schema.execute(query)
print(result)
```

TPUT DEBUG CONSOLE TERMINAL 2 PORTS SEARCH ERROR

TERMINAL

```
example2.py
ExecutionResult(data={'product3': {'id': '3', 'title': 'Juice'}}, errors=None)
```

Example 3: example3.py reads the schema and seen that the
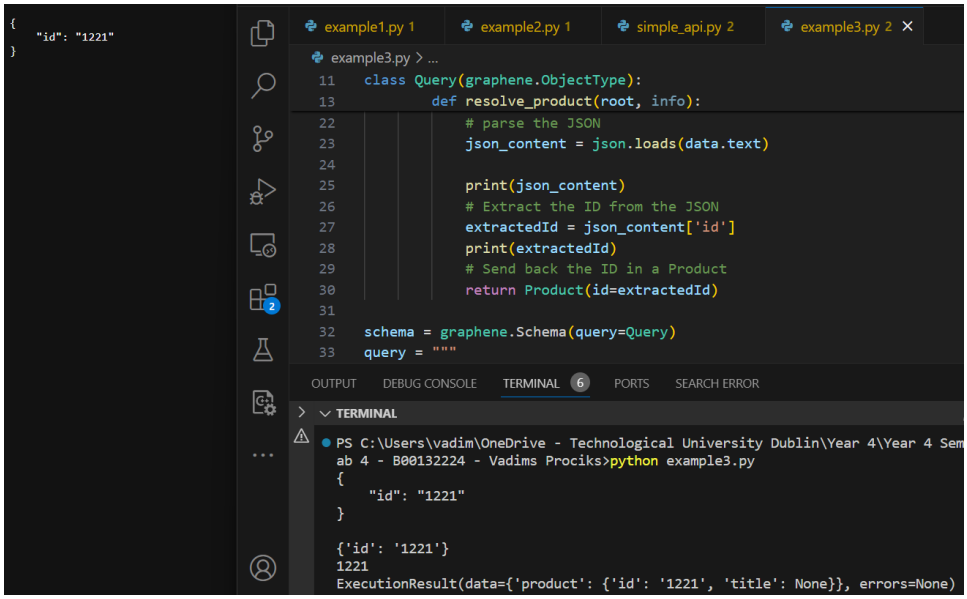
ID we want is on the API /getProducts page. It made a query to this page and then returned the value to us.