

Telegram connection returns an API error

CQ-2 | Bug report with linked test scenario TC-TG-CONNECT-001

Observed: the connection request returns HTTP 400 with telegram_api_failed; the channel remains disconnected.

Reported severity / priority	Major / High	Reported status	To Do
Observed attempts	3/3 (reporter-supplied)	Test outcome	Connection failed
Environment / role	Staging / Head of Sales	Client	Windows 11 / Chrome 154
Sample build	2026.10.03-417	UI / request locale	English / uk

Impact

Telegram channel setup cannot be completed in the observed session. No workaround is confirmed.

Preconditions and evidence limit

The user is signed in, can open the connection dialog, and Telegram is disconnected. A BotFather-issued token is available. Token validity was not independently verified. Successful connection also depends on permissions and Telegram API availability.

Test scenario / reproduction

#	Action	Expected checkpoint
1	Open Chats > Telegram.	Telegram setup is accessible.
2	Click Connect Telegram.	The connection dialog opens.
3	Enter the BotFather-issued token. Select the same user for Sales owner and Support owner.	Required fields are populated.
4	Click Connect Telegram in the dialog.	With valid credentials and available dependencies, the bot connects and appears as a connected channel.

Actual result

HTTP 400; the dialog stays open and Telegram remains disconnected. UI message: "Telegram API is temporarily unavailable. Try again."

Triage assessment

The failed attempt is documented. A product defect and its root cause are not yet isolated: validate the token and inspect the upstream Telegram response before assigning a cause.

Evidence and investigation

CQ-2 | Captured UI, request details and follow-up checks

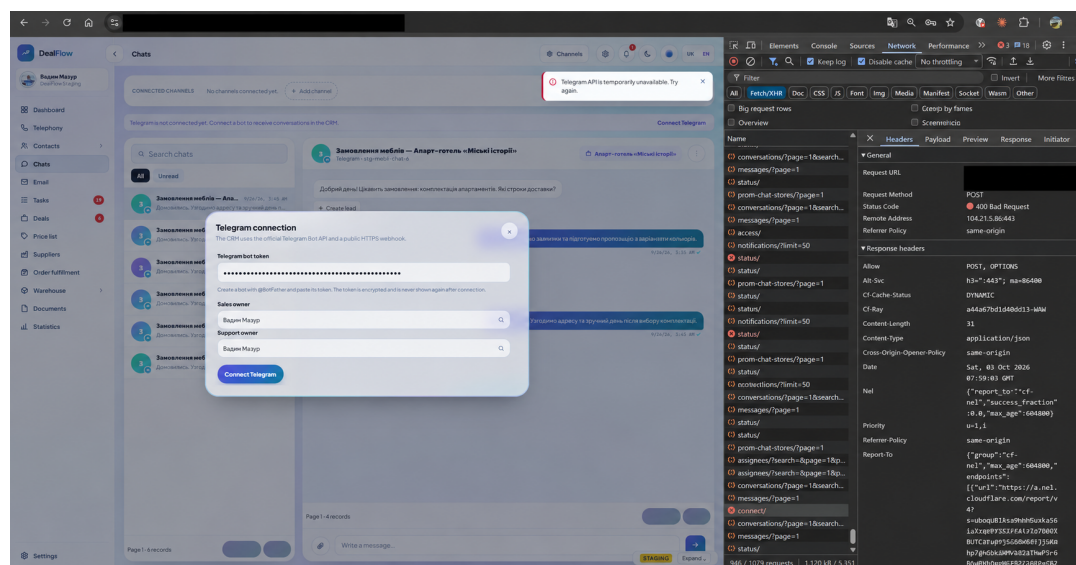


Figure 1. Connection dialog, error notification and HTTP 400. Original screenshot with masked URLs; redactions are preserved.

Request / POST /api/chats/telegram/connect/

Content-Type: application/json

```
{
  "token": "<REDACTED>",
  "sales_responsible_user_id": "<TEST_USER_ID>",
  "support_responsible_user_id": "<TEST_USER_ID>",
  "default_locale": "uk"
}
```

Reported response / HTTP 400

```
{ "error": "telegram_api_failed" }
```

Both owner fields reference the same user. Response body and the 3/3 attempt count were supplied by the reporter; they were not independently re-executed for this edition.

Next investigation steps / not executed

1. Verify token validity using an approved test bot.
2. Inspect backend logs and the upstream Telegram response without exposing credentials.
3. Repeat the scenario with a known-valid bot and confirm whether the failure persists.

Confirmation and regression / not executed

After resolution, verify that connection survives a refresh and incoming messages arrive. Check invalid-token feedback, retry without duplicate channels, and absence of tokens in errors or logs.

Evidence reference

Source capture: CQ-2; Oct 3, 2026, 12_14_05 PM.png. Sample build and original execution metadata are retained from the supplied report.