luv2code

Angular - Behind the Scenes

Angular

© luv2code LLC

Angular

- When we run the Angular app ... how is it loaded?

© luv2code LLC

Loading Angular App

© luv2code LLC

Loading Angular App

File: src/index.html

```
<!doctype html>
<html lang="en">
...
<body>

  <app-root></app-root>

</body>
</html>
```


© luv2code LLC

Loading Angular App

File: src/index.html

```
<!doctype html>
<html lang="en">
...
<body>

  <app-root></app-root>

</body>
</html>
```

Replace this tag / selector with the template of the component

(similar to an "include")

© luv2code LLC

Loading Angular App

File: src/index.html

```html
<!doctype html>
<html lang="en">
...
<body>

  <app-root></app-root>

</body>
</html>
```

File: src/app/app.component.ts

```typescript
import { Component } from '@angular/core';

@Component({
  selector: 'app-root',
  templateUrl: './app.component.html',
  styleUrls: ['./app.component.css']
})
export class AppComponent {
  title = 'my-first-angular-project';
}
```


© luv2code LLC

Loading Angular App

File: src/index.html

```
<!doctype html>
<html lang="en">
...
<body>

  <app-root></app-root>

</body>
</html>
```

1

File: src/app/app.component.ts

```
import { Component } from '@angular/core';

@Component({
  selector: 'app-root',
  templateUrl: './app.component.html',
  styleUrls: ['./app.component.css']
})
export class AppComponent {
  title = 'my-first-angular-project';
}
```


© luv2code LLC

Loading Angular App

File: src/index.html

```
<!doctype html>
<html lang="en">
...
<body>

  <app-root></app-root>

</body>
</html>
```

1

File: src/app/app.component.ts

```
import { Component } from '@angular/core';

@Component({
  selector: 'app-root',
  templateUrl: './app.component.html',
  styleUrls: ['./app.component.css']
})
export class AppComponent {
  title = 'my-first-angular-project';
}
```

File: src/app/app.component.html

```
<span>{{ title }} app is running! YES YES SUCCESS!!!</span>
```


© luv2code LLC

Loading Angular App

File: src/index.html

```
<!doctype html>
<html lang="en">
...
<body>

  <app-root></app-root>

</body>
</html>
```

1

File: src/app/app.component.ts

```
import { Component } from '@angular/core';

@Component({
  selector: 'app-root',
  templateUrl: './app.component.html',
  styleUrls: ['./app.component.css']
})
export class AppComponent {
  title = 'my-first-angular-project';
}
```

2

File: src/app/app.component.html

```
<span>{{ title }} app is running! YES YES SUCCESS!!!</span>
```


© luv2code LLC

Loading Angular App

File: src/index.html

```
<!doctype html>
<html lang="en">
...
<body>

  <app-root></app-root>

</body>
</html>
```

File: src/app/app.component.ts

```
import { Component } from '@angular/core';

@Component({
  selector: 'app-root',
  templateUrl: './app.component.html',
  styleUrls: ['./app.component.css']
})
export class AppComponent {
  title = 'my-first-angular-project';
}
```

File: src/app/app.component.html

```
<span>{{ title }} app is running! YES YES SUCCESS!!!</span>
```


© luv2code LLC

Loading Angular App

File: src/index.html

```
<!doctype html>
<html lang="en">
...
<body>

  <app-root></app-root>
```

File: src/app/app.component.ts

```
import { Component } from '@angular/core';

@Component({
  selector: 'app-root',
  templateUrl: './app.component.html',
  styleUrls: ['./app.component.css']
})
export class AppComponent {
  title = 'my-first-angular-project';
}
```

1

2

3

Read this property from the TypeScript class

File: src/app/app.component.html

```
<span>{{ title }} app is running! YES YES SUCCESS!!!</span>
```


© luv2code LLC

Loading Angular App

File: src/index.html

```
<!doctype html>
<html lang="en">
...
<body>

  <app-root></app-root>

</body>
</html>
```

File: src/app/app.component.ts

```
import { Component } from '@angular/core';

@Component({
  selector: 'app-root',
  templateUrl: './app.component.html',
  styleUrls: ['./app.component.css']
})
export class AppComponent {
  title = 'my-first-angular-project';
}
```

File: src/app/app.component.html

```
<span>{{ title }} app is running! YES YES SUCCESS!!!</span>
```


© luv2code LLC

Loading Angular App

File: src/index.html

```
<!doctype html>
<html lang="en">
...
<body>

  <app-root></app-root>

</body>
```

1

File: src/app/app.component.ts

```
import { Component } from '@angular/core';

@Component({
  selector: 'app-root',
  templateUrl: './app.component.html',
  styleUrls: ['./app.component.css']
})
export class AppComponent {
  title = 'my-first-angular-project';
}
```

2

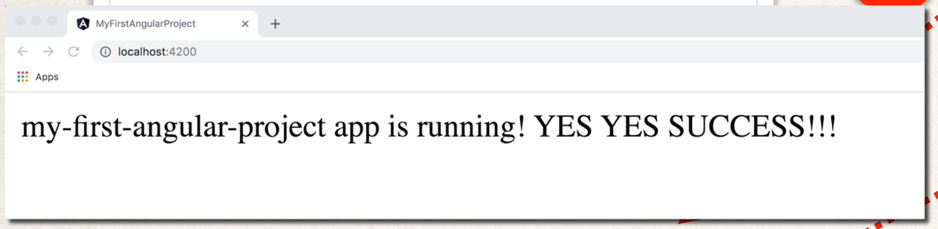

3

File: src/app/app.component.html

```
<span>{{ title }} app is running! YES YES SUCCESS!!!</span>
```


© luv2code LLC

Loading Angular App

File: src/index.html

```
<!doctype html>
<html lang="en">
...
<body>

  <app-root></app-root>

</body>
```

File: src/app/app.component.ts

```
import { Component } from '@angular/core';

@Component({
  selector: 'app-root',
  templateUrl: './app.component.html',
  styleUrls: ['./app.component.css']
})
export class AppComponent {
  title = 'my-first-angular-project';
}
```

1

2

3

4

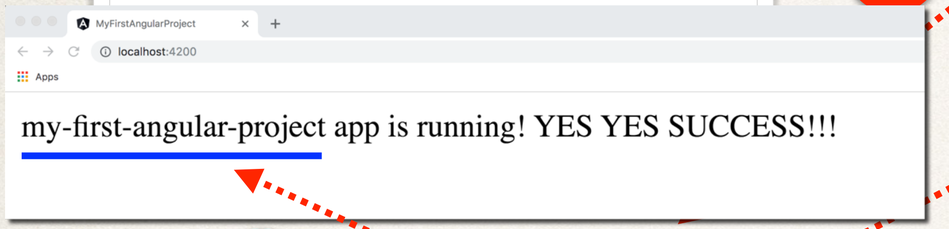

File: src/app/app.component.html

```
<span>{{ title }} app is running! YES YES SUCCESS!!!</span>
```


© luv2code LLC