```
C:\Users\VAHIDA>set path=C:\Program Files (x86)\GnuWin32\bin

C:\Users\VAHIDA>flex mobile.l.txt

C:\Users\VAHIDA>set path=C:\Program Files (x86)\MinGW\bin

C:\Users\VAHIDA>gcc lex.yy.c

C:\Users\VAHIDA>a

Enter Mobile Number: 9090909090909

Mobile Number Invalid

9948778030

Mobile Number Valid
```

```
C:\Users\VAHIDA>flex number.l.txt

C:\Users\VAHIDA>set path=C:\Program Files (x86)\MinGW\bin

C:\Users\VAHIDA>gcc lex.yy.c

C:\Users\VAHIDA>a

Enter  Number: 90808900

 Number Invalid

anj090

 Number Invalid
```

```
C:\Users\VAHIDA>set path=C:\Program Files (x86)\GnuWin32\bin

C:\Users\VAHIDA>flex email.l.txt

C:\Users\VAHIDA>set path=C:\Program Files (x86)\MinGW\bin

C:\Users\VAHIDA>gcc lex.yy.c

C:\Users\VAHIDA>a
vahida@gmail.com
Valid Email Address

jsdiudndo.com
Invalid Email Address

```

```
C:\Users\VAHIDA>set path=C:\Program Files (x86)\GnuWin32\bin

C:\Users\VAHIDA>flex identifier.l.txt

C:\Users\VAHIDA>set path=C:\Program Files (x86)\MinGW\bin

C:\Users\VAHIDA>gcc lex.yy.c

C:\Users\VAHIDA>a
Enter an identifier: 1huj
Invalid Identifier

huj
Valid Identifier
```

```
C:\Users\VAHIDA>set path=C:\Program Files (x86)\GnuWin32\bin

C:\Users\VAHIDA>flex token.l.txt

C:\Users\VAHIDA>set path=C:\Program Files (x86)\MinGW\bin

C:\Users\VAHIDA>gcc lex.yy.c

C:\Users\VAHIDA>a
Enter an expression:
vahia is good
Identifier: vahia
Identifier: is
Identifier: good
vahida has 2 mems and +1+1 person
Identifier: vahida
Identifier: has
Number: 2
Identifier: mems
Identifier: and
Operator/Symbol: +
Number: 1
Operator/Symbol: +
Number: 1
Identifier: person
```

```
C:\Users\VAHIDA>set path=C:\Program Files (x86)\GnuWin32\bin

C:\Users\VAHIDA>flex vowel.l.txt
flex: can't open vowel.l.txt

C:\Users\VAHIDA>flex vowels.l.txt

C:\Users\VAHIDA>set path=C:\Program Files (x86)\MinGW\bin

C:\Users\VAHIDA>gcc lex.yy.c

C:\Users\VAHIDA>a
vahida
Vowels = 3
Consonants = 3


C:\Users\VAHIDA>
```

```
C:\Users\VAHIDA>flex posneg.l.txt

C:\Users\VAHIDA>set path=C:\Program Files (x86)\MinGW\bin

C:\Users\VAHIDA>gcc lex.yy.c

C:\Users\VAHIDA>a
+9 -1 +999 +12 -180
+Positive number Negative number +Positive number +Positive number Negative number
0909
Positive number
```

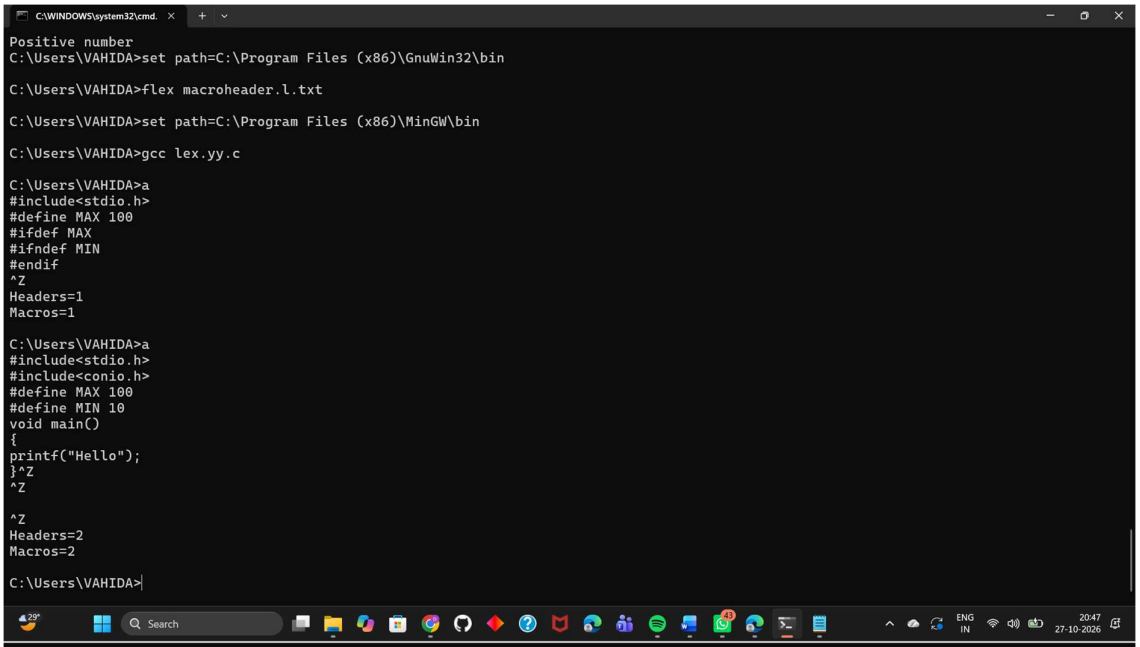


```
C:\Users\VAHIDA>set path=C:\Program Files (x86)\GnuWin32\bin

C:\Users\VAHIDA>flex comment.l.txt

C:\Users\VAHIDA>set path=C:\Program Files (x86)\MinGW\bin

C:\Users\VAHIDA>gcc lex.yy.c

C:\Users\VAHIDA>a
#include<stdio.h>
#include<stdio.h>int m=0,h=0; /* Counters */
int m=0,h=0; %%
%%"#define"  {m++;}  /* Macro count */
"#define"  {m++;}  "#include" {h++;} /* Header count */
"#include" {h++;} %%
%%int main()
int main(){
{    yylex();
    yylex();    printf("Macros=%d Headers=%d",m,h);
    printf("Macros=%d Headers=%d",m,h);}
}int yywrap(){return 1;}
```

```
C:\Users\VAHIDA>set path=C:\Program Files (x86)\GnuWin32\bin

C:\Users\VAHIDA>flex upperlower.l.txt

C:\Users\VAHIDA>set path=C:\Program Files (x86)\MinGW\bin

C:\Users\VAHIDA>gcc lex.yy.c

C:\Users\VAHIDA>a
VahiDAAADdjhyuAAAOPLI
^Z
Uppercase=13
Lowercase=8

C:\Users\VAHIDA>
```


```
C:\Users\VAHIDA>set path=C:\Program Files (x86)\GnuWin32\bin

C:\Users\VAHIDA>flex addline.l.txt

C:\Users\VAHIDA>set path=C:\Program Files (x86)\MinGW\bin

C:\Users\VAHIDA>gcc lex.yy.c

C:\Users\VAHIDA>a
```

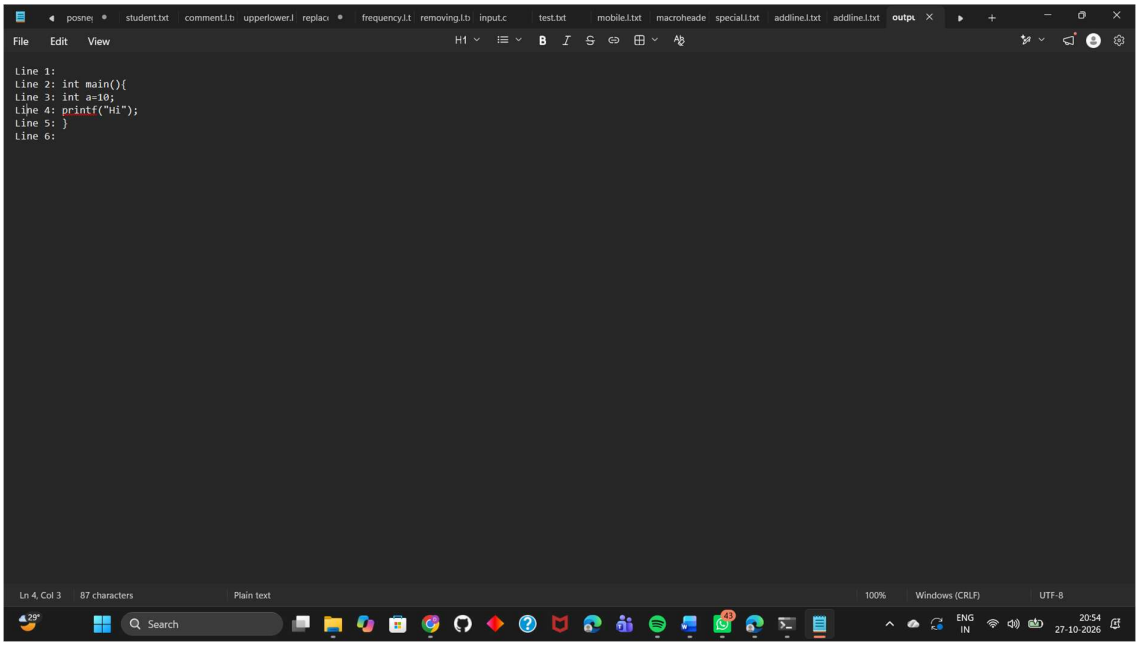

```
C:\Users\VAHIDA>set path=C:\Program Files (x86)\GnuWin32\bin

C:\Users\VAHIDA>flex replace.l.txt

C:\Users\VAHIDA>set path=C:\Program Files (x86)\MinGW\bin

C:\Users\VAHIDA>gcc lex.yy.c

C:\Users\VAHIDA>a
Enter a sentence:
cat has toy
dog has toy
```

```
C:\Users\VAHIDA>set path=C:\Program Files (x86)\GnuWin32\bin

C:\Users\VAHIDA>flex frequency.l.txt

C:\Users\VAHIDA>set path=C:\Program Files (x86)\MinGW\bin

C:\Users\VAHIDA>gcc lex.yy.c

C:\Users\VAHIDA>a
Enter a sentence:
vahia has apple and cat apple is very tasty tast has limit
z
^Z
vahia = 1
has = 2
apple = 2
and = 1
cat = 1
is = 1
very = 1
tasty = 1
tast = 1
limit = 1
z = 1

C:\Users\VAHIDA>
```

```
C:\Users\VAHIDA>set path=C:\Program Files (x86)\GnuWin32\bin

C:\Users\VAHIDA>flex removing.l.txt

C:\Users\VAHIDA>set path=C:\Program Files (x86)\MinGW\bin

C:\Users\VAHIDA>gcc lex.yy.c

C:\Users\VAHIDA>a
"#define"   { m++; }  /* Macro count */
"#define"{m++;}"#include" { h++; }  /* Header count */
"#include"{h++;}" "        ;         /* Ignore space */
"";\n         ;         /* Ignore newline */
```

```
C:\Users\VAHIDA>set path=C:\Program Files (x86)\GnuWin32\bin

C:\Users\VAHIDA>flex special.l.txt

C:\Users\VAHIDA>set path=C:\Program Files (x86)\MinGW\bin

C:\Users\VAHIDA>gcc lex.yy.c

C:\Users\VAHIDA>a
@#T$%^^%$^$vahida suhana@#$0-=dig
^Z
Special characters = 8
```

```
C:\Users\VAHIDA>set path=C:\Program Files (x86)\GnuWin32\bin


C:\Users\VAHIDA>flex operators.l.txt

C:\Users\VAHIDA>set path=C:\Program Files (x86)\MinGW\bin

C:\Users\VAHIDA>gcc lex.yy.c


C:\Users\VAHIDA>a
a+b-hui+m==b>5%m*
abhuimb5m
^Z
Arithmetic operators = 5
Relational operators = 2

C:\Users\VAHIDA>
```

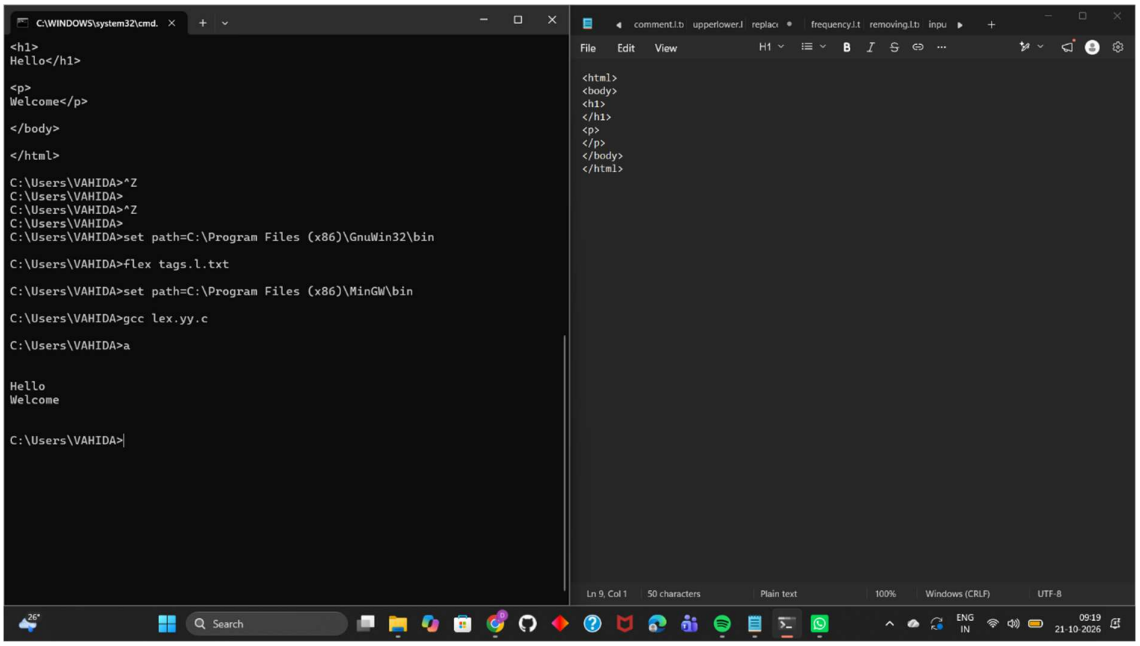
C:\WINDOWS\system32\cmd.
<h1>
Hello</h1>

Welcome
</body>
</html>
C:\Users\VAHIDA>^Z
C:\Users\VAHIDA>
C:\Users\VAHIDA>^Z
C:\Users\VAHIDA>
C:\Users\VAHIDA>set path=C:\Program Files (x86)\GnuWin32\bin
C:\Users\VAHIDA>flex tags.l.txt
C:\Users\VAHIDA>set path=C:\Program Files (x86)\MinGW\bin
C:\Users\VAHIDA>gcc lex.yy.c
C:\Users\VAHIDA>a
Hello
Welcome
C:\Users\VAHIDA>
File Edit View
<html>
<body>
<h1>
</h1>

</body>
</html>
Ln 9, Col 1
50 characters
Plain text
100%
Windows (CRLF)
UTF-8
Search
09:19
21-10-2026

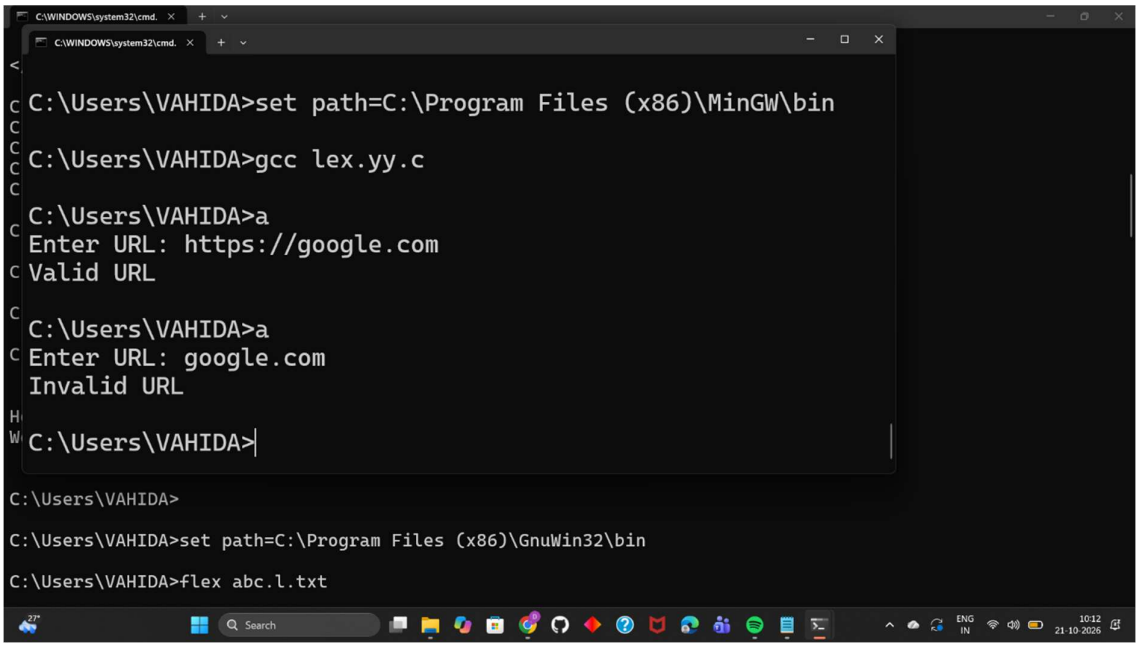
C:\WINDOWS\system32\cmd.
C:\Users\VAHIDA>set path=C:\Program Files (x86)\MinGW\bin
C:\Users\VAHIDA>gcc lex.yy.c
C:\Users\VAHIDA>a
Enter URL: https://google.com
Valid URL
C:\Users\VAHIDA>a
Enter URL: google.com
Invalid URL
C:\Users\VAHIDA>
C:\Users\VAHIDA>
C:\Users\VAHIDA>set path=C:\Program Files (x86)\GnuWin32\bin
C:\Users\VAHIDA>flex abc.l.txt
Search
10:12
21-10-2026