

# Image Filtering

```
In [1]: import cv2
import numpy as np
import matplotlib.pyplot as plt
from PIL import Image, ImageFilter
# from google.colab.patches import cv2_imshow
from skimage.filters import threshold_local
from matplotlib.gridspec import GridSpec
```

```
C:\Users\raval\anaconda3\Lib\site-packages\paramiko\transport.py:219: CryptographyDeprecationWarning: Blowfish has been deprecated
  "class": algorithms.Blowfish,
```

```
In [2]: original_image = cv2.imread(r"C:\Users\raval\Downloads\images\images\Lenna_(test_image).png")
```

```
In [3]: plt.imshow(original_image)
plt.axis('off') # Hide axis
plt.show()
```



## Image nosing

```
In [4]: if original_image is None:
    print("Error: Unable to load the image.")
else:
    def generate_film_grain(image):
        film_grain_noise = np.random.normal(loc=0, scale=20, size=image.shape).astype(np.uint8)
        return cv2.add(image, film_grain_noise)

    def generate_periodic(image):
        periodic_noise = np.zeros(image.shape, dtype=np.uint8)
        periodic_noise[::10, ::10, :] = 255
        return cv2.add(image, periodic_noise)

    def generate_speckle(image):
        speckle_noise = np.random.normal(loc=0, scale=0.1, size=image.shape) * 255
        return cv2.add(image, speckle_noise.astype(np.uint8))

    def generate_salt_and_pepper(image):
        salt_pepper_noise = np.random.choice([0, 255], size=image.shape[:2] + (image.shape[2],))
        return cv2.add(image, salt_pepper_noise)

    def generate_gaussian(image):
        gaussian_noise = np.random.normal(loc=0, scale=100, size=image.shape).astype(np.uint8)
        return cv2.add(image, gaussian_noise)

    noise_generators = {
        'Film Grain': generate_film_grain,
        'Periodic': generate_periodic,
        'Speckle': generate_speckle,
        'Salt-and-Pepper': generate_salt_and_pepper,
        'Gaussian': generate_gaussian
    }

    noisy_images = {noise_type: noise_generator(original_image) for noise_type, noise_generator in noise_generators.items()}

    # Display the original image and the five noisy images
    plt.figure(figsize=(20, 10))
    for i, (noise_type, noisy_image) in enumerate(noisy_images.items(), start=1):
        plt.subplot(1, len(noisy_images), i)
        plt.imshow(cv2.cvtColor(noisy_image, cv2.COLOR_BGR2RGB))
        plt.title(noise_type)
        plt.axis('off')
    plt.show()
```

```
In [5]: plt.figure(figsize=(20, 10))
for i, (noise_type, noisy_image) in enumerate(noisy_images.items(), start=1):
    plt.subplot(1, len(noisy_images), i)
    plt.imshow(cv2.cvtColor(noisy_image, cv2.COLOR_BGR2RGB))
    plt.title(noise_type)
    plt.axis('off')
plt.show()
```



# Linear Filtering

## Box Filter

```
In [6]: def apply_box_filter(image):
    return cv2.boxFilter(image, -1, (5, 5))

plt.figure(figsize=(8, 15))

for noise_type, noisy_image in noisy_images.items():
    plt.subplot(len(noisy_images), 2, 2*(list(noisy_images.keys()).index(noise_type)) + 1)
    plt.imshow(cv2.cvtColor(noisy_image, cv2.COLOR_BGR2RGB))
    plt.title(noise_type + ' Noisy', fontsize=12)
    plt.axis('off')


    box_filtered = apply_box_filter(noisy_image)

    plt.subplot(len(noisy_images), 2, 2*(list(noisy_images.keys()).index(noise_type)) + 2)
    plt.imshow(cv2.cvtColor(box_filtered, cv2.COLOR_BGR2RGB))
    plt.title(noise_type + ' Box Filtered', fontsize=12)
    plt.axis('off')


plt.tight_layout()
plt.savefig('box_filter_ppt.png', bbox_inches='tight')
plt.show()
```



Film Grain Noisy

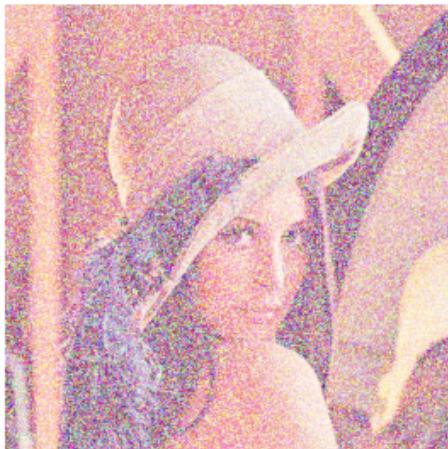

Film Grain Box Filtered

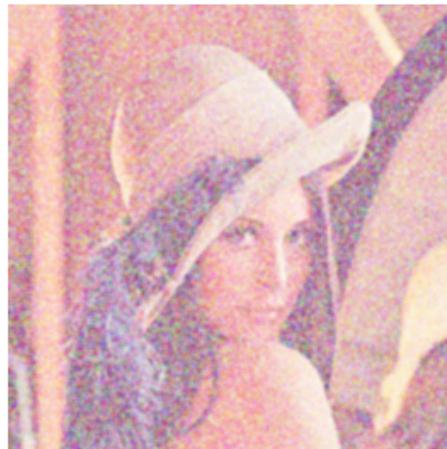


Periodic Noisy




Periodic Box Filtered




Speckle Noisy

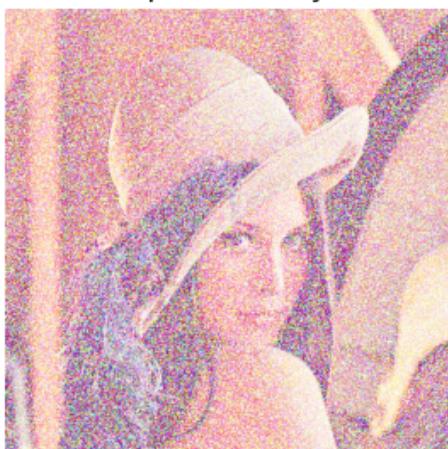


Speckle Box Filtered

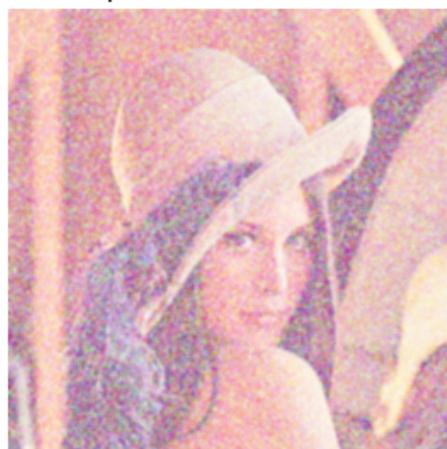


Salt-and-Pepper Noisy

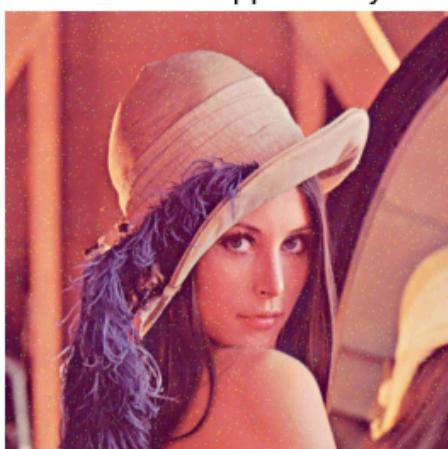

Salt-and-Pepper Box Filtered

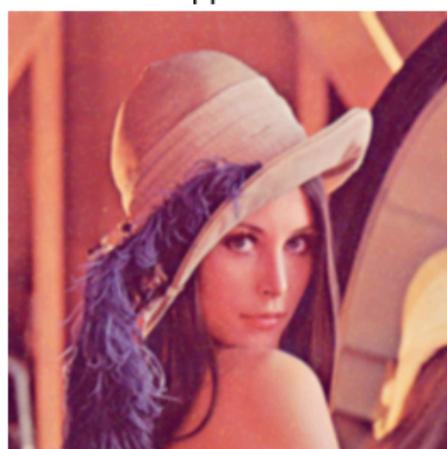


Gaussian Noisy



Gaussian Box Filtered



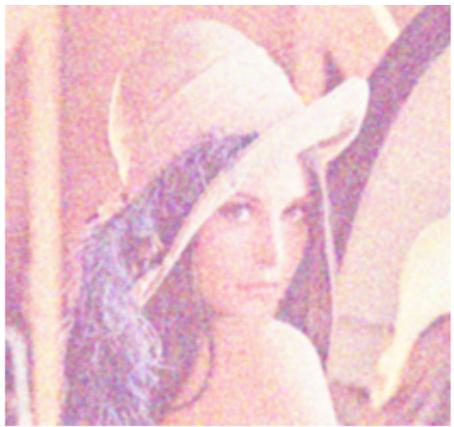

## Gaussian Filter

```
In [7]: def apply_gaussian_filter(image):
    return cv2.GaussianBlur(image, (11, 11), sigmaX=1.5)

plt.figure(figsize=(8, 15))

for i, (noise_type, noisy_image) in enumerate(noisy_images.items()):
    plt.subplot(len(noisy_images), 2, 2*i + 1)
    plt.imshow(cv2.cvtColor(noisy_image, cv2.COLOR_BGR2RGB))
    plt.title(noise_type + ' Noisy', fontsize=12)
    plt.axis('off')


    gaussian_filtered = apply_gaussian_filter(noisy_image)

    plt.subplot(len(noisy_images), 2, 2*i + 2)
    plt.imshow(cv2.cvtColor(gaussian_filtered, cv2.COLOR_BGR2RGB))
    plt.title(noise_type + ' Gaussian Filtered', fontsize=12)
    plt.axis('off')


plt.tight_layout()
plt.savefig('gaussian_filter_ppt.png', bbox_inches='tight')
plt.show()
```



Film Grain Noisy

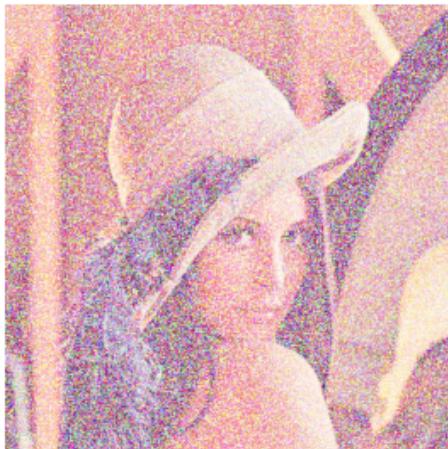

Film Grain Gaussian Filtered

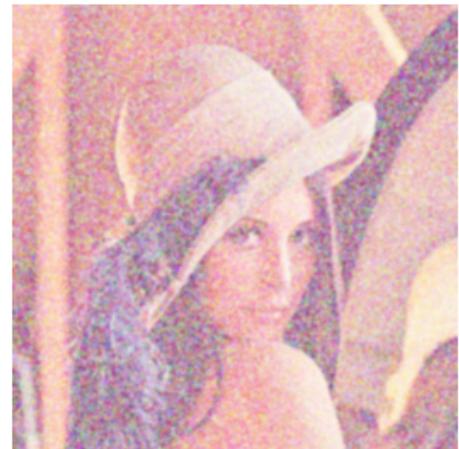


Periodic Noisy




Periodic Gaussian Filtered



Speckle Noisy

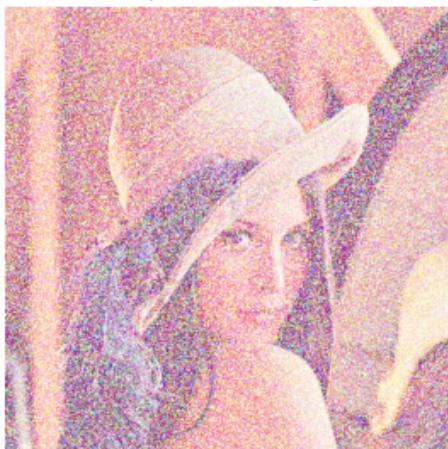


Speckle Gaussian Filtered

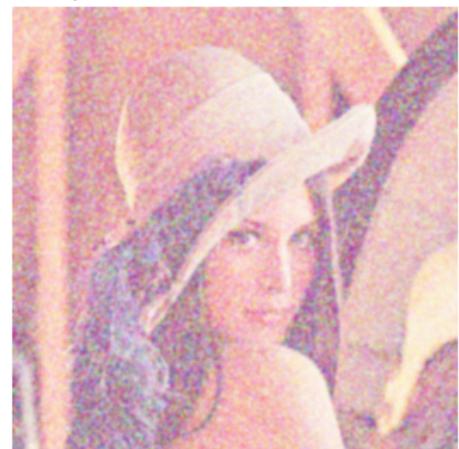

Salt-and-Pepper Noisy



Salt-and-Pepper Gaussian Filtered

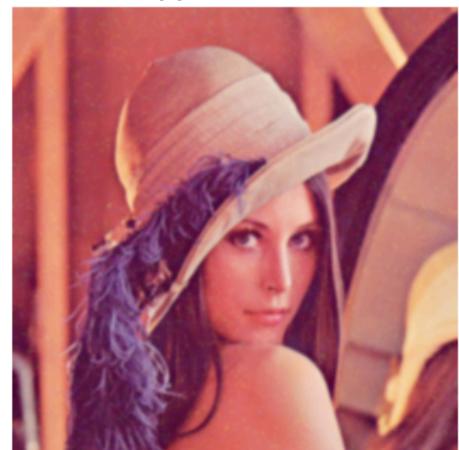


Gaussian Noisy



Gaussian Gaussian Filtered




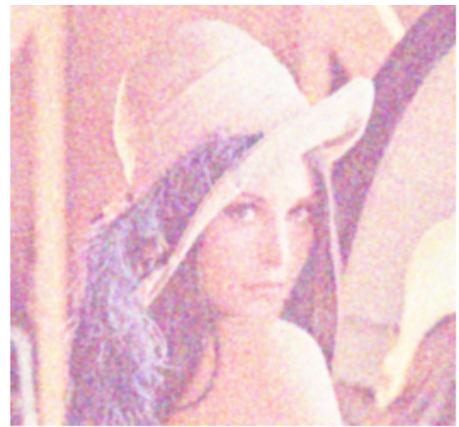

## Sobel

```
In [8]: if original_image is None:  
    print("Error: Unable to load the image.")  
else:  
    sobel_x = cv2.Sobel(original_image, cv2.CV_64F, 1, 0, ksize=3)  
    sobel_y = cv2.Sobel(original_image, cv2.CV_64F, 0, 1, ksize=3)  
  
    sobel_mag = np.sqrt(sobel_x**2 + sobel_y**2)  
  
    threshold = 38  
    sobel_edges = np.where(sobel_mag > threshold, 255, 0).astype(np.uint8)  
  
    plt.figure(figsize=(10, 5))  
    plt.subplot(1, 2, 1)  
    plt.imshow(original_image, cmap='gray')  
    plt.title('Original Image')  
    plt.axis('off')  
  
    plt.subplot(1, 2, 2)  
    plt.imshow(sobel_edges, cmap='gray')  
    plt.title('Sobel Edges')  
    plt.axis('off')  
  
    plt.savefig('sobel_filter_ppt.png', bbox_inches='tight')  
    plt.show()
```

Original Image

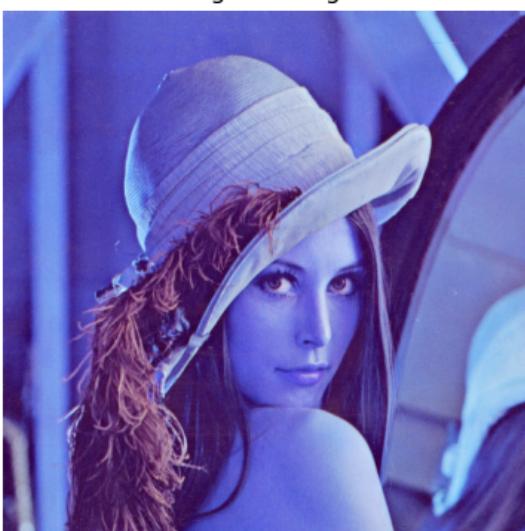

Sobel Edges



```
In [9]: def detect_edges(image):
    sobel_x = cv2.Sobel(image, cv2.CV_64F, 1, 0, ksize=3)
    sobel_y = cv2.Sobel(image, cv2.CV_64F, 0, 1, ksize=3)
    sobel_mag = np.sqrt(sobel_x**2 + sobel_y**2)
    threshold = 70
    sobel_edges = np.where(sobel_mag > threshold, 255, 0).astype(np.uint8)
    return sobel_edges

plt.figure(figsize=(8, 15))


for i, (noise_type, noisy_image) in enumerate(noisy_images.items()):
    plt.subplot(len(noisy_images), 2, 2*i + 1)
    plt.imshow(cv2.cvtColor(noisy_image, cv2.COLOR_BGR2RGB))
    plt.title(noise_type + ' Noisy', fontsize=12)
    plt.axis('off')

    plt.subplot(len(noisy_images), 2, 2*i + 2)
    edges = detect_edges(cv2.cvtColor(noisy_image, cv2.COLOR_BGR2GRAY))
    plt.imshow(edges, cmap='gray')
    plt.title(noise_type + ' Edges', fontsize=12)
    plt.axis('off')

plt.tight_layout()
plt.savefig('sobel_filter2_ppt.png', bbox_inches='tight')
plt.show()
```



Film Grain Noisy

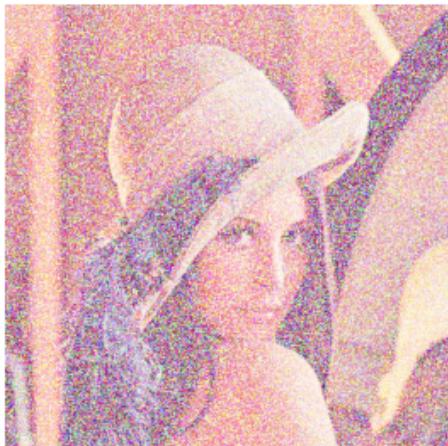

Film Grain Edges




Periodic Noisy



Periodic Edges




Speckle Noisy

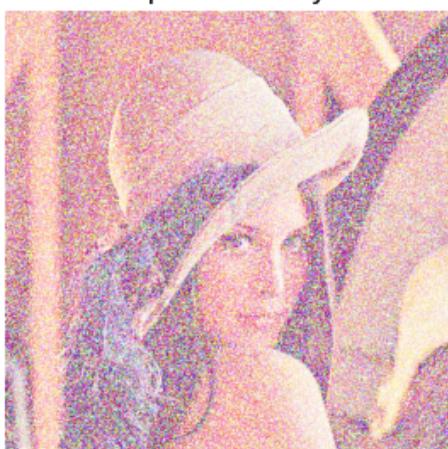

Speckle Edges



Salt-and-Pepper Noisy

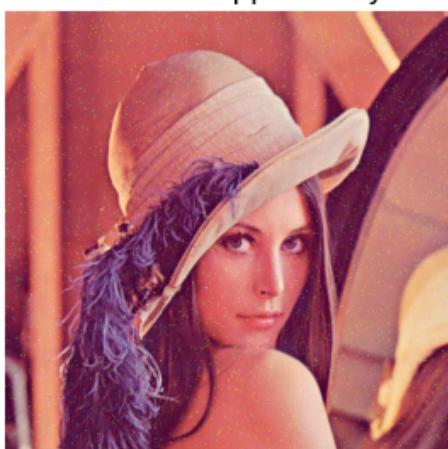

Salt-and-Pepper Edges




Gaussian Noisy



Gaussian Edges



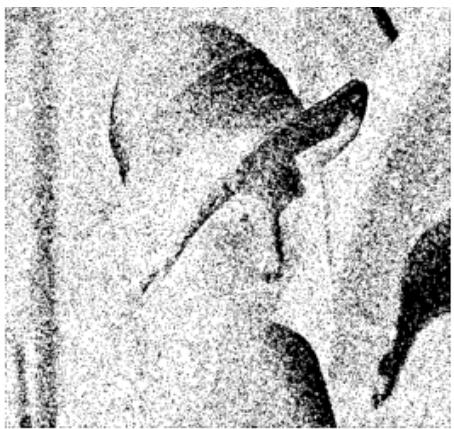

# Non-linear Filtering

## Median Filter

```
In [10]: def apply_median_filter(image):
    return cv2.medianBlur(image, 5)

plt.figure(figsize=(8, 15))

for i, (noise_type, noisy_image) in enumerate(noisy_images.items()):
    plt.subplot(len(noisy_images), 2, 2*i + 1)
    plt.imshow(cv2.cvtColor(noisy_image, cv2.COLOR_BGR2RGB))
    plt.title(noise_type + ' Noisy', fontsize=12)
    plt.axis('off')


    noisy_image_gray = cv2.cvtColor(noisy_image, cv2.COLOR_BGR2GRAY)
    median_filtered = apply_median_filter(noisy_image_gray)

    plt.subplot(len(noisy_images), 2, 2*i + 2)
    plt.imshow(median_filtered, cmap='gray')
    plt.title(noise_type + ' Median Filtered', fontsize=12)
    plt.axis('off')

plt.tight_layout()
plt.savefig('median_filter_ppt.png', bbox_inches='tight')
plt.show()
```



Film Grain Noisy

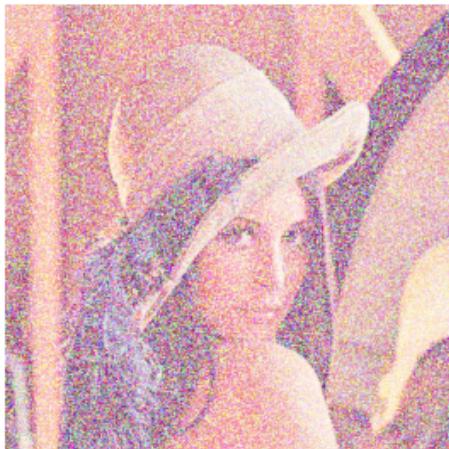

Film Grain Median Filtered




Periodic Noisy



Periodic Median Filtered




Speckle Noisy

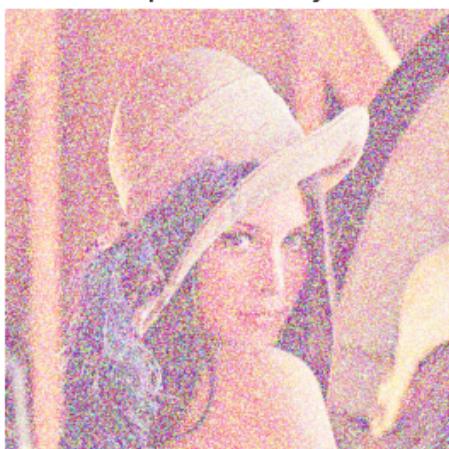


Speckle Median Filtered



Salt-and-Pepper Noisy

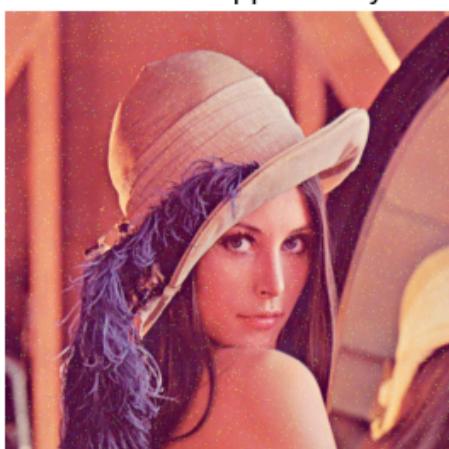

Salt-and-Pepper Median Filtered

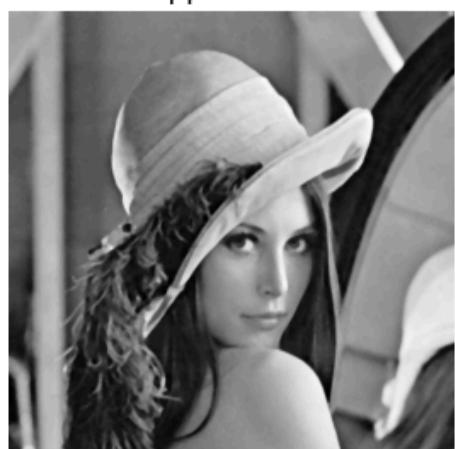

Gaussian Noisy



Gaussian Median Filtered





## Rank Filter

```
In [11]: def apply_rank_filter(image):
    kernel_size = 3
    rank = 4

    padded_image = cv2.copyMakeBorder(image, 1, 1, 1, 1, cv2.BORDER_REPLICATE)
    filtered_image = np.zeros_like(image)

    for y in range(image.shape[0]):
        for x in range(image.shape[1]):
            neighborhood = padded_image[y:y+kernel_size, x:x+kernel_size]
            sorted_neighborhood = np.sort(neighborhood.flatten())
            filtered_image[y, x] = sorted_neighborhood[rank]

    return filtered_image

num_noises = len(noisy_images)
num_images = num_noises

plt.figure(figsize=(8, 15))

for i, (noise_type, noisy_image) in enumerate(noisy_images.items()):
    plt.subplot(len(noisy_images), 2, 2*i + 1)
    plt.imshow(cv2.cvtColor(noisy_image, cv2.COLOR_BGR2RGB))
    plt.title(noise_type + ' Noisy', fontsize=12)
    plt.axis('off')

    noisy_image_gray = cv2.cvtColor(noisy_image, cv2.COLOR_BGR2GRAY)
    rank_filtered = apply_rank_filter(noisy_image_gray)

    plt.subplot(len(noisy_images), 2, 2*i + 2)
    plt.imshow(rank_filtered, cmap='gray')
    plt.title(noise_type + ' Rank Filtered', fontsize=12)
    plt.axis('off')

plt.tight_layout()
plt.savefig('rank_filter_ppt.png', bbox_inches='tight')
plt.show()
```



Film Grain Noisy




Film Grain Rank Filtered




Periodic Noisy



Periodic Rank Filtered

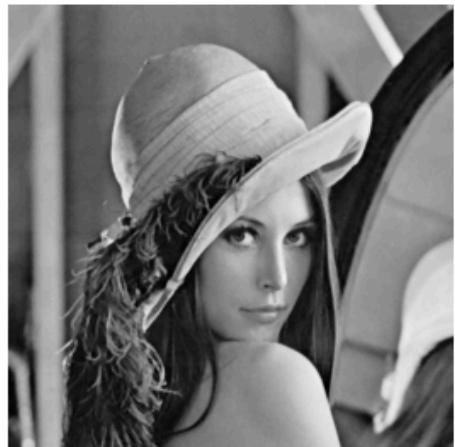


Speckle Noisy

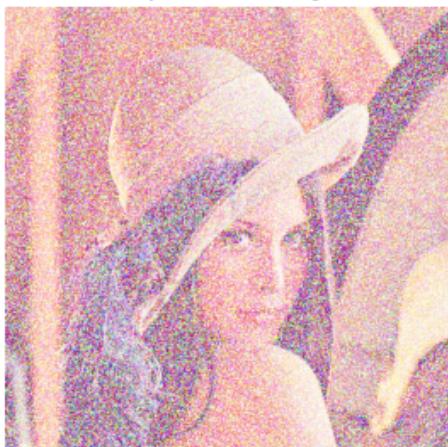


Speckle Rank Filtered



Salt-and-Pepper Noisy

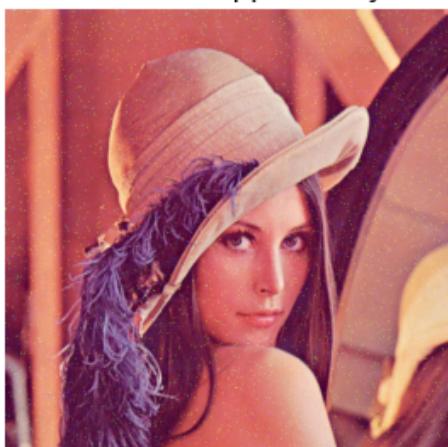

Salt-and-Pepper Rank Filtered

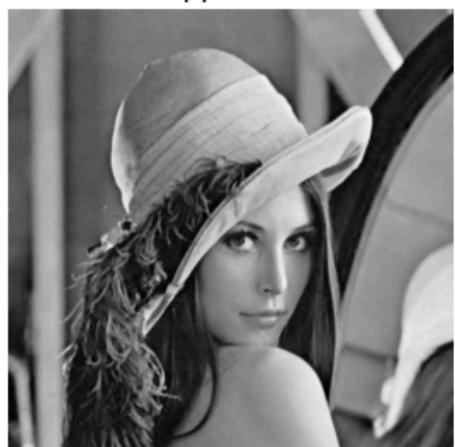

Gaussian Noisy



Gaussian Rank Filtered





## Adaptive Filter

```
In [12]: def apply_adaptive_filter(image):
    gray_image = cv2.cvtColor(image, cv2.COLOR_BGR2GRAY)
    return cv2.adaptiveThreshold(gray_image, 255, cv2.ADAPTIVE_THRESH_GAUSSIAN_C, cv2.THRES_OTSU)

num_noises = len(noisy_images)
num_images = num_noises + 1

plt.figure(figsize=(8, 15))

for i, (noise_type, noisy_image) in enumerate(noisy_images.items(), start=1):
    plt.subplot(num_images, 2, i * 2 - 1)
    plt.imshow(cv2.cvtColor(noisy_image, cv2.COLOR_BGR2RGB))
    plt.title(noise_type + ' Noisy')
    plt.axis('off')

    adaptive_filtered = apply_adaptive_filter(noisy_image)

    plt.subplot(num_images, 2, i * 2)
    plt.imshow(adaptive_filtered, cmap='gray')
    plt.title(noise_type + ' Adaptive Filtered')
    plt.axis('off')


plt.tight_layout()
plt.savefig('adaptive_filter_ppt.png', bbox_inches='tight')
plt.show()
```



Film Grain Noisy



Film Grain Adaptive Filtered

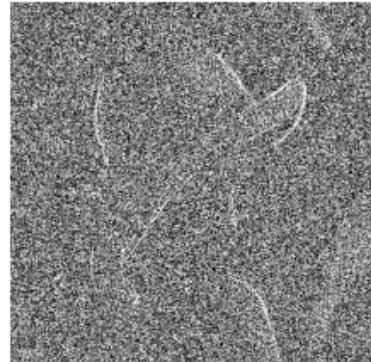


Periodic Noisy




Periodic Adaptive Filtered




Speckle Noisy

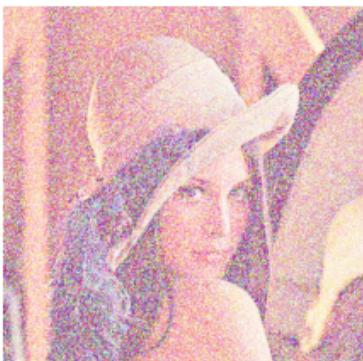

Speckle Adaptive Filtered

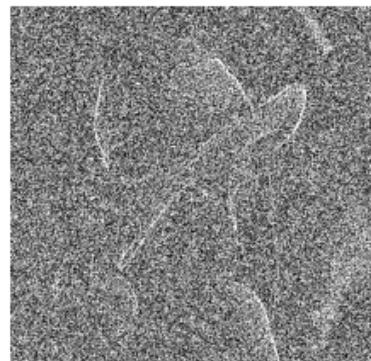


Salt-and-Pepper Noisy

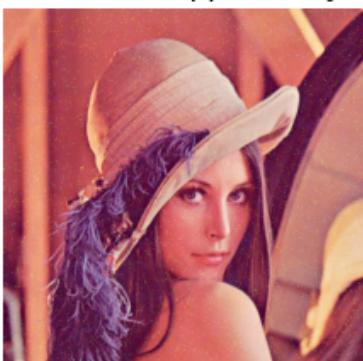

Salt-and-Pepper Adaptive Filtered



Gaussian Noisy

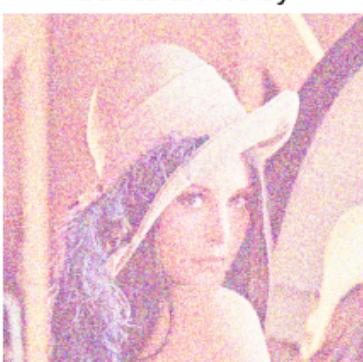

Gaussian Adaptive Filtered





## Bilateral Filter

```
In [13]: def apply_bilateral_filter(image):
    return cv2.bilateralFilter(image, 9, 75, 75)

num_noises = len(noisy_images)
num_images = num_noises + 1

plt.figure(figsize=(8, 15))

for i, (noise_type, noisy_image) in enumerate(noisy_images.items(), start=1):
    plt.subplot(num_images, 2, i * 2 + 1)
    plt.imshow(cv2.cvtColor(noisy_image, cv2.COLOR_BGR2RGB))
    plt.title(noise_type + ' Noisy')
    plt.axis('off')


    bilateral_filtered = apply_bilateral_filter(noisy_image)

    plt.subplot(num_images, 2, i * 2 + 2)
    plt.imshow(cv2.cvtColor(bilateral_filtered, cv2.COLOR_BGR2RGB))
    plt.title(noise_type + ' Bilateral Filtered')
    plt.axis('off')

plt.tight_layout()
plt.savefig('bilateral_filter_ppt.png', bbox_inches='tight')
plt.show()
```



Film Grain Noisy

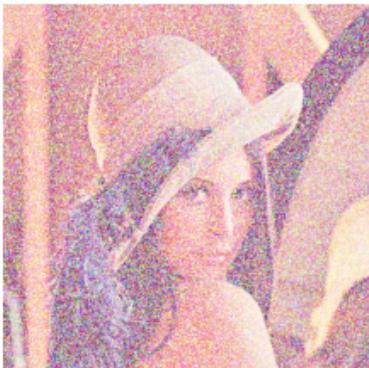

Film Grain Bilateral Filtered




Periodic Noisy




Periodic Bilateral Filtered



Speckle Noisy

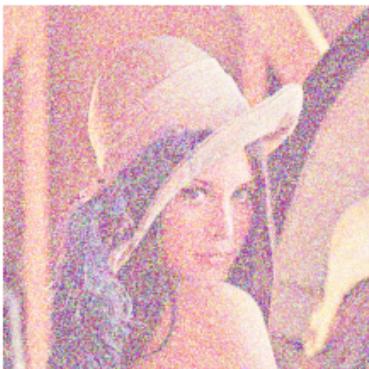


Speckle Bilateral Filtered

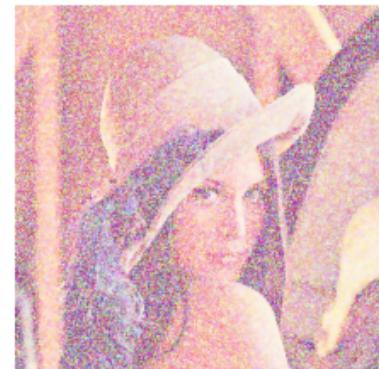

Salt-and-Pepper Noisy



Salt-and-Pepper Bilateral Filtered

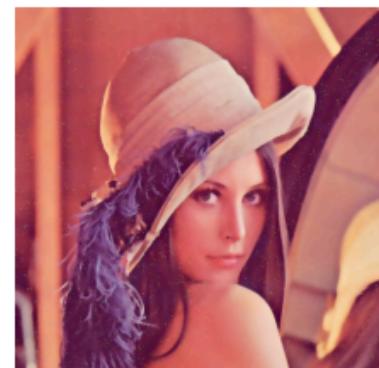

Gaussian Noisy



Gaussian Bilateral Filtered





## Image Filtering on colour image

```
In [14]: bgr_image = cv2.imread(r"C:\Users\raval\Downloads\images\images\flower.jpg")
original_image = cv2.cvtColor(bgr_image, cv2.COLOR_BGR2RGB)
```

```
In [15]: plt.imshow(original_image)
plt.axis('off')
plt.show()
```



```
In [16]: if original_image is None:
    print("Error: Unable to load the image.")
else:
    def generate_film_grain(image):
        film_grain_noise = np.random.normal(loc=1, scale=1, size=image.shape).astype(np.uint8)
        return cv2.add(image, film_grain_noise)

    def generate_periodic(image):
        periodic_noise = np.zeros(image.shape, dtype=np.uint8)
        periodic_noise[::5, ::5, :] = 255
        return cv2.add(image, periodic_noise)

    def generate_speckle(image):
        speckle_noise = np.random.normal(loc=1, scale=0.5, size=image.shape) * 255
        return cv2.add(image, speckle_noise.astype(np.uint8))

    def generate_salt_and_pepper(image):
        salt_pepper_noise = np.random.choice([0, 255], size=image.shape[:2] + (image.shape[2],))
        return cv2.add(image, salt_pepper_noise)

    def generate_gaussian(image):
        gaussian_noise = np.random.normal(loc=1, scale=2, size=image.shape).astype(np.uint8)
        return cv2.add(image, gaussian_noise)

    noise_generators = {
        'Film Grain': generate_film_grain,
        'Periodic': generate_periodic,
        'Speckle': generate_speckle,
        'Salt-and-Pepper': generate_salt_and_pepper,
        'Gaussian': generate_gaussian
    }

    noisy_images = {noise_type: noise_generator(original_image) for noise_type, noise_generator in noise_generators.items()}
```

```
In [17]: plt.figure(figsize=(15, 15))
for i, (noise_type, noisy_image) in enumerate(noisy_images.items(), start=1):
    plt.subplot(3, 2, i)
    plt.imshow(noisy_image)
    plt.title(noise_type)
    plt.axis('off')
plt.show()
```

Film Grain



Periodic



Speckle



Salt-and-Pepper



Gaussian



# Linear Filtering

## BOX Filter

```
In [18]: def apply_box_filter(image):
    return cv2.boxFilter(image, -1, (5, 5))

plt.figure(figsize=(8, 15))

for noise_type, noisy_image in noisy_images.items():
    plt.subplot(len(noisy_images), 2, 2*(list(noisy_images.keys()).index(noise_type)) + 1)
    plt.imshow(noisy_image)
    plt.title(noise_type + ' Noisy', fontsize=12)
    plt.axis('off')

    box_filtered = apply_box_filter(noisy_image)

    plt.subplot(len(noisy_images), 2, 2*(list(noisy_images.keys()).index(noise_type)) + 2)
    plt.imshow(box_filtered)
    plt.title(noise_type + ' Box Filtered', fontsize=12)
    plt.axis('off')

plt.tight_layout()
plt.savefig('box_filter_output.png', bbox_inches='tight')
plt.show()
```




Film Grain Noisy



Film Grain Box Filtered




Periodic Noisy

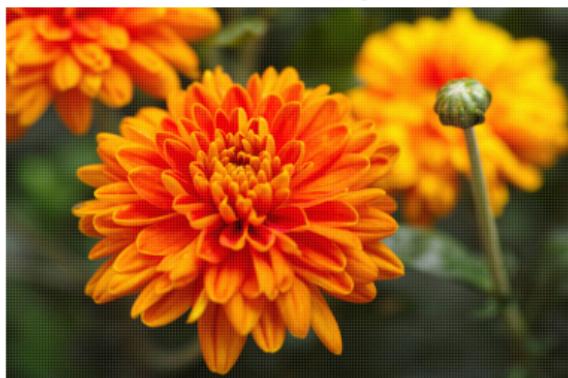

Periodic Box Filtered



Speckle Noisy

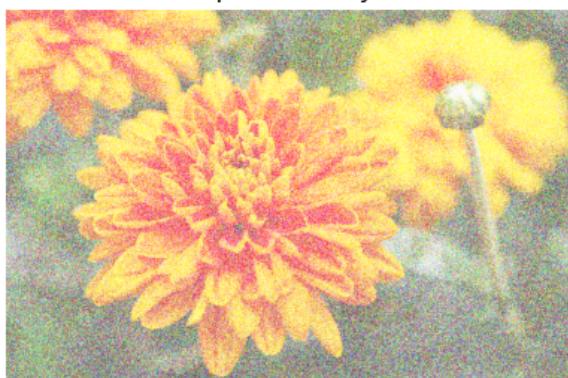

Speckle Box Filtered



Salt-and-Pepper Noisy



Salt-and-Pepper Box Filtered




Gaussian Noisy



Gaussian Box Filtered





## Gaussian Filter

```
In [19]: def apply_gaussian_filter(image):
    return cv2.GaussianBlur(image, (11, 11), sigmaX=1.5)

plt.figure(figsize=(8, 15))

for i, (noise_type, noisy_image) in enumerate(noisy_images.items()):
    plt.subplot(len(noisy_images), 2, 2*i + 1)
    plt.imshow(noisy_image)
    plt.title(noise_type + ' Noisy', fontsize=12)
    plt.axis('off')

    gaussian_filtered = apply_gaussian_filter(noisy_image)

    plt.subplot(len(noisy_images), 2, 2*i + 2)
    plt.imshow(gaussian_filtered)
    plt.title(noise_type + ' Gaussian Filtered', fontsize=12)
    plt.axis('off')

plt.tight_layout()
plt.savefig('gaussian_filter_output.png', bbox_inches='tight')
plt.show()
```



Film Grain Noisy



Film Grain Gaussian Filtered



Periodic Noisy



Periodic Gaussian Filtered



Speckle Noisy



Speckle Gaussian Filtered



Salt-and-Pepper Noisy



Salt-and-Pepper Gaussian Filtered




Gaussian Noisy



Gaussian Gaussian Filtered






## Sobel

```
In [20]: if original_image is None:  
    print("Error: Unable to load the image.")  
else:  
    sobel_x = cv2.Sobel(original_image, cv2.CV_64F, 1, 0, ksize=3)  
    sobel_y = cv2.Sobel(original_image, cv2.CV_64F, 0, 1, ksize=3)  
  
    sobel_mag = np.sqrt(sobel_x**2 + sobel_y**2)  
  
    threshold = 130  
    sobel_edges = np.where(sobel_mag > threshold, 255, 0).astype(np.uint8)  
  
    plt.figure(figsize=(10, 5))  
    plt.subplot(1, 2, 1)  
    plt.imshow(original_image, cmap='gray')  
    plt.title('Original Image')  
    plt.axis('off')  
  
    plt.subplot(1, 2, 2)  
    plt.imshow(sobel_edges, cmap='gray')  
    plt.title('Sobel Edges')  
    plt.axis('off')  
    plt.savefig('sobel_filter_output.png', bbox_inches='tight')  
    plt.show()
```

Original Image



Sobel Edges

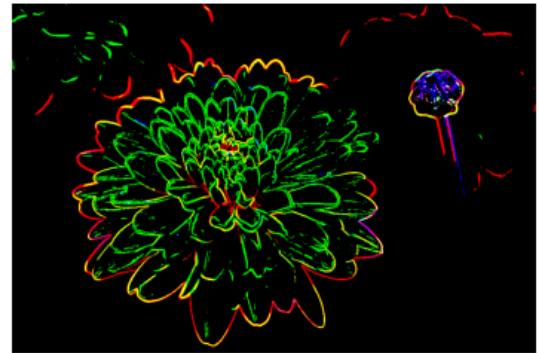

```
In [21]: def detect_edges(image):
    sobel_x = cv2.Sobel(image, cv2.CV_64F, 1, 0, ksize=3)
    sobel_y = cv2.Sobel(image, cv2.CV_64F, 0, 1, ksize=3)
    sobel_mag = np.sqrt(sobel_x**2 + sobel_y**2)
    threshold = 255
    sobel_edges = np.where(sobel_mag > threshold, 255, 0).astype(np.uint8)
    return sobel_edges

plt.figure(figsize=(8, 15))

for i, (noise_type, noisy_image) in enumerate(noisy_images.items()):
    plt.subplot(len(noisy_images), 2, 2*i + 1)
    plt.imshow(noisy_image)
    plt.title(noise_type + ' Noisy', fontsize=12)
    plt.axis('off')

    plt.subplot(len(noisy_images), 2, 2*i + 2)
    edges = detect_edges(noisy_image)
    plt.imshow(edges, cmap='gray')
    plt.title(noise_type + ' Edges', fontsize=12)
    plt.axis('off')


plt.tight_layout()
plt.savefig('sobel_filter2_output.png', bbox_inches='tight')
plt.show()
```



Film Grain Noisy




Film Grain Edges

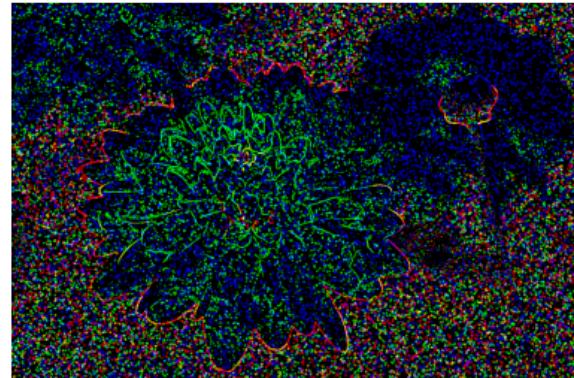

Periodic Noisy




Periodic Edges

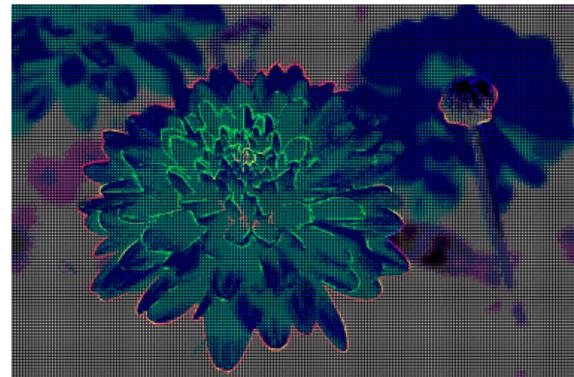

Speckle Noisy




Speckle Edges

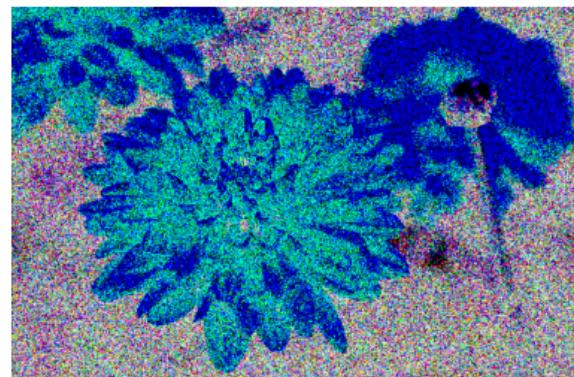

Salt-and-Pepper Noisy




Salt-and-Pepper Edges


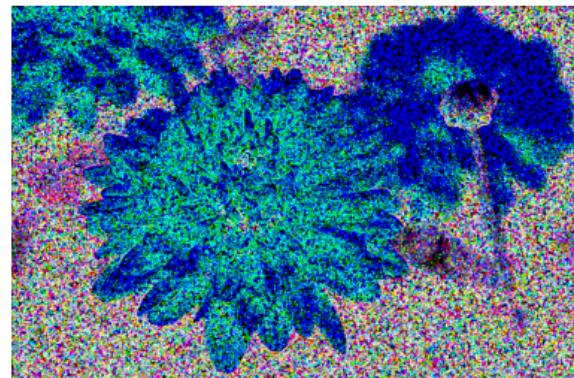


Gaussian Noisy



Gaussian Edges

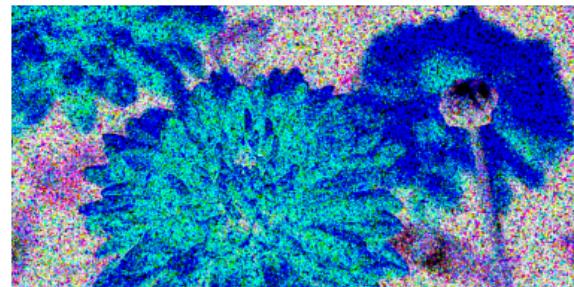



# Non-linear Filtering

## Median Filter

```
In [22]: def apply_median_filter(image):
    return cv2.medianBlur(image, 5)

plt.figure(figsize=(8, 15))

for i, (noise_type, noisy_image) in enumerate(noisy_images.items()):
    plt.subplot(len(noisy_images), 2, 2*i + 1)
    plt.imshow(noisy_image)
    plt.title(noise_type + ' Noisy', fontsize=12)
    plt.axis('off')

    # noisy_image_gray = cv2.cvtColor(noisy_image, cv2.COLOR_BGR2GRAY)
    median_filtered = apply_median_filter(noisy_image)

    plt.subplot(len(noisy_images), 2, 2*i + 2)
    plt.imshow(median_filtered, cmap='gray')
    plt.title(noise_type + ' Median Filtered', fontsize=12)
    plt.axis('off')

plt.tight_layout()
plt.savefig('median_filter_output.png', bbox_inches='tight')
plt.show()
```



Film Grain Noisy



Film Grain Median Filtered



Periodic Noisy



Periodic Median Filtered



Speckle Noisy



Speckle Median Filtered



Salt-and-Pepper Noisy



Salt-and-Pepper Median Filtered




Gaussian Noisy



Gaussian Median Filtered





## Rank Filter

```
In [23]: def apply_rank_filter(image):
    kernel_size = 3
    rank = 4

    padded_image = cv2.copyMakeBorder(image, 1, 1, 1, 1, cv2.BORDER_REPLICATE)
    filtered_image = np.zeros_like(image)

    for y in range(image.shape[0]):
        for x in range(image.shape[1]):
            neighborhood = padded_image[y:y+kernel_size, x:x+kernel_size]
            sorted_neighborhood = np.sort(neighborhood.flatten())
            filtered_image[y, x] = sorted_neighborhood[rank]

    return filtered_image

num_noises = len(noisy_images)
num_images = num_noises

plt.figure(figsize=(8, 15))

for i, (noise_type, noisy_image) in enumerate(noisy_images.items()):
    plt.subplot(len(noisy_images), 2, 2*i + 1)
    plt.imshow(noisy_image)
    plt.title(noise_type + ' Noisy', fontsize=12)
    plt.axis('off')

    # noisy_image_gray = cv2.cvtColor(noisy_image, cv2.COLOR_BGR2GRAY)
    rank_filtered = apply_rank_filter(noisy_image)

    plt.subplot(len(noisy_images), 2, 2*i + 2)
    plt.imshow(rank_filtered)
    plt.title(noise_type + ' Rank Filtered', fontsize=12)
    plt.axis('off')


plt.tight_layout()
plt.savefig('rank_filter_output.png', bbox_inches='tight')
plt.show()
```



Film Grain Noisy




Film Grain Rank Filtered

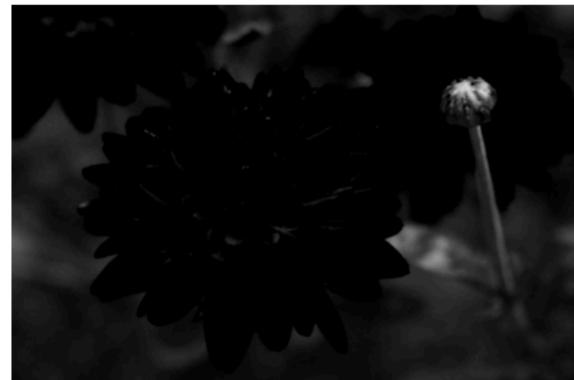


Periodic Noisy




Periodic Rank Filtered

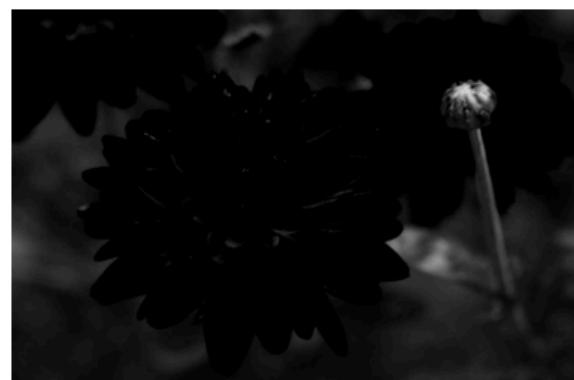

Speckle Noisy

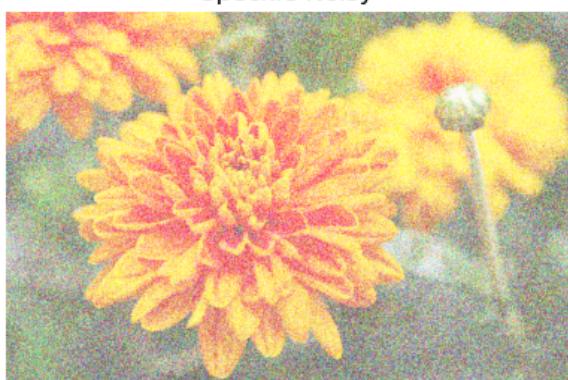

Speckle Rank Filtered

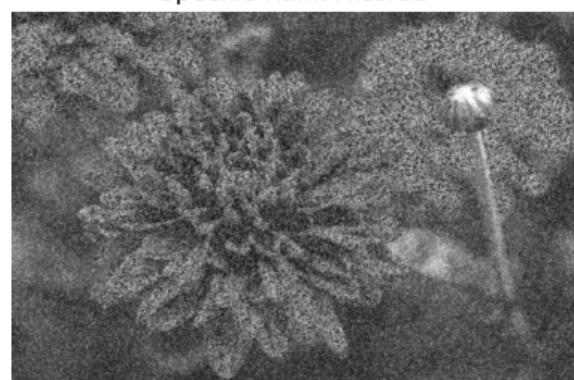


Salt-and-Pepper Noisy




Salt-and-Pepper Rank Filtered




Gaussian Noisy

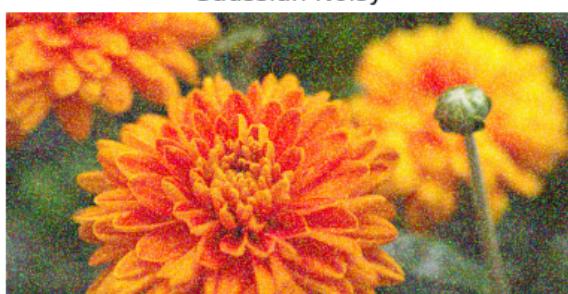

Gaussian Rank Filtered

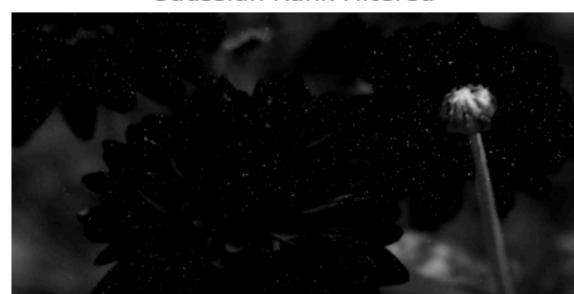



## Adaptive Filter

```
In [24]: def apply_adaptive_filter(image):
    gray_image = cv2.cvtColor(image, cv2.COLOR_BGR2GRAY)
    return cv2.adaptiveThreshold(gray_image, 255, cv2.ADAPTIVE_THRESH_GAUSSIAN_C, cv2.THRES_OTSU)

num_noises = len(noisy_images)
num_images = num_noises + 1

plt.figure(figsize=(8, 15))

for i, (noise_type, noisy_image) in enumerate(noisy_images.items(), start=1):
    plt.subplot(num_images, 2, i * 2 - 1)
    plt.imshow(noisy_image)
    plt.title(noise_type + ' Noisy')
    plt.axis('off')

    adaptive_filtered = apply_adaptive_filter(noisy_image)


    plt.subplot(num_images, 2, i * 2)
    plt.imshow(adaptive_filtered, cmap='gray')
    plt.title(noise_type + ' Adaptive Filtered')
    plt.axis('off')

plt.tight_layout()
plt.savefig('adaptive_filter_output.png', bbox_inches='tight')
plt.show()
```

Film Grain Noisy




Film Grain Adaptive Filtered

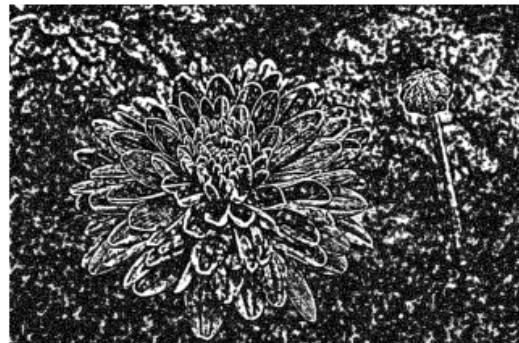

Periodic Noisy




Periodic Adaptive Filtered

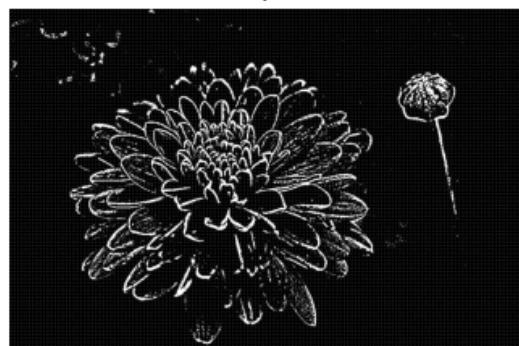

Speckle Noisy




Speckle Adaptive Filtered

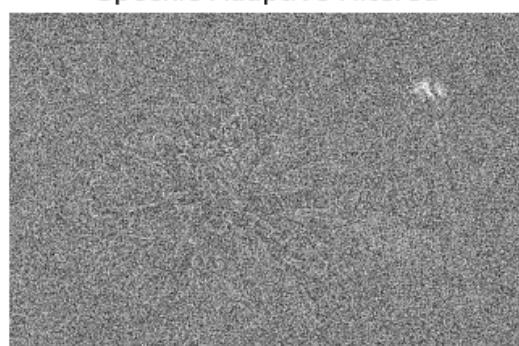


Salt-and-Pepper Noisy




Salt-and-Pepper Adaptive Filtered

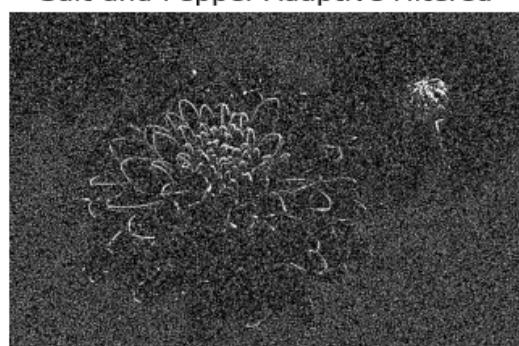

Gaussian Noisy

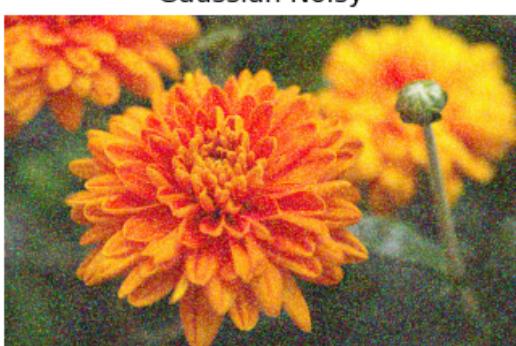

Gaussian Adaptive Filtered

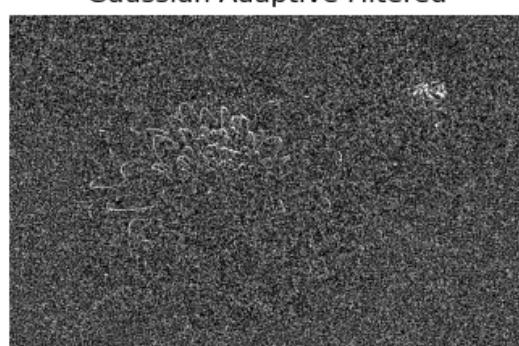

## Bilateral Filter

```
In [25]: def apply_bilateral_filter(image):
    return cv2.bilateralFilter(image, 9, 75, 75)

num_noises = len(noisy_images)
num_images = num_noises + 1

plt.figure(figsize=(8, 15))

for i, (noise_type, noisy_image) in enumerate(noisy_images.items(), start=1):
    plt.subplot(num_images, 2, i * 2 + 1)
    plt.imshow(noisy_image)
    plt.title(noise_type + ' Noisy')
    plt.axis('off')

    bilateral_filtered = apply_bilateral_filter(noisy_image)

    plt.subplot(num_images, 2, i * 2 + 2)
    plt.imshow(bilateral_filtered)
    plt.title(noise_type + ' Bilateral Filtered')
    plt.axis('off')

plt.tight_layout()
# Save the generated output
plt.savefig('output.png', bbox_inches='tight')
plt.savefig('bilateral_filter_output.png', bbox_inches='tight')
plt.show()
```

Film Grain Noisy



Film Grain Bilateral Filtered



Periodic Noisy




Periodic Bilateral Filtered



Speckle Noisy



Speckle Bilateral Filtered

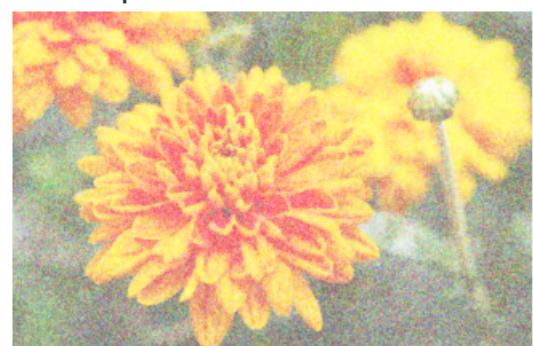


Salt-and-Pepper Noisy




Salt-and-Pepper Bilateral Filtered



Gaussian Noisy

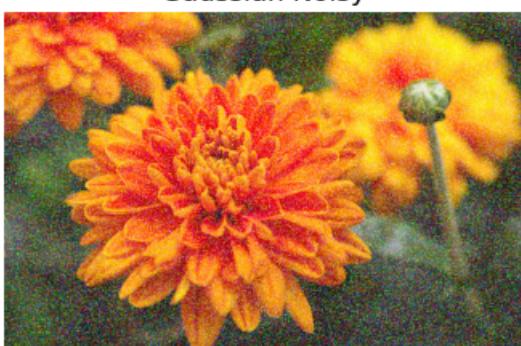

Gaussian Bilateral Filtered

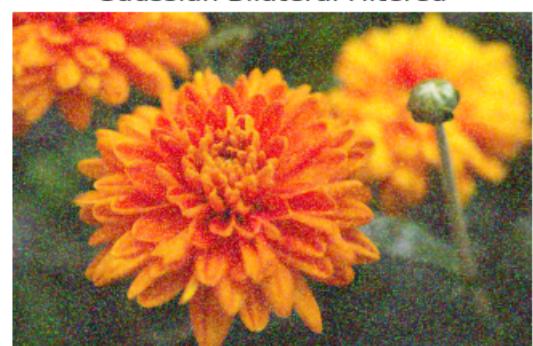

# Gray Scale Imaging

## Average Method

```
In [27]: def average_method(img):
    grayscale_img = np.mean(img, axis=2)

    grayscale_img = np.uint8(grayscale_img)

    return grayscale_img

color_img = cv2.imread(r"C:\Users\raval\Downloads\images\images\flower1.jpg")

grayscale_img_avg = average_method(color_img)

org = cv2.cvtColor(color_img, cv2.COLOR_BGR2RGB)

plt.figure(figsize=(15, 15))

plt.subplot(1,2,1)
plt.imshow(org)
plt.title('Color Image')
plt.axis('off') # Hide axis

plt.subplot(1,2,2)
plt.imshow(grayscale_img_avg, cmap='gray') # Specify grayscale colormap
plt.title('Grayscale Image (Average Method)')
plt.axis('off') # Hide axis

plt.show()
```



## Luminosity Method

```
In [29]: def luminosity_method(img):
    R = img[:, :, 0]
    G = img[:, :, 1]
    B = img[:, :, 2]

    grayscale_img = 0.21 * R + 0.72 * G + 0.07 * B
    grayscale_img = np.uint8(grayscale_img)

    return grayscale_img

color_img = cv2.imread(r"C:\Users\raval\Downloads\images\images\flower1.jpg")

# Convert the color image to grayscale using the Luminosity method
grayscale_img_lum = luminosity_method(color_img)

org = cv2.cvtColor(color_img, cv2.COLOR_BGR2RGB)

plt.figure(figsize=(15, 15))

plt.subplot(1, 2, 1)
plt.imshow(org)
plt.title('Color Image')
plt.axis('off') # Hide axis

plt.subplot(1, 2, 2)
plt.imshow(grayscale_img_lum, cmap='gray') # Specify grayscale colormap
plt.title('Grayscale Image (Luminosity Method)')
plt.axis('off') # Hide axis

plt.show()
```



## Single Channel Method

```
In [31]: color_img = cv2.imread(r"C:\Users\raval\Downloads\images\images\flower1.jpg")

green_channel = color_img[:, :, 1]

# Extract the red channel
red_channel = color_img[:, :, 2]

# Extract the blue channel
blue_channel = color_img[:, :, 0]

org = cv2.cvtColor(color_img, cv2.COLOR_BGR2RGB)

plt.figure(figsize=(15, 15))

plt.subplot(2,2,1)
plt.imshow(org)
plt.title('Color Image')
plt.axis('off') # Hide axis

plt.subplot(2,2,2)
plt.imshow(green_channel, cmap='gray') # Specify grayscale colormap
plt.title('Grayscale Image (Single Channel - Green)')
plt.axis('off') # Hide axis

plt.subplot(2,2,3)
plt.imshow(red_channel, cmap='gray') # Specify grayscale colormap
plt.title('Grayscale Image (Single Channel - Red)')
plt.axis('off') # Hide axis

plt.subplot(2,2,4)
plt.imshow(blue_channel, cmap='gray') # Specify grayscale colormap
plt.title('Grayscale Image (Single Channel - Blue)')
plt.axis('off') # Hide axis

plt.show()
```

Color Image



Grayscale Image (Single Channel - Green)



Grayscale Image (Single Channel - Red)



Grayscale Image (Single Channel - Blue)



## Image Blurring

```
In [32]: image_path = r"C:\Users\raval\Downloads\images\images\flower1.jpg"
# image_path = "/Users/user/Downloads/images/animated1.jpg"
bgr_image = cv2.imread(image_path)
img = cv2.cvtColor(bgr_image, cv2.COLOR_BGR2RGB)

plt.imshow(img)
plt.axis('off') # Hide axis
plt.show()
```



```
In [33]: averaging.blur = cv2.blur(img, (11, 11))
gaussian.blur = cv2.GaussianBlur(img, (11, 11), 0)
bilateral.blur = cv2.bilateralFilter(img, 9, 75, 75)
median.blur = cv2.medianBlur(img, 11)
```

```
In [34]: display_size = (200, 200)
original_display = cv2.resize(img, display_size)
```

```
In [35]: plt.figure(figsize=(10, 10))

plt.subplot(2,2,1)
plt.imshow(averaging.blur)
plt.title('averaging blur')
plt.axis('off') # Hide axis

plt.subplot(2,2,2)
plt.imshow(gaussian.blur)
plt.title('gaussian blur')
plt.axis('off') # Hide axis

plt.subplot(2,2,3)
plt.imshow(bilateral.blur)
plt.title('bilateral blur')
plt.axis('off')

plt.subplot(2,2,4)
plt.imshow(median.blur)
plt.title('median blur')
plt.axis('off')

plt.tight_layout()
plt.show()
```



# Histogram based image analysis

```
In [36]: image_path = r"C:\Users\raval\Downloads\images\images\animated1.jpg"
image = Image.open(image_path).convert('L')
```

```
In [37]: def histogram_equalization(image):
    # Calculate histogram
    hist, bins = np.histogram(image.flatten(), 256, [0,256])

    # Calculate cumulative distribution function
    cdf = hist.cumsum()
    cdf_normalized = cdf * hist.max() / cdf.max()

    # Perform histogram equalization
    cdf_m = np.ma.masked_equal(cdf, 0)
    cdf_m = (cdf_m - cdf_m.min())*255 / (cdf_m.max()-cdf_m.min())
    cdf = np.ma.filled(cdf_m, 0).astype('uint8')

    # Apply histogram equalization
    equalized_image = cdf[image]

    return equalized_image, hist
```

```
In [38]: equalized_image, hist = histogram_equalization(np.array(image))
```



```
In [39]: plt.figure(figsize=(10, 5))
plt.subplot(2, 2, 1)
plt.imshow(image, cmap='gray')
plt.title('Original Image')
plt.axis('off')

plt.subplot(2, 2, 2)
plt.imshow(equalized_image, cmap='gray')
plt.title('Equalized Image')
plt.axis('off')

# Display histogram
plt.subplot(2, 2, 3)
plt.plot(hist, color='blue')
plt.title('Histogram')
plt.xlabel('Pixel Value')
plt.ylabel('Frequency')

plt.subplot(2, 2, 4)
plt.hist(equalized_image.flatten(), 256, [0,256], color='black')
plt.title('Equalized Histogram')
plt.xlabel('Pixel Value')
plt.ylabel('Frequency')

plt.tight_layout()
plt.show()
```

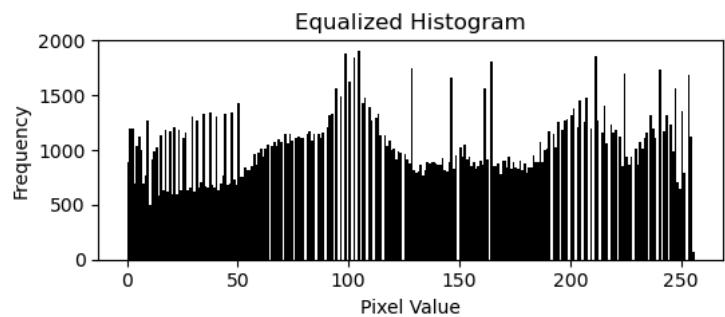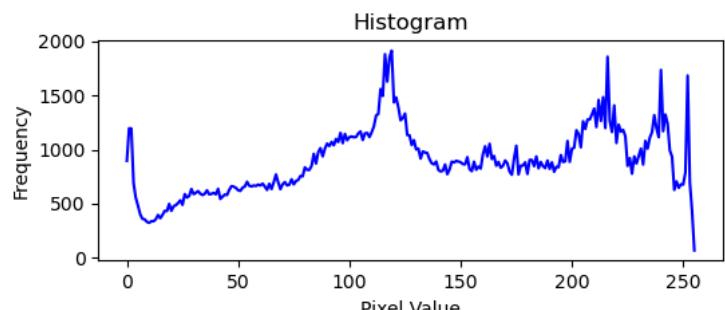

```
In [40]: image = Image.open(r"C:\Users\raval\Downloads\images\images\Fig0310(b)(washed_out_pollen_im
```

```
In [41]: def histogram_equalization(image):
    # Calculate histogram
    hist, bins = np.histogram(image.flatten(), 256, [0,256])

    # Calculate cumulative distribution function
    cdf = hist.cumsum()
    cdf_normalized = cdf * hist.max() / cdf.max()

    # Perform histogram equalization
    cdf_m = np.ma.masked_equal(cdf, 0)
    cdf_m = (cdf_m - cdf_m.min())*255 / (cdf_m.max()-cdf_m.min())
    cdf = np.ma.filled(cdf_m, 0).astype('uint8')

    # Apply histogram equalization
    equalized_image = cdf[image]

    return equalized_image, hist, cdf
```

```
In [42]: equalized_image, hist_original, cdf_equalized = histogram_equalization(np.array(image))
```

```
In [43]: plt.figure(figsize=(12, 6))


plt.subplot(2, 2, 1)
plt.imshow(image, cmap='gray')
plt.title('Original Image')
plt.axis('off')

plt.subplot(2, 2, 2)
plt.imshow(equalized_image, cmap='gray')
plt.title('Equalized Image')
plt.axis('off')

# Display histograms
plt.subplot(2, 2, 3)
plt.plot(hist_original, color='blue')
plt.title('Original Histogram')
plt.xlabel('Pixel Value')
plt.ylabel('Frequency')

plt.subplot(2, 2, 4)
plt.hist(equalized_image.flatten(), 256, [0,256], color='black')
plt.title('Equalized Histogram')
plt.xlabel('Pixel Value')
plt.ylabel('Frequency')

plt.tight_layout()
plt.show()
```

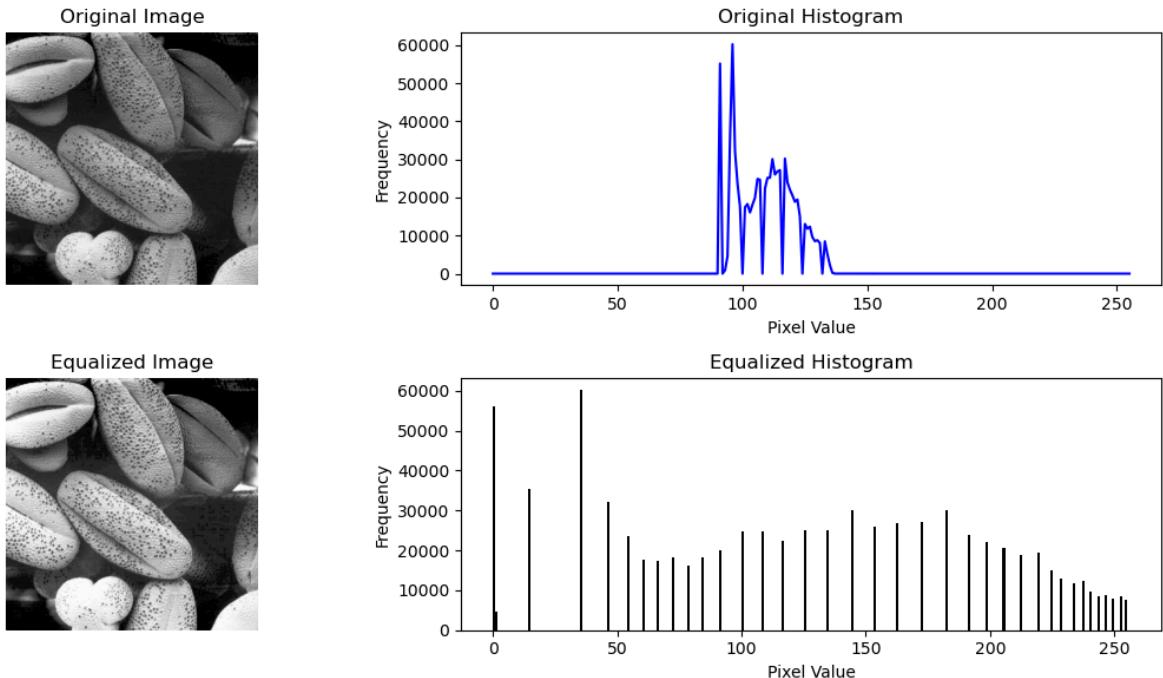

## Image Scaling

### Nearest neighbor

```
In [44]: from PIL import Image, ImageDraw, ImageFont
from IPython.display import display
```

```
In [45]: original_img = Image.open(r"C:\Users\raval\Downloads\images\images\flower1.jpg")

original_width, original_height = original_img.size

new_width = original_width // 2
new_height = original_height // 2
```


```
In [46]: resized_img = original_img.resize((new_width, new_height), resample=Image.NEAREST)
```

```
In [47]: original_width, original_height = original_img.size

plt.subplot(1, 2, 1)
plt.imshow(original_img)
plt.title('Original Image')
plt.gca().set_aspect('auto') # Ensure the aspect ratio is automatic

plt.subplot(1, 2, 2)
plt.imshow(resized_img)
plt.title('Equalized Image')
plt.gca().set_aspect(original_width/original_height) # Set aspect ratio based on original


plt.tight_layout()
plt.show()
```

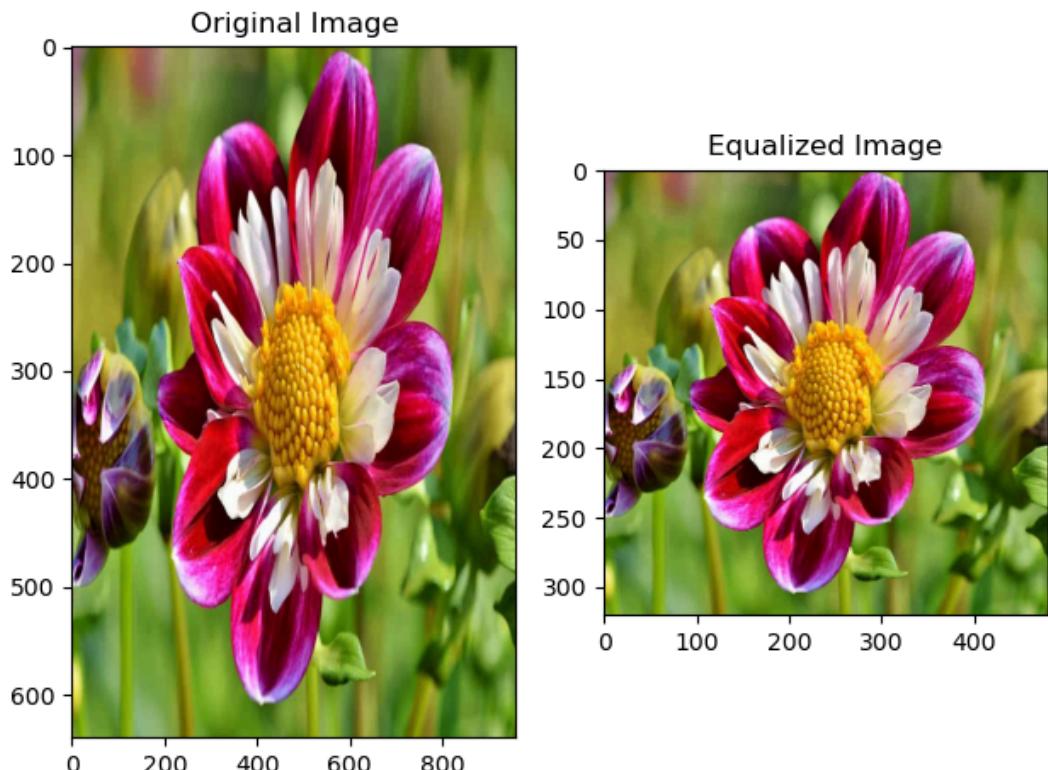

## Bilinar Interpolation

```
In [48]: resized_img = original_img.resize((new_width, new_height), resample=Image.BILINEAR)
```


```
In [49]: original_width, original_height = original_img.size  
  
plt.subplot(1, 2, 1)  
plt.imshow(original_img)  
plt.title('Original Image')  
plt.gca().set_aspect('auto') # Ensure the aspect ratio is automatic  
  
plt.subplot(1, 2, 2)  
plt.imshow(resized_img)  
plt.title('Equalized Image')  
plt.gca().set_aspect(original_width/original_height) # Set aspect ratio based on original  
  
plt.tight_layout()  
plt.show()
```

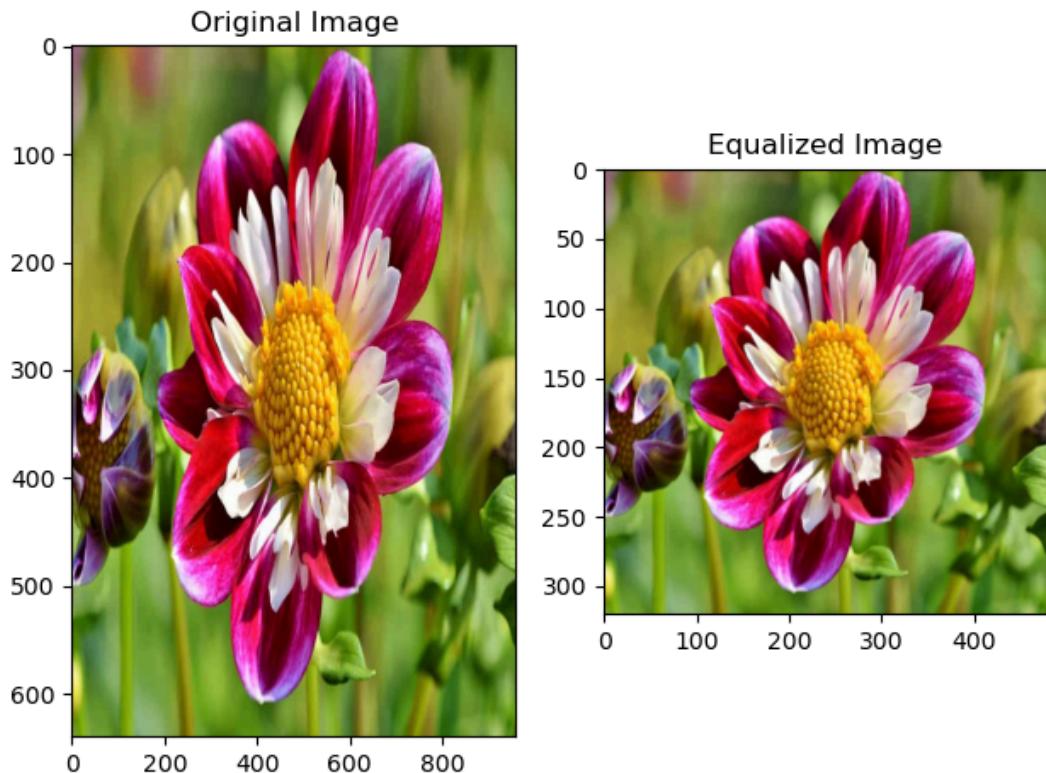

## Bicubic Interpolation

```
In [50]: resized_img = original_img.resize((new_width, new_height), resample=Image.BICUBIC)
```


```
In [51]: original_width, original_height = original_img.size  
  
plt.subplot(1, 2, 1)  
plt.imshow(original_img)  
plt.title('Original Image')  
plt.gca().set_aspect('auto') # Ensure the aspect ratio is automatic  
  
plt.subplot(1, 2, 2)  
plt.imshow(resized_img)  
plt.title('Equalized Image')  
plt.gca().set_aspect(original_width/original_height) # Set aspect ratio based on original  
  
plt.tight_layout()  
plt.show()
```

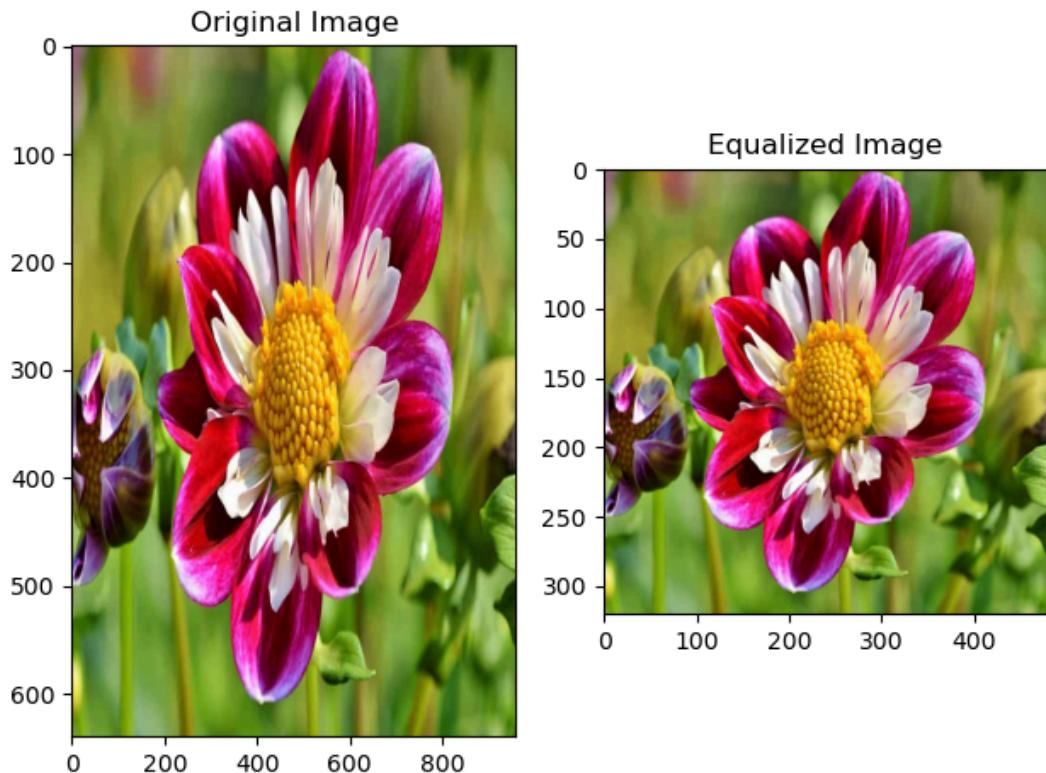

## Lanczos Interpolation

```
In [52]: resized_img = original_img.resize((new_width, new_height), resample=Image.LANCZOS)
```

```
In [53]: original_width, original_height = original_img.size  
  
plt.subplot(1, 2, 1)  
plt.imshow(original_img)  
plt.title('Original Image')  
plt.gca().set_aspect('auto') # Ensure the aspect ratio is automatic  
  
plt.subplot(1, 2, 2)  
plt.imshow(resized_img)  
plt.title('Equalized Image')  
plt.gca().set_aspect(original_width/original_height) # Set aspect ratio based on original  
  
plt.tight_layout()  
plt.show()
```

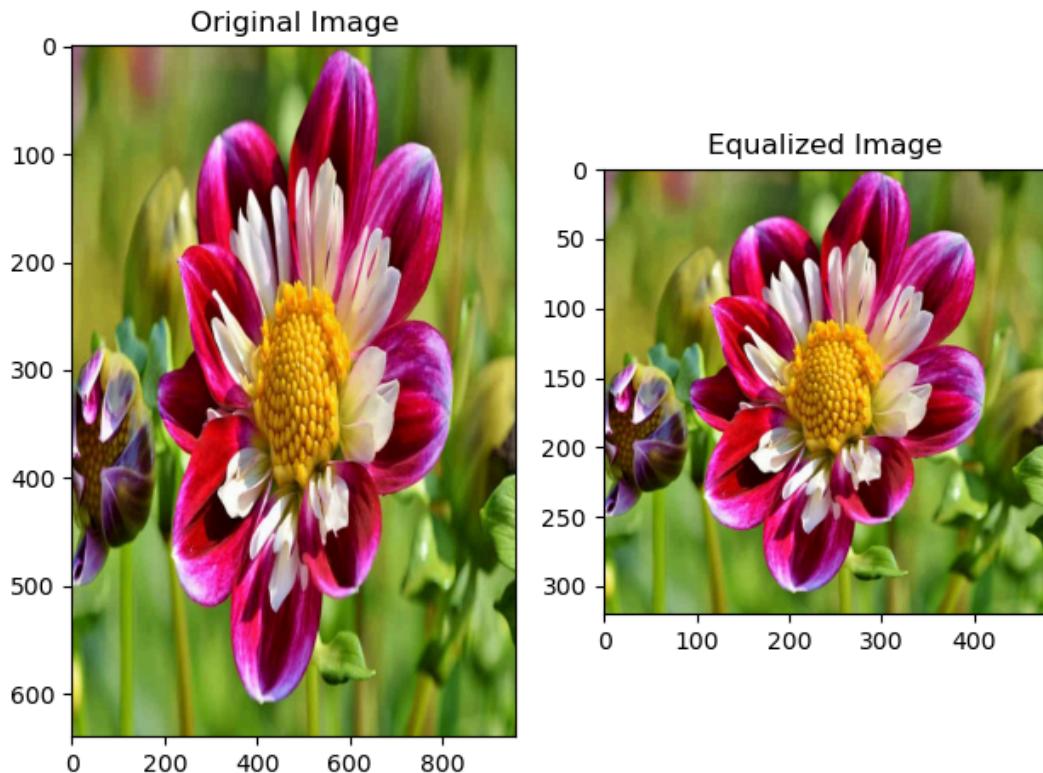

```
In [ ]:
```