PRACTICAL-8(Application in studenthub portal)

Design the database for StudentHub with students, events and registrations. Create PHP database connection using MYSQL statements.

Code:
Sql code:

```
USE StudentHub;

CREATE TABLE IF NOT EXISTS students (
    id INT AUTO_INCREMENT PRIMARY KEY,
    name VARCHAR(100) NOT NULL,
    email VARCHAR(100) UNIQUE NOT NULL,
    password VARCHAR(255) NOT NULL
);

CREATE TABLE IF NOT EXISTS events (
    id INT AUTO_INCREMENT PRIMARY KEY,
    event_name VARCHAR(100) NOT NULL,
    event_date DATE,
    description TEXT
);

CREATE TABLE IF NOT EXISTS registrations (
    id INT AUTO_INCREMENT PRIMARY KEY,
    student_id INT,
    event_id INT,
    registration_date TIMESTAMP DEFAULT CURRENT_TIMESTAMP,
    FOREIGN KEY (student_id) REFERENCES students(id),
    FOREIGN KEY (event_id) REFERENCES events(id)
);
```

Db.php

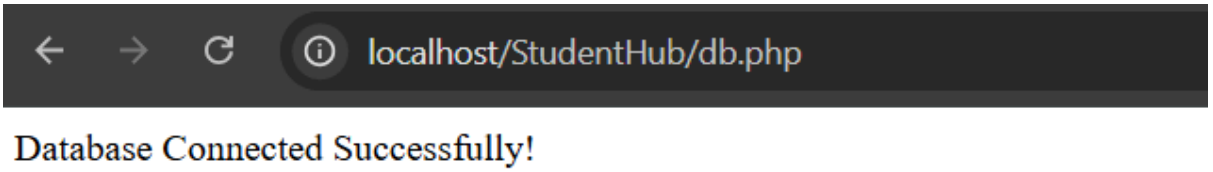
```php
<?php
$conn = new mysqli("localhost", "root", "", "StudentHub");

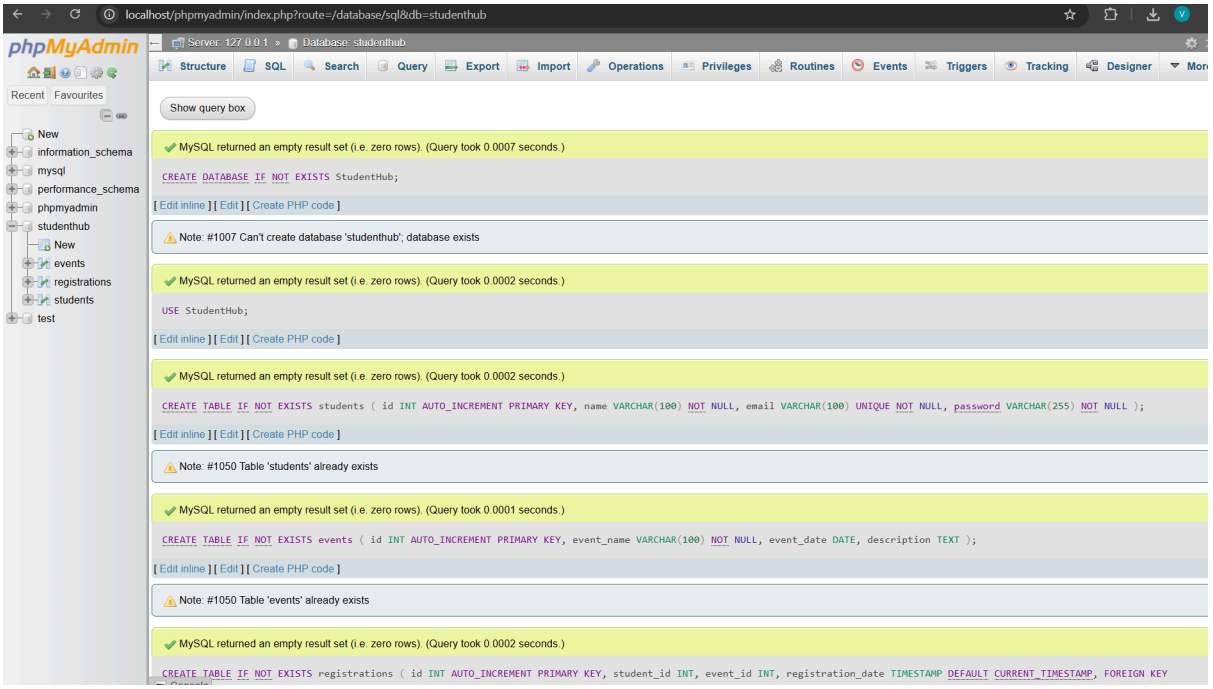
if ($conn->connect_error) {
    die("Connection failed");
}

echo "Database Connected Successfully!";
```

```
?>
```

output:


localhost/StudentHub/db.php
Database Connected Successfully!


localhost/phpmyadmin/index.php?route=/database/sql&db=studenthub
phpMyAdmin
Recent Favourites
New
information_schema
mysql
performance_schema
phpmyadmin
studenthub
New
events
registrations
students
test
Server: 127.0.0.1 » Database: studenthub
Structure SQL Search Query Export Import Operations Privileges Routines Events Triggers Tracking Designer
Show query box
MySQL returned an empty result set (i.e. zero rows). (Query took 0.0007 seconds.)
CREATE DATABASE IF NOT EXISTS StudentHub;
[Edit inline] [Edit] [Create PHP code]
Note: #1007 Can't create database 'studenthub'; database exists
MySQL returned an empty result set (i.e. zero rows). (Query took 0.0002 seconds.)
USE StudentHub;
[Edit inline] [Edit] [Create PHP code]
MySQL returned an empty result set (i.e. zero rows). (Query took 0.0002 seconds.)
CREATE TABLE IF NOT EXISTS students (id INT AUTO_INCREMENT PRIMARY KEY, name VARCHAR(100) NOT NULL, email VARCHAR(100) UNIQUE NOT NULL, password VARCHAR(255) NOT NULL);
[Edit inline] [Edit] [Create PHP code]
Note: #1050 Table 'students' already exists
MySQL returned an empty result set (i.e. zero rows). (Query took 0.0001 seconds.)
CREATE TABLE IF NOT EXISTS events (id INT AUTO_INCREMENT PRIMARY KEY, event_name VARCHAR(100) NOT NULL, event_date DATE, description TEXT);
[Edit inline] [Edit] [Create PHP code]
Note: #1050 Table 'events' already exists
MySQL returned an empty result set (i.e. zero rows). (Query took 0.0002 seconds.)
CREATE TABLE IF NOT EXISTS registrations (id INT AUTO_INCREMENT PRIMARY KEY, student_id INT, event_id INT, registration_date TIMESTAMP DEFAULT CURRENT_TIMESTAMP, FOREIGN KEY