

NAME: VAIDEHI MOHARE

PRN:- 202501050034

PRACTICAL - 1

1.1.1 Calculate Momentum

Write a program that accepts the mass of an object (in kilograms) and its velocity (in meters per second), then calculates and displays the momentum of the object. The momentum is calculated using the formula:

where:

is the mass of the object (in kilograms).

is the velocity of the object (in meters per second).

Input Format:

- A single floating-point number representing the mass of the object in kilograms.
- A single floating-point number representing the velocity of the object in meters per second.

Output Format:

- The output will display calculated momentum with appropriate units (kgm/s) (rounded up to 2 decimal places).

Code:

```
mass = float(input())  
velocity = float(input())  
momentum = mass*velocity  
print(f"{momentum:.2f}kgm/s")
```

The screenshot shows the CODETANTRA online judge interface. At the top, there's a header with the logo, navigation links (Home, Learn Anywhere), and user information (202501050034@mitaoe.ac.in, Support, Logout). Below the header, there's a section for the current problem, showing the average time (0.007 s), maximum time (0.010 s), and the status of test cases (2 out of 2 shown test case(s) passed, 2 out of 2 hidden test case(s) passed). The main area displays the test case details, including the expected output and actual output for each test case. The test cases are: Test case 1 (Expected output: 5.0, 18.0, 50.00kg/s; Actual output: 5.0, 18.0, 50.00kg/s) and Test case 2 (Expected output: 2.3, 4.3, 11.04kg/s; Actual output: 2.3, 4.3, 11.04kg/s). At the bottom, there's a status bar with buttons for < Prev, Reset, Submit, and Next >.

1.1.2. Conditional Calculation Based on the Number of Digits

Write a Python program that accepts an integer n as input. Depending on the number of digits in n .

Constraints:

$$1 \leq n \leq 999$$

Input Format:

- The input consists of a single integer n .

Output Format:

- If n is a single-digit number, print its square.
- If n is a two-digit number, print its square root (rounded to two decimal places).
- If n is a three-digit number, print its cube root (rounded to two decimal places).
- Else print "Invalid".


Code:

```
n=int(input())
if 0<=n and n<=9:
    print(n*n)
elif 10<=n and n<=99:
    print(f"{n**(1/2):.2f}")
elif 100<=n and n<=999:
```

```
print(f"{n**(1/3):.2f}")
```

else:

```
print("Invalid")
```

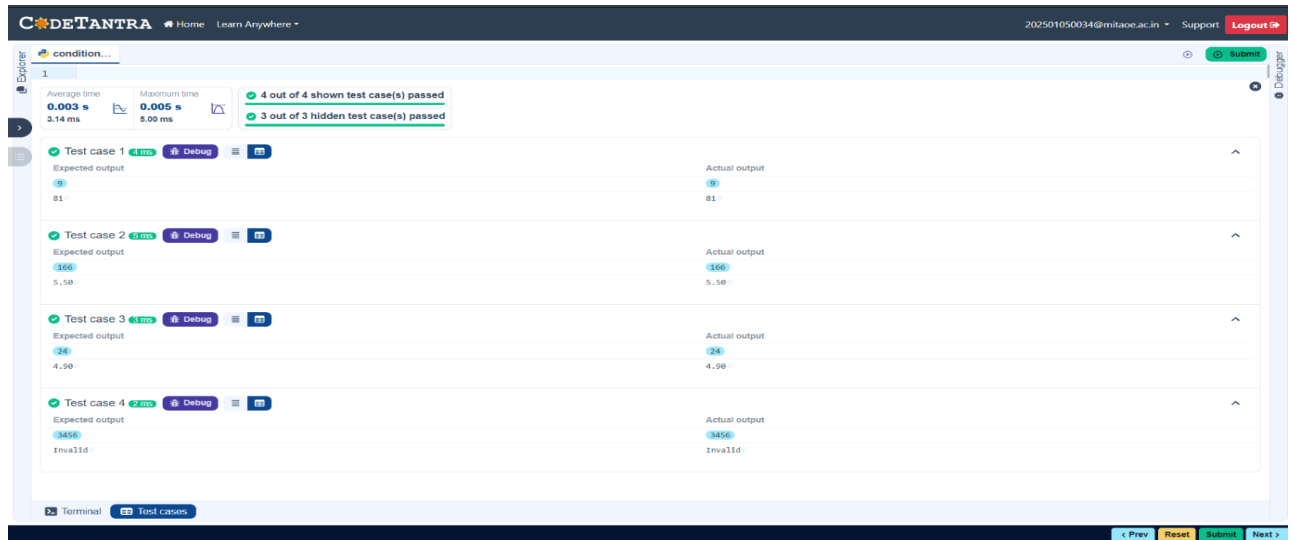

1.1.3. Days between Two Dates

Write a Python program to calculate number of days between two dates.

Input Format:

- The first line contains the first date in the format YYYY-MM-DD
- The second line contains the second date in the format YYYY-MM-DD

Output Format:

- An integer representing the number of days between the given dates.

Code:

```
from datetime import datetime

date1=input().strip()
date2=input().strip()

d1=datetime.strptime(date1,"%Y-%m-%d")
d2=datetime.strptime(date2,"%Y-%m-%d")

difference = d2-d1

print(difference.days)
```

The screenshot shows the CODETANTRA online testing interface. At the top, there's a navigation bar with 'CODETANTRA', 'Home', 'Learn Anywhere', a user email '202501050034@mitaoe.ac.in', 'Support', and a 'Logout' button. Below the navigation bar, there's a 'noOfDays...' section. The main area displays test results for two test cases. Test case 1 is 'Test case 1' with a status of 'Passed' (green checkmark). It shows 'Expected output' as '2014-07-02', '2014-11-02', and '123', and 'Actual output' as '2014-07-02', '2014-11-02', and '123'. Test case 2 is 'Test case 2' with a status of 'Passed' (green checkmark). It shows 'Expected output' as '2014-07-02', '2014-07-11', and '9', and 'Actual output' as '2014-07-02', '2014-07-11', and '9'. The interface also includes a 'Submit' button, a 'Debugger' button, and a 'Terminal' button. At the bottom, there are navigation buttons: '< Prev', 'Reset', 'Submit', and 'Next >'.

1.1.4. Reverse a Number

Write a Python program to reverse the digits of the number and print the reversed number.

Input Format:

- The input is a single integer.

Output Format:

- The output prints a single integer, which is the reversed number.

Code:

```
num = int(input())
reversed_num= int(str(num)[::-1])
print(reversed_num)
```

The screenshot shows the CodeTANTRA online judge interface. At the top, there's a navigation bar with 'Home' and 'Learn Anywhere' links, a user email '202501050034@mitaoe.ac.in', and a 'Logout' button. The main area displays the problem name 'reverseN...' and a 'Submit' button. Below this, a summary box shows 'Average time: 0.008 s (7.60 ms)' and 'Maximum time: 0.011 s (11.00 ms)'. It also states '2 out of 2 shown test case(s) passed' and '3 out of 3 hidden test case(s) passed'. Two test cases are expanded: 'Test case 1' and 'Test case 2'. Each test case shows 'Expected output' and 'Actual output' as '5367' and '7635' respectively. At the bottom, there are buttons for 'Terminal', 'Test cases', 'Prev', 'Reset', 'Submit', and 'Next'.

1.1.5. Multiplication Table

Write a Python program that takes an integer as input and prints the multiplication table for that integer from 1 to 10.

Input Format:

- The first line of input contains an integer that represents the number for which the multiplication table is to be printed.

Output Format:

- Print the multiplication table for the given number in the format:


<number> x <multiplier> = <result>

Code:

```
num = int(input())
```

```
for i in range(1,11):
```

```
    print(f"{num} x {i} = {num * i}")
```

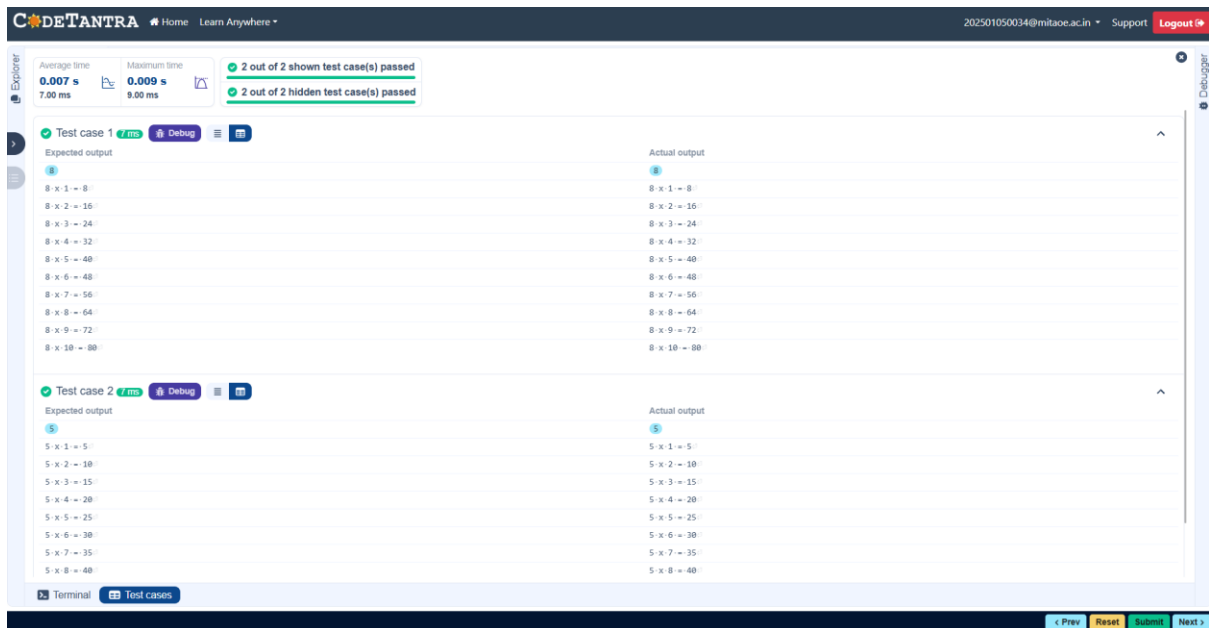

1.2.1. Pass or Fail

Write a Python program that accepts the number of courses and the marks of a student in those courses.

The grade is determined based on the aggregate percentage:

- If the aggregate percentage is greater than 75, the grade is Distinction.
- If the aggregate percentage is greater than or equal to 60 but less than 75, the grade is First Division.
- If the aggregate percentage is greater than or equal to 50 but less than 60, the grade is Second Division.
- If the aggregate percentage is greater than or equal to 40 but less than 50, the grade is Third Division.

Input Format:

- The first input will be an integer , the number of courses.
- The second input will be integers representing the marks of the student in each of the courses, separated by a space.

Output Format:

If the student passes all courses:

- Print the aggregate percentage (formatted to two decimal places).
- Print the grade based on the aggregate percentage.

If the student fails any course (marks < 40 in any course), print:

- "Fail".

Code:

```
def cal(marks, total_courses):  
    if any(mark < 40 for mark in marks):  
        return "Fail"  
  
    total_marks = sum(marks)  
  
    aggregate_percentage=(total_marks/(total_courses *100))*100  
  
    if aggregate_percentage >75:  
        grade="Distinction"  
  
    elif aggregate_percentage >=60:  
        grade= "First Division"  
  
    elif aggregate_percentage >=50:  
        grade= "Second Division"  
  
    elif aggregate_percentage >=40:  
        grade= "Third Division"  
  
    return (aggregate_percentage,grade)  
  
num_courses= int(input())  
marks= list(map(int,input().split()))  
result= cal(marks,num_courses)  
  
if result == "Fail":  
    print("Fail")  
  
else:  
    aggregate_percentage,grade=result  
    print(f"Aggregate Percentage: {aggregate_percentage:.2f}")  
    print(f"Grade: {grade}")
```

1.2.2. Fibonacci Series

Write a Python program that uses recursion to print the first n terms of the Fibonacci series.

Input Format:

- A single integer n representing the number of terms to generate.

Output Format:

- A single line containing the first n terms of the Fibonacci sequence, separated by spaces.


Code:

```
def fibonacci(n):
    if n == 1:
        return 0

    elif n == 2:
        return 1

    else:
        return fibonacci(n - 1) + fibonacci(n - 2)

n = int(input())
for i in range(1, n + 1):
    print(fibonacci(i), end=" ")
```

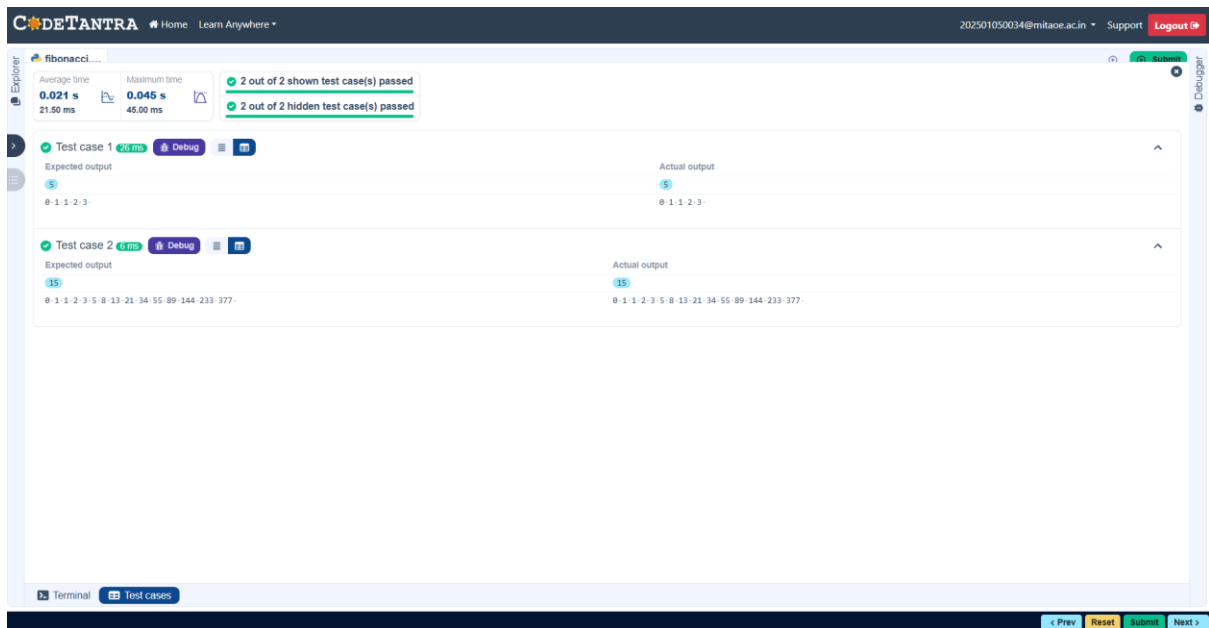1.2.3. Pattern -1

Write a Python program to print a pattern of asterisks in the form of a right-angled triangle.

Input Format:

- The input is an integer, representing the number of rows in the pattern.

Output Format


- The output should display the pattern of asterisks (*), with each row containing an increasing number of asterisks.

Code:

```
n = int(input())
```

```
for i in range (1, n+1):
```

```
    print('* ' * i)
```

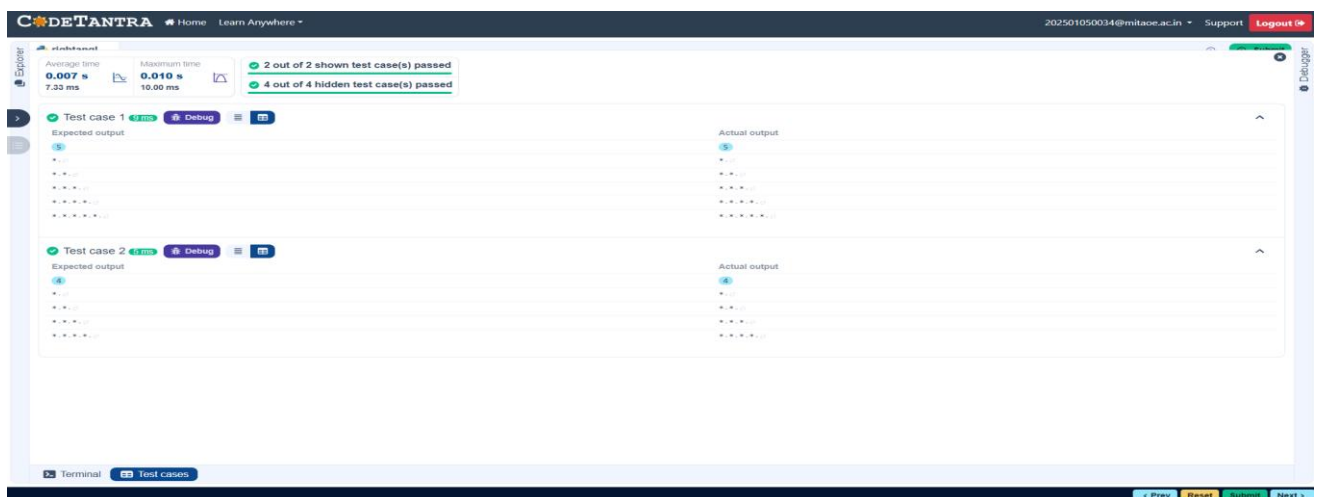

1.2.4. Pattern -2

Write a Python program to print a right-angled triangle pattern of numbers.

Input Format:

- The input is an integer, representing the number of rows in the pattern.

Output Format:

- The output should display the pattern of numbers separated by space, with each row containing increasing numbers starting from 1 up to the row number.

Code:

```
n = int(input())
for i in range(1, n+1):
    for j in range(1, i+1):
        print(j,end=" ")
    print()
```

CODETANTRA Home Learn Anywhere 202501050034@mitaoe.ac.in Support Logout

numberP...

Average time: 0.007 s Maximum time: 0.011 s

2 out of 2 shown test case(s) passed
2 out of 2 hidden test case(s) passed

Test case 1 5 ms Debug

Expected output

Actual output

Test case 2 11 ms Debug

Expected output

Actual output

Terminal Test cases

< Prev Reset Submit Next >