

Module 6: S3 Bucket Creation Assignment


Problem Statement: You work for XYZ Corporation. Their application requires a storage service that can store files and publicly share them if required. Implement S3 for the same.

Tasks To Be Performed:

1. Create an S3 Bucket for file storage.
2. Upload 5 objects with different file extensions.

Solution:

1. Open S3 dashboard in AWS console.
2. Click on Create a bucket

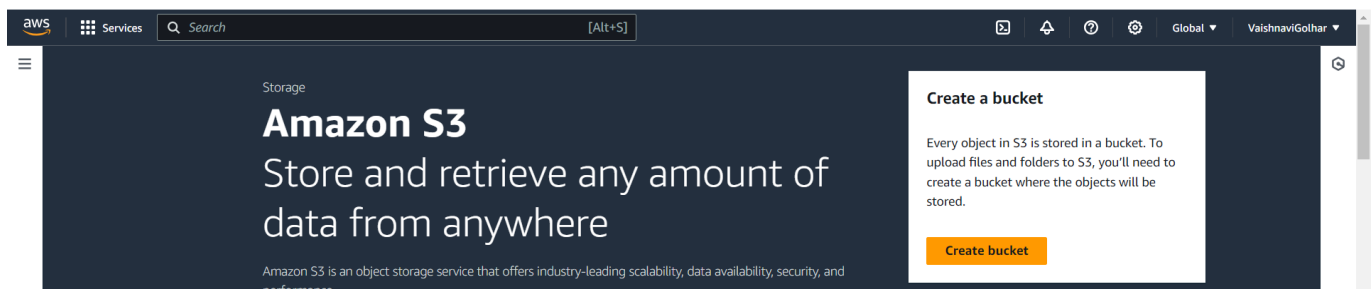

3. Create bucket with General configuration

a. AWS region: US East (N. Virginia) us-east-1

b. Bucket Type: General Purpose

c. Bucket Name: s3-vaishnavi-bucket

d. Object Ownership: ACLs enabled

e. Remaining go with default option

The screenshot shows the 'Create bucket' page in the AWS Management Console. The 'General configuration' section is active, showing the following settings:

- AWS Region:** US East (N. Virginia) us-east-1
- Bucket type:** General purpose (selected). The 'Directory - New' option is also visible.
- Bucket name:** s3-vaishnavi-bucket
- Copy settings from existing bucket - optional:** A button labeled 'Choose bucket' is present.
- Object Ownership:** The 'ACLs enabled' option is selected. The 'ACLs disabled (recommended)' option is also visible.

The screenshot shows the 'Object Ownership' section of the 'Create bucket' page. The 'ACLs enabled' option is selected. A warning message states: 'We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.' Below this, the 'Object Ownership' section shows the 'Bucket owner preferred' option selected. A note at the bottom states: 'If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads. Learn more'.

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on block all public access. These settings apply only to this bucket and to access points. *AWS* recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

- ☐ **Block all public access**

Turning this setting on is the same as turning on all four settings below. Each of the following settings is independent of one another.

 - ☐ **Block public access to buckets and objects granted through new access control lists (ACLs)**

S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access S3 ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.
 - ☐ **Block public access to buckets and objects granted through any access control lists (ACLs)**

S3 will ignore all ACLs that grant public access to buckets and objects.
 - ☐ **Block public access to buckets and objects granted through new public bucket or access point policies**

S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
 - ☐ **Block public and cross-account access for buckets and objects through any public bucket or access point policies**

S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

**Turning off block all public access might result in this bucket and the objects within becoming public**

AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.

- ☒ I acknowledge that the current settings might result in this bucket and the objects within becoming public.

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#)

Bucket Versioning

- ☒ Disable
- ☐ Enable

Tags - optional (0)

You can use bucket tags to track storage costs and organize buckets. [Learn more](#)

No tags associated with this bucket.

Add tag

Default encryption info

Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type info

- ☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)
- ☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)
- ☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)

Secure your objects with two separate layers of encryption. For details on pricing, see [DSSE-KMS pricing on the Storage tab of the Amazon S3 pricing page](#).

No tags associated with this bucket.

Add tag

Default encryption [Info](#)

Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type [Info](#)

- ☒ Server-side encryption with Amazon S3 managed keys (SSE-S3)
- ☐ Server-side encryption with AWS Key Management Service keys (SSE-KMS)
- ☐ Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)
 - Secure your objects with two separate layers of encryption. For details on pricing, see [DSSE-KMS pricing on the Amazon S3 pricing page](#).

Bucket Key

Using an S3 Bucket key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. [Learn more](#)

☐ Disable


☒ Enable

▶ Advanced settings


1

After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

4. Bucket has been created.


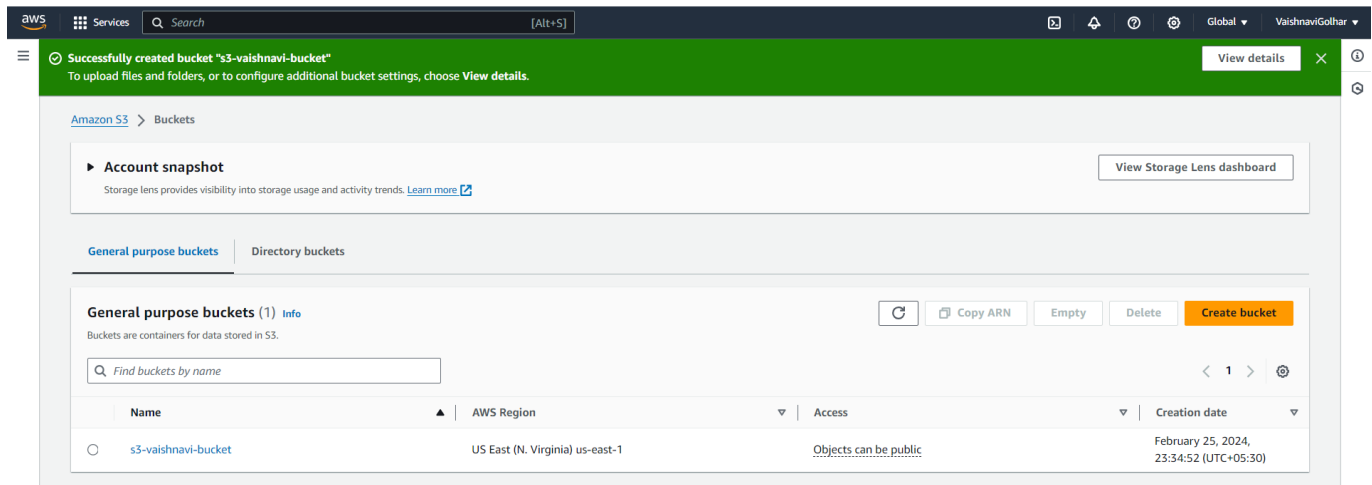


5. Upload the objects from Objects tab.

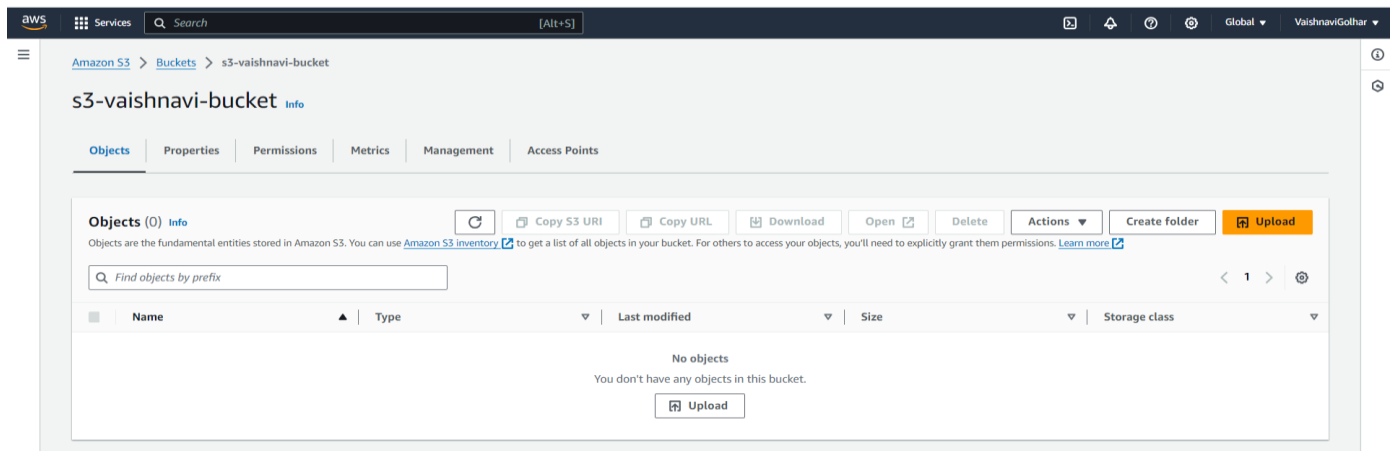

a. Add files

b. Upload it

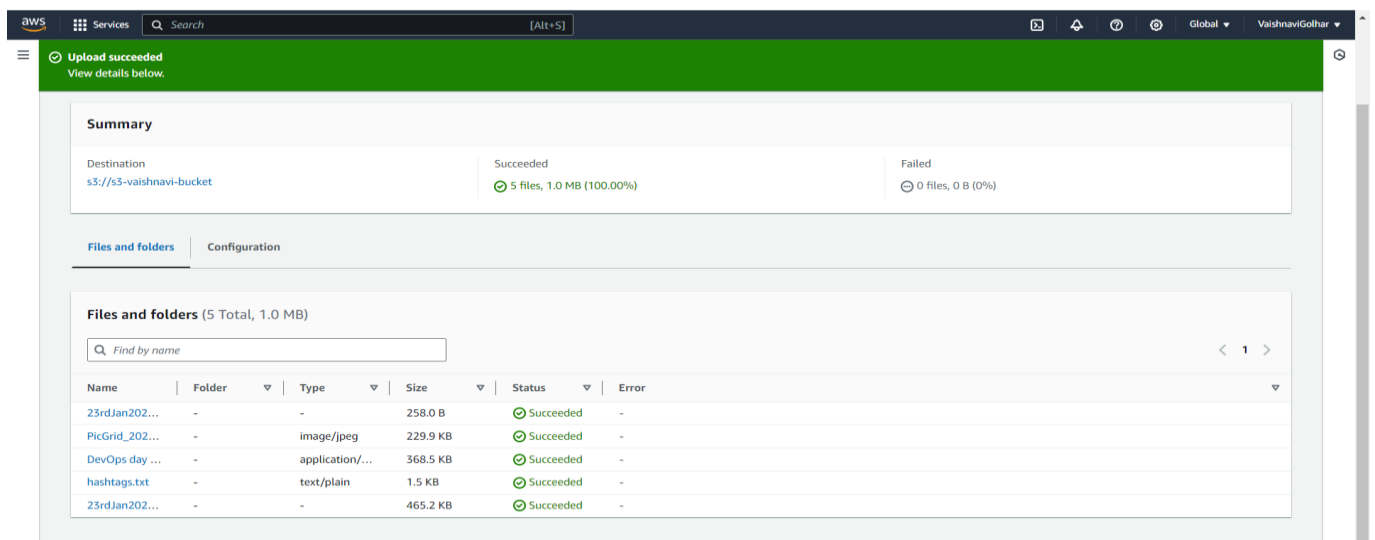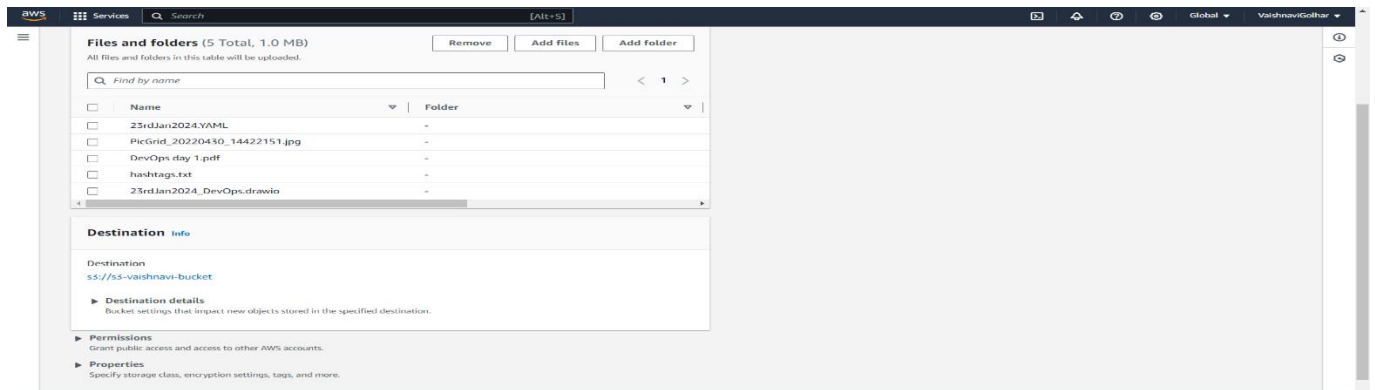

6. Check the objects got upload or not.

