App.js

```
import React, { useState, useEffect } from 'react';
import axios from 'axios';
import './App.css';


const SNACKS_LIST = [
  { id: 's1', name: 'Caramel Popcorn', price: 180, image: '🍿' },
  { id: 's2', name: 'Cold Drink (Coca-Cola)', price: 120, image: '🥤' },
  { id: 's3', name: 'Cheese Nachos', price: 200, image: '🧀' },
  { id: 's4', name: 'Movie Combo (Popcorn + Drink)', price: 260, image: '🎬' }
];

function App() {
  const [movies, setMovies] = useState([]);
  const [shows, setShows] = useState([]);
  const [loading, setLoading] = useState(true);

  // Selection states
  const [selectedShow, setSelectedShow] = useState(null);
  const [selectedSeats, setSelectedSeats] = useState([]);
  const [selectedSnacks, setSelectedSnacks] = useState({});
  const [userEmail, setUserEmail] = useState('');
  const [bookingSuccess, setBookingSuccess] = useState('');

  useEffect(() => {
    const fetchData = async () => {
      try {
        const moviesRes = await axios.get('http://localhost:5000/api/movies');
        const showsRes = await axios.get('http://localhost:5000/api/shows');

        setMovies(moviesRes.data);
        setShows(showsRes.data);
        setLoading(false);
      } catch (error) {
        console.error('Error fetching data:', error);
        setLoading(false);
      }
```

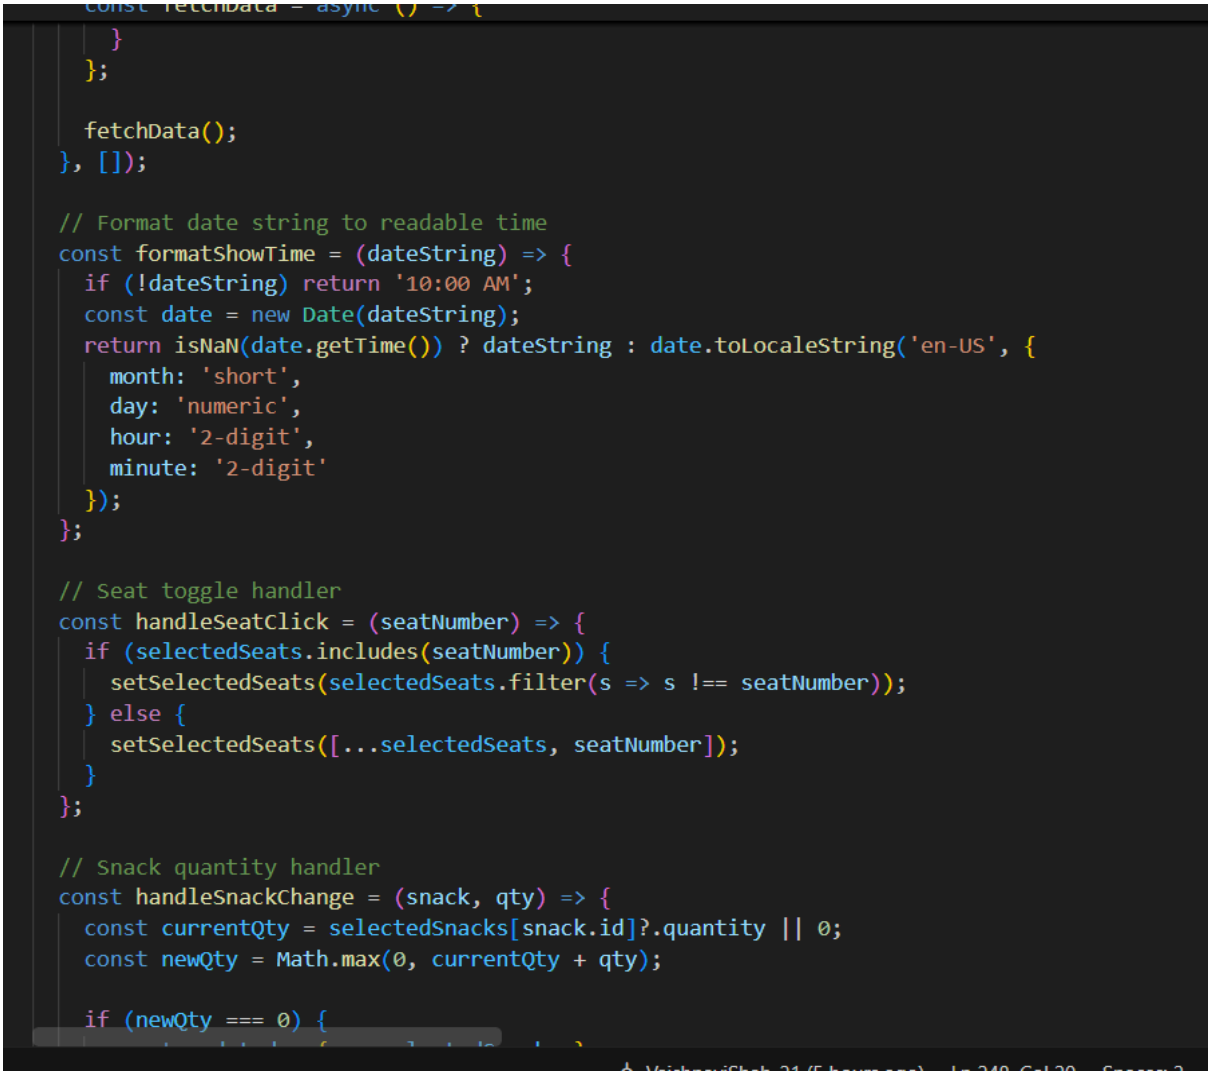

```
    const fetchData = async () => {
      }
    };

    fetchData();
  }, []);

  // Format date string to readable time
  const formatShowTime = (dateString) => {
    if (!dateString) return '10:00 AM';
    const date = new Date(dateString);
    return isNaN(date.getTime()) ? dateString : date.toLocaleString('en-US', {
      month: 'short',
      day: 'numeric',
      hour: '2-digit',
      minute: '2-digit'
    });
  };

  // Seat toggle handler
  const handleSeatClick = (seatNumber) => {
    if (selectedSeats.includes(seatNumber)) {
      setSelectedSeats(selectedSeats.filter(s => s !== seatNumber));
    } else {
      setSelectedSeats([...selectedSeats, seatNumber]);
    }
  };

  // Snack quantity handler
  const handleSnackChange = (snack, qty) => {
    const currentQty = selectedSnacks[snack.id]?.quantity || 0;
    const newQty = Math.max(0, currentQty + qty);

    if (newQty === 0) {
```

```
nt > src > JS App.js > default
  function App() {
    const handleSnackChange = (snack, qty) => {
      if (newQty === 0) {
        const updated = { ...selectedSnacks };
        delete updated[snack.id];
        setSelectedSnacks(updated);
      } else {
        setSelectedSnacks({
          ...selectedSnacks,
          [snack.id]: {
            name: snack.name,
            price: snack.price,
            quantity: newQty
          }
        });
      }
    };

    // Total Calculations
    const seatsCost = selectedShow ? selectedSeats.length * selectedShow.price : 0;
    const snacksCost = Object.values(selectedSnacks).reduce(
      (acc, item) => acc + item.price * item.quantity,
      0
    );
    const grandTotal = seatsCost + snacksCost;

    // Submit Booking
    const handleBooking = async (e) => {
      e.preventDefault();
      if (!selectedShow || selectedSeats.length === 0 || !userEmail) {
        alert('Please select a show, at least one seat, and enter your email!');
        return;
      }

      try {
        const bookingData = {
```

```
function App() {
  const handleBooking = async (e) => {
      const bookingData = {
        show: selectedShow._id,
        userEmail,
        seats: selectedSeats,
        snacks: Object.values(selectedSnacks),
        totalAmount: grandTotal
      };

      const response = await axios.post('http://localhost:5000/api/bookings', bookingData);
      setBookingSuccess('Booking Successful! Booking ID: ' + (response.data._id || 'Confirmed'));
      setSelectedSeats([]);
      setSelectedSnacks({});
      setUserEmail('');
      setSelectedShow(null);
    } catch (error) {
      console.error('Booking error:', error);
      alert('Failed to book tickets. Please try again.');
    }
  };

  return (
    <div style={{ padding: '20px', fontFamily: 'Arial, sans-serif', backgroundColor: '#ffffff', color: '
      <h1 style={{ textAlign: 'center', color: '#6d28d9', fontWeight: 'bold' }}>IMovies - Book Your Show

      {/* Global Success Message Banner */}
      {bookingSuccess && (
        <div style={{ backgroundColor: '#f3e8ff', border: '2px solid #7c3aed', padding: '15px', border
          <p style={{ color: '#5b21b6', margin: 0, fontWeight: 'bold', fontSize: '18px' }}>
            {bookingSuccess}
          </p>
        </div>
      )}

      {loading ? (
```

```
loading ? (
  <p style={{ textAlign: 'center', color: '#4b5563' }}>Loading movies and shows...</p>
) : (
  <>
    {/* Movies Showcase with Posters */}
    <h2 style={{ color: '#111827', borderBottom: '3px solid #7c3aed', paddingBottom: '6px', marginTop: '30px' }}>Now Showing (Movies)</h2>
    <div style={{ display: 'flex', flexWrap: 'wrap', gap: '20px', marginTop: '15px', justifyContent: 'center' }}>
      {movies.map(movie => (
        <div key={movie._id} style={{ backgroundColor: '#f5f3ff', border: '1px solid #ddd6fe', borderRadius: '8px', width: '220px', padding: '12px', boxShadow: '0 4p
          {movie.posterUrl ? (
            <img src={movie.posterUrl} alt={movie.title} style={{ width: '100%', height: '280px', objectFit: 'cover', borderRadius: '6px', marginBottom: '10px' }} />
          ) : (
            <div style={{ width: '100%', height: '280px', backgroundColor: '#ede9fe', borderRadius: '6px', display: 'flex', alignItems: 'center', justifyContent: 'cent
          )}
          <h3 style={{ margin: '5px 0', color: '#111827', fontSize: '16px', fontWeight: 'bold' }}>{movie.title}</h3>
          <p style={{ fontSize: '13px', color: '#4b5563', margin: '3px 0' }}>{movie.genre} | {movie.releaseYear}</p>
        </div>
      ))}
    </div>

    {/* Show Selection */}
    <h2 style={{ color: '#111827', borderBottom: '3px solid #7c3aed', paddingBottom: '6px', marginTop: '40px' }}>Select Show & Timings</h2>
    <div style={{ display: 'flex', flexWrap: 'wrap', gap: '20px', marginTop: '15px', justifyContent: 'center' }}>
      {shows.map(show => (
        <div key={show._id} style={{ backgroundColor: selectedShow?._id === show._id ? '#ede9fe' : '#f5f3ff', border: selectedShow?._id === show._id ? '2px solid #
          <p style={{ fontSize: '15px', color: '#111827', margin: '0 0 8px 0' }}><strong>Show Time:</strong> {formatShowTime(show.timing || show.time)}</p>
          <p style={{ fontSize: '14px', color: '#374151', margin: '0 0 8px 0' }}><strong>Price per seat:</strong> ₹{show.price}</p>
          <button
            onClick={() => setSelectedShow(show)}
            style={{ backgroundColor: selectedShow?._id === show._id ? '#5b21b6' : '#7c3aed', color: '#ffffff', border: 'none', padding: '10px 15px', borderRadius:
            {selectedShow?._id === show._id ? 'Show Selected' : 'Select Show'}
          </button>
        </div>
      ))}
    </div>
```

```
tedShow && (
 style={{ marginTop: '40px', backgroundColor: '#faf5ff', padding: '25px', borderRadius: '10px', border: '2px solid #c084fc', maxWidth: '650px', marginLeft: 'auto',

 * 1. Seat Grid */}
3 style={{ color: '#6d28d9', textAlign: 'center', margin: '0 0 10px 0', fontSize: '20px' }}>Select Your Seats</h3>
 style={{ textAlign: 'center', fontSize: '12px', color: '#6b7280', letterSpacing: '1px' }}>SCREEN THIS WAY</p>
iv style={{ display: 'grid', gridTemplateColumns: 'repeat(5, 1fr)', gap: '10px', margin: '15px 0 20px 0', justifyContent: 'center' }}>
{['A1', 'A2', 'A3', 'A4', 'A5', 'B1', 'B2', 'B3', 'B4', 'B5'].map(seat => (
  <button
    key={seat}
    onClick={() => handleSeatClick(seat)}
    style={{
      padding: '12px',
      backgroundColor: selectedSeats.includes(seat) ? '#7c3aed' : '#e9d5ff',
      color: selectedSeats.includes(seat) ? '#ffffff' : '#4c1d95',
      border: 'none',
      borderRadius: '6px',
      cursor: 'pointer',
      fontWeight: 'bold',
      fontSize: '14px'
    }}>
    {seat}
  </button>
))}
div>
 style={{ textAlign: 'center', color: '#111827', fontSize: '15px' }}>Selected Seats: <strong>{selectedSeats.join(', ') || 'None'}</strong></p>

 * 2. Snacks Section */}
3 style={{ color: '#6d28d9', textAlign: 'center', marginTop: '30px', fontSize: '20px' }}>2. Grab Some Snacks 🍿</h3>
iv style={{ display: 'flex', flexDirection: 'column', gap: '10px', marginTop: '15px' }}>
{SNACKS_LIST.map(snack => {
  const qty = selectedSnacks[snack.id]?.quantity || 0;
  return (
    <div key={snack.id} style={{ display: 'flex', justifyContent: 'space-between', alignItems: 'center', backgroundColor: '#ffffff', padding: '12px 16px', borderRadius
```



```
pp() {
    ))}
  </div>
  <p style={{ textAlign: 'center', color: '#111827', fontSize: '15px' }}>Selected Seats: <strong>{selectedSeats.join(', ') || 'None'}</strong></p>

  {/* 2. Snacks Section */}
  <h3 style={{ color: '#6d28d9', textAlign: 'center', marginTop: '30px', fontSize: '20px' }}>2. Grab Some Snacks 🍿</h3>
  <div style={{ display: 'flex', flexDirection: 'column', gap: '10px', marginTop: '15px' }}>
    {SNACKS_LIST.map(snack => {
      const qty = selectedSnacks[snack.id]?.quantity || 0;
      return (
        <div key={snack.id} style={{ display: 'flex', justifyContent: 'space-between', alignItems: 'center', backgroundColor: '#ffffff', padding: '12px 16px', border
          <div>
            <span style={{ fontSize: '20px', marginRight: '10px' }}>{snack.image}</span>
            <strong style={{ color: '#111827' }}>{snack.name}</strong>
            <span style={{ color: '#6b7280', marginLeft: '10px' }}>₹{snack.price}</span>
          </div>
          <div style={{ display: 'flex', alignItems: 'center', gap: '10px' }}>
            <button onClick={() => handleSnackChange(snack, -1)} style={{ backgroundColor: '#ddd6fe', color: '#4c1d95', border: 'none', borderRadius: '4px', width
            <span style={{ color: '#111827', fontWeight: 'bold', minWidth: '15px', textAlign: 'center' }}>{qty}</span>
            <button onClick={() => handleSnackChange(snack, 1)} style={{ backgroundColor: '#7c3aed', color: '#ffffff', border: 'none', borderRadius: '4px', width:
          </div>
        </div>
      );
    })}
  </div>

  {/* 3. Summary & Booking */}
  <div style={{ marginTop: '25px', paddingTop: '15px', borderTop: '2px solid #e9d5ff' }}>
    <p style={{ fontSize: '14px', margin: '4px 0', color: '#4b5563' }}>Tickets ({selectedSeats.length}): ₹{seatsCost}</p>
    <p style={{ fontSize: '14px', margin: '4px 0', color: '#4b5563' }}>Snacks: ₹{snacksCost}</p>
    <h3 style={{ color: '#111827', margin: '10px 0', fontSize: '20px', fontWeight: 'bold' }}>Total Amount: ₹{grandTotal}</h3>

    <form onSubmit={handleBooking} style={{ display: 'flex', flexDirection: 'column', gap: '12px', marginTop: '15px' }}>
      <input
        type="email"
```

```
        </div>
      );
    })}
  </div>

  {/* 3. Summary & Booking */}
  <div style={{ marginTop: '25px', paddingTop: '15px', borderTop: '2px solid #e9d5ff' }}>
    <p style={{ fontSize: '14px', margin: '4px 0', color: '#4b5563' }}>Tickets ({selectedSeats.length}): ₹{seatsCost}</p>
    <p style={{ fontSize: '14px', margin: '4px 0', color: '#4b5563' }}>Snacks: ₹{snacksCost}</p>
    <h3 style={{ color: '#111827', margin: '10px 0', fontSize: '20px', fontWeight: 'bold' }}>Total Amount: ₹{grandTotal}</h3>

    <form onSubmit={handleBooking} style={{ display: 'flex', flexDirection: 'column', gap: '12px', marginTop: '15px' }}>
      <input
        type="email"
        placeholder="Enter your email"
        value={userEmail}
        onChange={(e) => setUserEmail(e.target.value)}
        required
        style={{ padding: '12px', borderRadius: '6px', border: '1px solid #c084fc', backgroundColor: '#ffffff', color: '#111827', fontSize: '15px' }}
      />
      <button type="submit" style={{ backgroundColor: '#7c3aed', color: '#ffffff', padding: '14px', border: 'none', borderRadius: '6px', fontWeight: 'bold', fontSi
        Confirm & Pay ₹{grandTotal}
      </button>
    </form>
  </div>
</div>
)}
```

This code is the React frontend (`App.js`) of your IMovies application, which allows users to browse movies and book tickets.

Main Features:

- Data Fetching (`useEffect`): Fetches movies and shows data from the backend APIs (`/api/movies` and `/api/shows`).
- Show & Seat Selection: Allows users to select a showtime and choose seats (`A1`, `B1`, etc.) from an interactive grid.
- Snacks Selection: Enables users to add or remove snacks (Popcorn, Drinks, Nachos) and manage their quantities.
- Booking & Cost Calculation: Calculates the total cost (seats + snacks), takes the user's email input, and sends a POST request to `/api/bookings` to confirm the reservation.