

## CERTIFICADO PATRON DE CND


**TEND** 

NDT Reference Standard Certificate

Tubo patrón número
Reference standard #

2u175

Datos del Producto Product Information							
Diametro [mm]	168,3	Cliente Client	Ciclo Product	72464			
Espesor [mm] Wall Thickness	18,26	Tratamiento Termico	Colada <sub>Heat</sub>	0			
Trazabilidad Traceability	0		Expediente Manufacturing Order				

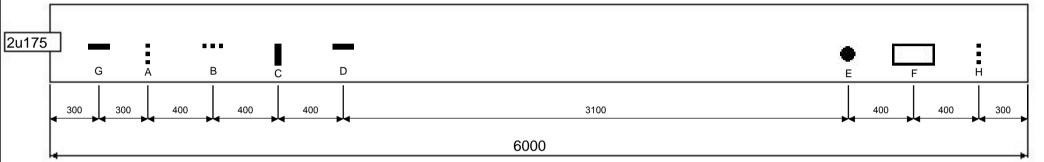

Valores Pedidos / Requested Values

Valores Medidos / Measured Values

Posicion Position	Tipo de Notch Notch Type	Ancho / Diam Max [mm] Max Width / Diam	Profundidad Nominal [%] Depth	Tolerancia [%] Tolerance	Profundidad Maxima [mm] Max Depth	Profundidad Minima [mm] Min Depth	Profundidad Nominal [mm] Nom Depth	Longitud Maxima [mm] Max Length	Longitud [mm] Length	Profundida d A [mm] Depth A	Profundida d B [mm] Depth B	Ancho / Diam [mm] Width / Diam	Responsable Responsible	Fecha Date
Α	Transversal Interno Transverse ID	1,00	4	±15	0,840	0,621	0,730	50,80	42,00	0,664	0,664	0,96	Sebastian Monteros	28/06/04
В	Longitudinal Interno Longitudinal ID	1,00	5	±15	1,050	0,776	0,913	50,80	46,00	0,883	0,912	0,97	Sebastian Monteros	28/06/04
С	Transversal Externo Transverse OD	1,00	5	±15	1,050	0,776	0,913	50,80	48,00	1,008	1,023	0,95	Sebastian Monteros	28/06/04
D	Longitudinal Externo longitudinal OD	1,00	5	±15	1,050	0,776	0,913	50,80	48,00	0,965	0,957	0,95	Sebastian Monteros	28/06/04
E	Agujero Fondo Plano Flat bottom hole	6,35	50	±15	10,500	7,761	9,130	ı	-	9,000	-	6,40	Sebastian Monteros	28/06/04
F	Chavetero Grove	8,00	50	±15	10,500	7,761	9,130	30,00	30,00	9,100	9,100	8,00	Sebastian Monteros	28/06/04
G	Longitudinal Externo longitudinal OD	1,00	5	±15	1,050	0,776	0,913	50,80	49,00	0,960	0,966	0,94	Sebastian Monteros	28/06/04
Н	Transversal Interno Transverse ID	1,00	5	±15	1,050	0,776	0,913	50,80	46,00	0,924	0,913	0,98	Sebastian Monteros	28/06/04

## Notas:

1.-Todas las dimensiones son en milimetros excepto que se indique lo contrario.

2.-Minima Profundidad Nominal de las ranuras 0.3 mm.

CERTIFICADO CON REPLICA NO

## Notes:

- 1.-All dimensions in milimeters unless stated.
- 2.-Minimum notch nominal depth 0.3 mm.

CERTIFIED WITH PLASTIC REPLICA NO



## CERTIFICADO PATRON DE CND

**TEND** 

NDT Reference Standard Certificate

Tubo patrón número
Reference standard #

2u175

Datos del Producto Product Information								
Diametro [mm] Diameter	168,3	Cliente Client	Ciclo Product	72464				
Espesor [mm] Wall Thickness	18,26	Tratamiento Termico Heat Treatment	Colada <sub>Heat</sub>	0				
Trazabilidad Traceability	0		Expediente Manufacturing Order					

Instrumentos de Medicion Utilizados:

Notas:

1.-Todas las dimensiones son en milimetros excepto que se indique lo contrario.

2.-Minima Profundidad Nominal de las ranuras 0.3 mm.

CERTIFICADO CON REPLICA NO

Notes:

1.-All dimensions in milimeters unless stated.

2.-Minimum notch nominal depth 0.3 mm.

CERTIFIED WITH PLASTIC REPLICA NO