

CERTIFICADO PATRON DE CND


TEND

NDT Reference Standard Certificate

Tubo patrón número
Reference standard #

2u263

Datos del Producto Product Information Ciclo Product Cliente Diametro [mm] 219.1 75362 Diameter Espesor [mm]
Wall Thickness Tratamiento Termico Colada 17,3 0 **Heat Treatment** Heat Trazabilidad Expediente Manufacturing Order 0 Traceability

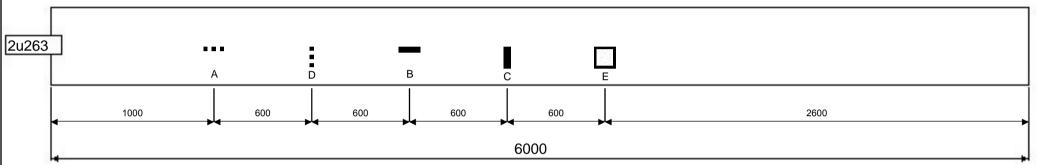

Valores Pedidos / Requested Values

Valores Medidos / Measured Values

Posicion Position	Tipo de Notch Notch Type	Ancho / Diam Max [mm] Max Width / Diam	Profundidad Nominal [%] Depth	Tolerancia [%] Tolerance	Profundidad Maxima [mm] Max Depth	Profundidad Minima [mm] Min Depth	Profundidad Nominal [mm] Nom Depth	Longitud Maxima [mm] Max Length	Longitud [mm] Length	Profundida d A [mm] Depth A	Profundida d B [mm] Depth B	Ancho / Diam [mm] Width / Diam	Responsable Responsible	Fecha Date
Α	Longitudinal Interno Longitudinal ID	1,00	5	±15	0,995	0,735	0,865	25,40	24,00	0,981	0,951	0,96	Sebastian Monteros	02/06/04
В	Longitudinal Externo longitudinal OD	1,00	5	±15	0,995	0,735	0,865	25,40	24,20	0,884	0,834	0,93	Sebastian Monteros	02/06/04
С	Transversal Externo Transverse OD	1,00	5	±15	0,995	0,735	0,865	9,52	9,00	0,824	0,000	0,96	Sebastian Monteros	02/06/04
D	Transversal Interno Transverse ID	1,00	5	±15	0,995	0,735	0,865	25,40	24,50	0,944	0,863	0,94	Sebastian Monteros	02/06/04
Е	Reduccion de Espesor Externo	40,00	13	±15	2,487	1,838	2,163	75,00	75,00	-	-	40,00	Sebastian Monteros	02/06/04

Instrumentos de Medicion Utilizados:

Notas:

- 1.-Todas las dimensiones son en milimetros excepto que se indique lo contrario.
- 2.-Minima Profundidad Nominal de las ranuras 0.3 mm.

CERTIFICADO CON REPLICA NO

Notes:

1.-All dimensions in milimeters unless stated.

1/2

2.-Minimum notch nominal depth 0.3 mm.

CERTIFIED WITH PLASTIC REPLICA NO