


Postman

- **Create using POST**


Create and update should be done in one POST method.

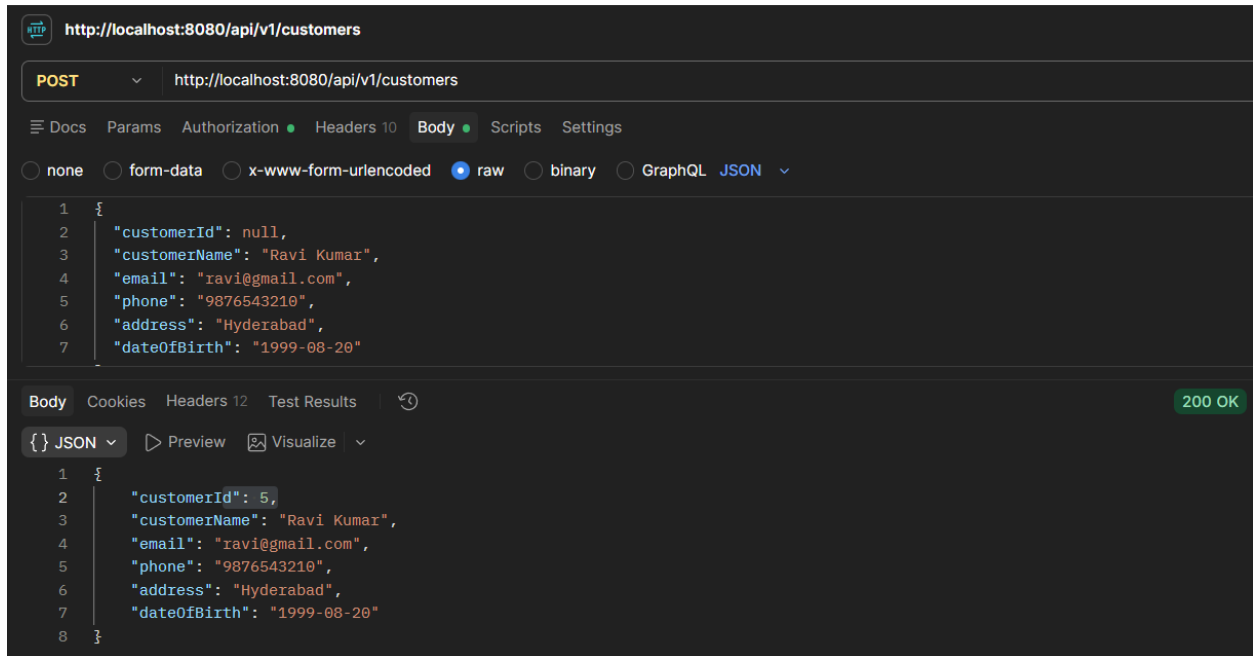

Update using the SAME POST

POST: <http://localhost:8080/api/v1/customers>

Now use the ID returned from the previous response.

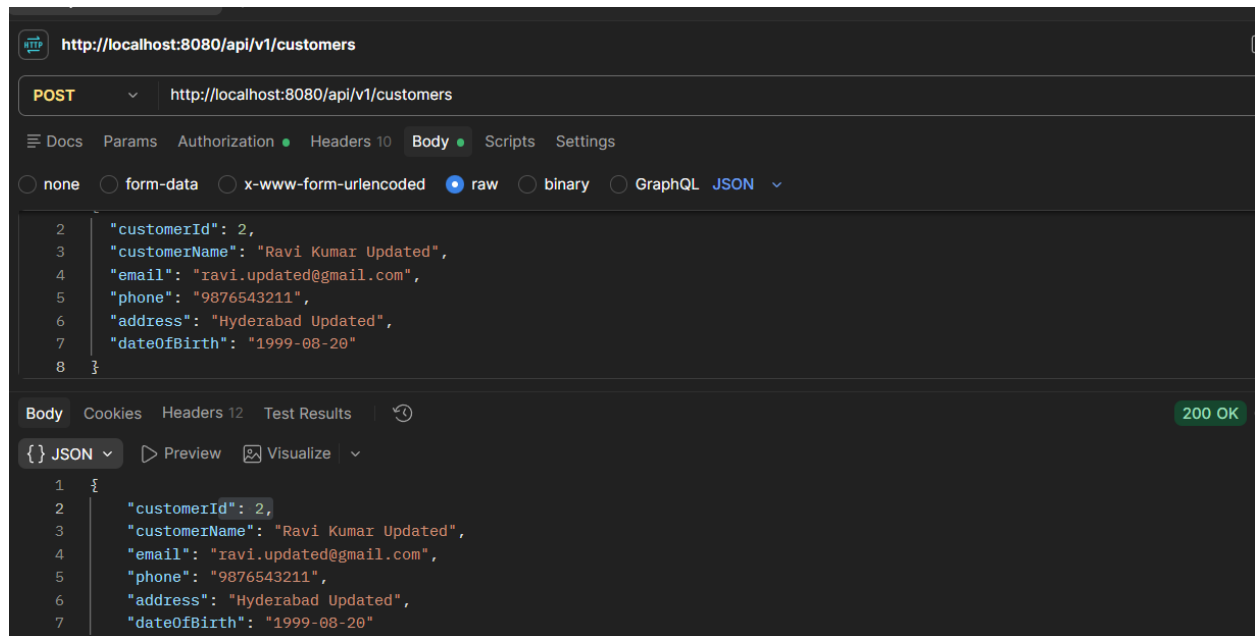

- **API Versioning**

GET: <http://localhost:8080/api/v1/customers>

/api/v1/customers


/api/v1/accounts

/api/v1/transactions

/api/v1/loans

/api/v1/investments

/api/v1/audit-logs

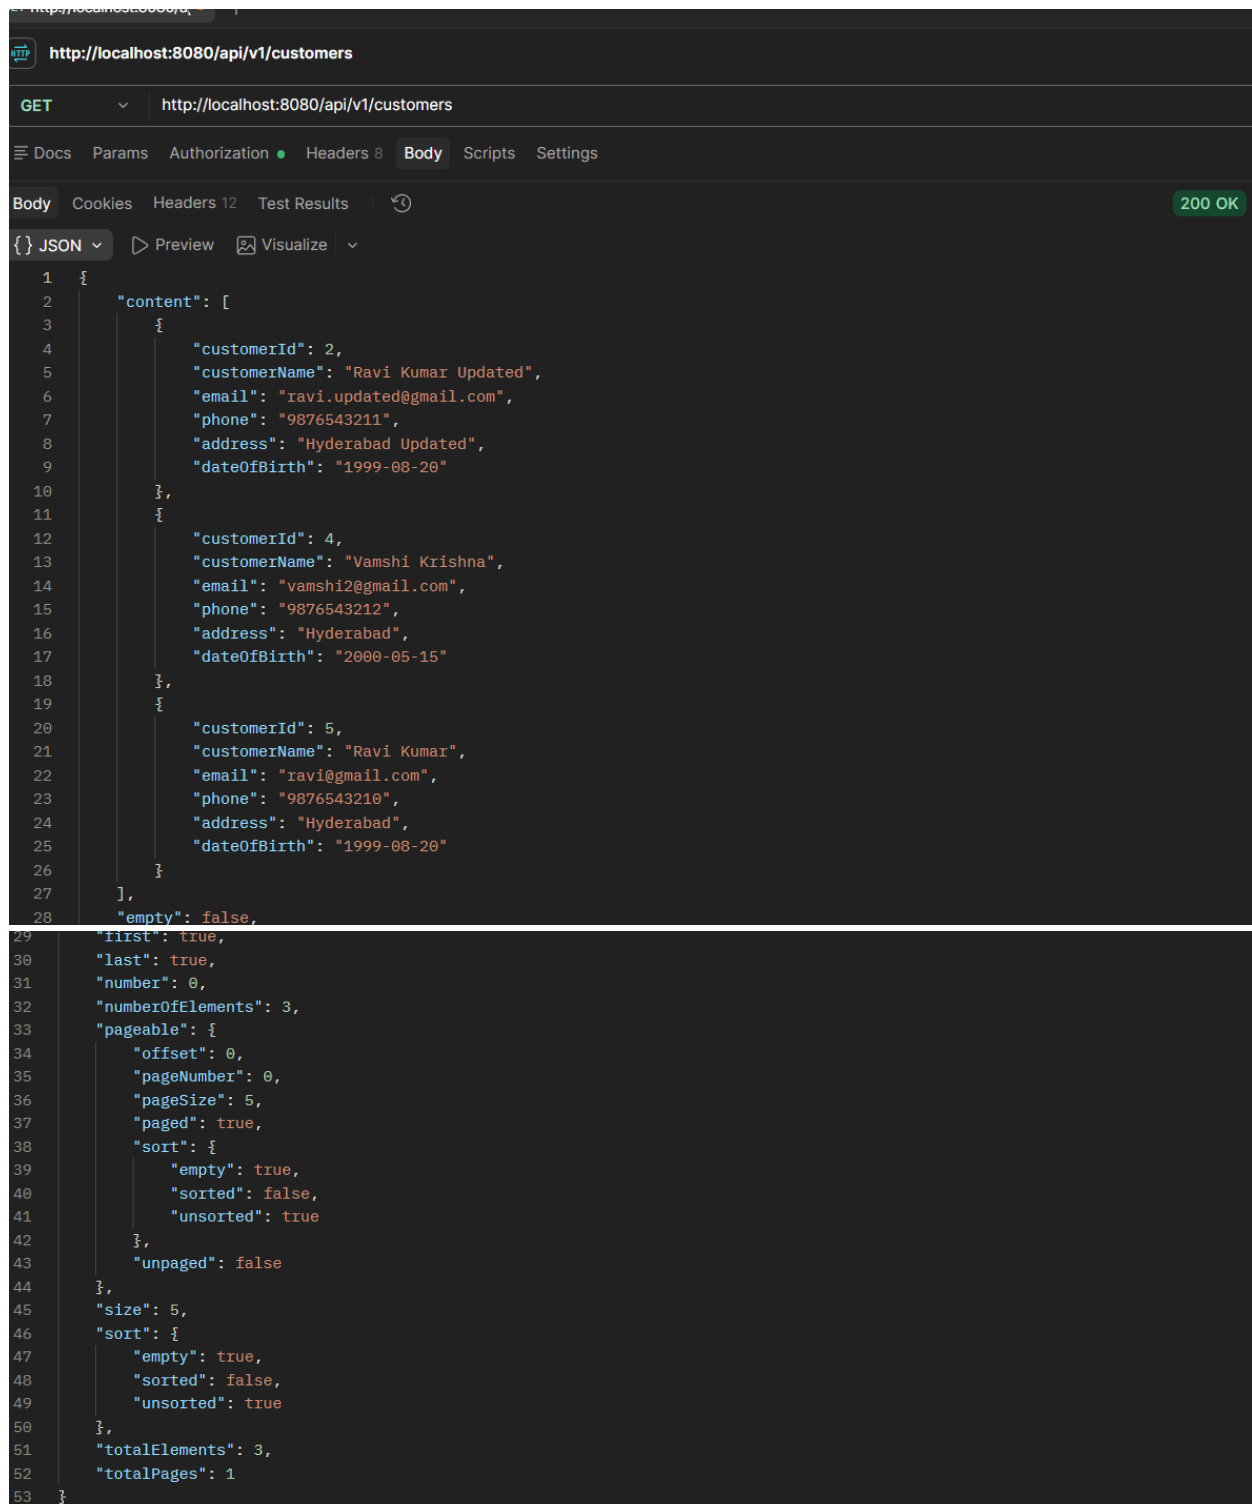

```
1  {
2    "content": [
3      {
4        "customerId": 2,
5        "customerName": "Ravi Kumar Updated",
6        "email": "ravi.updated@gmail.com",
7        "phone": "9876543211",
8        "address": "Hyderabad Updated",
9        "dateOfBirth": "1999-08-20"
10     },
11     {
12       "customerId": 4,
13       "customerName": "Vamshi Krishna",
14       "email": "vamshi2@gmail.com",
15       "phone": "9876543212",
16       "address": "Hyderabad",
17       "dateOfBirth": "2000-05-15"
18     },
19     {
20       "customerId": 5,
21       "customerName": "Ravi Kumar",
22       "email": "ravi@gmail.com",
23       "phone": "9876543210",
24       "address": "Hyderabad",
25       "dateOfBirth": "1999-08-20"
26     }
27   ],
28   "empty": false,
29   "first": true,
30   "last": true,
31   "number": 0,
32   "numberOfElements": 3,
33   "pageable": {
34     "offset": 0,
35     "pageNumber": 0,
36     "pageSize": 5,
37     "paged": true,
38     "sort": {
39       "empty": true,
40       "sorted": false,
41       "unsorted": true
42     },
43     "unpaged": false
44   },
45   "size": 5,
46   "sort": {
47     "empty": true,
48     "sorted": false,
49     "unsorted": true
50   },
51   "totalElements": 3,
52   "totalPages": 1
53 }
```

- **Pagination**

get: <http://localhost:8080/api/v1/customers?page=0&size=5>

```
GET http://localhost:8080/a. +
http://localhost:8080/api/v1/customers
GET http://localhost:8080/api/v1/customers?page=0&size=5
Body Scripts Settings
Body Cookies Headers 12 Test Results 200 OK
JSON Preview Visualize
1 {
2   "content": [
3     {
4       "customerId": 2,
5       "customerName": "Ravi Kumar Updated",
6       "email": "ravi.updated@gmail.com",
7       "phone": "9876543211",
8       "address": "Hyderabad Updated",
9       "dateOfBirth": "1999-08-20"
10    },
11    {
12      "customerId": 4,
13      "customerName": "Vamshi Krishna",
14      "email": "vamshi2@gmail.com",
15      "phone": "9876543212",
16      "address": "Hyderabad",
17      "dateOfBirth": "2000-05-15"
18    },
19    {
20      "customerId": 5,
21      "customerName": "Ravi Kumar",
22      "email": "ravi@gmail.com",
23      "phone": "9876543210",
24      "address": "Hyderabad",
25      "dateOfBirth": "1999-08-20"
26    }
27  ],
28  "empty": false,
29  "first": true,
30  "last": true,
31  "number": 0,
32  "numberOfElements": 3,
33  "pageable": {
34    "offset": 0,
35    "pageNumber": 0,
36    "pageSize": 5,
37    "paged": true,
38    "sort": {
39      "empty": true,
40      "sorted": false,
41      "unsorted": true
42    },
43    "unpaged": false
44  },
45  "size": 5,
46  "sort": {
47    "empty": true,
48    "sorted": false,
49    "unsorted": true
50  },
51  "totalElements": 3,
52  "totalPages": 1
53 }
```

- **Actuator Metrics**

<http://localhost:8080/actuator/health>

GET http://localhost:8080/a GET http://localhost:8080/a

http://localhost:8080/actuator/metrics

GET http://localhost:8080/actuator/metrics

Docs Params Authorization Headers 8 Body Scripts Settings

Body Cookies Headers 11 Test Results 200 OK

```
{
  "names": [
    "application.ready.time",
    "application.started.time",
    "disk.free",
    "disk.total",
    "executor.active",
    "executor.completed",
    "executor.pool.core",
    "executor.pool.max",
    "executor.pool.size",
    "executor.queue.remaining",
    "executor.queued",
    "hikaricp.connections",
    "hikaricp.connections.acquire",
    "hikaricp.connections.active",
    "hikaricp.connections.creation",
    "hikaricp.connections.idle",
    "hikaricp.connections.max",
    "hikaricp.connections.min",
    "hikaricp.connections.pending",
    "hikaricp.connections.timeout",
    "hikaricp.connections.usage",
    "http.server.requests",
    "http.server.requests.active",
    "jdbc.connections.active",
    "jdbc.connections.idle",
    "..."
  ]
}
```

```
"jdbc.connections.max",
"jdbc.connections.min",
"jvm.buffer.count",
"jvm.buffer.memory.used",
"jvm.buffer.total.capacity",
"jvm.classes.loaded",
"jvm.classes.loaded.count",
"jvm.classes.unloaded",
"jvm.compilation.time",
"jvm.gc.concurrent.phase.time",
"jvm.gc.live.data.size",
"jvm.gc.max.data.size",
"jvm.gc.memory.allocated",
"jvm.gc.memory.promoted",
"jvm.gc.overhead",
"jvm.gc.pause",
"jvm.info",
"jvm.memory.committed",
"jvm.memory.max",
"jvm.memory.usage.after.gc",
"jvm.memory.used",
"jvm.threads.daemon",
"jvm.threads.live",
"jvm.threads.peak",
"jvm.threads.started",
"jvm.threads.states",
"logback.events",
"process.cpu.time",
"process.cpu.usage",
"process.start.time",
"process.uptime",
"spring.data.repository.invocations",
"spring.security.authorizations",
"spring.security.authorizations.active",
"spring.security.filterchains",
"spring.security.filterchains.JwtAuthenticationFilter.after",
"spring.security.filterchains.JwtAuthenticationFilter.before",
"spring.security.filterchains.access.exceptions.after",
"spring.security.filterchains.access.exceptions.before",
"spring.security.filterchains.active",
"spring.security.filterchains.authentication.anonymous.after",
"spring.security.filterchains.authentication.anonymous.before",
"spring.security.filterchains.authorization.after",
"spring.security.filterchains.authorization.before",
"spring.security.filterchains.context.async.after",
"spring.security.filterchains.context.async.before",
"spring.security.filterchains.context.holder.after",
"spring.security.filterchains.context.holder.before",
"spring.security.filterchains.context.servlet.after",
"spring.security.filterchains.context.servlet.before",
"spring.security.filterchains.header.after",
"spring.security.filterchains.header.before",
"spring.security.filterchains.logout.after",
"spring.security.filterchains.logout.before",
"spring.security.filterchains.requestcache.after",
"spring.security.filterchains.requestcache.before",
```

```

        "spring.security.filterchains.session.management.after",
        "spring.security.filterchains.session.management.before",
        "spring.security.filterchains.session.urlencoding.after",
        "spring.security.filterchains.session.urlencoding.before",
        "spring.security.http.secured.requests",
        "spring.security.http.secured.requests.active",
        "system.cpu.count",
        "system.cpu.usage",
        "tasks.scheduled.execution",
        "tasks.scheduled.execution.active",
        "tomcat.sessions.active.current",
        "tomcat.sessions.active.max",
        "tomcat.sessions.alive.max",
        "tomcat.sessions.created",
        "tomcat.sessions.expired",
        "tomcat.sessions.rejected"
    ]
}

```

- **HikariCP metric**

The screenshot shows a web browser interface for a REST client. The address bar displays the URL `http://localhost:8080/actuator/metrics/hikaricp.connections.active`. The method is set to `GET`. The response status is `200 OK`. The response body is shown in JSON format:


```

{
  "availableTags": [
    {
      "tag": "pool",
      "values": [
        "FinanceHikariPool"
      ]
    }
  ],
  "description": "Active connections",
  "measurements": [
    {
      "statistic": "VALUE",
      "value": 0.0
    }
  ],
  "name": "hikaricp.connections.active"
}

```

- **HikariCP Idle Connections**

<http://localhost:8080/actuator/metrics/hikaricp.connections.idle>

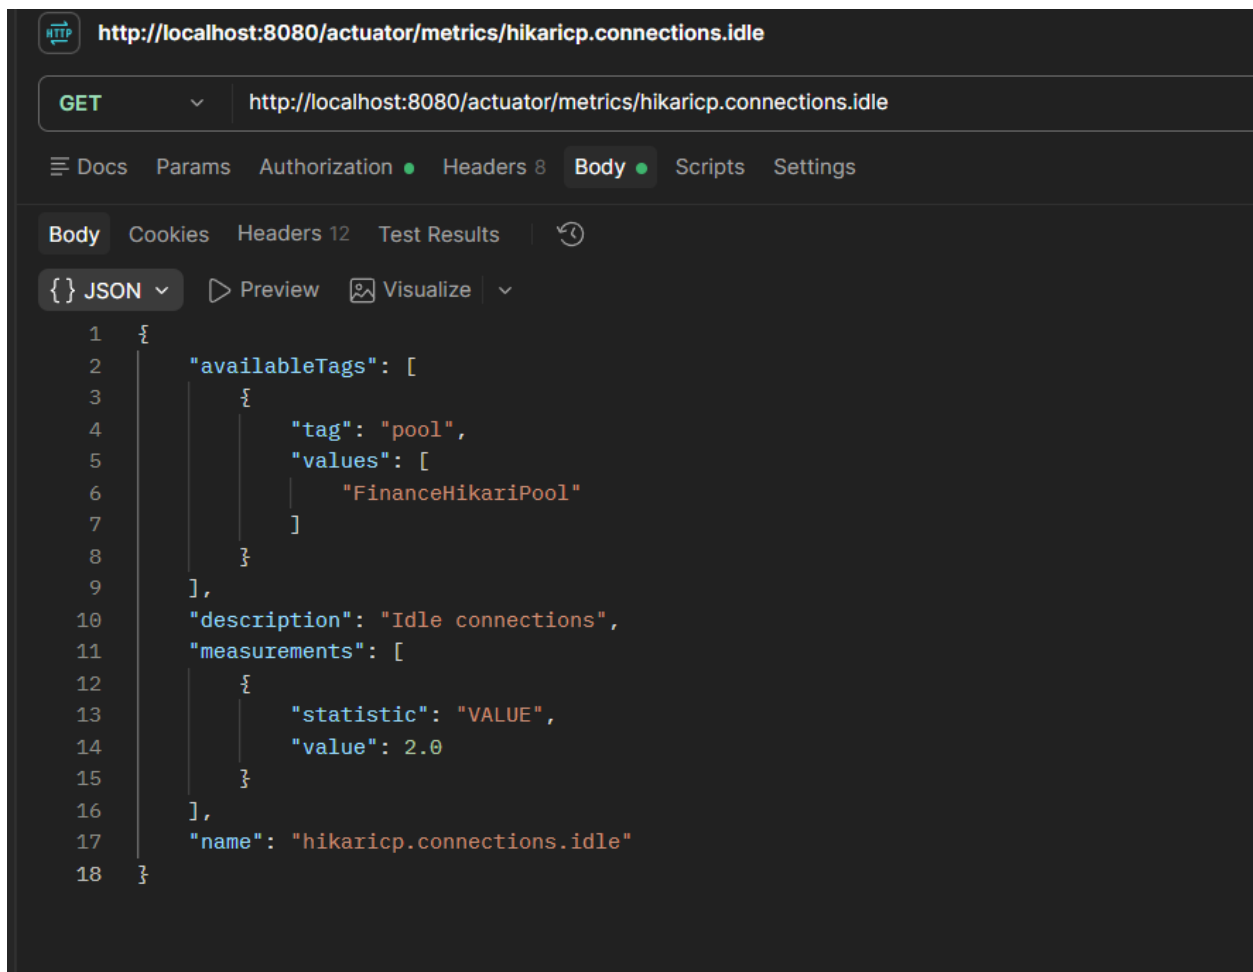


Maximum Connections

<http://localhost:8080/actuator/metrics/hikaricp.connections.max>


```
1 {
2   "availableTags": [
3     {
4       "tag": "pool",
5       "values": [
6         "FinanceHikariPool"
7       ]
8     }
9   ],
10  "description": "Max connections",
11  "measurements": [
12    {
13      "statistic": "VALUE",
14      "value": 10.0
15    }
16  ],
17  "name": "hikaricp.connections.max"
```

<http://localhost:8080/actuator/metrics/hikaricp.connections.min>

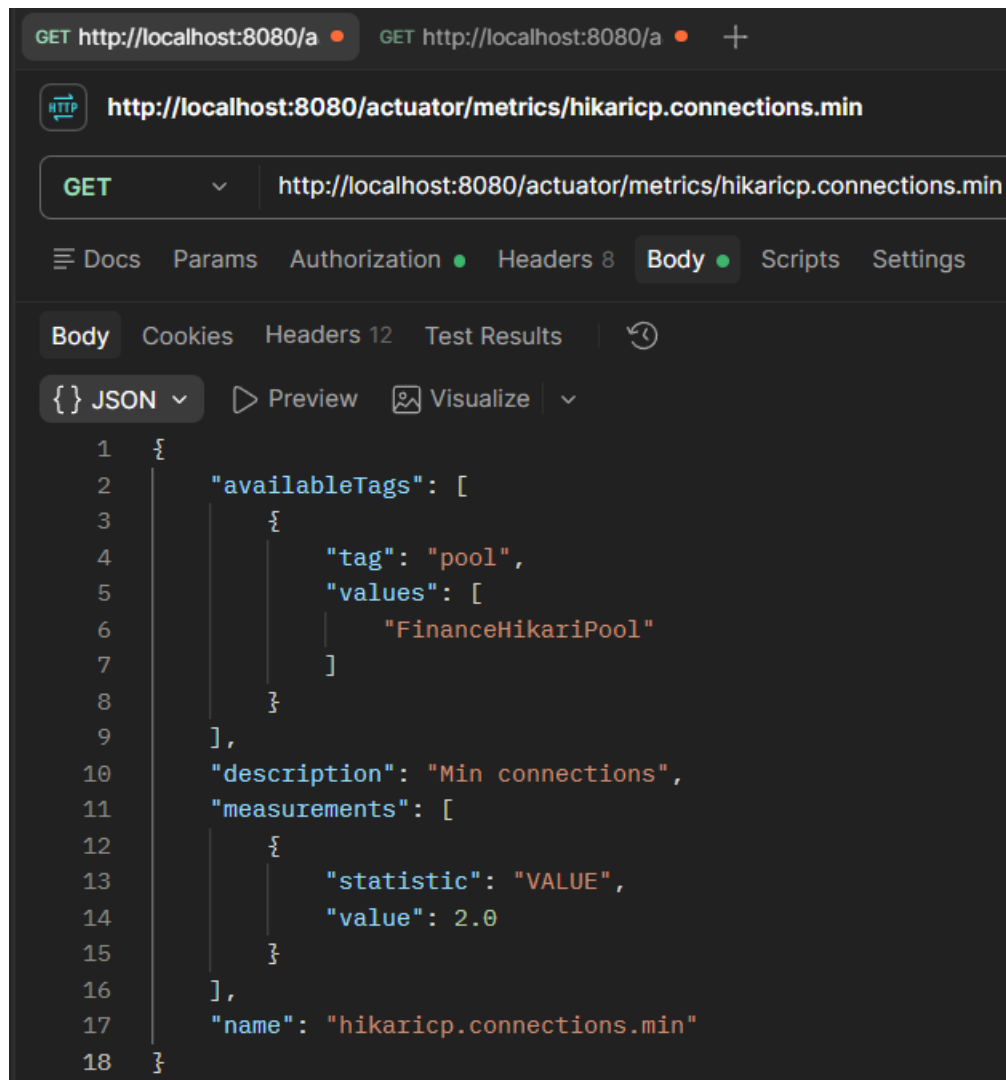


```
GET http://localhost:8080/a GET http://localhost:8080/a +
http://localhost:8080/actuator/metrics/hikaricp.connections.min
GET http://localhost:8080/actuator/metrics/hikaricp.connections.min
Docs Params Authorization Headers 8 Body Scripts Settings
Body Cookies Headers 12 Test Results
JSON Preview Visualize
1 {
2   "availableTags": [
3     {
4       "tag": "pool",
5       "values": [
6         "FinanceHikariPool"
7       ]
8     }
9   ],
10  "description": "Min connections",
11  "measurements": [
12    {
13      "statistic": "VALUE",
14      "value": 2.0
15    }
16  ],
17  "name": "hikaricp.connections.min"
18 }
```

- Scheduler Evidence

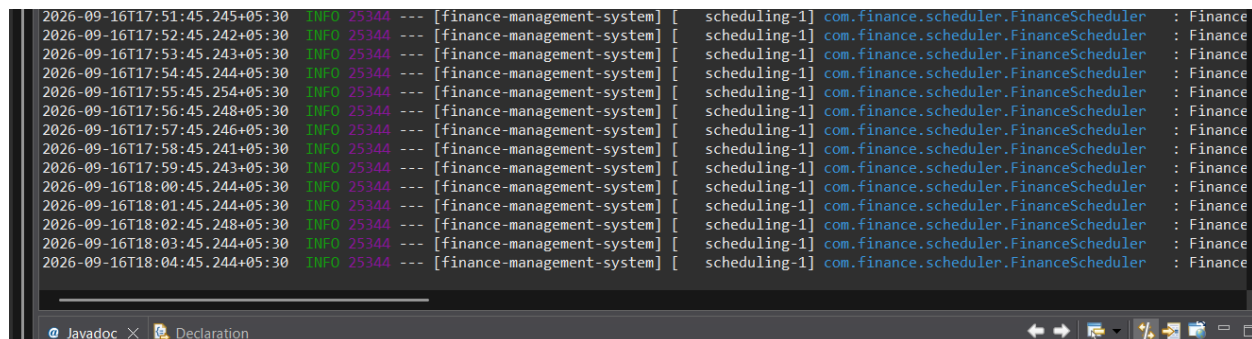

```
2026-09-16T17:51:45.245+05:30 INFO 25344 --- [finance-management-system] [ scheduling-1] com.finance.scheduler.FinanceScheduler : Finance
2026-09-16T17:52:45.242+05:30 INFO 25344 --- [finance-management-system] [ scheduling-1] com.finance.scheduler.FinanceScheduler : Finance
2026-09-16T17:53:45.243+05:30 INFO 25344 --- [finance-management-system] [ scheduling-1] com.finance.scheduler.FinanceScheduler : Finance
2026-09-16T17:54:45.244+05:30 INFO 25344 --- [finance-management-system] [ scheduling-1] com.finance.scheduler.FinanceScheduler : Finance
2026-09-16T17:55:45.254+05:30 INFO 25344 --- [finance-management-system] [ scheduling-1] com.finance.scheduler.FinanceScheduler : Finance
2026-09-16T17:56:45.248+05:30 INFO 25344 --- [finance-management-system] [ scheduling-1] com.finance.scheduler.FinanceScheduler : Finance
2026-09-16T17:57:45.246+05:30 INFO 25344 --- [finance-management-system] [ scheduling-1] com.finance.scheduler.FinanceScheduler : Finance
2026-09-16T17:58:45.241+05:30 INFO 25344 --- [finance-management-system] [ scheduling-1] com.finance.scheduler.FinanceScheduler : Finance
2026-09-16T17:59:45.243+05:30 INFO 25344 --- [finance-management-system] [ scheduling-1] com.finance.scheduler.FinanceScheduler : Finance
2026-09-16T18:00:45.244+05:30 INFO 25344 --- [finance-management-system] [ scheduling-1] com.finance.scheduler.FinanceScheduler : Finance
2026-09-16T18:01:45.244+05:30 INFO 25344 --- [finance-management-system] [ scheduling-1] com.finance.scheduler.FinanceScheduler : Finance
2026-09-16T18:02:45.248+05:30 INFO 25344 --- [finance-management-system] [ scheduling-1] com.finance.scheduler.FinanceScheduler : Finance
2026-09-16T18:03:45.244+05:30 INFO 25344 --- [finance-management-system] [ scheduling-1] com.finance.scheduler.FinanceScheduler : Finance
2026-09-16T18:04:45.244+05:30 INFO 25344 --- [finance-management-system] [ scheduling-1] com.finance.scheduler.FinanceScheduler : Finance
```

- AOP + Logger + Profiling

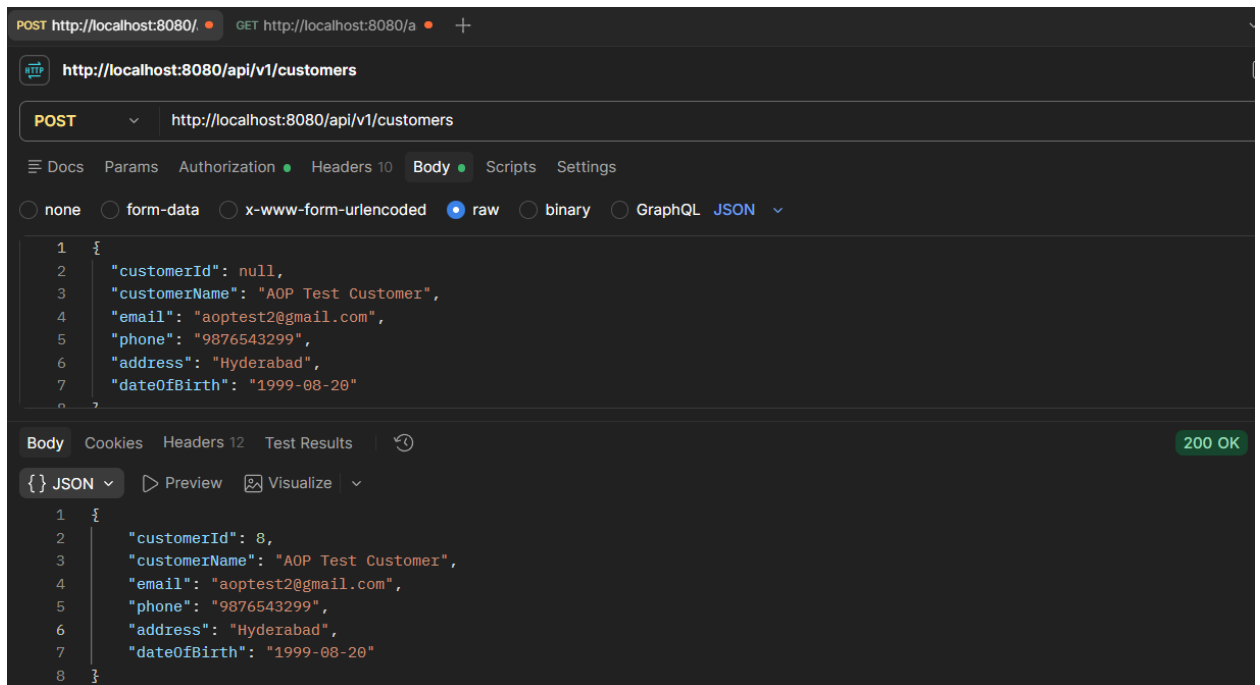


- **Audit**

Make sure your Bearer Token is present under:

Authorization → Bearer Token

GET :`http://localhost:8080/api/v1/audit-logs`

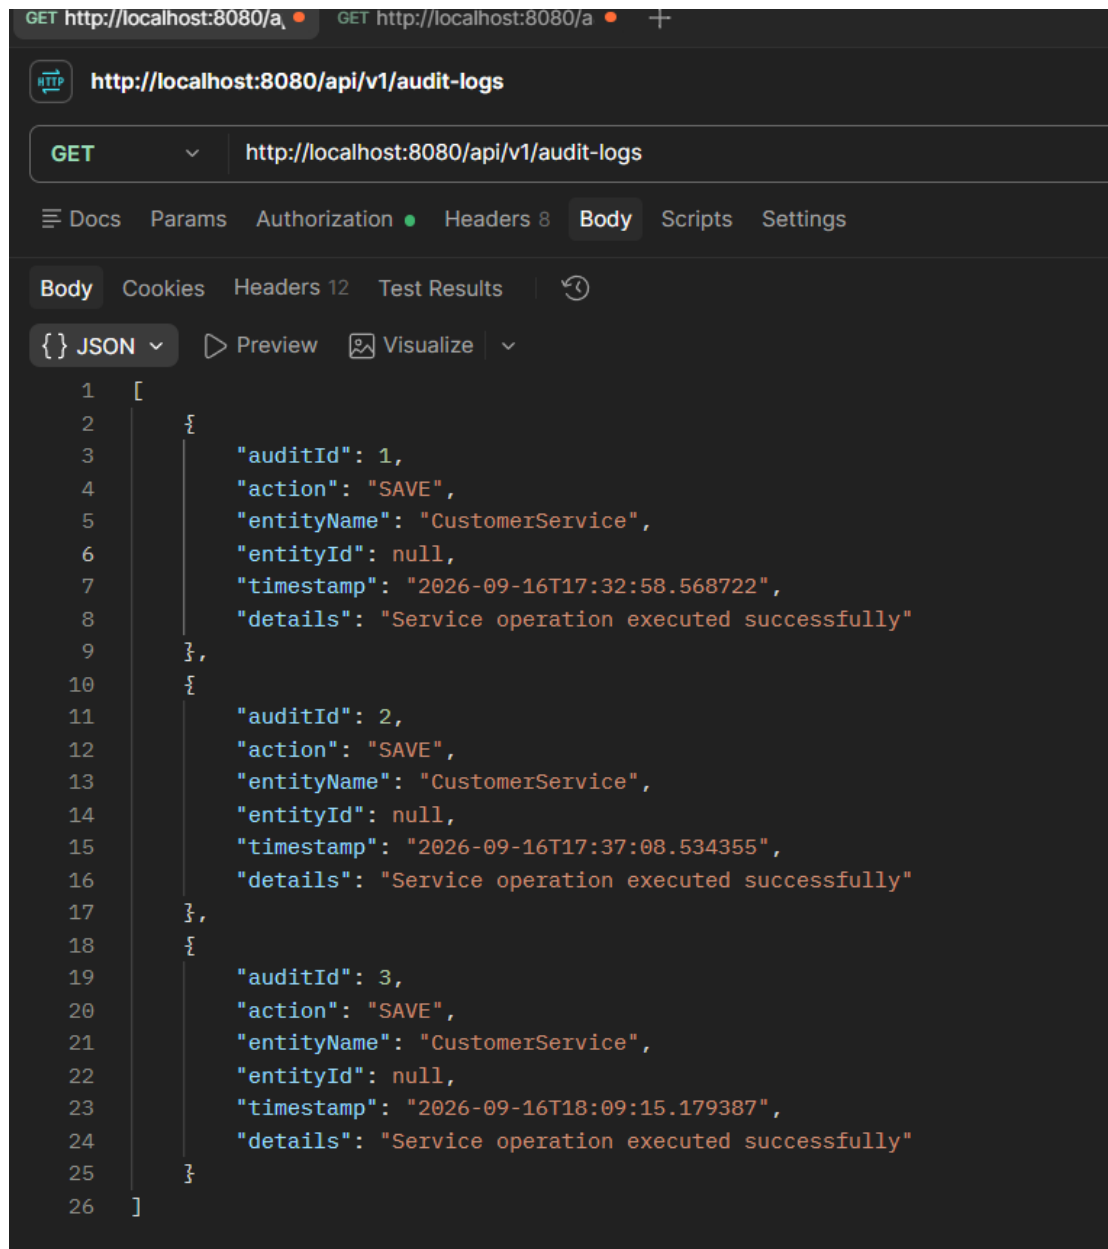

GET http://localhost:8080/api/v1/audit-logs

GET http://localhost:8080/api/v1/audit-logs


Docs Params Authorization Headers 8 Body Scripts Settings

Body Cookies Headers 12 Test Results

{ } JSON Preview Visualize

```
1  [
2    {
3      "auditId": 1,
4      "action": "SAVE",
5      "entityName": "CustomerService",
6      "entityId": null,
7      "timestamp": "2026-09-16T17:32:58.568722",
8      "details": "Service operation executed successfully"
9    },
10   {
11     "auditId": 2,
12     "action": "SAVE",
13     "entityName": "CustomerService",
14     "entityId": null,
15     "timestamp": "2026-09-16T17:37:08.534355",
16     "details": "Service operation executed successfully"
17   },
18   {
19     "auditId": 3,
20     "action": "SAVE",
21     "entityName": "CustomerService",
22     "entityId": null,
23     "timestamp": "2026-09-16T18:09:15.179387",
24     "details": "Service operation executed successfully"
25   }
26 ]
```

- **JWT/Security protected API test is working**

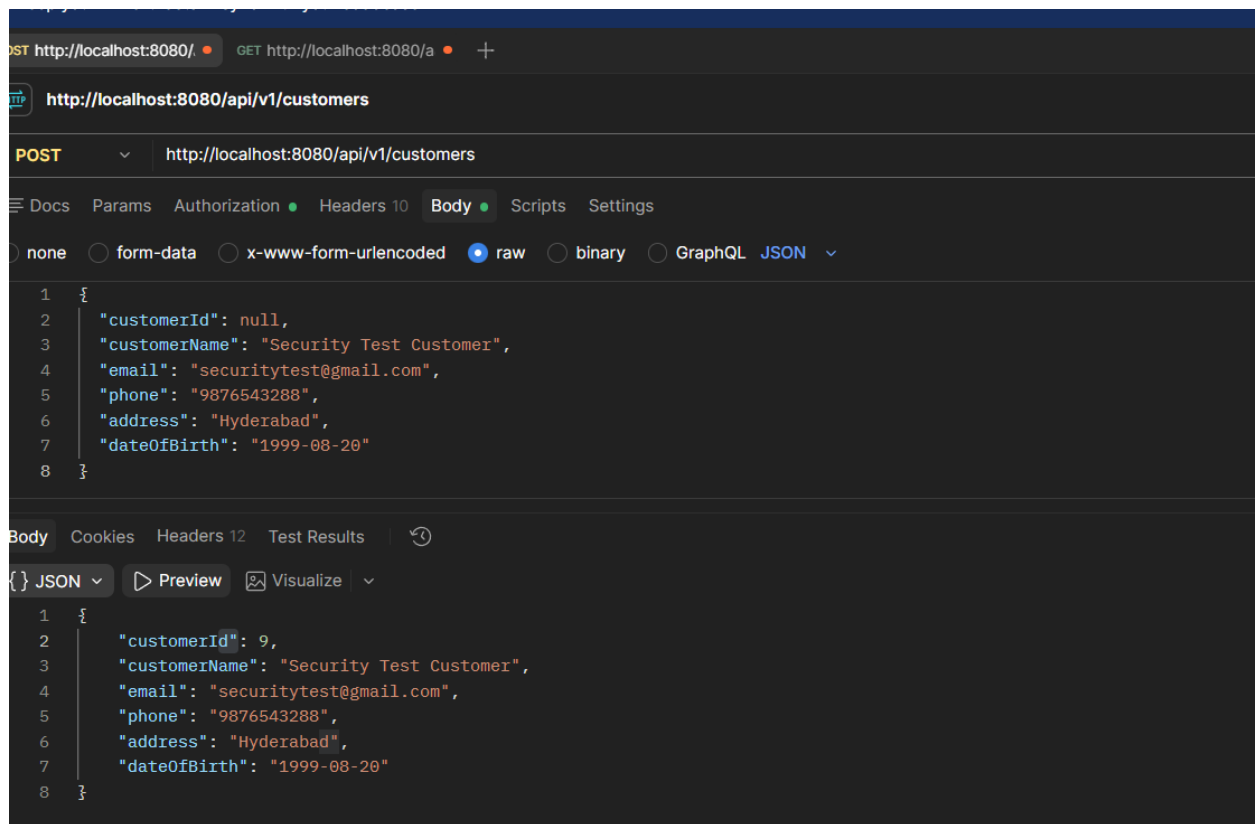

- **Customer CRUD**

Create Customer

POST: <http://localhost:8080/api/customers>

POST http://localhost:8080/ + No environment

http://localhost:8080/api/customers Save Share

POST http://localhost:8080/api/customers Send

Docs Params Authorization Headers 9 Body Scripts Settings Cookies

none form-data x-www-form-urlencoded raw binary GraphQL JSON Schema Beautify

```
1 {
2   "customerName": "Vamshi Krishna",
3   "email": "vamshi2@gmail.com",
4   "phone": "9876543212",
5   "address": "Hyderabad",
6   "dateOfBirth": "2000-05-15"
7 }
```

Body Cookies Headers 12 Test Results 201 Created • 400 ms • 557 B

{ } JSON Preview Visualize

```
1 {
2   "customerId": 4,
3   "customerName": "Vamshi Krishna",
4   "email": "vamshi2@gmail.com",
5   "phone": "9876543212",
6   "address": "Hyderabad",
7   "dateOfBirth": "2000-05-15"
8 }
```


Database

```
141
142 • USE finance_db;
143
144 • SELECT * FROM customers;
```

Result Grid Filter Rows: Edit: Export/Import: Wrap Cell Content:

	customer_id	customer_name	email	phone	address	date_of_birth	created_at
▶	1	Vamshi	vamshi@gmail.com	9876543210	Hyderabad	2000-05-15	2026-09-15 19:48:30
	2	Krishna	krishna@gmail.com	9876543211	Bangalore	1999-08-20	2026-09-15 19:48:30
	4	Vamshi Krishna	vamshi2@gmail.com	9876543212	Hyderabad	2000-05-15	2026-09-15 23:41:18
*	NULL	NULL	NULL	NULL	NULL	NULL	NULL


- GET: <http://localhost:8080/api/customers/1>

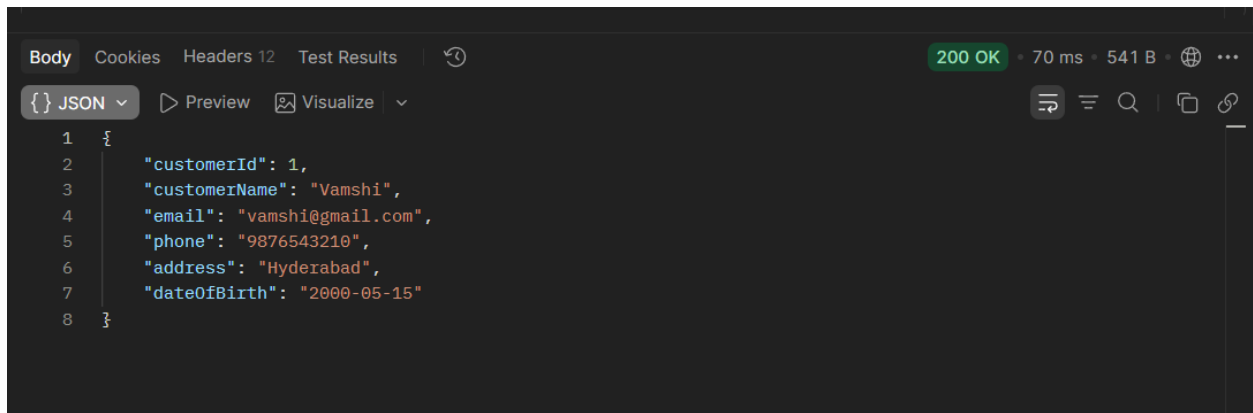

Body Cookies Headers 12 Test Results 200 OK • 70 ms • 541 B •

```
{
  "customerId": 1,
  "customerName": "Vamshi",
  "email": "vamshi@gmail.com",
  "phone": "9876543210",
  "address": "Hyderabad",
  "dateOfBirth": "2000-05-15"
}
```

- GET: <http://localhost:8080/api/customers>

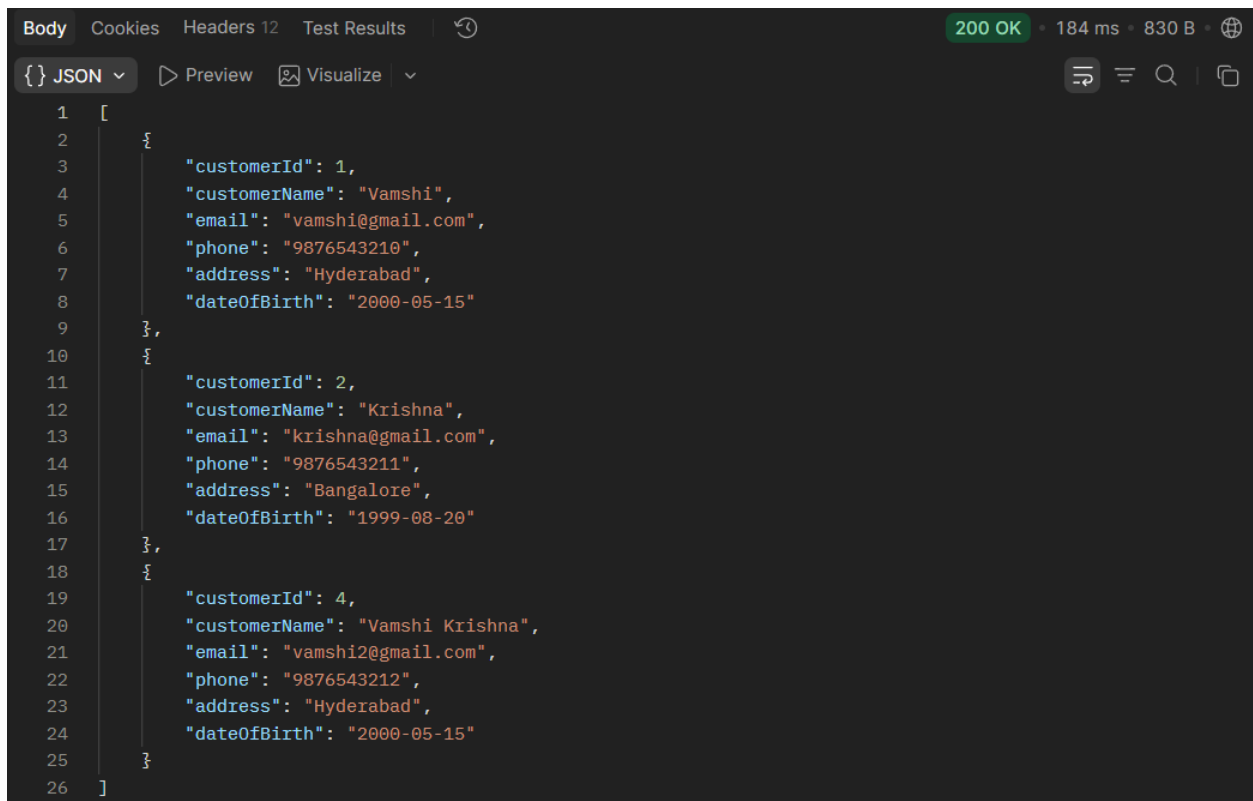

Body Cookies Headers 12 Test Results 200 OK • 184 ms • 830 B •

```
[
  {
    "customerId": 1,
    "customerName": "Vamshi",
    "email": "vamshi@gmail.com",
    "phone": "9876543210",
    "address": "Hyderabad",
    "dateOfBirth": "2000-05-15"
  },
  {
    "customerId": 2,
    "customerName": "Krishna",
    "email": "krishna@gmail.com",
    "phone": "9876543211",
    "address": "Bangalore",
    "dateOfBirth": "1999-08-20"
  },
  {
    "customerId": 4,
    "customerName": "Vamshi Krishna",
    "email": "vamshi2@gmail.com",
    "phone": "9876543212",
    "address": "Hyderabad",
    "dateOfBirth": "2000-05-15"
  }
]
```

- Update Customer

PUT: <http://localhost:8080/api/customers/1>

PUT http://localhost:8080/a

http://localhost:8080/api/customers/1

PUT http://localhost:8080/api/customers/1

Body

```
1 {
2   "customerName": "krishna",
3   "email": "krishnad@gmail.com",
4   "phone": "9876543210",
5   "address": "Hyderabad",
6   "dateOfBirth": "2000-05-15"
7 }
```

Body Cookies Headers 12 Test Results 200 OK • 28 ms • 544 B

{ } JSON Preview Visualize

```
1 {
2   "customerId": 1,
3   "customerName": "krishna",
4   "email": "krishnad@gmail.com",
5   "phone": "9876543210",
6   "address": "Hyderabad",
7   "dateOfBirth": "2000-05-15"
8 }
```


- **database**

SELECT * FROM customers;

customer_id	customer_name	email	phone	address	date_of_birth	created_at
1	krishna	krishnad@gmail.com	9876543210	Hyderabad	2000-05-15	2026-09-15 19:48:30
2	Krishna	krishna@gmail.com	9876543211	Bangalore	1999-08-20	2026-09-15 19:48:30
4	Vamshi Krishna	vamshi2@gmail.com	9876543212	Hyderabad	2000-05-15	2026-09-15 23:41:18
NULL	NULL	NULL	NULL	NULL	NULL	NULL

- **Delete Customer**

DELETE: <http://localhost:8080/api/customers/1>

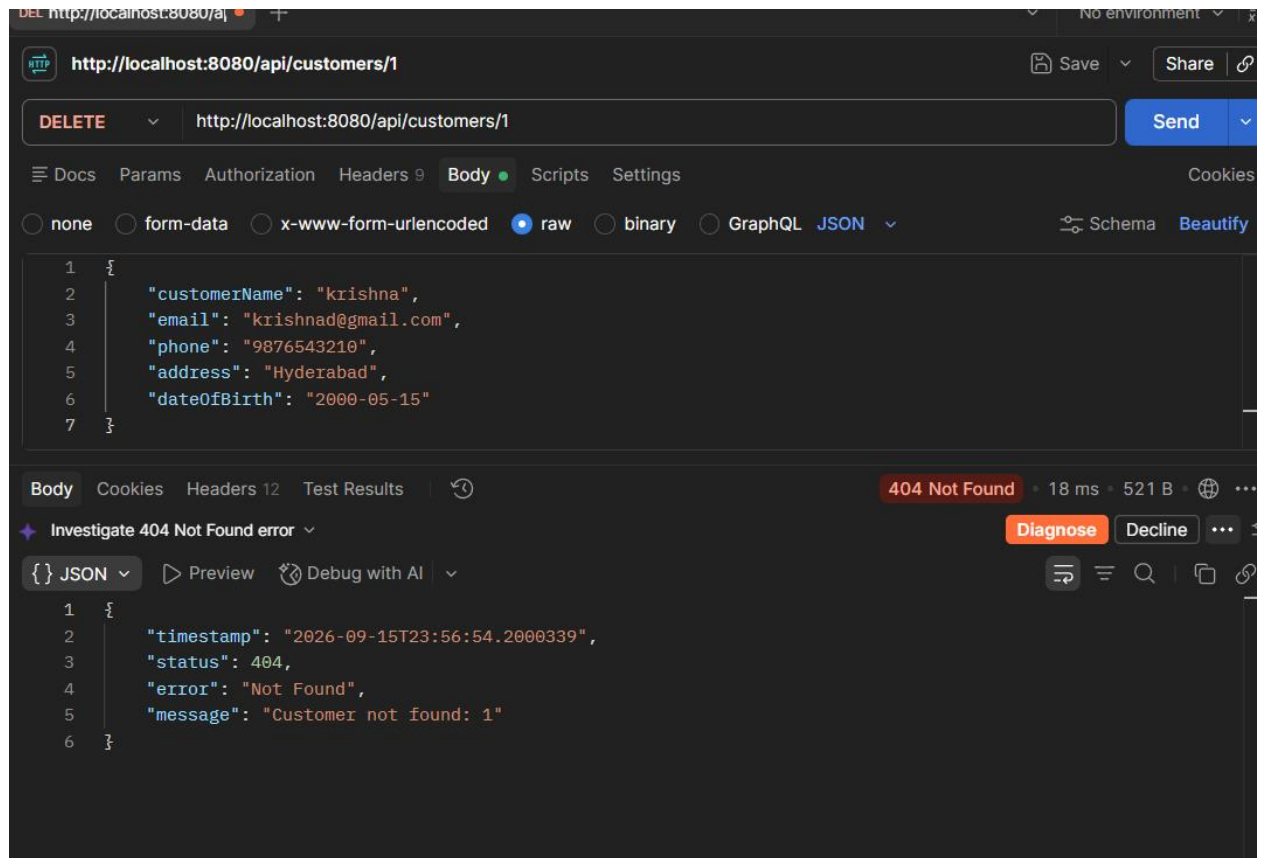

Database

146 • `SELECT * FROM customers;`

	customer_id	customer_name	email	phone	address	date_of_birth	created_at
▶	2	Krishna	krishna@gmail.com	9876543211	Bangalore	1999-08-20	2026-09-15 19:48:30
	4	Vamshi Krishna	vamshi2@gmail.com	9876543212	Hyderabad	2000-05-15	2026-09-15 23:41:18
*	NULL	NULL	NULL	NULL	NULL	NULL	NULL

• Account CRUD

POST : <http://localhost:8080/api/accounts/1>

```

{
  "accountType": "SAVINGS",
  "balance": 10000
}

```

get : <http://localhost:8080/api/accounts/2>

GET <http://localhost:8080/api/accounts>

The screenshot shows a REST client interface with a dark theme. At the top, a tab displays 'GET http://localhost:8080/a' with a red status indicator and a plus sign to add more tabs. Below the tab bar, the URL 'http://localhost:8080/api/accounts' is entered. The interface includes tabs for 'GET', 'Docs', 'Params', 'Authorization' (which is active and marked with a green dot), 'Headers 8', 'Body', 'Scripts', and 'Settings'. The 'Body' tab is selected, showing a JSON response. The JSON is displayed in a code editor with line numbers 1 through 9. The response is an array containing one object with the following fields: 'accountId' (2), 'accountNumber' ('ACC1002'), 'accountType' ('CURRENT'), 'balance' (50000.00), and 'customerId' (2). The JSON is formatted with syntax highlighting and collapsible nodes.

```
1  [  
2    {  
3      "accountId": 2,  
4      "accountNumber": "ACC1002",  
5      "accountType": "CURRENT",  
6      "balance": 50000.00,  
7      "customerId": 2  
8    }  
9  ]
```

GET http://localhost:8080/a, +

HTTP http://localhost:8080/api/accounts/2

GET http://localhost:8080/api/accounts/2

Docs Params Authorization Headers 8 Body Scripts Settings

Body Cookies Headers 12 Test Results

{ } JSON Preview Visualize

```
1 {
2   "accountId": 2,
3   "accountNumber": "ACC1002",
4   "accountType": "CURRENT",
5   "balance": 50000.00,
6   "customerId": 2
7 }
```


147 • SELECT * FROM accounts;

Result Grid Filter Rows: Edit: Export/Import:


	account_id	account_number	account_type	balance	customer_id	created_at
▶	2	ACC1002	CURRENT	50000.00	2	2026-09-15 19:48:36
*	NULL	NULL	NULL	NULL	NULL	NULL

- **Update Account**

PUT: <http://localhost:8080/api/accounts/2>

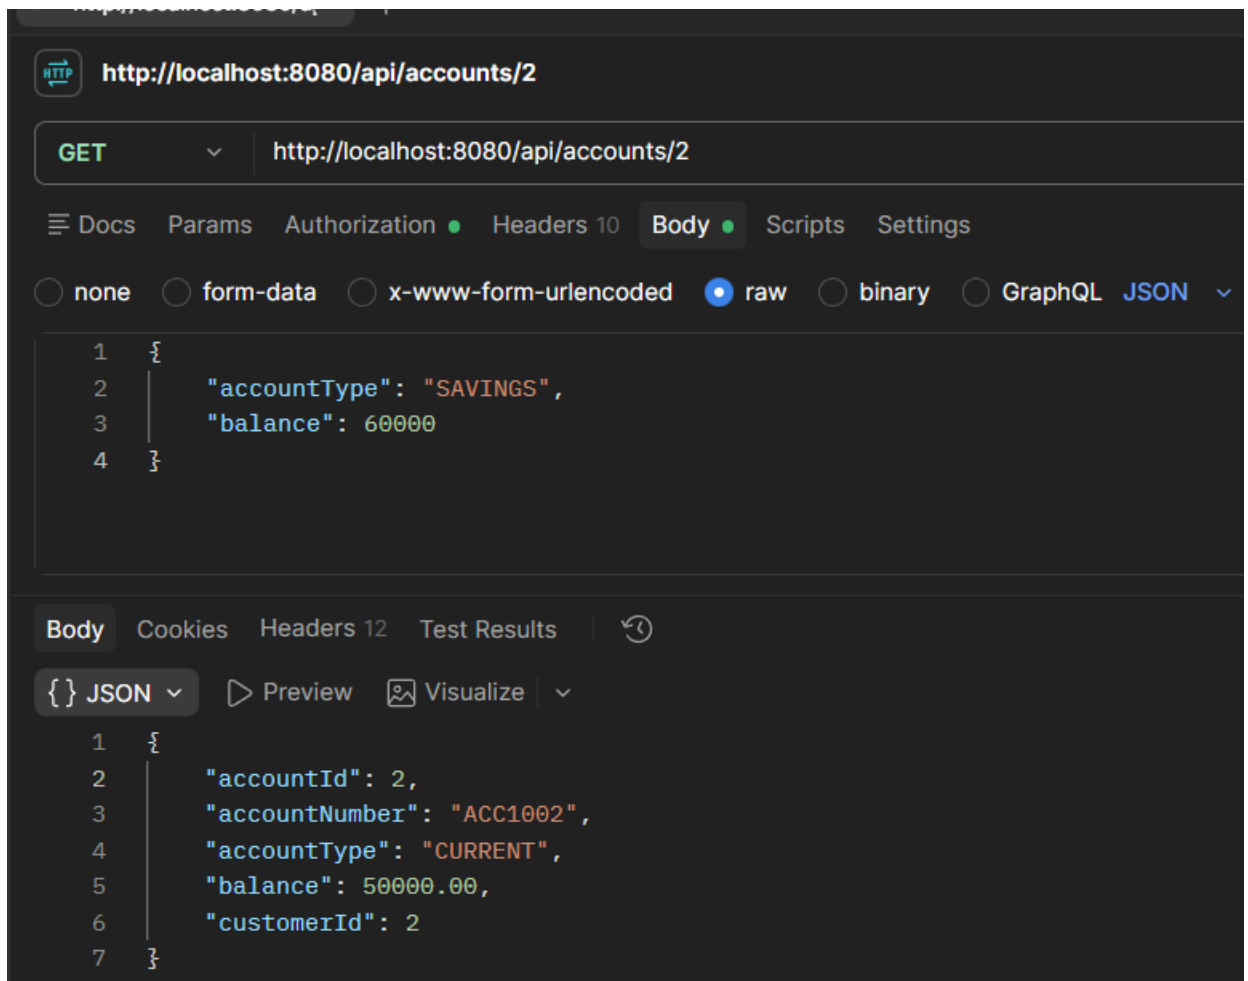

- Database

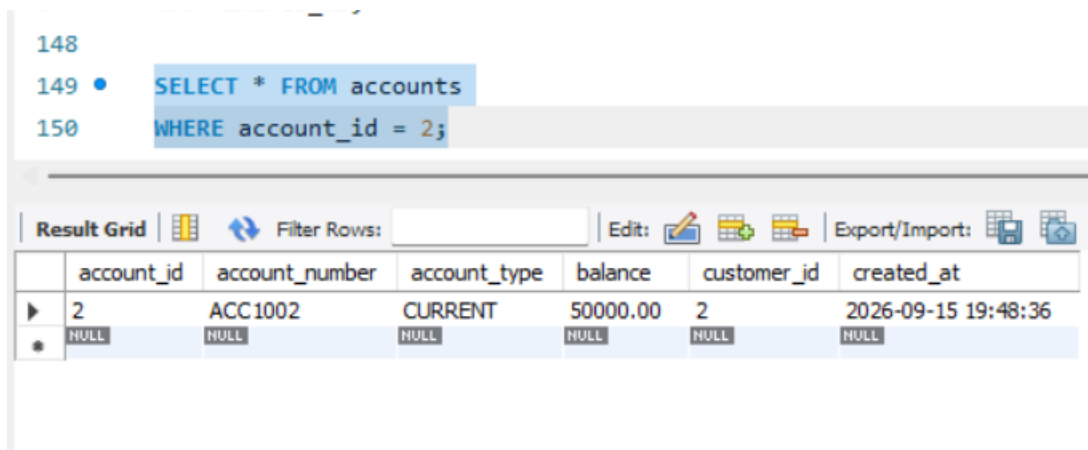

- DELETE Account

DELETE : <http://localhost:8080/api/accounts/2>

database

```
149 • USE finance_db;
```

```
150
```


```
151 • SELECT * FROM accounts;
```

Result Grid						
Filter Rows:						
Edit:   						
Export/Import:  						
	account_id	account_number	account_type	balance	customer_id	created_at
*	NULL	NULL	NULL	NULL	NULL	NULL

- **Deposit**


POST:

<http://localhost:8080/api/transactions>

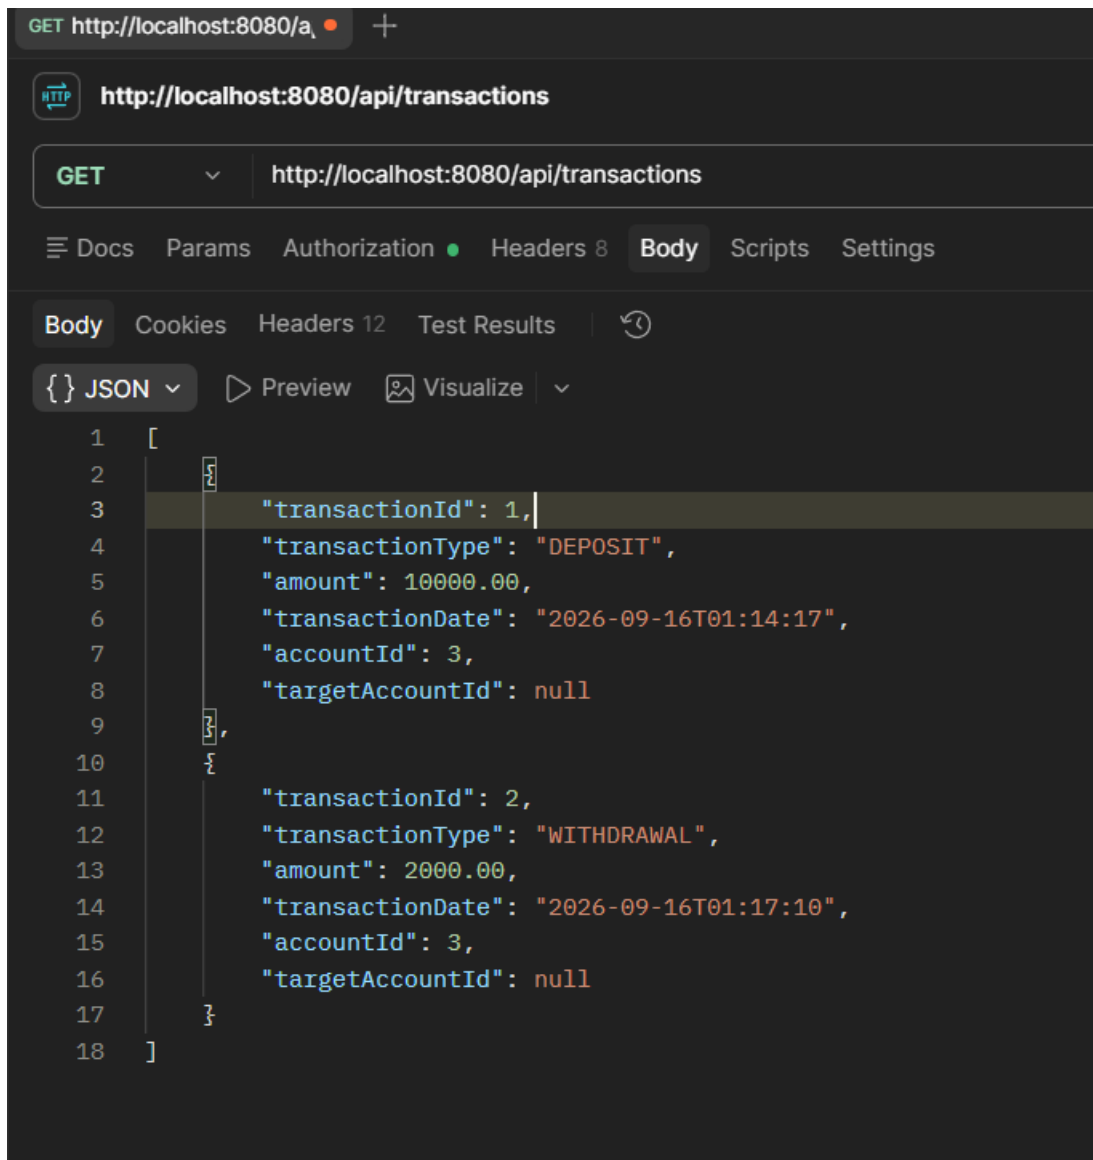


```
GET http://localhost:8080/a +  
  
HTTP http://localhost:8080/api/transactions  
  
GET http://localhost:8080/api/transactions  
  
Docs Params Authorization Headers 8 Body Scripts Settings  
  
Body Cookies Headers 12 Test Results  
  
JSON Preview Visualize  
  
1 [  
2   {  
3     "transactionId": 1,  
4     "transactionType": "DEPOSIT",  
5     "amount": 10000.00,  
6     "transactionDate": "2026-09-16T01:14:17",  
7     "accountId": 3,  
8     "targetAccountId": null  
9   },  
10  {  
11    "transactionId": 2,  
12    "transactionType": "WITHDRAWAL",  
13    "amount": 2000.00,  
14    "transactionDate": "2026-09-16T01:17:10",  
15    "accountId": 3,  
16    "targetAccountId": null  
17  }  
18 ]
```

- **Withdrawal**

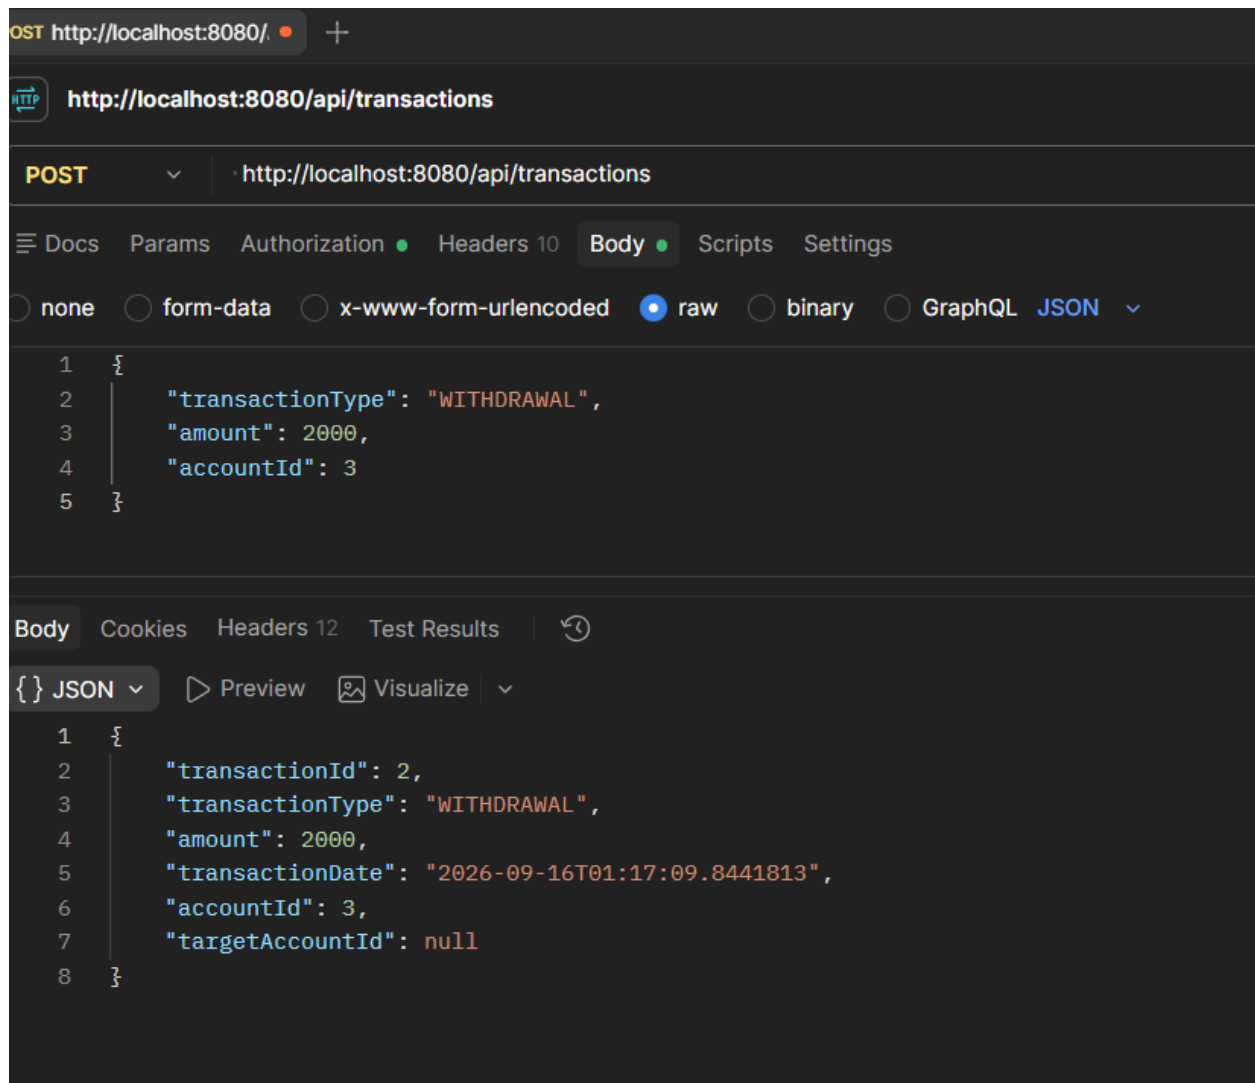

Balance

GET :`http://localhost:8080/api/accounts/3`

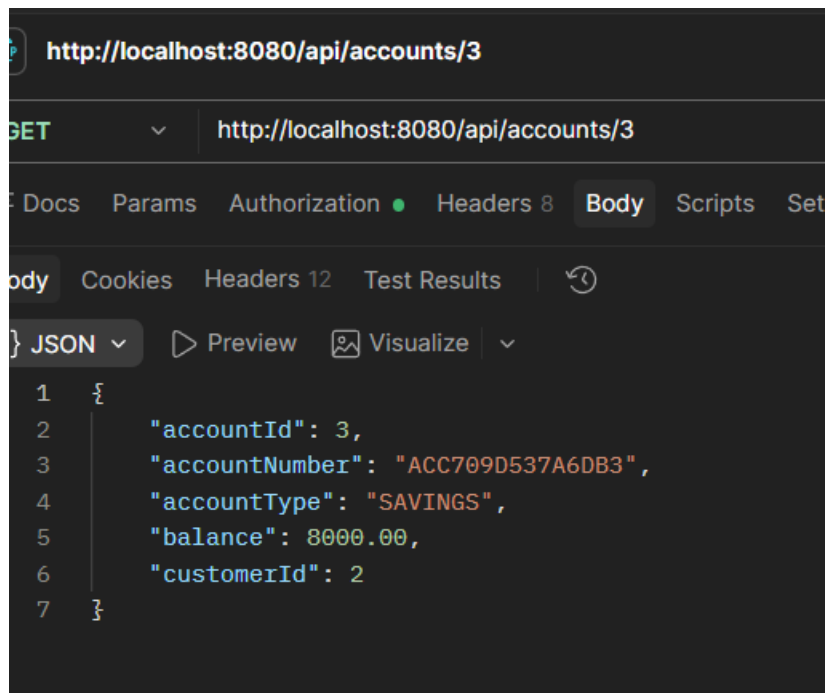

Database


SELECT * FROM accounts WHERE account_id = 3;

152 • `SELECT * FROM accounts WHERE account_id = 3;`


Result Grid |   Filter Rows: | Edit:    | Export/Import:   | Wrap Cell

	account_id	account_number	account_type	balance	customer_id	created_at
▶	3	ACC709D537A6DB3	SAVINGS	8000.00	2	2026-09-16 01:06:25
*	NULL	NULL	NULL	NULL	NULL	NULL

- Transaction CRUD

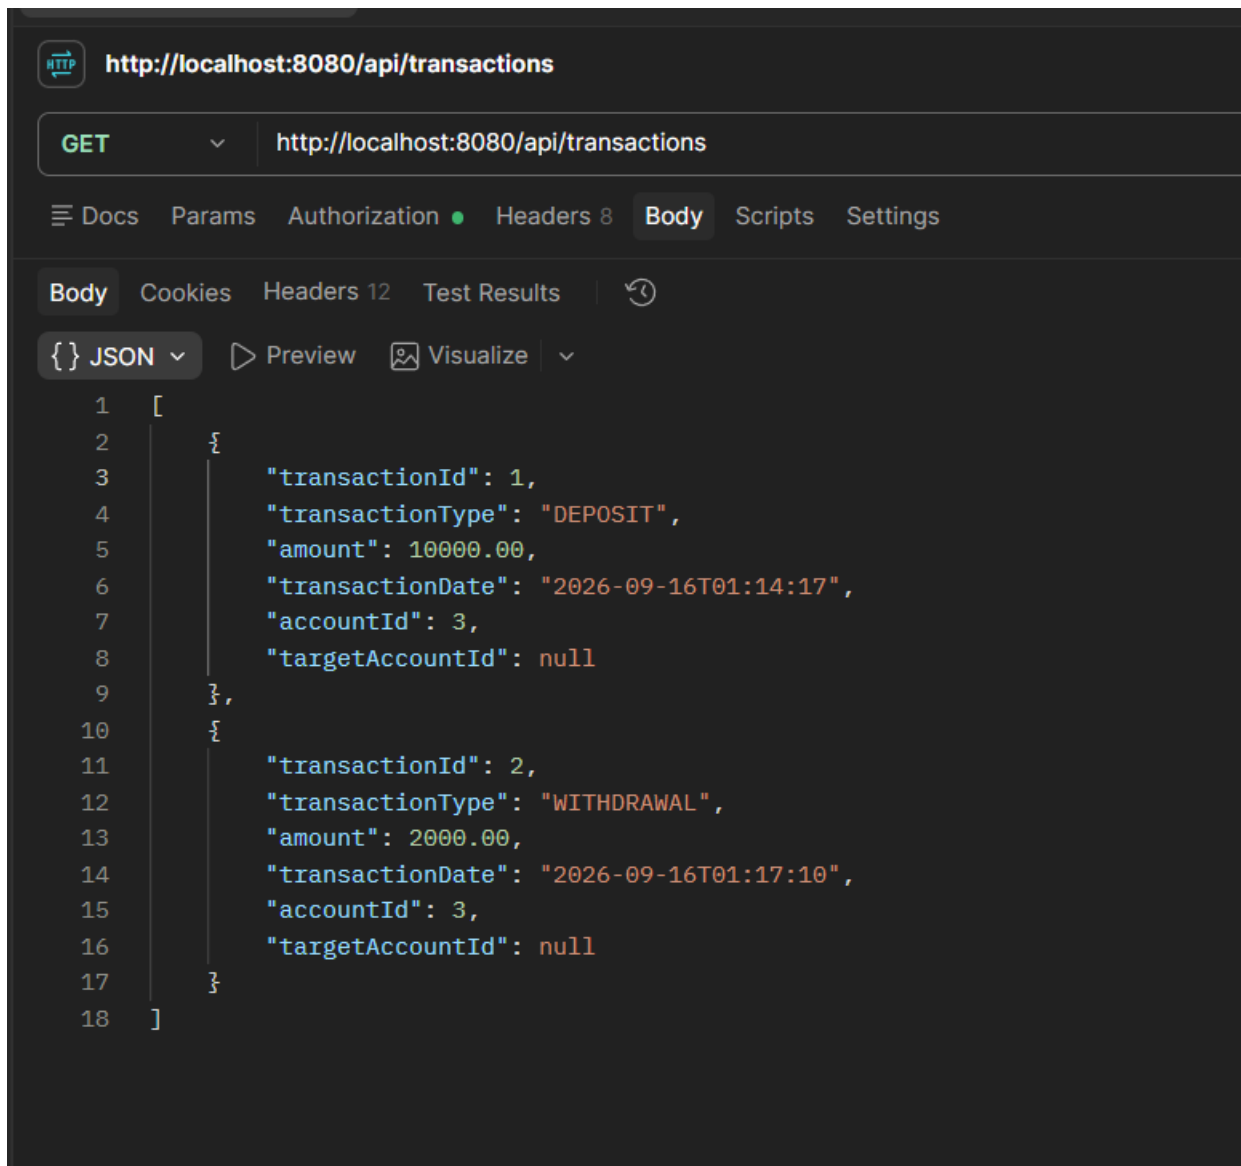


GET: <http://localhost:8080/api/transactions/1>

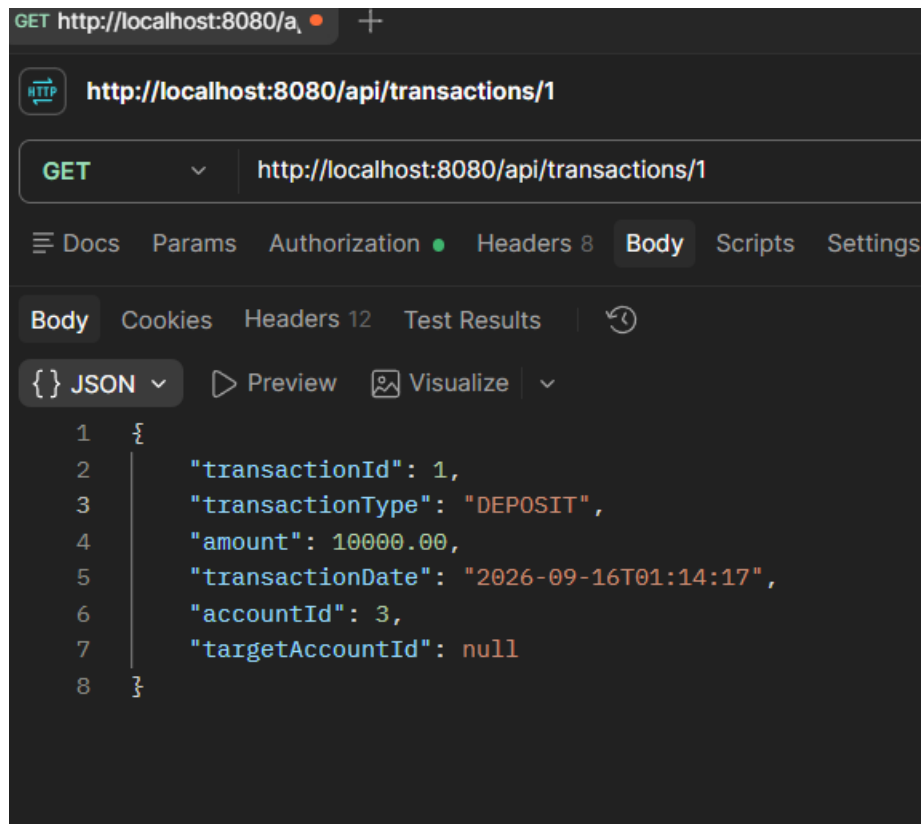


- Update Transaction

Get: <http://localhost:8080/api/transactions/1>

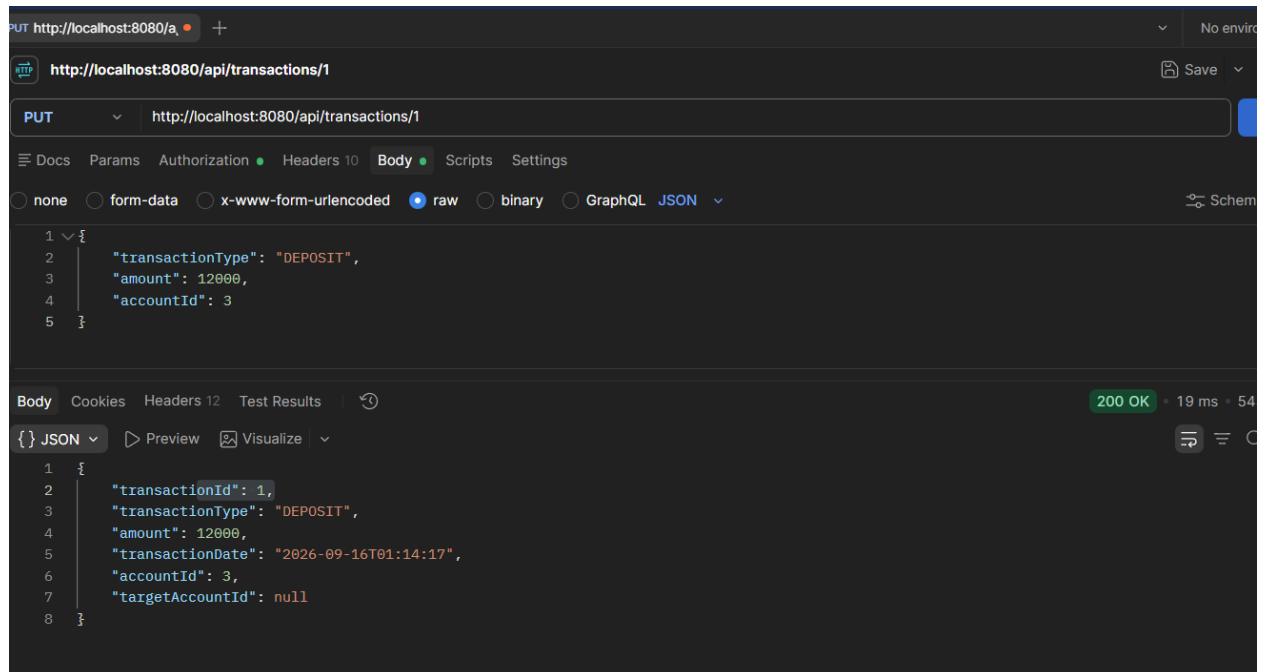

- **DELETE Transaction.**

<http://localhost:8080/api/transactions/1>

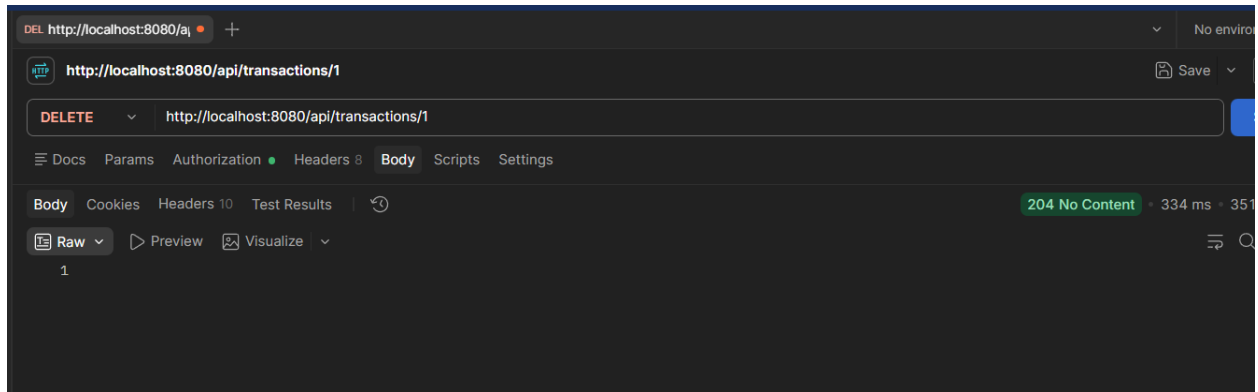

- **Database**


```
151 • SELECT * FROM accounts;
152 • SELECT * FROM accounts WHERE account_id = 3;
153 • SELECT * FROM transactions;
```

Result Grid							
Filter Rows:							
Edit:							
Export/Import:							
Wrap Cell							
	transaction_id	transaction_type	amount	transaction_date	description	account_id	target_acc
▶	2	WITHDRAWAL	2000.00	2026-09-16 01:17:10	NULL	3	NULL
*	NULL	NULL	NULL	NULL	NULL	NULL	NULL

-
- **Loan CRUD**

Create a Loan

POST : <http://localhost:8080/api/loans>

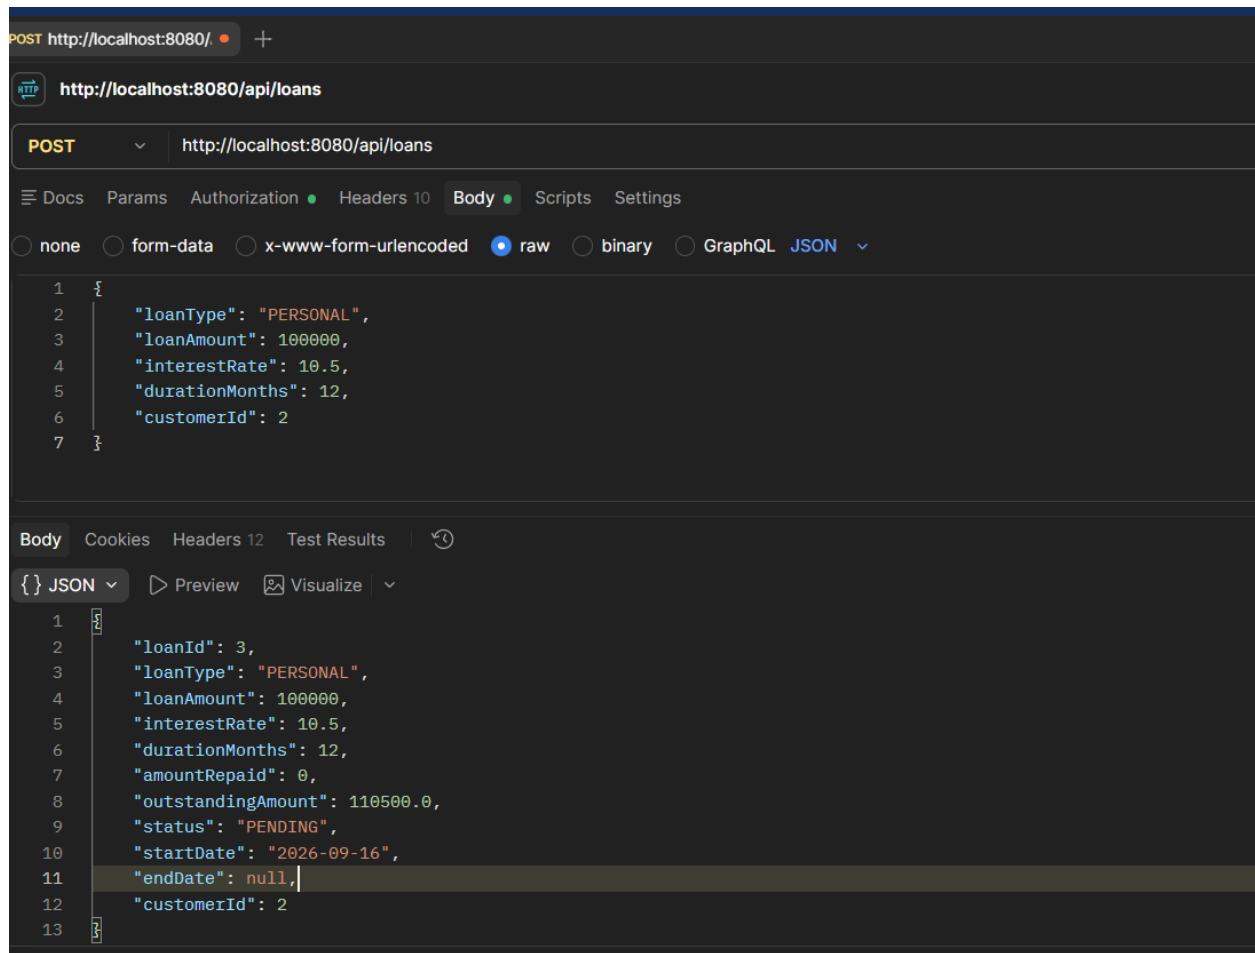


Loan cued (Read)

Get: <http://localhost:8080/api/loans>

```
GET http://localhost:8080/a. +
http://localhost:8080/api/loans
GET http://localhost:8080/api/loans
Docs Params Authorization Headers 8 Body Scripts Settings
Body Cookies Headers 12 Test Results
JSON Preview Visualize
1 [
2   {
3     "loanId": 2,
4     "loanType": "CAR",
5     "loanAmount": 300000.00,
6     "interestRate": 9.00,
7     "durationMonths": 0,
8     "amountRepaid": 0.00,
9     "outstandingAmount": 0.00,
10    "status": "ACTIVE",
11    "startDate": "2026-02-15",
12    "endDate": null,
13    "customerId": 2
14  },
15  {
16    "loanId": 3,
17    "loanType": "PERSONAL",
18    "loanAmount": 100000.00,
19    "interestRate": 10.50,
20    "durationMonths": 12,
21    "amountRepaid": 0.00,
22    "outstandingAmount": 110500.00,
23    "status": "PENDING",
24    "startDate": "2026-09-16",
25    "endDate": null,
26    "customerId": 2
27  }
28 ]
```

- **Loan Update**


PUT: <http://localhost:8080/api/loans/1>

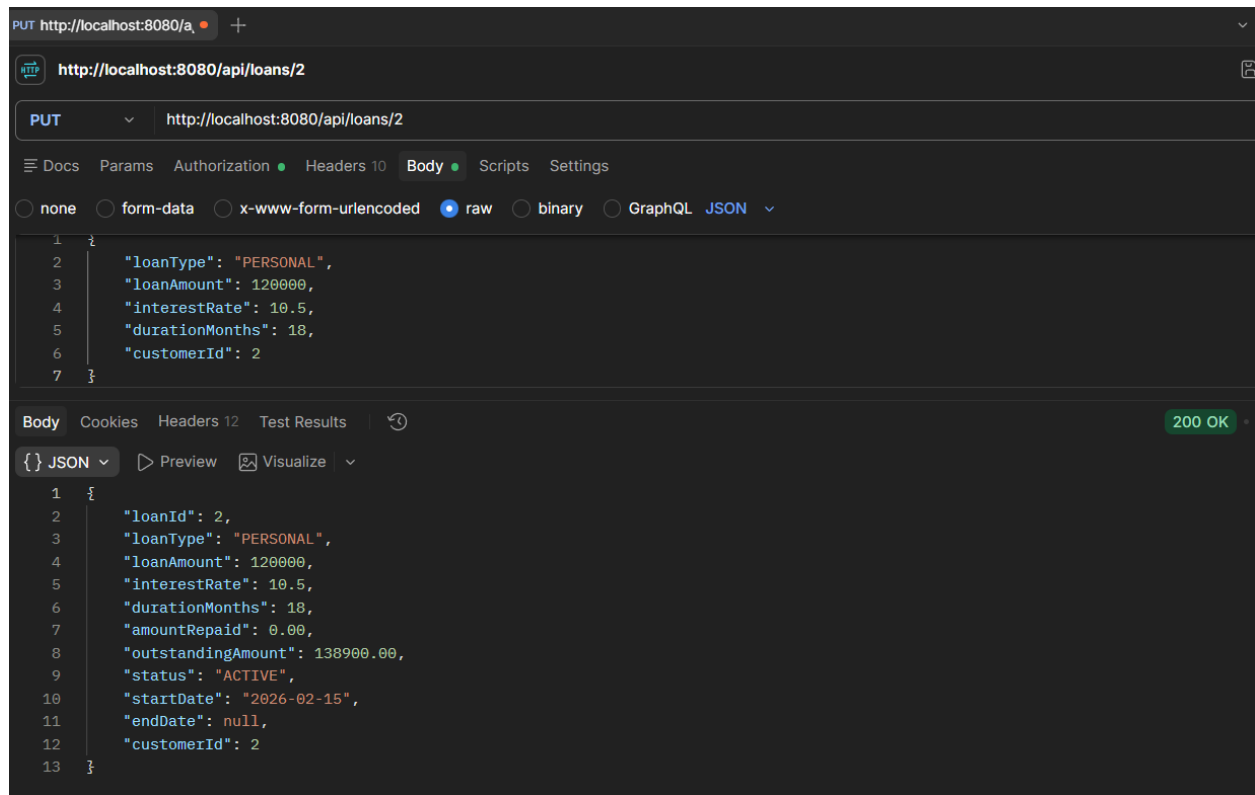


Delete :<http://localhost:8080/api/loans/2>

- **Approve Loan**

Get: <http://localhost:8080/api/loans>

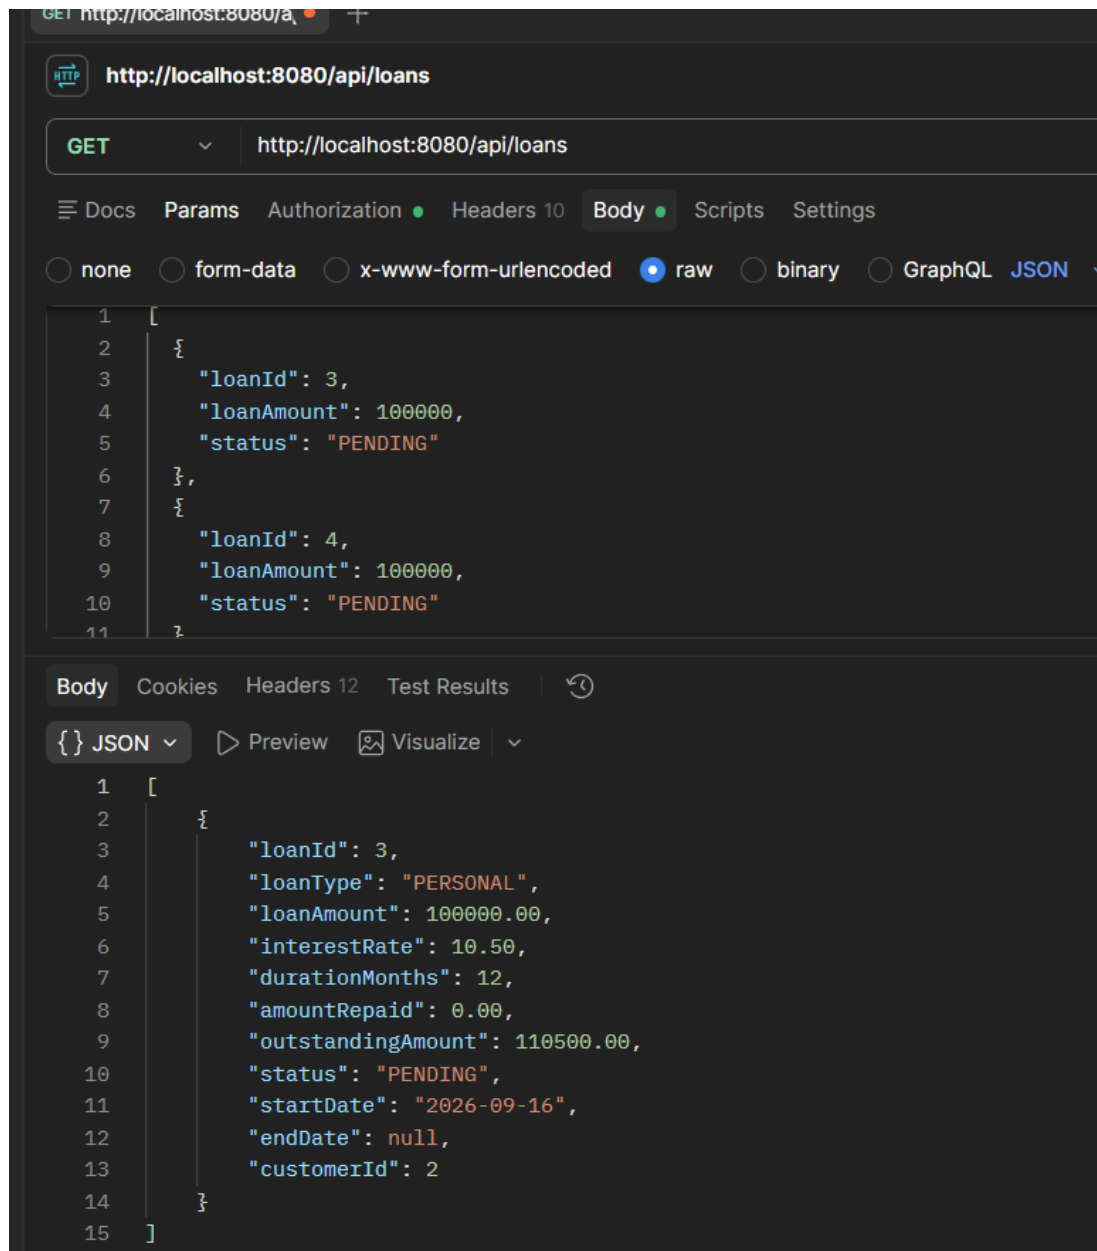


Patch: <http://localhost:8080/api/loans/3/approve>

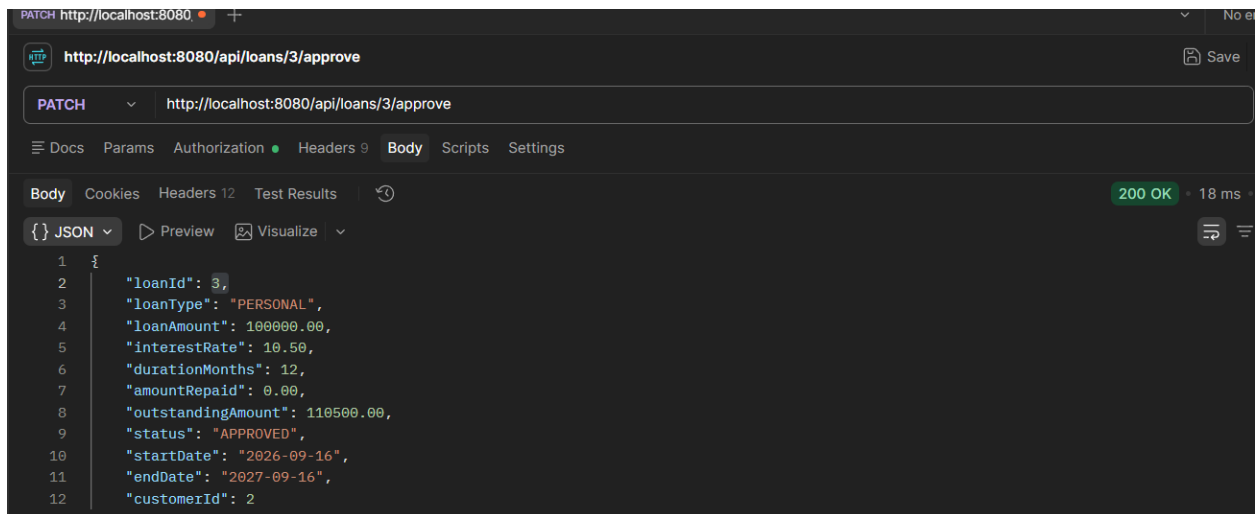

Loan Approval is successful.


- **Loan Repayment**

Post: <http://localhost:8080/api/loans/3/repay>

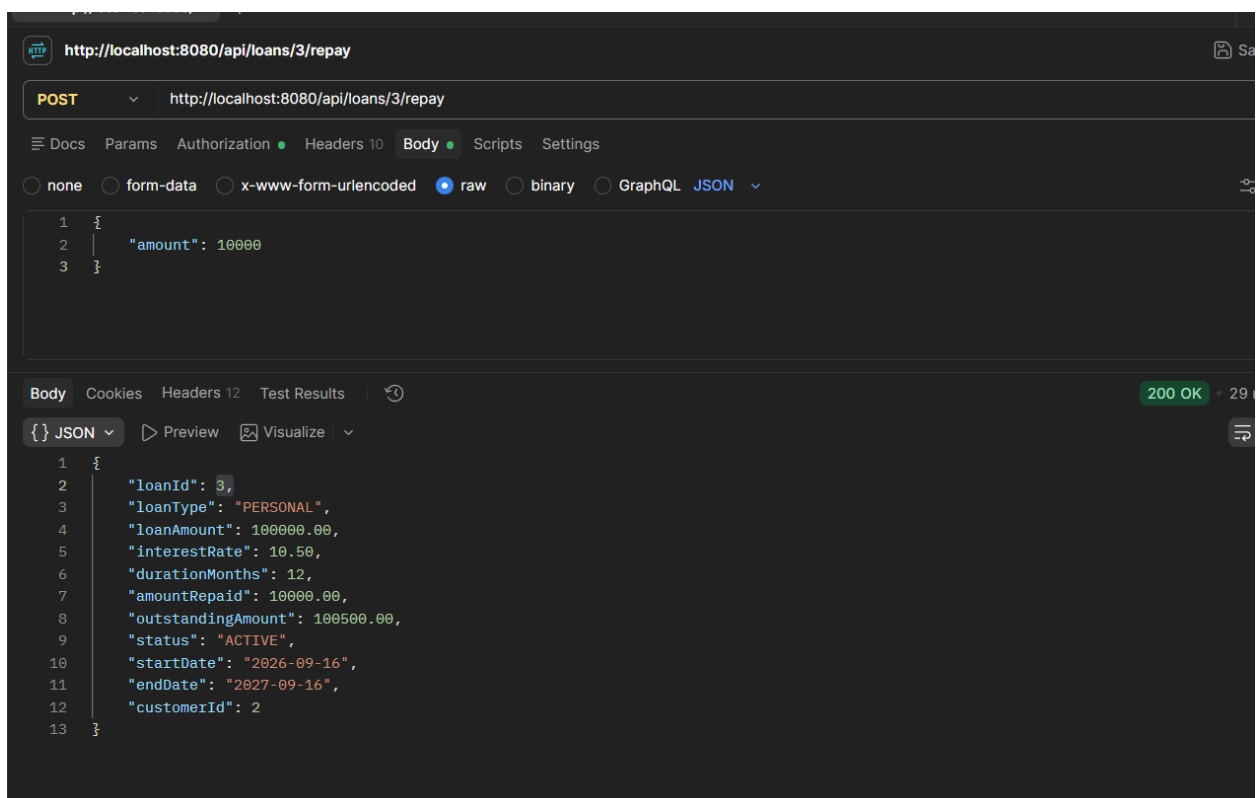

- **Full Loan Repayment**

Post: <http://localhost:8080/api/loans/3/repay>

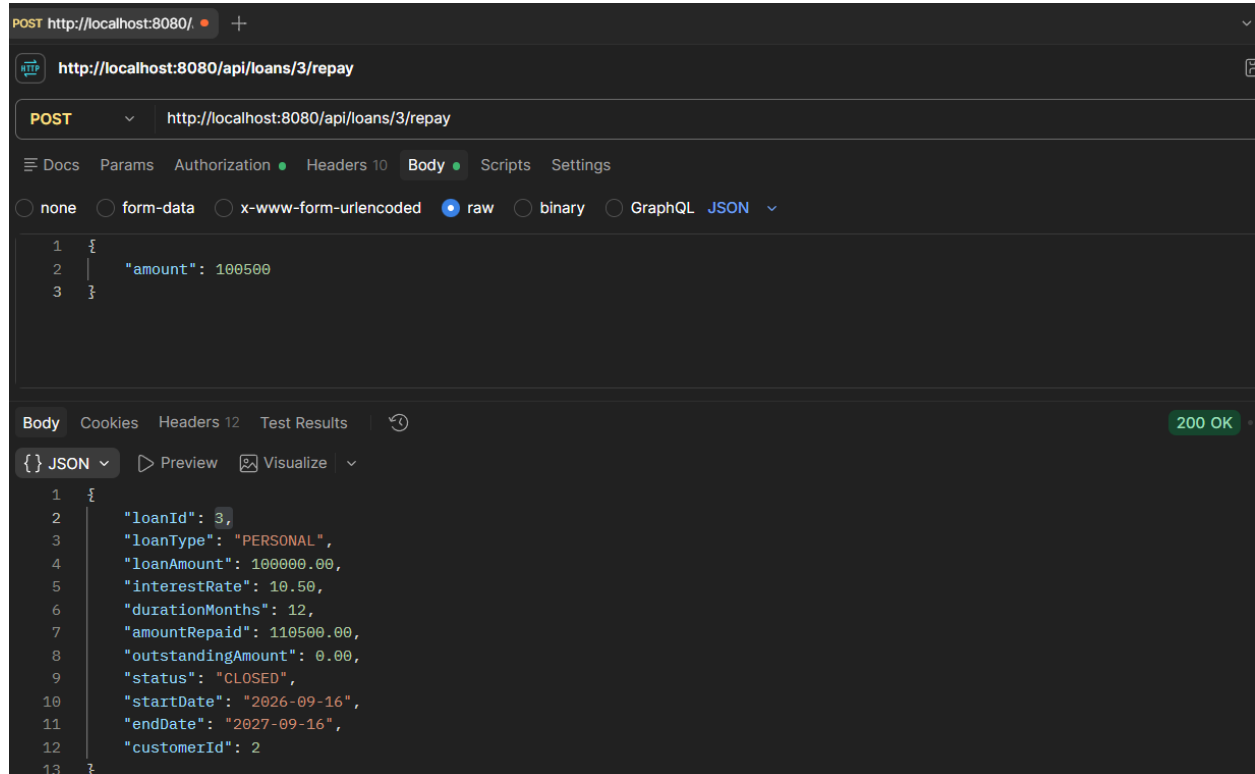

- **Loan Document Upload**

Post: <http://localhost:8080/api/loans/3/documents>

POST http://localhost:8080/api/loans/3/documents Send

Params Authorization Headers (9) Body Scripts Settings Cookies

☐ none ☒ form-data ☐ x-www-form-urlencoded ☐ raw ☐ binary ☐ GraphQL

	Key	Type	Value	Description	Bulk Edit ...
☒	file	File	ID_Proof_Test.docx.pdf		
☒	documentType	Text	ID_PROOF		
	Key	Text	Value	Description	

Body Cookies Headers (11) Test Results 201 Created · 85 ms · 512 B · ...

{ } JSON Preview Visualize

```
1 {
2   "id": 15,
3   "loanId": 3,
4   "documentType": "ID_PROOF",
5   "fileName": "ID_Proof_Test.docx.pdf",
6   "filePath": "/uploads/loan-documents/3/ID_Proof_Test.docx.pdf",
7   "uploadDate": "2026-09-16T10:24:27.0868667",
8   "message": "Document uploaded successfully"
9 }
```

Successful Loan Document

- **Investment CRUD**

Create Investment

POST http://localhost:8080/ +

http://localhost:8080/api/investments

POST http://localhost:8080/api/investments

Docs Params Authorization Headers 10 Body Scripts Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2   "customerId": 2,
3   "investmentType": "FD",
4   "amount": 50000,
5   "currentValue": 50000,
6   "investedDate": "2026-09-16",
7   "maturityDate": "2027-09-16",
8   "status": "ACTIVE"
9 }
```

Body Cookies Headers 12 Test Results

{ } JSON Preview Visualize

```
1 {
2   "investmentId": 3,
3   "investmentType": "FD",
4   "amount": 50000,
5   "maturityDate": "2027-09-16",
6   "currentValue": 50000,
7   "performanceInfo": null,
8   "customerId": 2
9 }
```

Get: <http://localhost:8080/api/investments>

GET http://localhost:8080/a/ + No environment

http://localhost:8080/api/investments Save Share

GET http://localhost:8080/api/investments Send

Docs Params Authorization Headers 8 Body Scripts Settings Cookies

Body Cookies Headers 12 Test Results 200 OK 133 ms 703 B

{ } JSON Preview Visualize

```
1 [
2   {
3     "investmentId": 2,
4     "investmentType": "FD",
5     "amount": 50000.00,
6     "maturityDate": "2027-03-01",
7     "currentValue": 54000.00,
8     "performanceInfo": null,
9     "customerId": 2
10  },
11  {
12    "investmentId": 3,
13    "investmentType": "FD",
14    "amount": 50000.00,
15    "maturityDate": "2027-09-16",
16    "currentValue": 50000.00,
17    "performanceInfo": null,
18    "customerId": 2
19  }
20 ]
```

get: <http://localhost:8080/api/investments/3>

The screenshot shows a REST client interface with a GET request to `http://localhost:8080/api/investments/3`. The response is a 200 OK status with a JSON body. The JSON object contains the following fields:

```
{  "investmentId": 3,  "investmentType": "FD",  "amount": 50000.00,  "maturityDate": "2027-09-16",  "currentValue": 50000.00,  "performanceInfo": null,  "customerId": 2}
```


put: <http://localhost:8080/api/investments/3>

The screenshot shows a REST client interface with a PUT request to `http://localhost:8080/api/investments/3`. The request body is raw JSON. The response is a 200 OK status with a JSON body. The JSON object contains the following fields:

```
{  "investmentType": "FD",  "amount": 60000,  "investedDate": "2026-09-16",  "maturityDate": "2027-09-16",  "currentValue": 62000,  "performanceInfo": "Updated FD investment",  "status": "ACTIVE",  "customerId": 2}
```

The response body shows the updated investment details, including the new amount of 60000, the updated maturity date, and the status "ACTIVE".

Delete: <http://localhost:8080/api/investments/3>

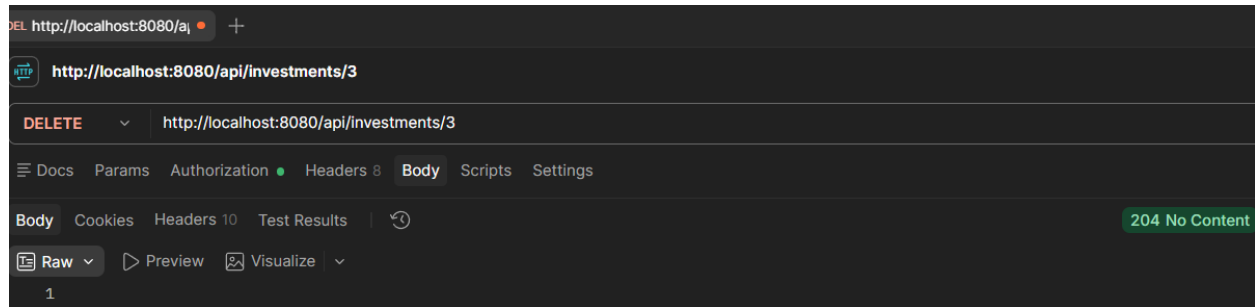

Database

```
158 • USE finance_db;
159
160 • SELECT * FROM investments;
```

	investment_id	investment_type	amount	current_value	performance	invested_date	maturity_date	status	customer_id	performance_info
▶	2	FD	50000.00	54000.00	8.00	2026-03-01	2027-03-01	ACTIVE	2	NULL
•	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL

- **Final Project Verification**

```
160 • SELECT * FROM investments;
```

```
161
```

```
162
```

```
163 • SHOW TABLES;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content: |

Tables_in_finance_db
accounts
customers
investments
loan_documents
loans
transactions

```
SELECT * FROM customers;
```

```
162
```

```
163 • SELECT * FROM customers;
```

Result Grid | Filter Rows: | Edit: | Export/Import: | Wrap Cell Content: |

customer_id	customer_name	email	phone	address	date_of_birth	created_at
2	Krishna	krishna@gmail.com	9876543211	Bangalore	1999-08-20	2026-09-15 19:48:30
4	Vamshi Krishna	vamshi2@gmail.com	9876543212	Hyderabad	2000-05-15	2026-09-15 23:41:18
NULL	NULL	NULL	NULL	NULL	NULL	NULL

```
SELECT * FROM accounts;
```


161 • **SELECT * FROM investments;**

investment_id	investment_type	amount	current_value	performance	invested_date	maturity_date	status	customer_id	performance_info
2	FD	50000.00	54000.00	8.00	2026-03-01	2027-03-01	ACTIVE	2	NULL
*	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL	NULL

- **Final API Verification**

GET http://localhost:8080/a. +

HTTP http://localhost:8080/api/customers

GET http://localhost:8080/api/customers

Docs Params Authorization Headers 8 **Body** Scripts Settings

Body Cookies Headers 12 Test Results 200 OK

{ } JSON Preview Visualize

```

1  [
2    {
3      "customerId": 2,
4      "customerName": "Krishna",
5      "email": "krishna@gmail.com",
6      "phone": "9876543211",
7      "address": "Bangalore",
8      "dateOfBirth": "1999-08-20"
9    },
10   {
11     "customerId": 4,
12     "customerName": "Vamshi Krishna",
13     "email": "vamshi2@gmail.com",
14     "phone": "9876543212",
15     "address": "Hyderabad",
16     "dateOfBirth": "2000-05-15"
17   }
18 ]

```

- **Actuator Health**

<http://localhost:8080/actuator/health>

- **Swagger**



/v3/api-docs

Explore

Finance Management System API v1 OAS 3.1

[/v3/api-docs](#)

REST API for Finance Management System

Servers

<http://localhost:8080> - Generated server url

Authorize

transaction-controller

GET	/api/v1/transactions	🔒	⌵
POST	/api/v1/transactions	🔒	⌵
GET	/api/v1/transactions/{id}	🔒	⌵
DELETE	/api/v1/transactions/{id}	🔒	⌵

loan-controller