

EFA

```
set.seed(42)

library(igraph)

##
## Attaching package: 'igraph'
## The following objects are masked from 'package:stats':
##
##      decompose, spectrum
## The following object is masked from 'package:base':
##
##      union
library(QuantPsyc) # for the multivariate normality test

## Loading required package: boot
## Loading required package: dplyr
##
## Attaching package: 'dplyr'
## The following objects are masked from 'package:igraph':
##
##      as_data_frame, groups, union
## The following objects are masked from 'package:stats':
##
##      filter, lag
## The following objects are masked from 'package:base':
##
##      intersect, setdiff, setequal, union
## Loading required package: purrr
##
## Attaching package: 'purrr'
## The following objects are masked from 'package:igraph':
##
##      compose, simplify
## Loading required package: MASS
##
## Attaching package: 'MASS'
## The following object is masked from 'package:dplyr':
##
##      select
```

```

##
## Attaching package: 'QuantPsyc'
## The following object is masked from 'package:base':
##
##      norm
library(nFactors) # for the scree plot

## Loading required package: lattice
##
## Attaching package: 'lattice'
## The following object is masked from 'package:boot':
##
##      melanoma
##
## Attaching package: 'nFactors'
## The following object is masked from 'package:lattice':
##
##      parallel
library(psych) # for PA FA

##
## Attaching package: 'psych'
## The following object is masked from 'package:boot':
##
##      logit
library(tidyverse)

## -- Attaching core tidyverse packages ----- tidyverse 2.0.0 --
## v forcats   1.0.0      v stringr   1.5.1
## v ggplot2   3.5.1      v tibble   3.2.1
## v lubridate 1.9.3      v tidyr    1.3.1
## v readr     2.1.5

## -- Conflicts ----- tidyverse_conflicts() --
## x lubridate::%--%()      masks igraph::%--%()
## x ggplot2::%+%()         masks psych::%+%()
## x ggplot2::alpha()       masks psych::alpha()
## x tibble::as_data_frame() masks dplyr::as_data_frame(), igraph::as_data_frame()
## x purrr::compose()       masks igraph::compose()
## x tidyr::crossing()      masks igraph::crossing()
## x dplyr::filter()        masks stats::filter()
## x dplyr::lag()           masks stats::lag()
## x MASS::select()         masks dplyr::select()
## x purrr::simplify()      masks igraph::simplify()
## i Use the conflicted package (<http://conflicted.r-lib.org/>) to force all conflicts to become errors

library(paletteer) # color palettes

library(conflicted) # to resolve QuantPsyc x dplyr conflicts
conflict_prefer("select", "dplyr")

```

```
## [conflicted] Will prefer dplyr::select over any other package.
```

```
conflict_prefer("filter", "dplyr")
```

```
## [conflicted] Will prefer dplyr::filter over any other package.
```

Load and tidy data

```
pretty_names <- read_csv("../feat_name_mapping.csv")
```

```
## Rows: 85 Columns: 2
```

```
## -- Column specification -----
```

```
## Delimiter: ","
```

```
## chr (2): name_orig, name_pretty
```

```
##
```

```
## i Use `spec()` to retrieve the full column specification for this data.
```

```
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.
```

```
data <- read_csv("../measurements/measurements.csv")
```

```
## Rows: 754 Columns: 108
```

```
## -- Column specification -----
```

```
## Delimiter: ","
```

```
## chr (20): fpath, KUK_ID, FileName, FileFormat, FolderPath, subcorpus, Source...
```

```
## dbl (85): RuleAbstractNouns, RuleAmbiguousRegards, RuleAnaphoricReferences, ...
```

```
## lgl (3): ClarityPursuit, SyllogismBased, Bindingness
```

```
##
```

```
## i Use `spec()` to retrieve the full column specification for this data.
```

```
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.
```

```
.firstnonmetacolumn <- 17
```

```
data_clean <- data %>%
```

```
  select(!c(
```

```
    fpath,
```

```
    # KUK_ID,
```

```
    # FileName,
```

```
    FolderPath,
```

```
    # subcorpus,
```

```
    DocumentTitle,
```

```
    ClarityPursuit,
```

```
    Readability,
```

```
    SyllogismBased,
```

```
    SourceDB
```

```
  )) %>%
```

```
  # replace -1s in variation coefficients with NAs
```

```
  mutate(across(c(
```

```
    `RuleDoubleAdpos.max_allowable_distance.v`,
```

```
    `RuleTooManyNegations.max_negation_frac.v`,
```

```
    `RuleTooManyNegations.max_allowable_negations.v`,
```

```
    `RuleTooManyNominalConstructions.max_noun_frac.v`,
```

```
    `RuleTooManyNominalConstructions.max_allowable_nouns.v`,
```

```
    `RuleCaseRepetition.max_repetition_count.v`,
```

```
    `RuleCaseRepetition.max_repetition_frac.v`,
```

```
    `RulePredSubjDistance.max_distance.v`,
```

```

`RulePredObjDistance.max_distance.v`,
`RuleInfVerbDistance.max_distance.v`,
`RuleMultiPartVerbs.max_distance.v`,
`RuleLongSentences.max_length.v`,
`RulePredAtClauseBeginning.max_order.v`,
`mattr.v`,
`maentropy.v`
), ~ na_if(.x, -1))) %>%
# replace NAs with 0s
replace_na(list(
  RuleGPcoordovs = 0,
  RuleGPdeverbaddr = 0,
  RuleGPpatinstr = 0,
  RuleGPdeverbsubj = 0,
  RuleGPadjective = 0,
  RuleGPpatbenperson = 0,
  RuleGPwordorder = 0,
  RuleDoubleAdpos = 0,
  RuleDoubleAdpos.max_allowable_distance = 0,
  RuleDoubleAdpos.max_allowable_distance.v = 0,
  RuleAmbiguousRegards = 0,
  RuleReflexivePassWithAnimSubj = 0,
  RuleTooManyNegations = 0,
  RuleTooManyNegations.max_negation_frac = 0,
  RuleTooManyNegations.max_negation_frac.v = 0,
  RuleTooManyNegations.max_allowable_negations = 0,
  RuleTooManyNegations.max_allowable_negations.v = 0,
  RuleTooManyNominalConstructions.max_noun_frac.v = 0,
  RuleTooManyNominalConstructions.max_allowable_nouns.v = 0,
  RuleFunctionWordRepetition = 0,
  RuleCaseRepetition.max_repetition_count.v = 0,
  RuleCaseRepetition.max_repetition_frac.v = 0,
  RuleWeakMeaningWords = 0,
  RuleAbstractNouns = 0,
  RuleRelativisticExpressions = 0,
  RuleConfirmationExpressions = 0,
  RuleRedundantExpressions = 0,
  RuleTooLongExpressions = 0,
  RuleAnaphoricReferences = 0,
  RuleLiteraryStyle = 0,
  RulePassive = 0,
  RulePredSubjDistance = 0,
  RulePredSubjDistance.max_distance = 0,
  RulePredSubjDistance.max_distance.v = 0,
  RulePredObjDistance = 0,
  RulePredObjDistance.max_distance = 0,
  RulePredObjDistance.max_distance.v = 0,
  RuleInfVerbDistance = 0,
  RuleInfVerbDistance.max_distance = 0,
  RuleInfVerbDistance.max_distance.v = 0,
  RuleMultiPartVerbs = 0,
  RuleMultiPartVerbs.max_distance = 0,
  RuleMultiPartVerbs.max_distance.v = 0,

```

```

RuleLongSentences.max_length.v = 0,
RulePredAtClauseBeginning.max_order.v = 0,
RuleVerbalNouns = 0,
RuleDoubleComparison = 0,
RuleWrongValencyCase = 0,
RuleWrongVerbonominalCase = 0,
RuleIncompleteConjunction = 0
)) %>%
# norm data expected to correlate with text length
mutate(across(c(
  RuleGPcoordovs,
  RuleGPdeverbaddr,
  RuleGPpatinstr,
  RuleGPdeverbsubj,
  RuleGPadjective,
  RuleGPpatbenperson,
  RuleGPwordorder,
  RuleDoubleAdpos,
  RuleAmbiguousRegards,
  RuleFunctionWordRepetition,
  RuleWeakMeaningWords,
  RuleAbstractNouns,
  RuleRelativisticExpressions,
  RuleConfirmationExpressions,
  RuleRedundantExpressions,
  RuleTooLongExpressions,
  RuleAnaphoricReferences,
  RuleLiteraryStyle,
  RulePassive,
  RuleVerbalNouns,
  RuleDoubleComparison,
  RuleWrongValencyCase,
  RuleWrongVerbonominalCase,
  RuleIncompleteConjunction,
  num_hapax,
  RuleReflexivePassWithAnimSubj,
  RuleTooManyNominalConstructions,
  RulePredSubjDistance,
  RuleMultiPartVerbs,
  RulePredAtClauseBeginning
), ~ .x / word_count)) %>%
mutate(across(c(
  RuleTooFewVerbs,
  RuleTooManyNegations,
  RuleCaseRepetition,
  RuleLongSentences,
  RulePredObjDistance,
  RuleInfVerbDistance
), ~ .x / sent_count)) %>%
# remove variables identified as "u counts"
select(!c(
  RuleTooFewVerbs,
  RuleTooManyNegations,

```

```

RuleTooManyNominalConstructions,
RuleCaseRepetition,
RuleLongSentences,
RulePredAtClauseBeginning,
sent_count,
word_count,
syllab_count,
char_count
)) %>%
# remove variables identified as unreliable
select(!c(
  RuleAmbiguousRegards,
  RuleFunctionWordRepetition,
  RuleDoubleComparison,
  RuleWrongValencyCase,
  RuleWrongVerbonominalCase
)) %>%
# remove artificially limited variables
select(!c(
  RuleCaseRepetition.max_repetition_frac,
  RuleCaseRepetition.max_repetition_frac.v
)) %>%
# remove further variables belonging to the 'acceptability' category
select(!c(RuleIncompleteConjunction)) %>%
mutate(across(c(class), ~ as.factor(.x)))

# no NAs should be present now
data_clean[!complete.cases(data_clean), ]

## # A tibble: 754 x 83
##   KUK_ID      FileName FileFormat subcorpus SourceID DocumentVersion
##   <chr>      <chr>      <chr>      <chr>      <chr>      <chr>
## 1 673b7a37c6537d54ff062~ 002_Kom~ TXT      KUKY      <NA>      Original
## 2 673b7a37c6537d54ff062~ 006_Chc~ TXT      KUKY      <NA>      Redesign
## 3 673b7a37c6537d54ff062~ 004_Nev~ TXT      KUKY      <NA>      Original
## 4 673b7a37c6537d54ff062~ 008_Pol~ TXT      KUKY      <NA>      Original
## 5 673b7a37c6537d54ff062~ 005_Och~ TXT      KUKY      <NA>      Original
## 6 673b7a37c6537d54ff062~ 016_Obc~ TXT      KUKY      <NA>      Original
## 7 673b7a37c6537d54ff062~ 019_Dět~ TXT      KUKY      <NA>      Redesign
## 8 673b7a37c6537d54ff062~ 007_DŮC~ TXT      KUKY      <NA>      Redesign
## 9 673b7a37c6537d54ff062~ 024_Opa~ TXT      KUKY      <NA>      Original
## 10 673b7a37c6537d54ff062~ 047_Dav~ TXT      KUKY      <NA>      Original
## # i 744 more rows
## # i 77 more variables: ParentDocumentID <chr>, LegalActType <chr>,
## #   Objectivity <chr>, Bindingness <lgl>, AuthorType <chr>,
## #   RecipientType <chr>, RecipientIndividuation <chr>, Anonymized <chr>,
## #   `Recipient Type` <chr>, class <fct>, RuleAbstractNouns <dbl>,
## #   RuleAnaphoricReferences <dbl>,
## #   RuleCaseRepetition.max_repetition_count <dbl>, ...
data_clean_scaled <- data_clean %>%
  mutate(across(class, ~ .x == "good")) %>%
  mutate(across(.firstnonmetacolumn:length(names(data_clean)), ~ scale(.x)))

```

```
## Warning: There was 1 warning in `mutate()`.
## i In argument: `across(.firstnonmetacolumn:length(names(data_clean)),
##   ~scale(.x))`.
## Caused by warning:
## ! Using an external vector in selections was deprecated in tidyselect 1.1.0.
## i Please use `all_of()` or `any_of()` instead.
##   # Was:
##   data %>% select(.firstnonmetacolumn)
##
##   # Now:
##   data %>% select(all_of(.firstnonmetacolumn))
##
## See <https://tidyselect.r-lib.org/reference/faq-external-vector.html>.
```

Important features identification

```
data_clean_good <- data_clean_scaled %>% filter(class == "good")
data_clean_bad <- data_clean_scaled %>% filter(class == "bad")

feature_importances <- tibble(
  feat_name = character(), p_value = numeric()
)

for (i in .firstnonmetacolumn:ncol(data_clean)) {
  fname <- names(data_clean)[i]

  formula_single <- reformulate(fname, "class")

  glm_model <- glm(formula_single, data_clean, family = "binomial")
  glm_coefficients <- summary(glm_model)$coefficients
  row_index <- which(rownames(glm_coefficients) == fname)
  p_value <- glm_coefficients[row_index, 4]

  feature_importances <- feature_importances %>%
    add_row(feat_name = fname, p_value = p_value)
}
feature_importances
```

```
## # A tibble: 67 x 2
##   feat_name                p_value
##   <chr>                  <dbl>
## 1 RuleAbstractNouns        0.00187
## 2 RuleAnaphoricReferences  0.660
## 3 RuleCaseRepetition.max_repetition_count  0.0722
## 4 RuleCaseRepetition.max_repetition_count.v 0.00479
## 5 RuleConfirmationExpressions 0.0985
## 6 RuleDoubleAdpos         0.312
## 7 RuleDoubleAdpos.max_allowable_distance  0.000154
## 8 RuleDoubleAdpos.max_allowable_distance.v 0.00000356
## 9 RuleGPadjective         0.380
## 10 RuleGPcoordovs        0.828
## # i 57 more rows
```

```
selected_features <- feature_importances %>%
  filter(p_value <= 0.05) %>%
  pull(feat_name)
```

Correlations

See Levshina (2015: 353-54).

```
analyze_correlation <- function(data) {
  cor_matrix <- cor(data)

  cor_tibble_long <- cor_matrix %>%
    as_tibble() %>%
    mutate(feat1 = rownames(cor_matrix)) %>%
    pivot_longer(!feat1, names_to = "feat2", values_to = "cor") %>%
    mutate(abs_cor = abs(cor))

  cor_matrix_upper <- cor_matrix
  cor_matrix_upper[lower.tri(cor_matrix_upper)] <- 0

  cor_tibble_long_upper <- cor_matrix_upper %>%
    as_tibble() %>%
    mutate(feat1 = rownames(cor_matrix)) %>%
    pivot_longer(!feat1, names_to = "feat2", values_to = "cor") %>%
    mutate(abs_cor = abs(cor)) %>%
    filter(feat1 != feat2 & abs_cor > 0)

  list(
    cor_matrix = cor_matrix,
    cor_matrix_upper = cor_matrix_upper,
    cor_tibble_long = cor_tibble_long,
    cor_tibble_long_upper = cor_tibble_long_upper
  )
}

data_purish <- data_clean %>% select(any_of(selected_features))
```

High correlations

```
.hcorrcutoff <- 0.9

analyze_correlation(data_purish)$cor_tibble_long %>%
  filter(feat1 != feat2 & abs_cor > .hcorrcutoff) %>%
  arrange(feat1, -abs_cor) %>%
  print(n = 100)
```

```
## # A tibble: 20 x 4
##   feat1                feat2          cor abs_cor
##   <chr>                <chr>      <dbl>  <dbl>
## 1 RuleLongSentences.max_length ari      0.944   0.944
## 2 RuleLongSentences.max_length gf       0.922   0.922
## 3 ari                  fkg1     0.984   0.984
## 4 ari                  gf       0.978   0.978
```


## 5 ari	smog	0.951	0.951
## 6 ari	RuleLongSentences.max_length	0.944	0.944
## 7 atl	cli	0.960	0.960
## 8 cli	atl	0.960	0.960
## 9 fkg1	ari	0.984	0.984
## 10 fkg1	gf	0.967	0.967
## 11 fkg1	smog	0.949	0.949
## 12 gf	smog	0.987	0.987
## 13 gf	ari	0.978	0.978
## 14 gf	fkg1	0.967	0.967
## 15 gf	RuleLongSentences.max_length	0.922	0.922
## 16 maentropy	mattr	0.964	0.964
## 17 mattr	maentropy	0.964	0.964
## 18 smog	gf	0.987	0.987
## 19 smog	ari	0.951	0.951
## 20 smog	fkg1	0.949	0.949

exclude:

- **ari:** corr. w/ RuleLongSentences.max_length > 0.94; sentence length seems more universal, let's make it a substitute
- **gf:** corr. w/ RuleLongSentences.max_length > 0.92; sentence length seems more universal, let's make it a substitute
- **maentropy:** corr. w/ mattr > 0.96, but mattr is implemented in QuitaUp. besides, the interesting thing about maentropy is its variation
- **smog:** corr. w/ fkg1 almost 0.95, but fkg1 coefficients adjusted for Czech are available
- **atl:** corr. w/ cli around 0.96; unlike cli, atl is not a readability metric

```
data_pureish_striphigh <- data_purish %>% select(!c(
  ari, gf, maentropy, smog, atl
))

analyze_correlation(data_pureish_striphigh)$cor_tibble_long %>%
  filter(feet1 != feat2 & abs_cor > .lcorrcutoff) %>%
  arrange(feet1, -abs_cor) %>%
  print(n = 100)
```

```
## # A tibble: 0 x 4
## # i 4 variables: feat1 <chr>, feat2 <chr>, cor <dbl>, abs_cor <dbl>
```

Low correlations

```
# 0.35 instead of 0.3 otherwise the FA bootstrapping would freeze
.lcorrcutoff <- 0.35

low_correlating_features <- analyze_correlation(data_pureish_striphigh)$
  cor_tibble_long %>%
  filter(feet1 != feat2) %>%
  group_by(feet1) %>%
  summarize(max_cor = max(abs_cor)) %>%
  filter(max_cor < .lcorrcutoff) %>%
  pull(feet1)

feature_importances %>% filter(feet_name %in% low_correlating_features)

## # A tibble: 10 x 2
```

```
##      feat_name                                p_value
##      <chr>                                <dbl>
## 1 RuleAbstractNouns                        0.00187
## 2 RuleCaseRepetition.max_repetition_count.v 0.00479
## 3 RuleGPdeverbaddr                        0.0112
## 4 RuleGPdeverbsubj                        0.0133
## 5 RuleRedundantExpressions                 0.0104
## 6 RuleRelativisticExpressions             0.00205
## 7 RuleTooManyNegations.max_negation_frac.v 0.0365
## 8 RuleTooManyNominalConstructions.max_noun_frac.v 0.00000311
## 9 RuleVerbalNouns                         0.0000748
## 10 RuleWeakMeaningWords                   0.0386
```

```
data_pure <- data_pureish_striphigh %>%
  select(!any_of(low_correlating_features))
```

```
cnames <- map(
  colnames(data_pure),
  function(x) {
    pull(pretty_names %>%
      filter(name_orig == x), name_pretty)
  }
) %>% unlist()
```

```
colnames(data_pure) <- cnames
```

Visualisation


```
my_colors <- paletteer::paletteer_d("ggthemes::Classic_10_Medium")

network_edges <- analyze_correlation(data_pure)$cor_tibble_long_upper %>%
  filter(abs_cor > 0.3)

network <- graph_from_data_frame(
  network_edges,
  directed = FALSE
)
E(network)$weight <- network_edges$abs_cor
network_communities <- cluster_optimal(network)

network_membership <- membership(network_communities)

plot(
  network,
  layout = layout_fruchterman_reingold,
  vertex_color = map(
    network_communities$membership,
    function(x) my_colors[x]
  ) %>% unlist(use.names = FALSE),
  vertex_size = 6,
  vertex_label_color = "black",
  vertex_label_cex = 0.7
)
```

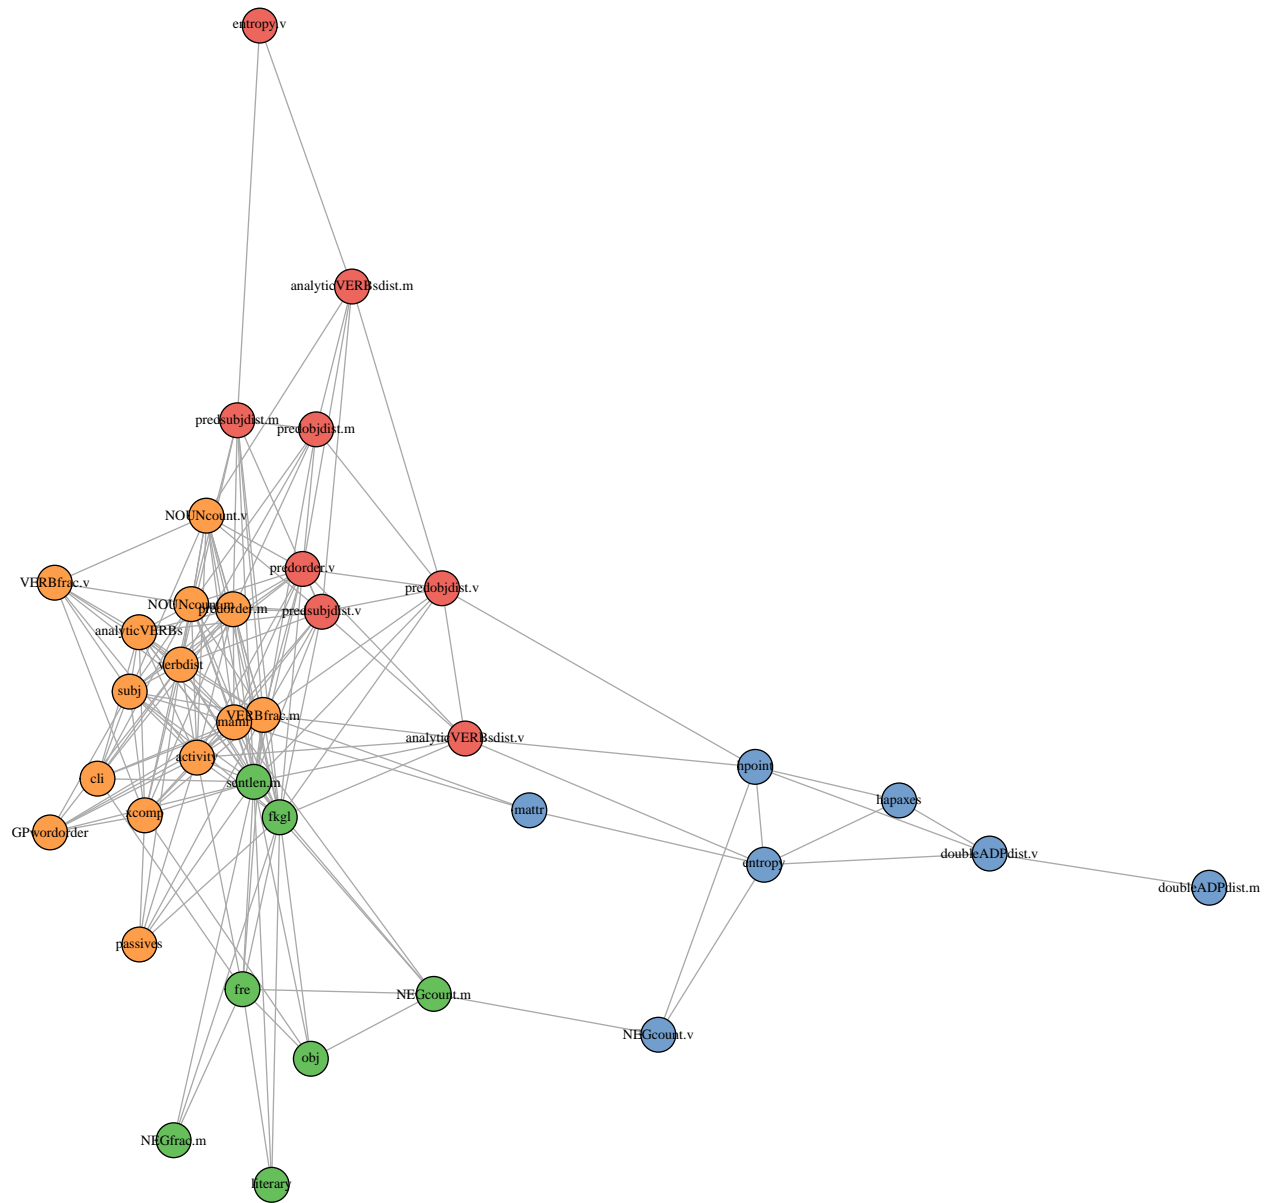

Scaling

```
data_scaled <- data_pure %>%
  mutate(across(1:length(colnames(data_pure)), ~ scale(.x)[, 1])))
```

Check for normality

```
mult.norm(data_pureish_striphigh %>% as.data.frame())$mult.test
```

```
##          Beta-hat      kappa p-val
## Skewness 1622.36 203876.6315    0
## Kurtosis 4329.61  438.3355    0
```


Low (null) p-values show that we can reject the hypothesis that the data would be in a multivariate normal distribution. I.e. the distribution isn't multivariate normal.

FA

No. of factors

```
eigen <- eigen(cor(data_scaled))
par <- nFactors::parallel(
  subject = nrow(data_scaled),
  var = ncol(data_scaled),
  rep = 100,
  quantile = .95,
  model = "factors"
)
scree <- nScree(x = eigen$values, aparallel = par$eigen$gevpea)
plotnScree(scree)
```


Non Graphical Solutions to Scree Test

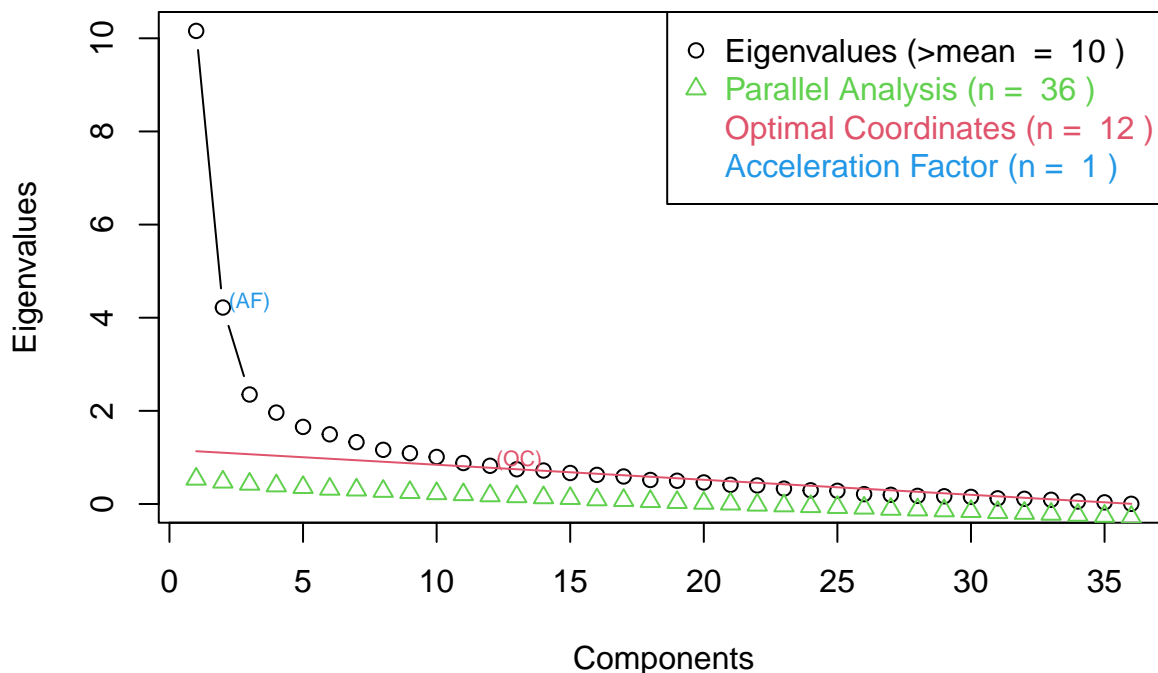

```
fa.parallel(data_scaled, fm = "pa", fa = "fa", n.iter = 20)
```

```
## Warning in fa.stats(r = r, f = f, phi = phi, n.obs = n.obs, np.obs = np.obs, :  
## The estimated weights for the factor scores are probably incorrect. Try a  
## different factor score estimation method.
```

Parallel Analysis Scree Plots

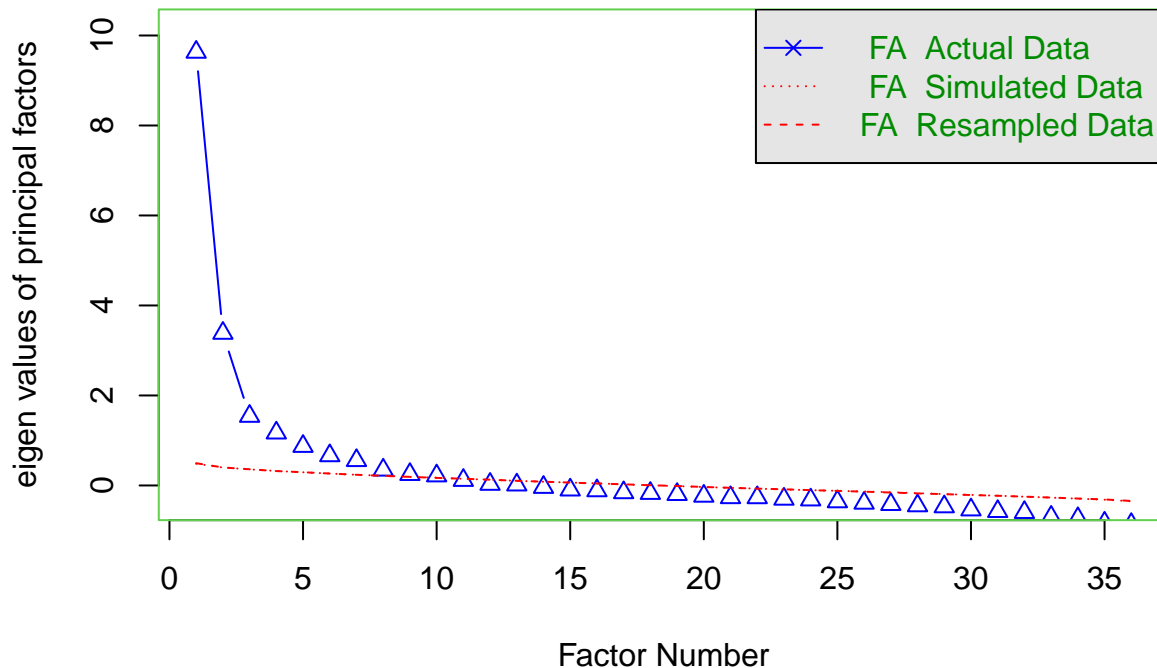

Parallel analysis suggests that the number of factors = 10 and the number of components = NA

Model

<https://www.rdocumentation.org/packages/psych/versions/2.5.3/topics/fa>

```
# appears to be the happiest when nfactors = 6 or 7
# throws the The estimated weights for the factor scores are probably incorrect.
# Try a different factor score estimation method. warning otherwise
fa_res <- fa(
  data_scaled,
  nfactors = 7,
  fm = "pa",
  rotate = "promax",
  oblique.scores = TRUE,
  scores = "tenBerge",
  n.iter = 100
)
```

Loading required namespace: GPArotation

```
fa_res
```

```
## Factor Analysis with confidence intervals using method = fa(r = data_scaled, nfactors = 7, n.iter = 100,
##   scores = "tenBerge", fm = "pa", oblique.scores = TRUE)
## Factor Analysis using method = pa
## Call: fa(r = data_scaled, nfactors = 7, n.iter = 100, rotate = "promax",
##   scores = "tenBerge", fm = "pa", oblique.scores = TRUE)
## Standardized loadings (pattern matrix) based upon correlation matrix
##
```

	PA1	PA4	PA2	PA3	PA5	PA6	PA7	h2	u2	com
## doubleADPdist.m	-0.28	0.00	0.20	0.08	-0.11	0.06	-0.02	0.14	0.864	2.5
## doubleADPdist.v	-0.11	0.06	0.56	0.01	-0.11	0.07	0.09	0.33	0.672	1.3

```

## GPwordorder      0.26  0.04  0.00 -0.02 -0.14  0.16 -0.11  0.18  0.823  2.8
## xcomp            0.50  0.26  0.01  0.04 -0.04  0.52  0.00  0.60  0.403  2.5
## literary         0.01  0.24 -0.02  0.08  0.24 -0.11  0.03  0.22  0.776  2.7
## sentlen.m       -0.63  0.43 -0.06  0.04  0.14  0.00 -0.09  0.93  0.072  2.0
## analyticVERBs    1.06  0.00 -0.12  0.39  0.02 -0.20  0.05  0.71  0.293  1.4
## analyticVERBsdist.m 0.21 -0.04 -0.04  0.82 -0.04 -0.04 -0.01  0.47  0.530  1.2
## analyticVERBsdist.v -0.03  0.10  0.25  0.28  0.07 -0.13 -0.03  0.33  0.672  2.9
## passives         0.10  0.22 -0.03  0.06  0.13 -0.60 -0.09  0.46  0.537  1.5
## predorder.m     -0.59  0.23 -0.15  0.13 -0.03  0.01 -0.10  0.60  0.404  1.6
## predorder.v     -0.12  0.11 -0.03  0.55  0.14  0.07  0.08  0.52  0.485  1.4
## obj             -0.01  0.50 -0.04 -0.02  0.30  0.50 -0.13  0.66  0.337  2.8
## predobjdist.m    0.00  0.01 -0.15  0.65 -0.09 -0.05 -0.03  0.38  0.623  1.2
## predobjdist.v    0.04  0.10  0.12  0.47  0.11  0.01  0.05  0.36  0.641  1.4
## subj            0.69  0.00  0.14 -0.09  0.02 -0.10 -0.23  0.55  0.451  1.4
## predsubjdist.m  -0.22  0.11 -0.09  0.36 -0.13 -0.01 -0.19  0.33  0.670  3.0
## predsubjdist.v  -0.18  0.08  0.06  0.40  0.17  0.02  0.00  0.45  0.551  1.9
## VERBfrac.m       0.78 -0.23 -0.06  0.20 -0.01  0.36  0.02  0.90  0.097  1.8
## VERBfrac.v      -0.55 -0.22 -0.04  0.10 -0.09  0.05  0.15  0.33  0.673  1.7
## NEGcount.m       -0.06 -0.14 -0.03 -0.09  0.97 -0.03  0.07  0.81  0.192  1.1
## NEGcount.v       0.21 -0.14  0.11 -0.03  0.81 -0.07  0.09  0.58  0.417  1.3
## NEGfrac.m        -0.10 -0.59 -0.07 -0.08  0.24  0.13 -0.06  0.33  0.672  1.6
## NOUNcount.m      -0.85  0.15  0.01 -0.02 -0.19 -0.11  0.04  0.80  0.201  1.2
## NOUNcount.v     -0.29 -0.03 -0.01  0.39  0.02  0.08  0.14  0.34  0.662  2.3
## activity         0.63 -0.27 -0.04  0.12  0.10  0.52 -0.04  0.92  0.083  2.5
## cli             0.52  0.44  0.04 -0.10 -0.24  0.03  0.29  0.49  0.508  3.1
## entropy          0.10  0.00  0.80  0.01  0.13  0.04  0.45  0.92  0.081  1.7
## fkg1            -0.37  0.80 -0.01 -0.05  0.07  0.01  0.02  0.98  0.018  1.4
## fre             -0.04 -1.02 -0.01  0.09  0.08 -0.04 -0.16  0.91  0.089  1.1
## hpoint          0.10 -0.02  0.90 -0.07  0.13 -0.02 -0.08  0.85  0.145  1.1
## entropy.v        0.06 -0.18  0.11  0.43 -0.08  0.03 -0.26  0.26  0.742  2.3
## mamr            0.81  0.05 -0.09 -0.02 -0.08 -0.04 -0.25  0.75  0.254  1.3
## mattr          -0.25  0.12  0.00 -0.08  0.11  0.05  0.72  0.62  0.383  1.4
## hapaxes         -0.07 -0.03 -0.81  0.13 -0.10  0.08  0.33  0.77  0.225  1.5
## verbdist        -0.74  0.02 -0.07  0.02 -0.11 -0.34 -0.10  0.79  0.209  1.5
##
##
##          PA1  PA4  PA2  PA3  PA5  PA6  PA7
## SS loadings      6.97 3.33 2.72 2.38 2.08 1.77 1.30
## Proportion Var    0.19 0.09 0.08 0.07 0.06 0.05 0.04
## Cumulative Var    0.19 0.29 0.36 0.43 0.49 0.53 0.57
## Proportion Explained 0.34 0.16 0.13 0.12 0.10 0.09 0.06
## Cumulative Proportion 0.34 0.50 0.63 0.75 0.85 0.94 1.00
##
## With factor correlations of
##          PA1  PA4  PA2  PA3  PA5  PA6  PA7
## PA1  1.00 -0.33 -0.08 -0.61 -0.31  0.29  0.01
## PA4 -0.33  1.00  0.32  0.39  0.50 -0.15 -0.03
## PA2 -0.08  0.32  1.00  0.32  0.34  0.00  0.00
## PA3 -0.61  0.39  0.32  1.00  0.33 -0.15 -0.15
## PA5 -0.31  0.50  0.34  0.33  1.00 -0.07 -0.02
## PA6  0.29 -0.15  0.00 -0.15 -0.07  1.00 -0.21
## PA7  0.01 -0.03  0.00 -0.15 -0.02 -0.21  1.00
##
## Mean item complexity = 1.8
## Test of the hypothesis that 7 factors are sufficient.

```

```

##
## df null model = 630 with the objective function = 30.2 with Chi Square = 22351.26
## df of the model are 399 and the objective function was 6.51
##
## The root mean square of the residuals (RMSR) is 0.04
## The df corrected root mean square of the residuals is 0.05
##
## The harmonic n.obs is 754 with the empirical chi square 1285.27 with prob < 1e-93
## The total n.obs was 754 with Likelihood Chi Square = 4788.13 with prob < 0
##
## Tucker Lewis Index of factoring reliability = 0.679
## RMSEA index = 0.121 and the 90 % confidence intervals are 0.118 0.124
## BIC = 2144.59
## Fit based upon off diagonal values = 0.98
## Measures of factor score adequacy
##
## Correlation of (regression) scores with factors PA1 PA4 PA2 PA3 PA5 PA6
## Multiple R square of scores with factors 1 0.99 0.97 0.93 0.98 0.94
## Minimum correlation of possible factor scores 1 0.98 0.94 0.86 0.95 0.88
##
## Correlation of (regression) scores with factors PA7
## Multiple R square of scores with factors 0.96
## Minimum correlation of possible factor scores 0.93
##
## Coefficients and bootstrapped confidence intervals
##
## low PA1 upper low PA4 upper low PA2 upper low
## doubleADPdist.m -0.55 -0.28 -0.04 -0.13 0.00 0.14 0.05 0.20 0.38 -0.56
## doubleADPdist.v -0.27 -0.11 0.05 -0.05 0.06 0.16 0.11 0.56 1.12 -0.37
## GPwordorder 0.02 0.26 0.59 -0.05 0.04 0.13 -0.11 0.00 0.09 -0.20
## xcomp 0.07 0.50 1.04 0.16 0.26 0.36 -0.07 0.01 0.09 -0.23
## literary -0.16 0.01 0.14 0.14 0.24 0.38 -0.09 -0.02 0.09 -0.04
## sentlen.m -1.05 -0.63 -0.24 0.29 0.43 0.59 -0.24 -0.06 0.08 -0.42
## analyticVERBs 0.47 1.06 1.55 -0.08 0.00 0.11 -0.23 -0.12 0.09 0.00
## analyticVERBsdist.m -0.09 0.21 0.39 -0.12 -0.04 0.08 -0.18 -0.04 0.17 -0.12
## analyticVERBsdist.v -0.21 -0.03 0.08 -0.01 0.10 0.22 -0.03 0.25 0.63 -0.17
## passives -0.10 0.10 0.23 0.11 0.22 0.39 -0.11 -0.03 0.06 -0.21
## predorder.m -1.13 -0.59 -0.15 0.01 0.23 0.44 -0.38 -0.15 0.05 -0.19
## predorder.v -0.50 -0.12 0.15 -0.03 0.11 0.27 -0.14 -0.03 0.13 -0.04
## obj -0.15 -0.01 0.21 0.36 0.50 0.66 -0.27 -0.04 0.14 -0.50
## predobjdist.m -0.29 0.00 0.23 -0.08 0.01 0.13 -0.25 -0.15 -0.05 -0.02
## predobjdist.v -0.18 0.04 0.20 0.01 0.10 0.24 -0.11 0.12 0.41 -0.12
## subj 0.15 0.69 1.34 -0.07 0.00 0.08 0.00 0.14 0.28 -0.21
## predsubjdist.m -0.52 -0.22 -0.01 -0.09 0.11 0.34 -0.24 -0.09 0.08 -0.46
## predsubjdist.v -0.52 -0.18 0.06 -0.02 0.08 0.21 -0.06 0.06 0.23 -0.10
## VERBfrac.m 0.24 0.78 1.36 -0.31 -0.23 -0.16 -0.10 -0.06 0.02 -0.04
## VERBfrac.v -1.02 -0.55 -0.17 -0.35 -0.22 -0.11 -0.15 -0.04 0.08 -0.33
## NEGcount.m -0.22 -0.06 0.06 -0.20 -0.14 -0.03 -0.12 -0.03 0.09 -0.56
## NEGcount.v 0.04 0.21 0.33 -0.20 -0.14 -0.04 -0.09 0.11 0.39 -0.49
## NEGfrac.m -0.25 -0.10 0.08 -0.83 -0.59 -0.38 -0.20 -0.07 0.03 -0.29
## NOUNcount.m -1.50 -0.85 -0.26 0.08 0.15 0.24 -0.07 0.01 0.06 -0.22
## NOUNcount.v -0.67 -0.29 -0.01 -0.13 -0.03 0.08 -0.18 -0.01 0.20 -0.34
## activity 0.16 0.63 1.17 -0.36 -0.27 -0.19 -0.10 -0.04 0.02 -0.12
## cli 0.20 0.52 0.88 0.25 0.44 0.67 -0.13 0.04 0.25 -0.89
## entropy 0.00 0.10 0.17 -0.04 0.00 0.07 -0.02 0.80 1.80 -0.42

```

## fkgl	-0.60	-0.37	-0.15	0.55	0.80	1.07	-0.10	-0.01	0.06	-0.28
## fre	-0.17	-0.04	0.06	-1.39	-1.02	-0.70	-0.10	-0.01	0.05	-0.07
## hpoint	-0.07	0.10	0.38	-0.10	-0.02	0.06	0.14	0.90	1.78	-0.35
## entropy.v	-0.15	0.06	0.22	-0.29	-0.18	-0.06	-0.06	0.11	0.35	-0.59
## mamr	0.19	0.81	1.53	-0.04	0.05	0.13	-0.18	-0.09	0.00	-0.17
## mattr	-0.77	-0.25	0.13	0.03	0.12	0.26	-0.13	0.00	0.22	-1.34
## hapaxes	-0.45	-0.07	0.17	-0.11	-0.03	0.07	-1.47	-0.81	-0.19	-0.59
## verbdist	-1.32	-0.74	-0.25	-0.07	0.02	0.12	-0.20	-0.07	0.04	-0.19
##	PA3	upper	low	PA5	upper	low	PA6	upper	low	PA7
## doubleADPdist.m	0.08	0.81	-0.26	-0.11	0.03	-0.17	0.06	0.32	-0.34	-0.02
## doubleADPdist.v	0.01	0.45	-0.23	-0.11	0.00	-0.11	0.07	0.26	-0.33	0.09
## GPwordorder	-0.02	0.22	-0.25	-0.14	-0.03	-0.05	0.16	0.42	-0.42	-0.11
## xcomp	0.04	0.35	-0.10	-0.04	0.07	-0.15	0.52	1.39	-0.19	0.00
## literary	0.08	0.17	0.10	0.24	0.40	-0.33	-0.11	0.08	-0.12	0.03
## sentlen.m	0.04	0.64	0.05	0.14	0.26	-0.09	0.00	0.09	-0.23	-0.09
## analyticVERBs	0.39	0.58	-0.10	0.02	0.11	-0.36	-0.20	-0.01	-0.70	0.05
## analyticVERBsdist.m	0.82	1.88	-0.16	-0.04	0.05	-0.30	-0.04	0.25	-0.83	-0.01
## analyticVERBsdist.v	0.28	0.79	-0.03	0.07	0.16	-0.35	-0.13	0.04	-0.29	-0.03
## passives	0.06	0.26	0.01	0.13	0.24	-1.57	-0.60	0.20	-0.97	-0.09
## predorder.m	0.13	0.56	-0.19	-0.03	0.16	-0.19	0.01	0.18	-0.29	-0.10
## predorder.v	0.55	1.22	-0.02	0.14	0.29	-0.15	0.07	0.33	-0.11	0.08
## obj	-0.02	0.63	0.06	0.30	0.60	-0.16	0.50	1.35	-0.34	-0.13
## predobjdist.m	0.65	1.50	-0.24	-0.09	0.04	-0.32	-0.05	0.16	-0.98	-0.03
## predobjdist.v	0.47	1.17	0.00	0.11	0.19	-0.27	0.01	0.29	-0.17	0.05
## subj	-0.09	0.04	-0.07	0.02	0.11	-0.50	-0.10	0.31	-1.21	-0.23
## predsubjdist.m	0.36	1.31	-0.28	-0.13	0.03	-0.22	-0.01	0.19	-1.24	-0.19
## predsubjdist.v	0.40	0.96	0.03	0.17	0.31	-0.15	0.02	0.21	-0.19	0.00
## VERBfrac.m	0.20	0.38	-0.09	-0.01	0.07	-0.21	0.36	1.09	-0.40	0.02
## VERBfrac.v	0.10	0.52	-0.26	-0.09	0.08	-0.27	0.05	0.33	-0.13	0.15
## NEGcount.m	-0.09	0.30	0.52	0.97	1.43	-0.33	-0.03	0.34	-0.11	0.07
## NEGcount.v	-0.03	0.31	0.44	0.81	1.21	-0.38	-0.07	0.28	-0.09	0.09
## NEGfrac.m	-0.08	0.14	0.08	0.24	0.41	-0.08	0.13	0.42	-0.20	-0.06
## NOUNcount.m	-0.02	0.28	-0.29	-0.19	-0.09	-0.56	-0.11	0.24	-0.31	0.04
## NOUNcount.v	0.39	1.16	-0.12	0.02	0.17	-0.16	0.08	0.35	-0.10	0.14
## activity	0.12	0.37	0.00	0.10	0.22	-0.26	0.52	1.53	-0.37	-0.04
## cli	-0.10	0.51	-0.46	-0.24	-0.06	-0.19	0.03	0.22	-0.52	0.29
## entropy	0.01	0.29	0.04	0.13	0.27	-0.16	0.04	0.20	-0.68	0.45
## fkgl	-0.05	0.26	0.02	0.07	0.16	-0.08	0.01	0.09	-0.25	0.02
## fre	0.09	0.26	-0.03	0.08	0.17	-0.16	-0.04	0.09	-0.93	-0.16
## hpoint	-0.07	0.38	0.05	0.13	0.26	-0.19	-0.02	0.14	-0.27	-0.08
## entropy.v	0.43	1.61	-0.24	-0.08	0.05	-0.13	0.03	0.20	-1.49	-0.26
## mamr	-0.02	0.14	-0.20	-0.08	0.01	-0.27	-0.04	0.25	-1.11	-0.25
## mattr	-0.08	0.84	-0.01	0.11	0.24	-0.33	0.05	0.35	-0.80	0.72
## hapaxes	0.13	0.58	-0.26	-0.10	0.01	-0.19	0.08	0.34	-0.03	0.33
## verbdist	0.02	0.33	-0.22	-0.11	-0.01	-1.00	-0.34	0.15	-0.32	-0.10
##	upper									
## doubleADPdist.m	0.30									
## doubleADPdist.v	0.61									
## GPwordorder	0.12									
## xcomp	0.14									
## literary	0.17									
## sentlen.m	0.04									
## analyticVERBs	0.62									
## analyticVERBsdist.m	0.59									


```

## analyticVERBsdist.v 0.14
## passives 0.68
## predorder.m 0.07
## predorder.v 0.22
## obj 0.04
## predobjdist.m 0.73
## predobjdist.v 0.22
## subj 0.56
## predsubjdist.m 0.54
## predsubjdist.v 0.15
## VERBfrac.m 0.30
## VERBfrac.v 0.49
## NEGcount.m 0.33
## NEGcount.v 0.33
## NEGfrac.m 0.09
## NOUNcount.m 0.53
## NOUNcount.v 0.34
## activity 0.15
## cli 1.33
## entropy 1.85
## fkg1 0.38
## fre 0.43
## hpoint 0.20
## entropy.v 0.57
## mamr 0.44
## mattr 2.57
## hapaxes 0.68
## verbdist 0.12
##
## Interfactor correlations and bootstrapped confidence intervals
##      lower estimate upper
## PA1-PA4 -0.794 -0.3318 0.53
## PA1-PA2 -0.587 -0.0773 0.39
## PA1-PA3 -1.009 -0.6090 0.64
## PA1-PA5 -0.821 -0.3127 0.63
## PA1-PA6 -0.433 0.2863 0.60
## PA1-PA7 -0.329 0.0137 0.30
## PA4-PA2 -0.048 0.3215 0.65
## PA4-PA3 -0.119 0.3943 0.73
## PA4-PA5 -0.293 0.4992 0.82
## PA4-PA6 -0.453 -0.1513 0.56
## PA4-PA7 -0.342 -0.0257 0.27
## PA2-PA3 0.026 0.3194 0.49
## PA2-PA5 -0.213 0.3399 0.63
## PA2-PA6 -0.298 -0.0013 0.44
## PA2-PA7 -0.304 -0.0046 0.26
## PA3-PA5 -0.316 0.3335 0.68
## PA3-PA6 -0.407 -0.1536 0.46
## PA3-PA7 -0.381 -0.1472 0.30
## PA5-PA6 -0.340 -0.0709 0.27
## PA5-PA7 -0.350 -0.0210 0.27
## PA6-PA7 -0.375 -0.2059 0.24

```

Loadings

```
fa_res$loadings
```

```
##
## Loadings:
##          PA1    PA4    PA2    PA3    PA5    PA6    PA7
## doubleADPdist.m -0.278          0.201    -0.105
## doubleADPdist.v -0.114          0.559    -0.114
## GPwordorder      0.264          -0.135  0.157 -0.115
## xcomp            0.503  0.264          0.518
## literary          0.241          0.238 -0.113
## sentlen.m        -0.628  0.431          0.138
## analyticVERBs     1.059    -0.116  0.393    -0.203
## analyticVERBsdist.m 0.214          0.824
## analyticVERBsdist.v      0.253  0.281    -0.135
## passives          0.100  0.222          0.135 -0.598
## predorder.m       -0.590  0.230 -0.152  0.131    -0.103
## predorder.v       -0.120  0.112          0.548  0.136
## obj              0.503          0.295  0.500 -0.128
## predobjdist.m          -0.146  0.649
## predobjdist.v          0.102  0.124  0.468  0.106
## subj             0.689          0.136    -0.228
## predsubjdist.m    -0.223  0.112          0.355 -0.126    -0.186
## predsubjdist.v    -0.181          0.398  0.165
## VERBfrac.m        0.778 -0.231          0.201    0.360
## VERBfrac.v        -0.546 -0.221          0.155
## NEGcount.m         -0.137          0.969
## NEGcount.v         0.208 -0.136  0.114    0.807
## NEGfrac.m          -0.585          0.237  0.133
## NOUNcount.m        -0.853  0.155          -0.190 -0.110
## NOUNcount.v        -0.286          0.386    0.141
## activity           0.625 -0.266          0.122    0.524
## cli                0.519  0.444          -0.242    0.288
## entropy            0.803          0.131    0.450
## fkgl              -0.369  0.796
## fre                -1.025    -0.159
## hpoint             0.101          0.897    0.134
## entropy.v          -0.176  0.109  0.431    -0.258
## mamr               0.808    -0.250
## mattr              -0.253  0.124          0.109    0.722
## hapaxes            -0.812  0.127    0.331
## verbdist           -0.742          -0.108 -0.336
##
##          PA1    PA4    PA2    PA3    PA5    PA6    PA7
## SS loadings  6.770 3.235 2.691 2.646 2.169 1.577 1.316
## Proportion Var 0.188 0.090 0.075 0.073 0.060 0.044 0.037
## Cumulative Var 0.188 0.278 0.353 0.426 0.486 0.530 0.567
```

```
for (i in 1:fa_res$nfactors) {
  cat("\n-----", colnames(fa_res$loadings)[i], "-----\n")

  loadings <- fa_res$loadings[, i]
  load_df <- data.frame(loading = loadings)
```

```

load_df_filtered <- load_df %>%
  mutate(abs_1 = abs(loading)) %>%
  arrange(-abs_1) %>%
  filter(abs_1 > 0.3)

load_df_filtered %>%
  round(3) %>%
  print()

cat("\n")
}

```

```

##
## ----- PA1 -----
##           loading abs_1
## analyticVERBs    1.059 1.059
## NOUNcount.m     -0.853 0.853
## mamr             0.808 0.808
## VERBfrac.m       0.778 0.778
## verbdist        -0.742 0.742
## subj            0.689 0.689
## sentlen.m       -0.628 0.628
## activity         0.625 0.625
## predorder.m     -0.590 0.590
## VERBfrac.v      -0.546 0.546
## cli             0.519 0.519
## xcomp           0.503 0.503
## fkg1            -0.369 0.369
##
##
## ----- PA4 -----
##           loading abs_1
## fre             -1.025 1.025
## fkg1            0.796 0.796
## NEGfrac.m      -0.585 0.585
## obj            0.503 0.503
## cli            0.444 0.444
## sentlen.m      0.431 0.431
##
##
## ----- PA2 -----
##           loading abs_1
## hpoint          0.897 0.897
## hapaxes        -0.812 0.812
## entropy         0.803 0.803
## doubleADPdist.v 0.559 0.559
##
##
## ----- PA3 -----
##           loading abs_1
## analyticVERBsdist.m 0.824 0.824
## predobjdist.m     0.649 0.649
## predorder.v       0.548 0.548

```

```

## predobjdist.v      0.468 0.468
## entropy.v          0.431 0.431
## predsubjdist.v     0.398 0.398
## analyticVERBs      0.393 0.393
## NOUNcount.v        0.386 0.386
## predsubjdist.m     0.355 0.355
##
##
## ----- PA5 -----
##           loading abs_1
## NEGcount.m    0.969 0.969
## NEGcount.v    0.807 0.807
##
##
## ----- PA6 -----
##           loading abs_1
## passives      -0.598 0.598
## activity       0.524 0.524
## xcomp          0.518 0.518
## obj            0.500 0.500
## VERBfrac.m    0.360 0.360
## verbdist      -0.336 0.336
##
##
## ----- PA7 -----
##           loading abs_1
## mattr         0.722 0.722
## entropy       0.450 0.450
## hapaxes       0.331 0.331

```

hypotheses:

- **PA1:** written, formal register (complex) vs. more spoken-like register
 - long, severely complex, nominalized sentences / shorter, more verbal sentences
- **PA4:** structure size? elaboratedness of expression? advancement (in years of age)?
 - short words, short sentences, more negations / long words, long sentences, more objects
 - cli: word complexity - sentence easiness
 - the negations might be because of the varying sentence length
- **PA2:** text length & enumerations
- **PA3:** intra-text (syntactic, possibly content-related) variation
 - note that the loadings of **VERBfrac.v** and **NEGcount.v** are negligible
 - however, the loading of **entropy.v** is significant
- **PA5:** negation
- **PA6:** passive / active
- **PA7:** unique words

NOTE: variables with low communalities are excluded from the analysis, yet still likely play a role in legal writing readability. this includes both those selected for the analysis and the excluded ones.

NOTE: some high-correlating variables were excluded from the FA.

Strong correlations:

- **PA1–PA3:** possible register switching
- **PA4–PA5:** expression sophisticatedness

Uniquenesses


```
fa_res$uniquenesses %>% round(3)
```

##	doubleADPdist.m	doubleADPdist.v	GPwordorder	xcomp
##	0.864	0.672	0.823	0.403
##	literary	sentlen.m	analyticVERBs	analyticVERBsdist.m
##	0.776	0.072	0.293	0.530
##	analyticVERBsdist.v	passives	predorder.m	predorder.v
##	0.672	0.537	0.404	0.485
##	obj	predobjdist.m	predobjdist.v	subj
##	0.337	0.623	0.641	0.451
##	predsubjdist.m	predsubjdist.v	VERBfrac.m	VERBfrac.v
##	0.670	0.551	0.097	0.673
##	NEGcount.m	NEGcount.v	NEGfrac.m	NOUNcount.m
##	0.192	0.417	0.672	0.201
##	NOUNcount.v	activity	cli	entropy
##	0.662	0.083	0.508	0.081
##	fkgl	fre	hpoint	entropy.v
##	0.018	0.089	0.145	0.742
##	mamr	mattr	hapaxes	verbdist
##	0.254	0.383	0.225	0.209


Plots

```
data_factors <- bind_cols(data_clean, fa_res$scores %>% as.data.frame())
data_factors_long <- data_factors %>%
  pivot_longer(PA1:PA7, names_to = "factor", values_to = "factor_score") %>%
  mutate(across(
    factor,
    ~ factor(.x, levels = c("PA1", "PA4", "PA2", "PA3", "PA5", "PA6", "PA7"))
  ))


data_factors_long %>%
  ggplot(aes(x = factor_score, y = class)) +
  facet_grid(factor ~ .) +
  theme(legend.position = "bottom") +
  geom_jitter(width = 0, height = 0.1, alpha = 0.2)
```

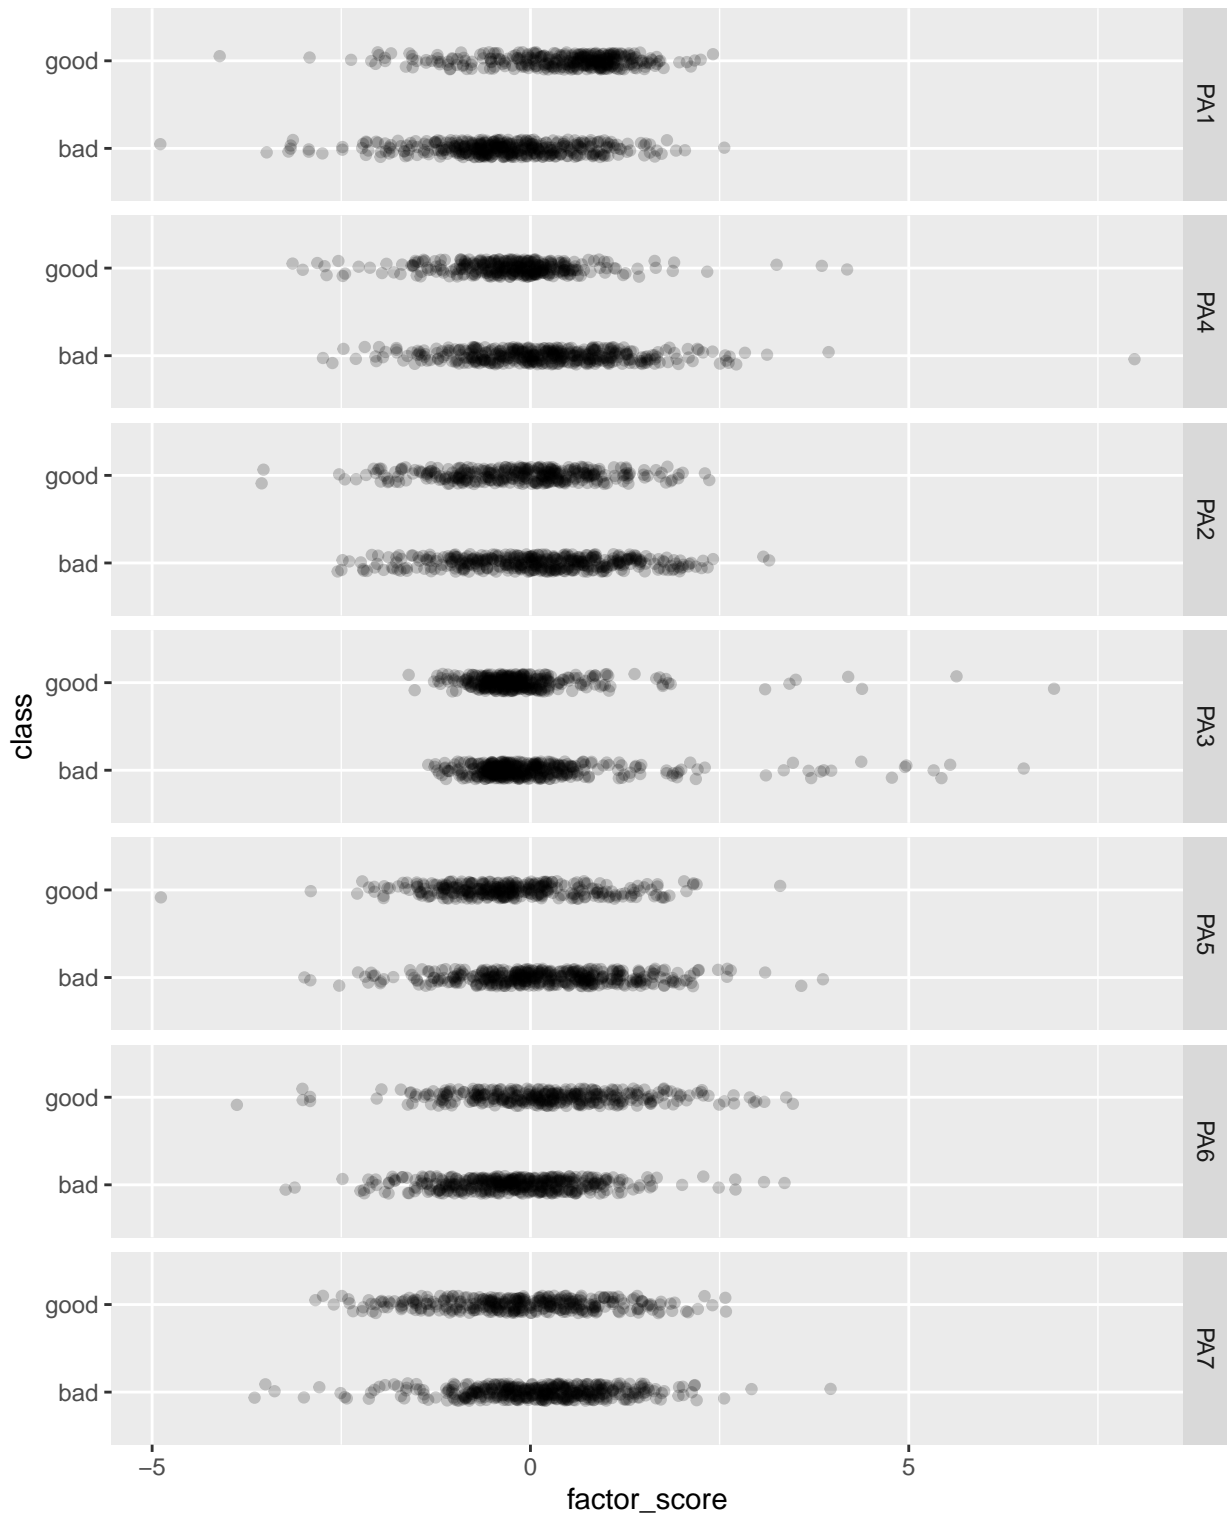


```
data_factors_long %>% ggplot(aes(x = factor_score, y = class)) +
  geom_boxplot() +
  facet_grid(factor ~ .)
```

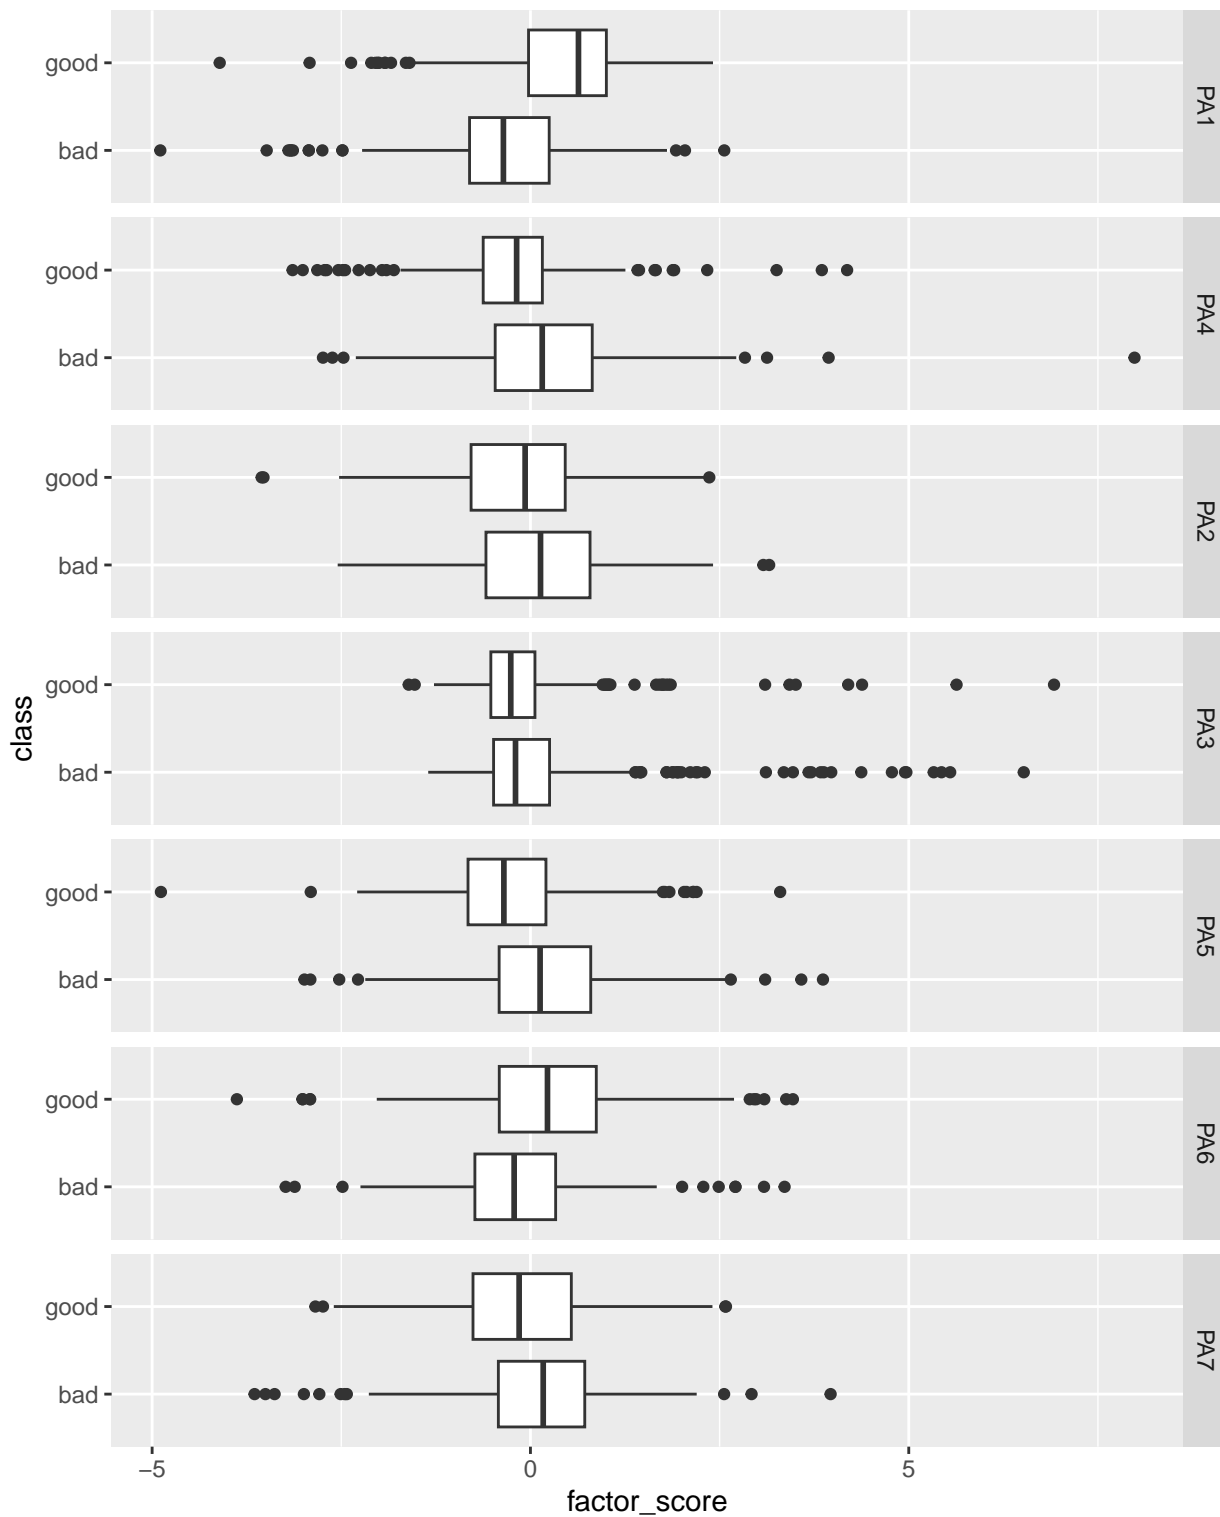


```
data_factors_long %>%
  ggplot(aes(x = factor_score, y = subcorpus, color = class)) +
  facet_grid(factor ~ .) +
  theme(legend.position = "bottom") +
  geom_jitter(width = 0, height = 0.1, alpha = 0.2)
```

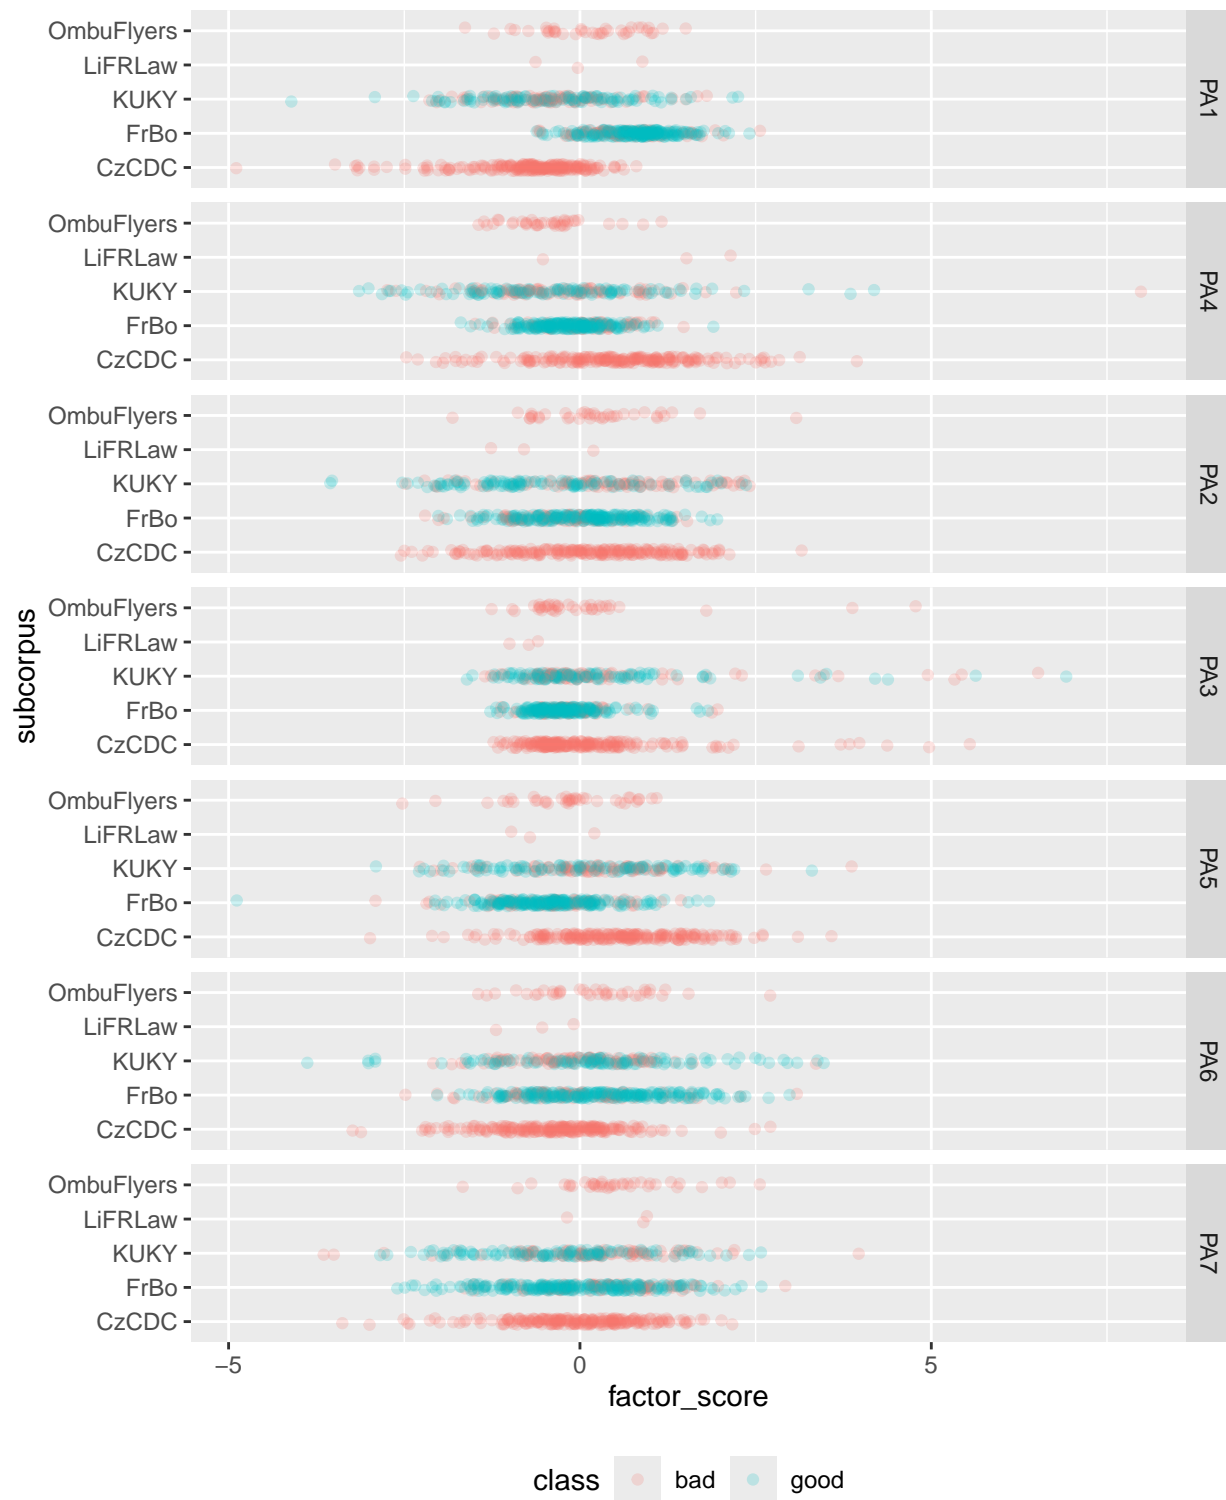


```
data_factors_long %>% ggplot(aes(x = factor_score, y = subcorpus)) +
  geom_boxplot() +
  facet_grid(factor ~ .)
```

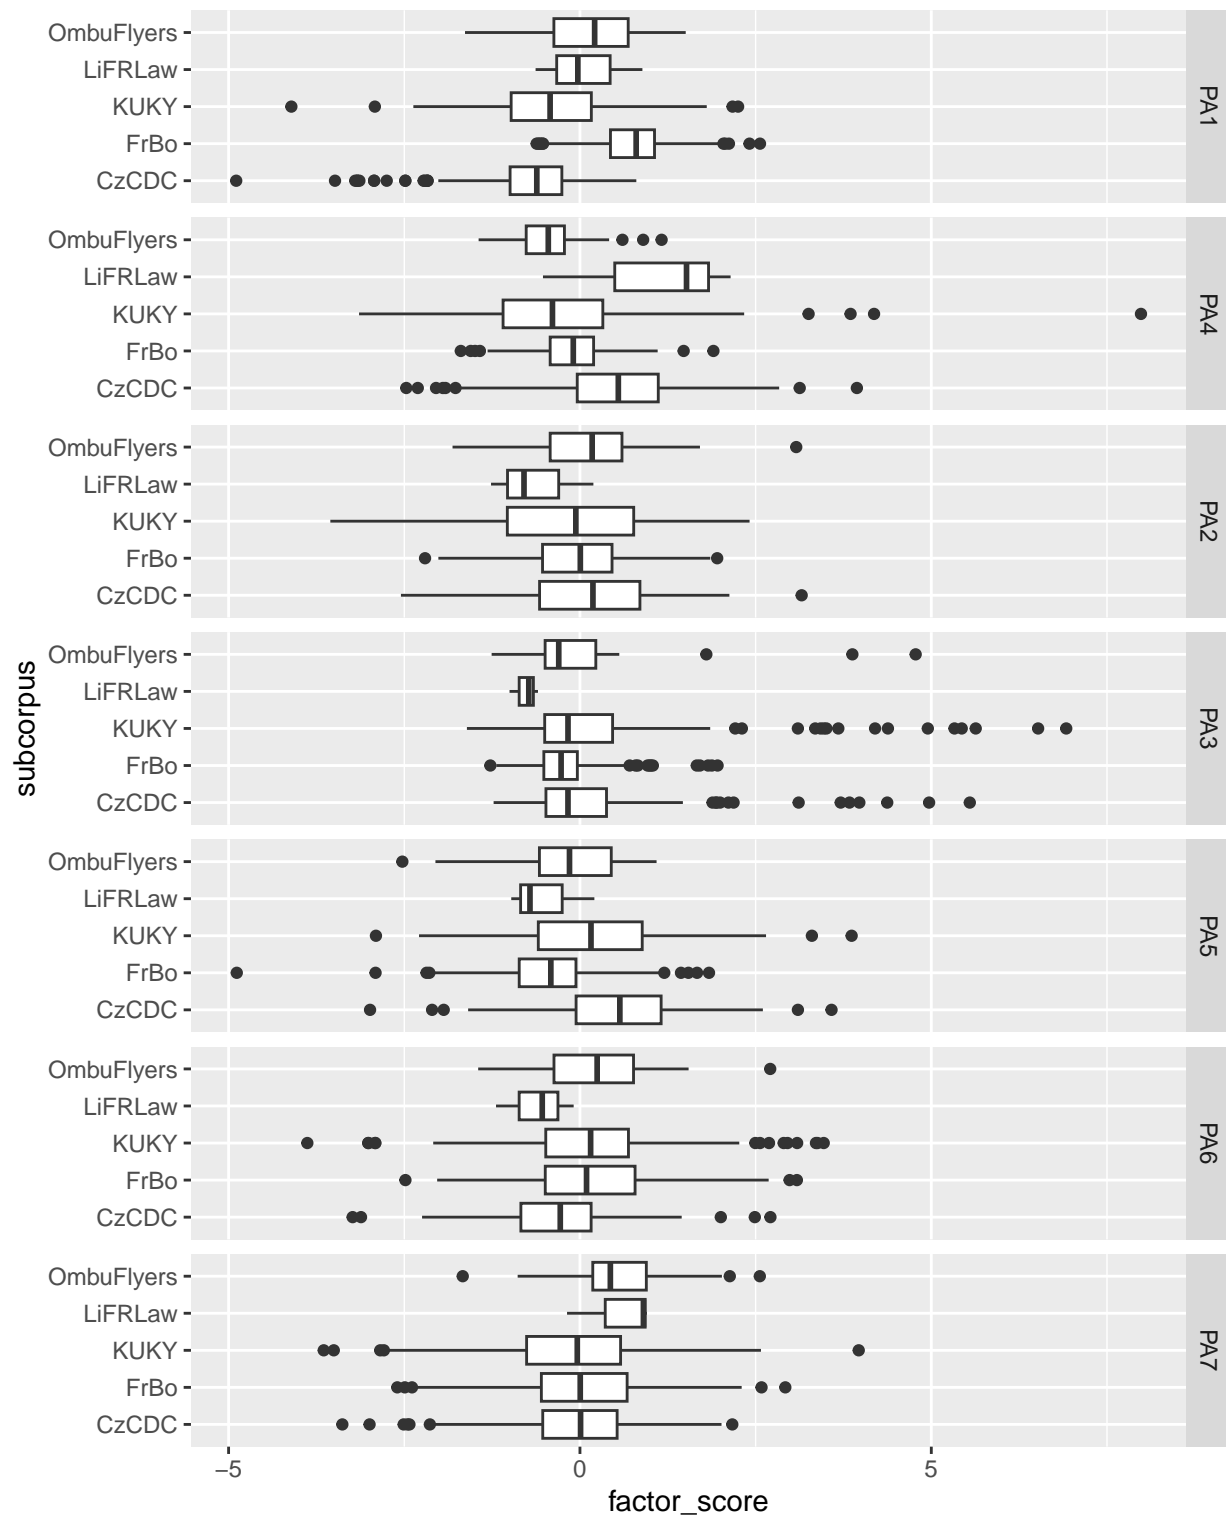
```
data_factors_long %>%
  ggplot(aes(x = factor_score, y = AuthorType, color = class)) +
  facet_grid(factor ~ .) +
  theme(legend.position = "bottom") +
  geom_jitter(width = 0, height = 0.1, alpha = 0.2)
```

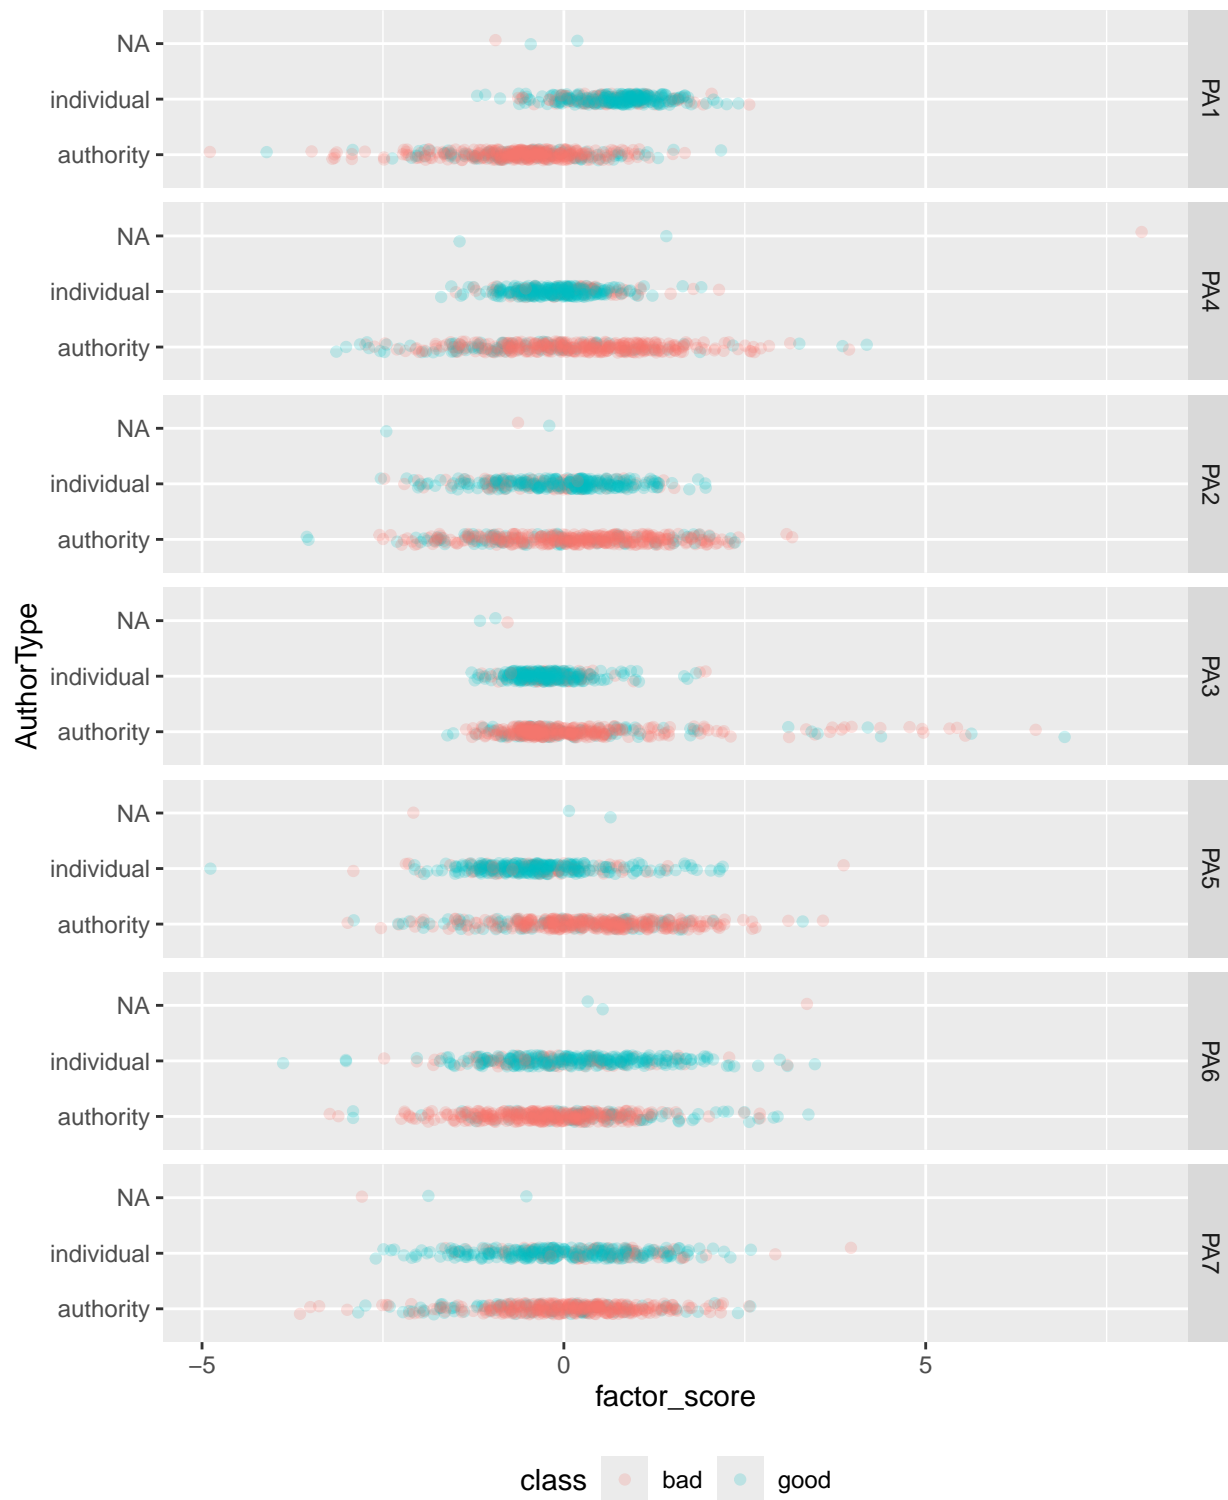


```
data_factors_long %>%
  ggplot(aes(x = factor_score, y = AuthorType)) +
  facet_grid(factor ~ .) +
  theme(legend.position = "bottom") +
  geom_boxplot()
```

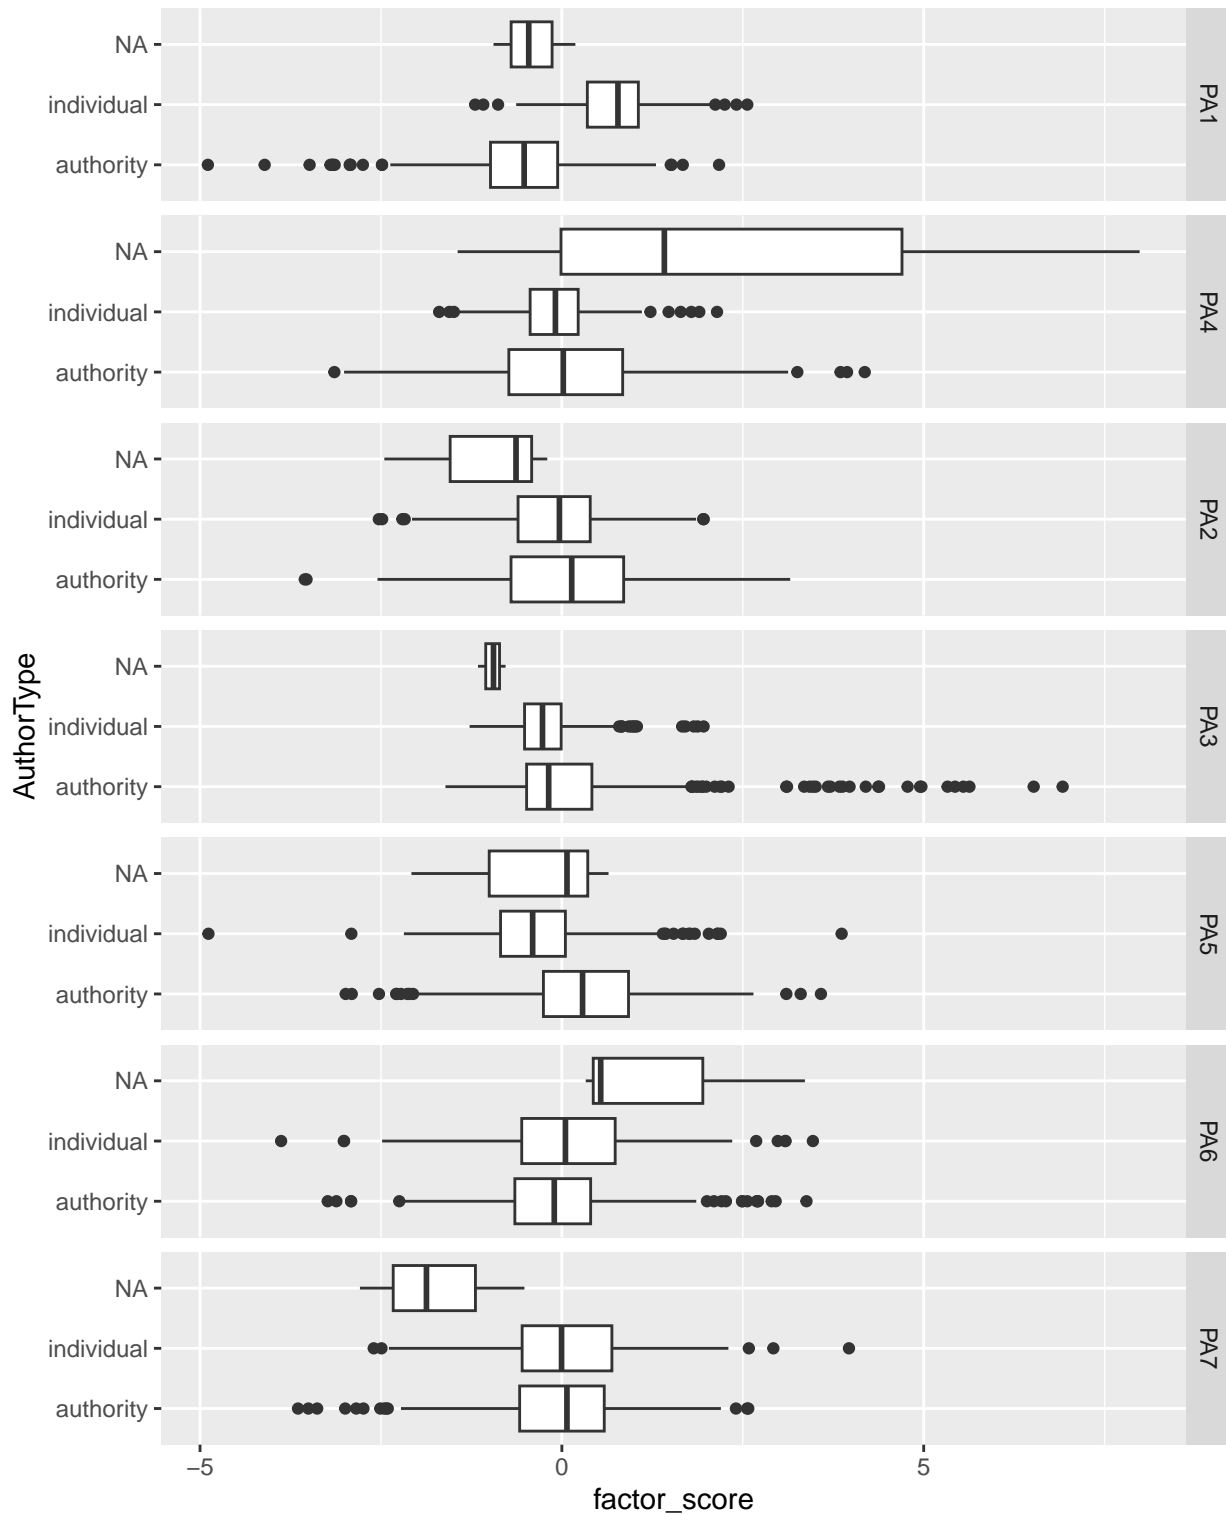


```
data_factors_long %>%
  ggplot(aes(x = factor_score, y = RecipientType, color = class)) +
  facet_grid(factor ~ .) +
  theme(legend.position = "bottom") +
  geom_jitter(width = 0, height = 0.1, alpha = 0.2)
```

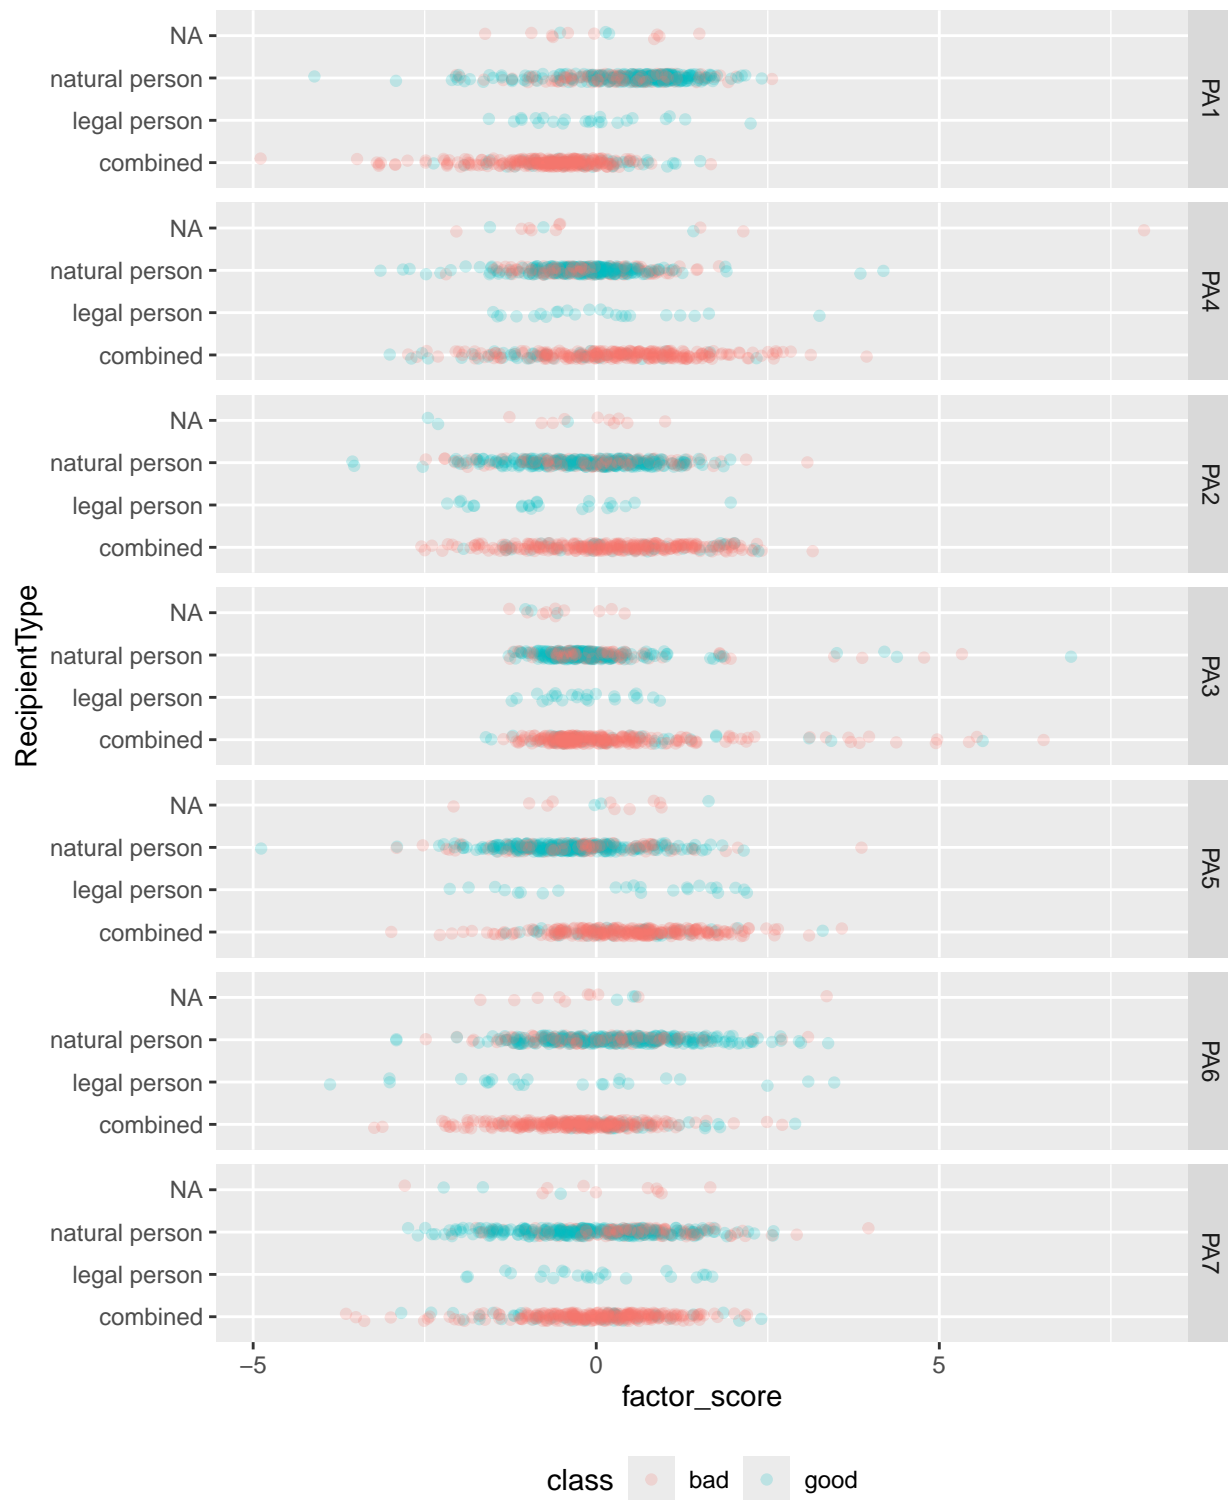


```
data_factors_long %>%
  ggplot(aes(x = factor_score, y = RecipientType)) +
  facet_grid(factor ~ .) +
  theme(legend.position = "bottom") +
  geom_boxplot()
```

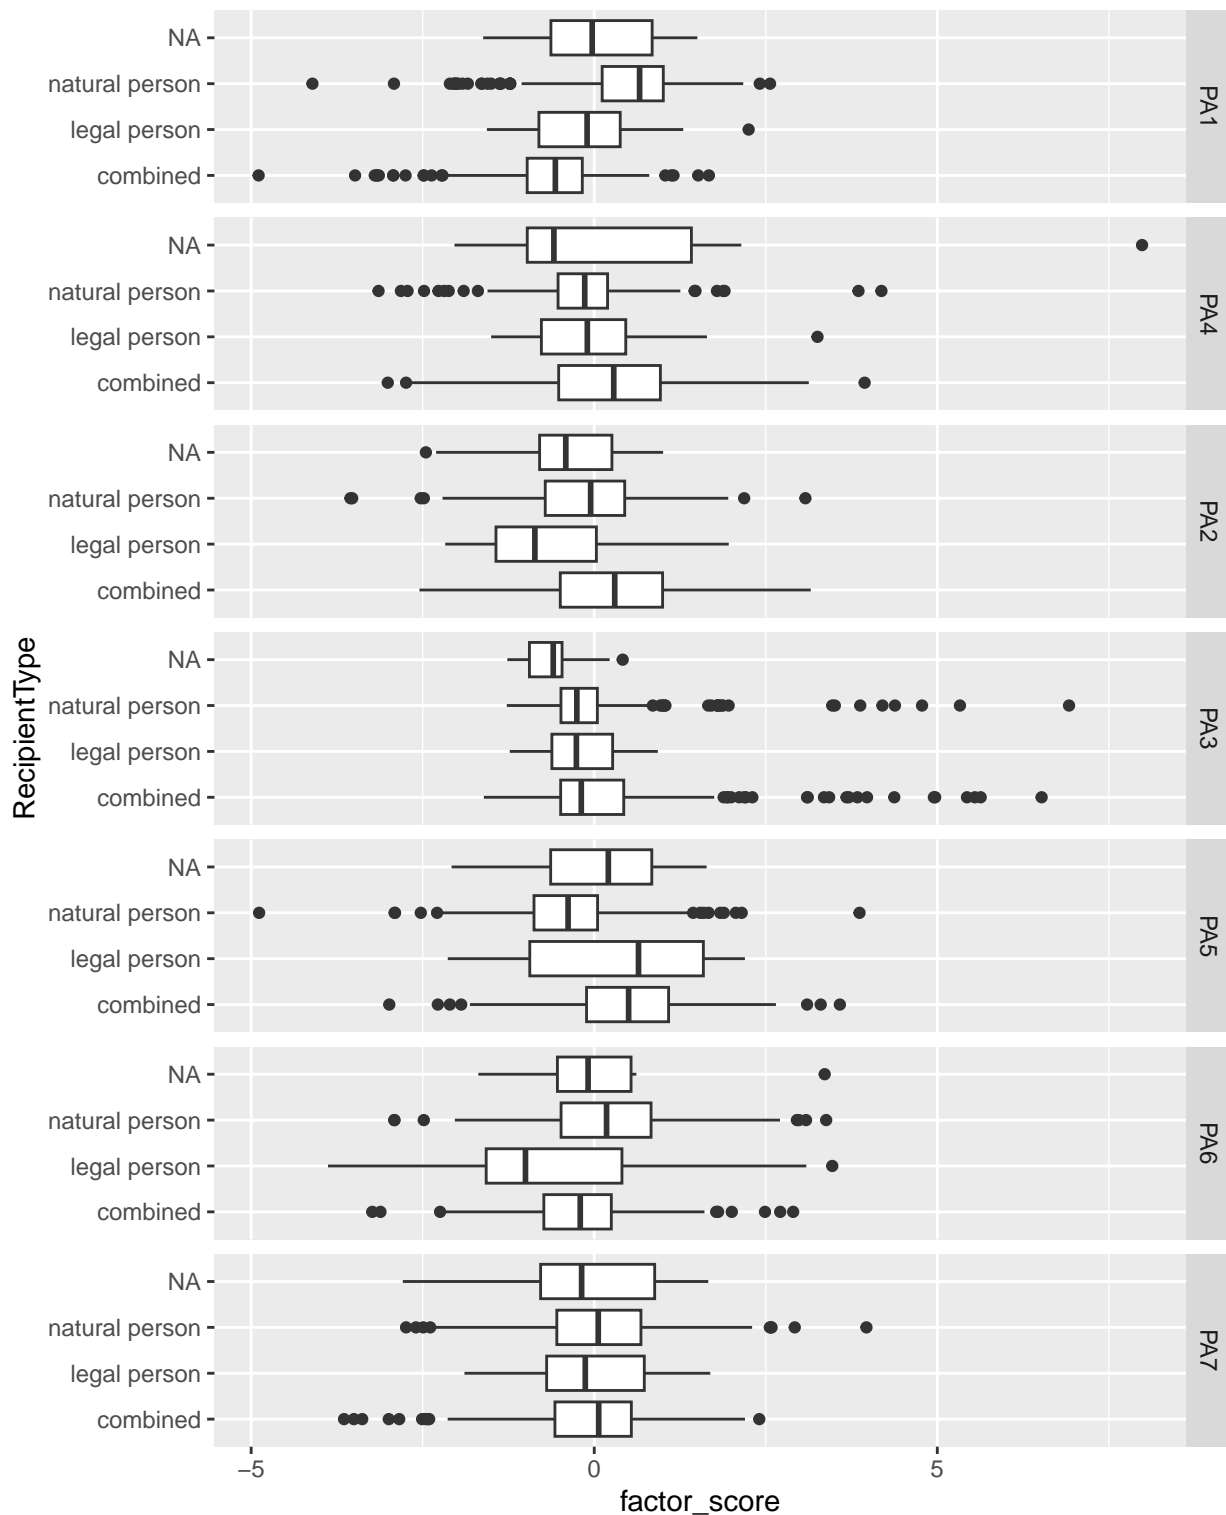


```
data_factors_long %>%
  ggplot(aes(x = factor_score, y = RecipientIndividuation, color = class)) +
  facet_grid(factor ~ .) +
  theme(legend.position = "bottom") +
  geom_jitter(width = 0, height = 0.1, alpha = 0.2)
```

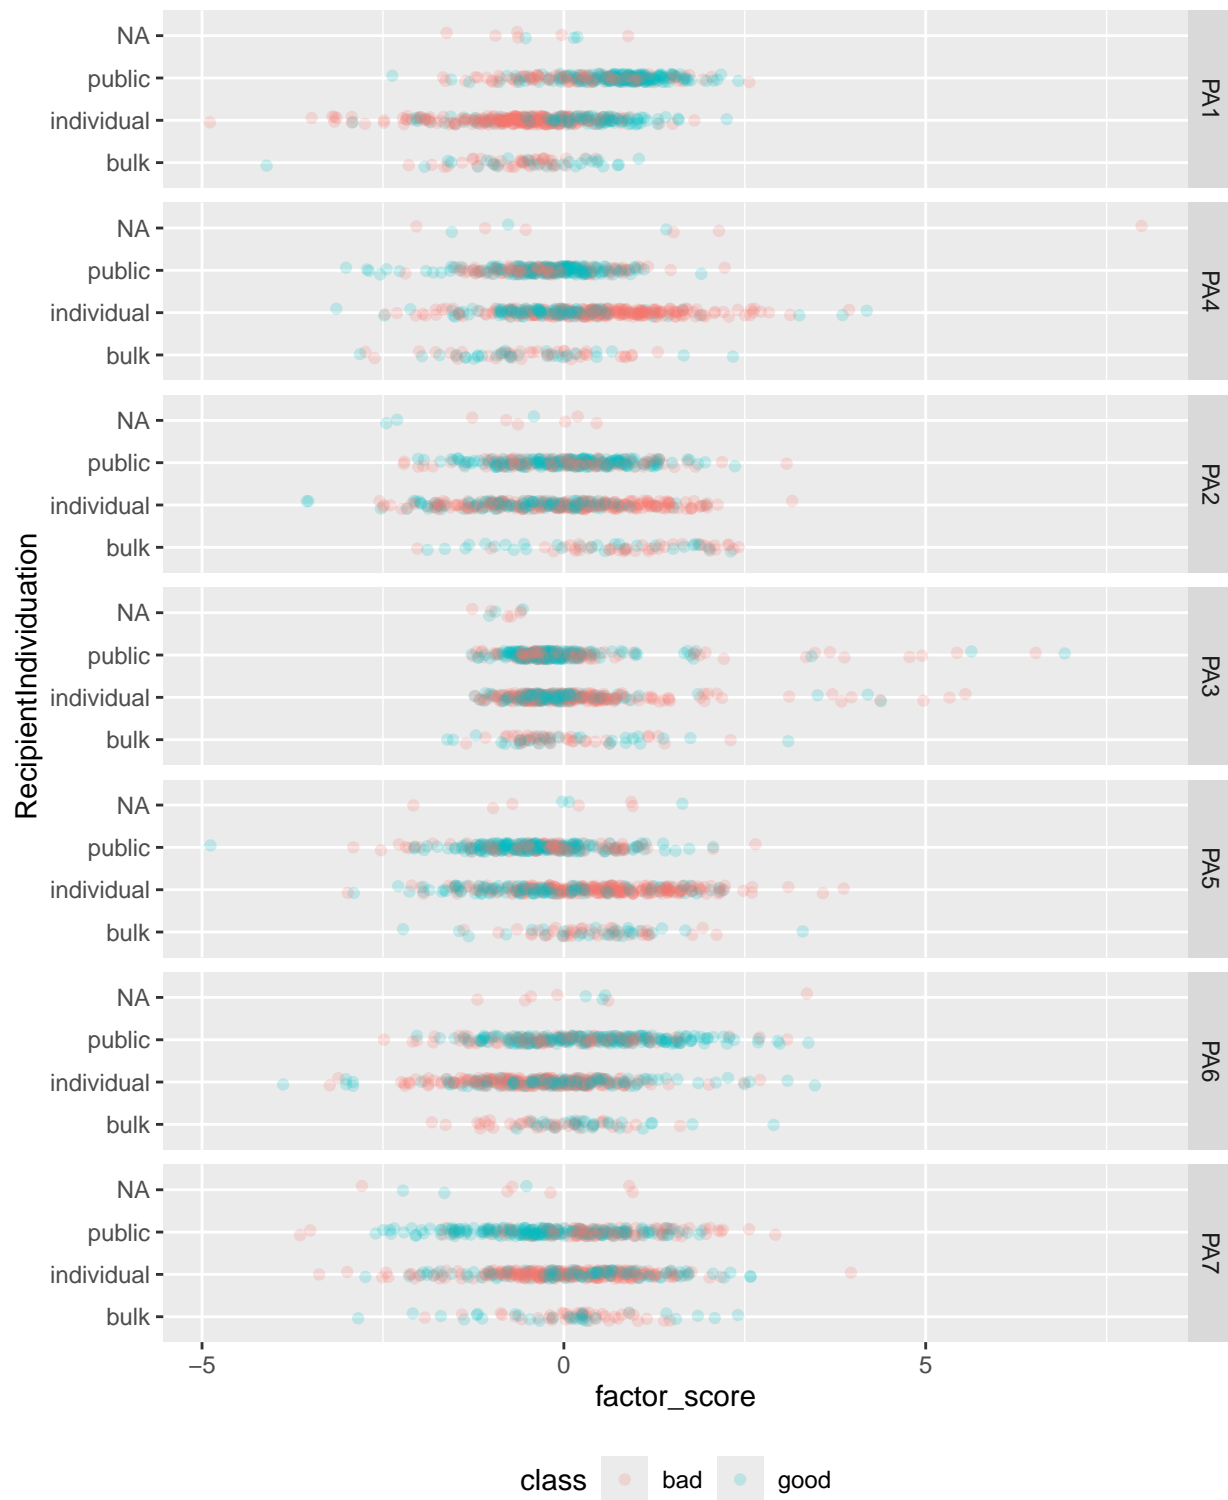


```
data_factors_long %>%
  ggplot(aes(x = factor_score, y = RecipientIndividuation)) +
  facet_grid(factor ~ .) +
  theme(legend.position = "bottom") +
  geom_boxplot()
```

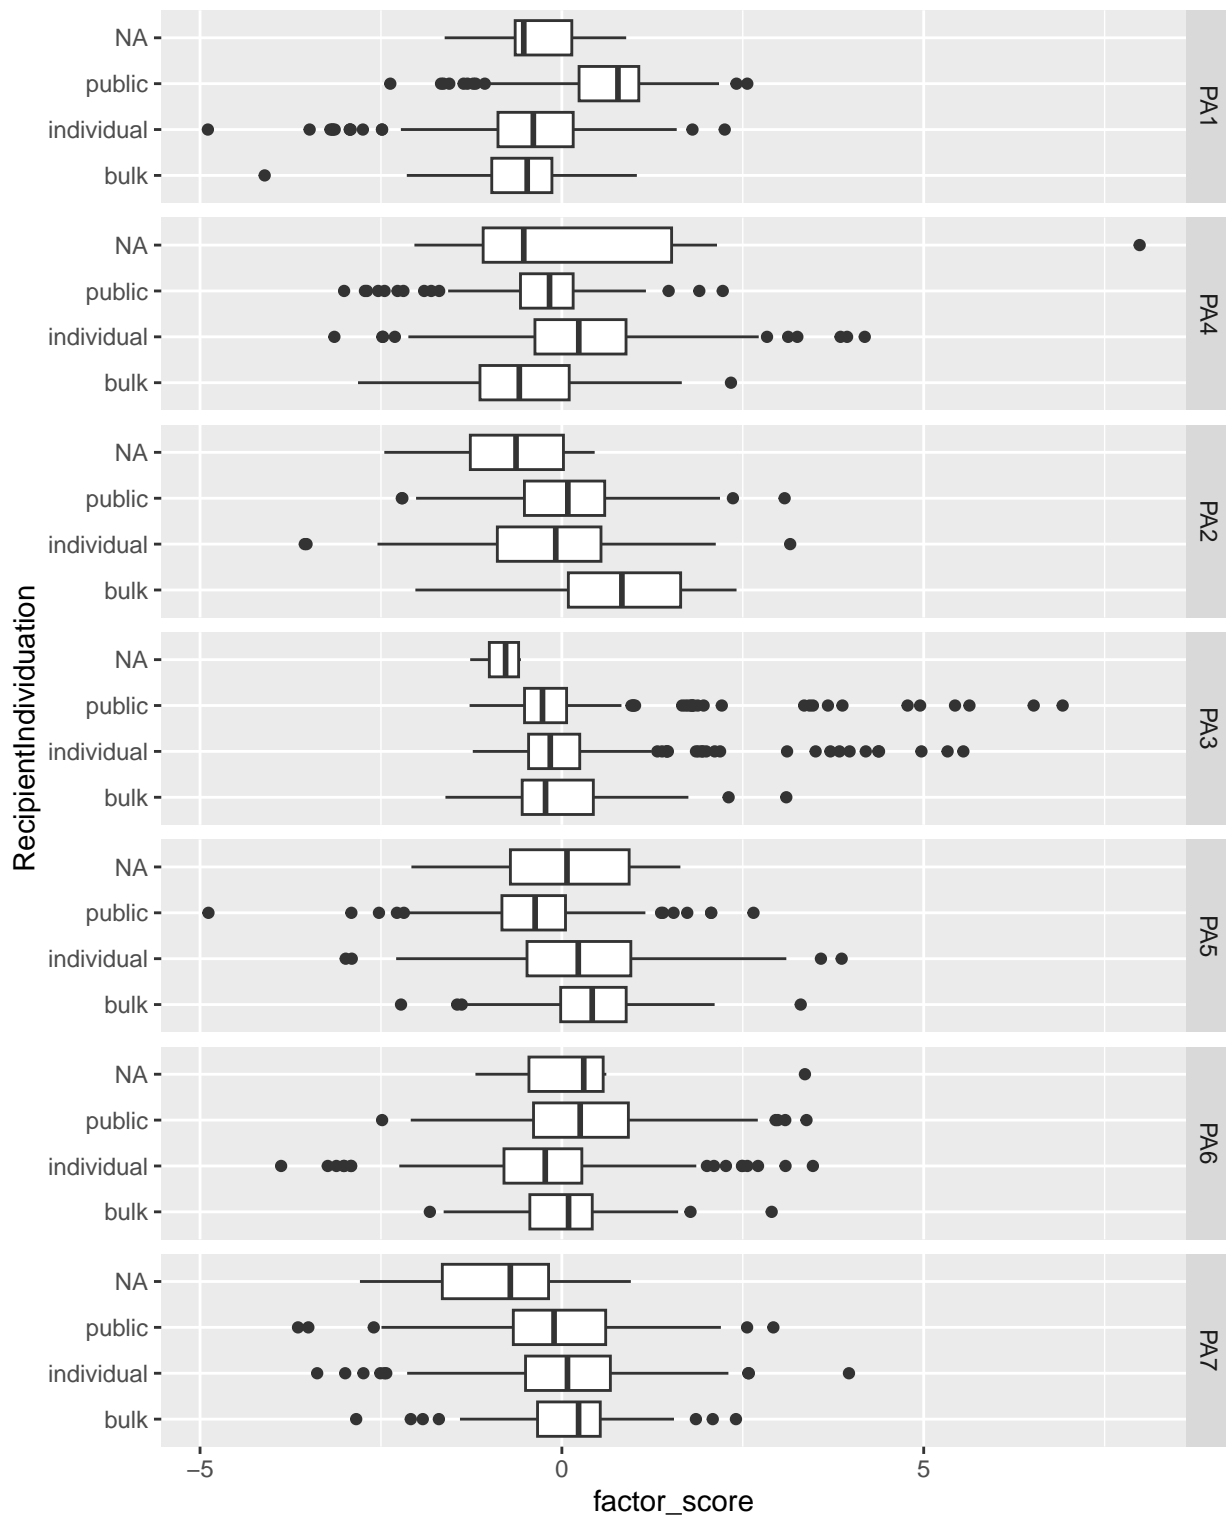


```
data_factors_long %>%
  ggplot(aes(x = factor_score, y = Objectivity, color = class)) +
  facet_grid(factor ~ .) +
  theme(legend.position = "bottom") +
  geom_jitter(width = 0, height = 0.1, alpha = 0.2)
```

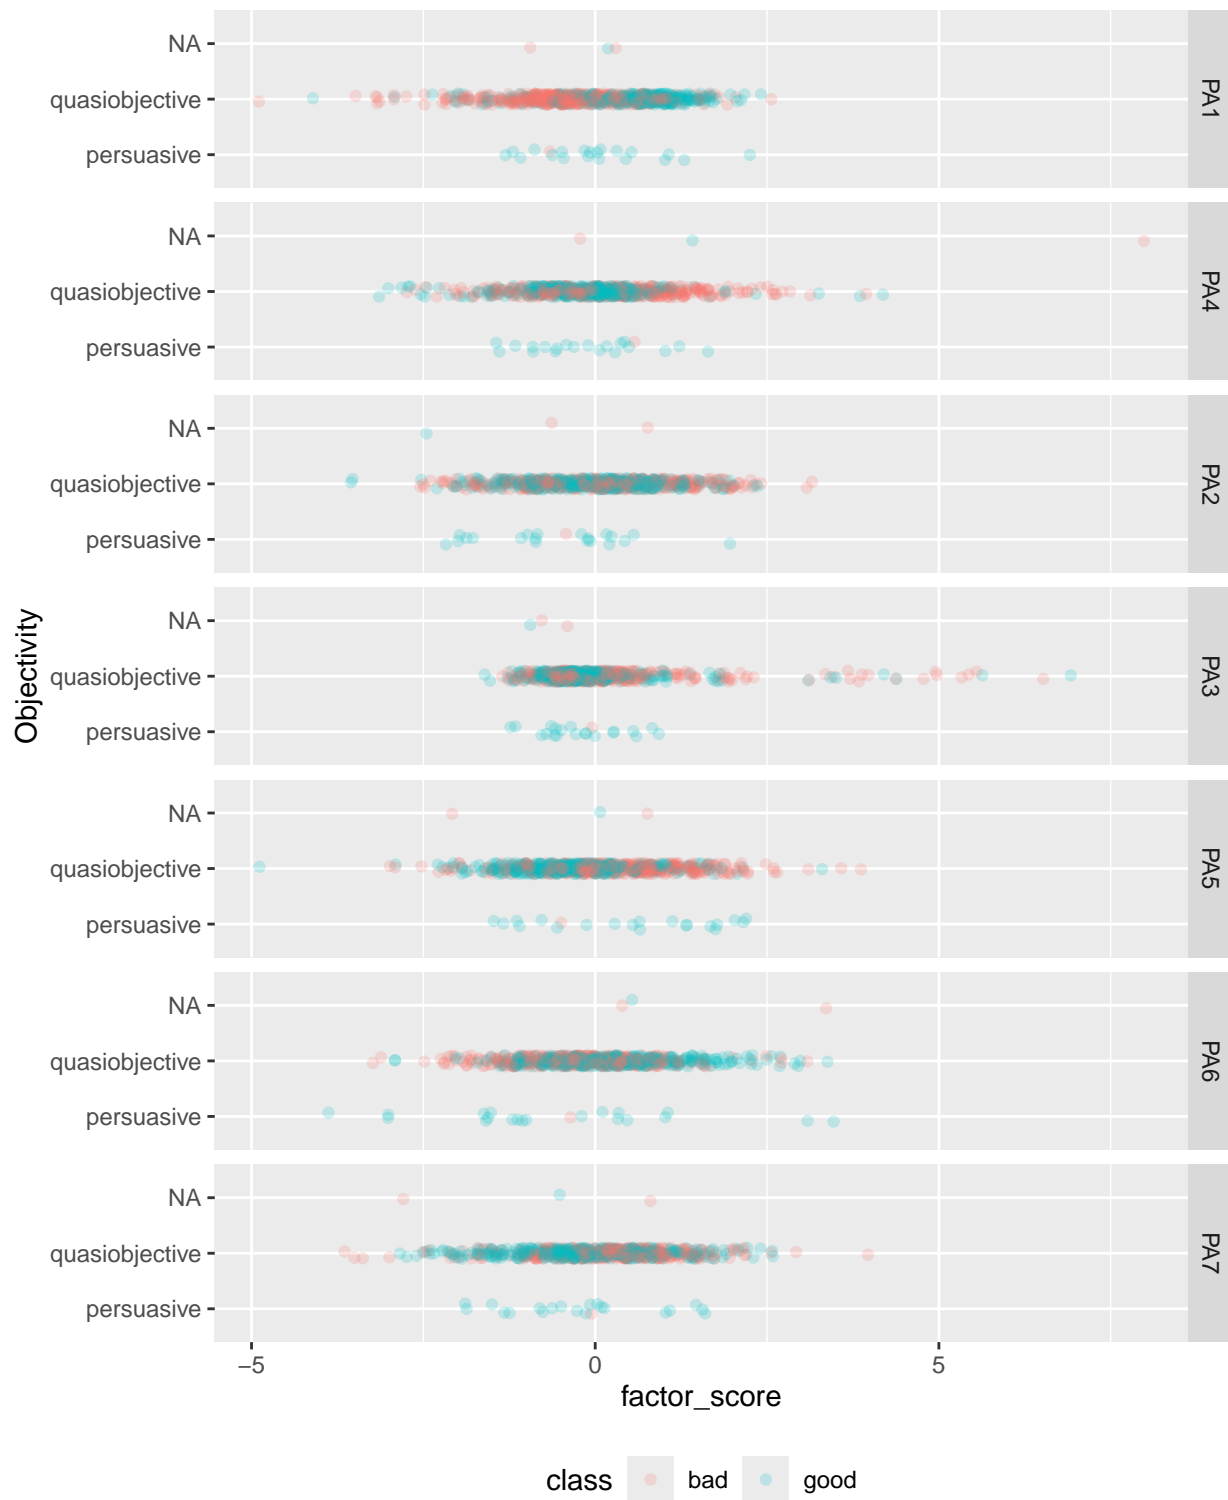

```
data_factors_long %>%
  ggplot(aes(x = factor_score, y = Objectivity)) +
  facet_grid(factor ~ .) +
  theme(legend.position = "bottom") +
  geom_boxplot()
```
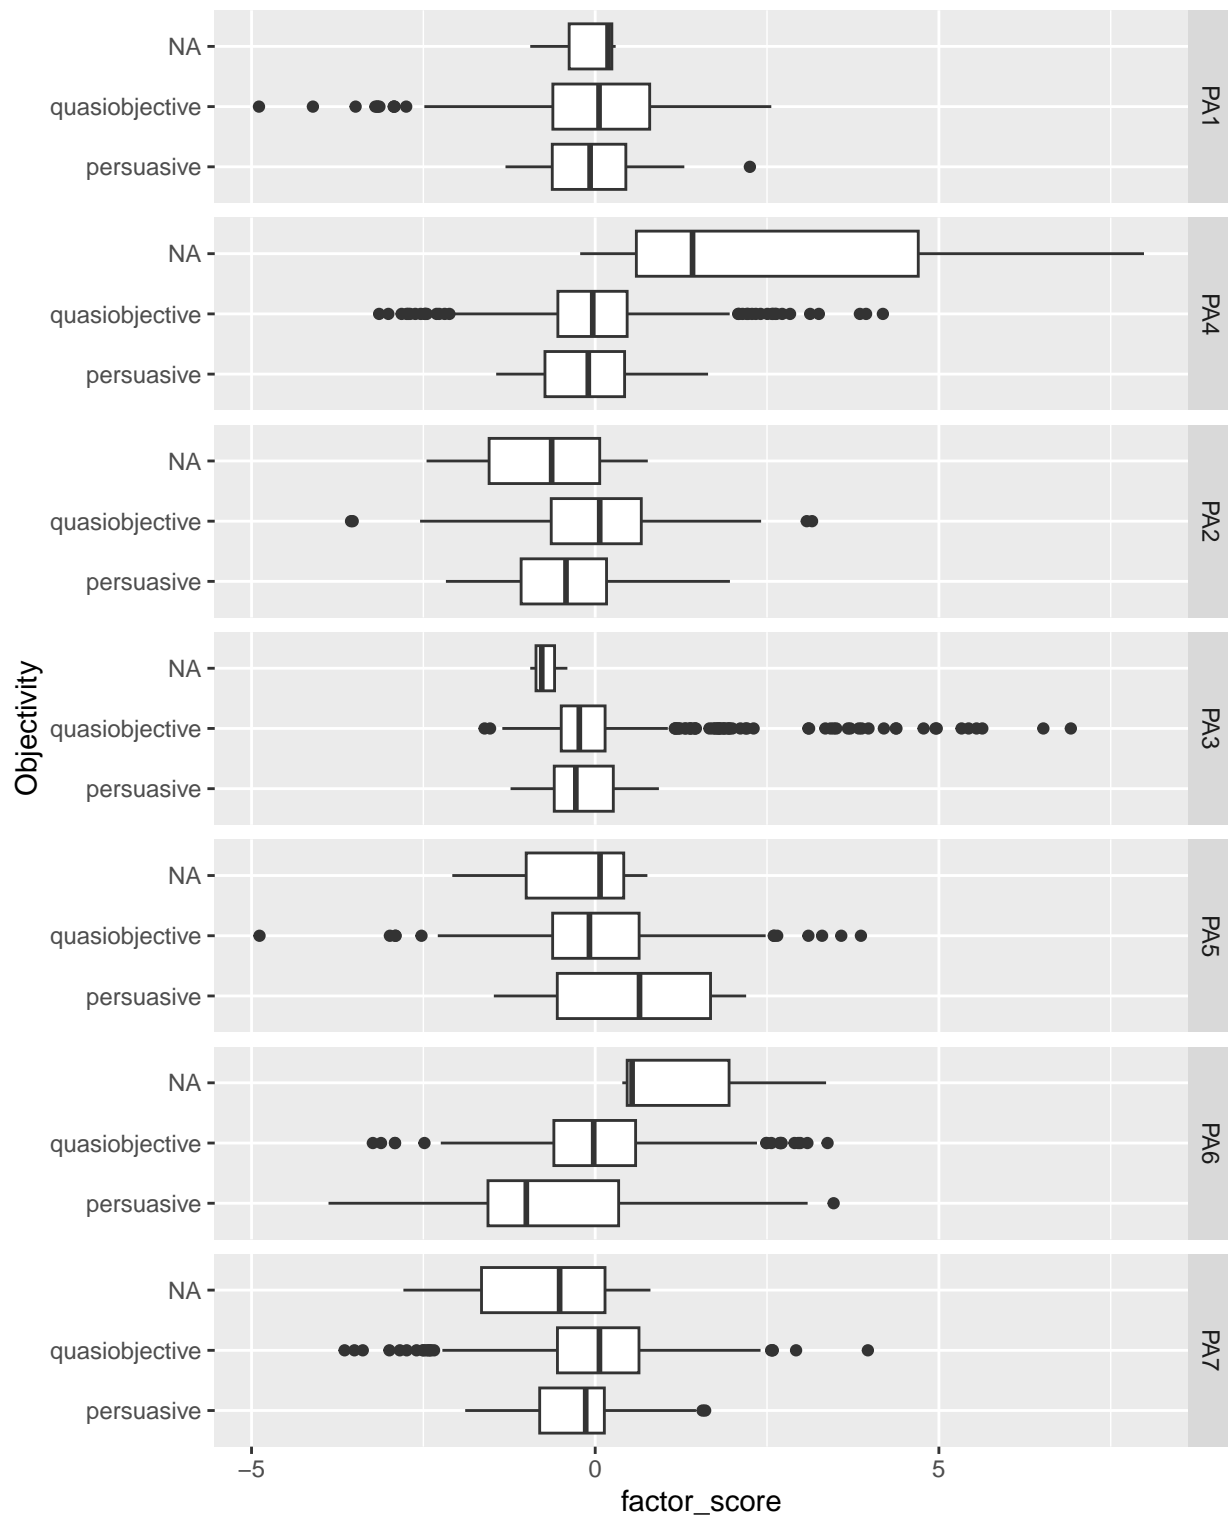
```
data_factors_long %>%
  ggplot(aes(x = factor_score, y = Bindingness, color = class)) +
  facet_grid(factor ~ .) +
  theme(legend.position = "bottom") +
  geom_jitter(width = 0, height = 0.1, alpha = 0.2)
```

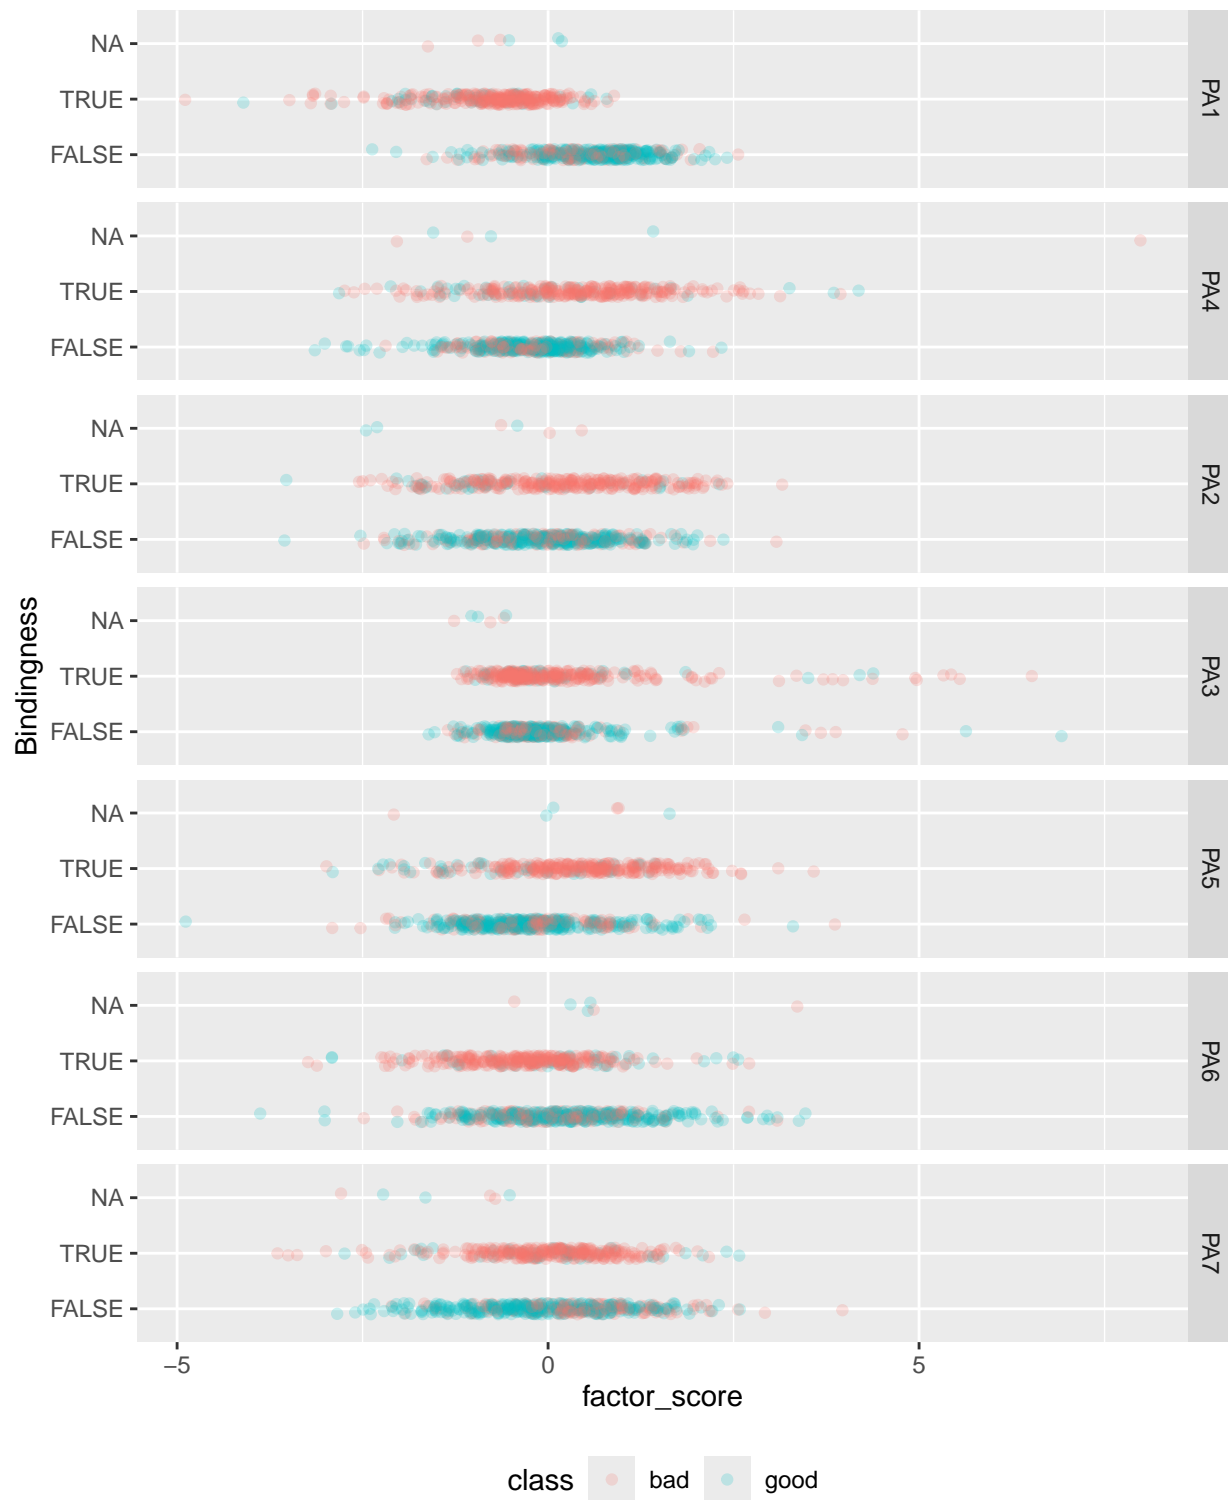

```
data_factors_long %>%
  ggplot(aes(x = factor_score, y = Bindingness)) +
  facet_grid(factor ~ .) +
  theme(legend.position = "bottom") +
  geom_boxplot()
```

