

Analysis of Available Data

Load the corpora

```
library(tidyverse)
```

```
## -- Attaching core tidyverse packages ----- tidyverse 2.0.0 --
## v dplyr      1.1.4      v readr      2.1.5
## v forcats    1.0.0      v stringr   1.5.1
## v ggplot2    3.5.1      v tibble    3.2.1
## v lubridate  1.9.3      v tidyr     1.3.1
## v purrr      1.0.2
## -- Conflicts ----- tidyverse_conflicts() --
## x dplyr::filter() masks stats::filter()
## x dplyr::lag()     masks stats::lag()
## i Use the conflicted package (<http://conflicted.r-lib.org/>) to force all conflicts to become errors
```

```
library(tidymodels)
```

```
## -- Attaching packages ----- tidymodels 1.2.0 --
## v broom       1.0.5      v rsample    1.2.1
## v dials       1.3.0      v tune       1.2.1
## v infer       1.0.7      v workflows  1.1.4
## v modeldata   1.4.0      v workflowsets 1.1.0
## v parsnip     1.2.1      v yardstick  1.3.2
## v recipes     1.1.0
## -- Conflicts ----- tidymodels_conflicts() --
## x scales::discard() masks purrr::discard()
## x dplyr::filter()   masks stats::filter()
## x recipes::fixed() masks stringr::fixed()
## x dplyr::lag()      masks stats::lag()
## x yardstick::spec() masks readr::spec()
## x recipes::step()   masks stats::step()
## * Dig deeper into tidy modeling with R at https://www.tmw.r.org
```

```
library(jsonlite)
```

```
##
## Attaching package: 'jsonlite'
##
## The following object is masked from 'package:purrr':
##
##     flatten
```

```
library(psych)
```

```
##
## Attaching package: 'psych'
##
## The following objects are masked from 'package:scales':
```

```

##
##   alpha, rescale
##
## The following objects are masked from 'package:ggplot2':
##
##   %+%, alpha
set.seed(42)

load_kuk_subcorpus_metadata <- function(crp) {
  read_tsv(paste(c(
    "../corpora/KUK_1.0/metadata/", crp, "_DocumentFileFormat.tsv"
  ), collapse = "")) %>%
  filter(FileFormat == "TXT") %>%
  full_join(
    read_tsv(paste(c(
      "../corpora/KUK_1.0/metadata/",
      crp,
      "_DocumentIdentificationGenreProperties.tsv"
    ), collapse = "")),
    by = "KUK_ID"
  ) %>%
  mutate(across(where(is.numeric), as.character)) %>%
  mutate(subcorpus = crp) %>%
  select(KUK_ID, FileName, FileFormat, FolderPath, subcorpus, everything())
}

kuky_orig <- fromJSON("../corpora/KUKY/argumentative.json")$documents %>%
  as_tibble() %>%
  bind_rows(
    fromJSON("../corpora/KUKY/normative.json")$documents %>% as_tibble()
  ) %>%
  rename(KUK_ID = doc_id) %>%
  select(!c(plainText, doc_name)) %>%
  select(KUK_ID, everything())

kuky_kuk <- load_kuk_subcorpus_metadata("KUKY") %>%
  filter(FolderPath == "data/KUKY/TXT") %>%
  select(!c(Anonymized, RecipientType, RecipientIndividuation, AuthorType, Objectivity, LegalActType, B

## Rows: 448 Columns: 4
## -- Column specification -----
## Delimiter: "\t"
## chr (4): KUK_ID, FileName, FileFormat, FolderPath
##
## i Use `spec()` to retrieve the full column specification for this data.
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.
## Rows: 224 Columns: 12
## -- Column specification -----
## Delimiter: "\t"
## chr (8): KUK_ID, SourceDB, Anonymized, RecipientType, RecipientIndividuation...
## lgl (4): SourceID, DocumentTitle, ClarityPursuit, Bindingness
##
## i Use `spec()` to retrieve the full column specification for this data.
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.

```

```

kuky <- kuky_kuk %>% full_join(kuky_orig, by = "KUK_ID")
czcdc <- load_kuk_subcorpus_metadata("CzCDC")

## Rows: 237723 Columns: 4
## -- Column specification -----
## Delimiter: "\t"
## chr (4): KUK_ID, FileName, FileFormat, FolderPath
##
## i Use `spec()` to retrieve the full column specification for this data.
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.
## Rows: 237723 Columns: 12
## -- Column specification -----
## Delimiter: "\t"
## chr (10): KUK_ID, SourceDB, SourceID, DocumentTitle, Anonymized, RecipientTy...
## lgl (2): ClarityPursuit, Bindingness
##
## i Use `spec()` to retrieve the full column specification for this data.
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.
eso <- load_kuk_subcorpus_metadata("ESO")

```

```

## Rows: 11230 Columns: 4
## -- Column specification -----
## Delimiter: "\t"
## chr (3): KUK_ID, FileFormat, FolderPath
## dbl (1): FileName
##
## i Use `spec()` to retrieve the full column specification for this data.
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.
## Rows: 5615 Columns: 12
## -- Column specification -----
## Delimiter: "\t"
## chr (10): KUK_ID, SourceDB, SourceID, DocumentTitle, Anonymized, RecipientTy...
## lgl (2): ClarityPursuit, Bindingness
##
## i Use `spec()` to retrieve the full column specification for this data.
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.

```

```

frbo <- load_kuk_subcorpus_metadata("FrBo") %>%
  # load metadata for FrBo updated with Quality (=Readability)
  bind_rows(
    read_csv("../corpora/FrBo_contents.csv") %>%
      mutate(Readability = str_to_lower(Quality)) %>%
      mutate(across(c(Readability), ~ str_replace(.x, "good", "high"))) %>%
      select(!Quality)
  ) %>%
  # and move the Quality values to the original rows
  arrange(KUK_ID) %>%
  group_by(KUK_ID) %>%
  fill(Readability, .direction = "up") %>%
  ungroup() %>%
  filter(!is.na(FileName))

```

```

## Rows: 638 Columns: 4
## -- Column specification -----

```

```

## Delimiter: "\t"
## chr (4): KUK_ID, FileName, FileFormat, FolderPath
##
## i Use `spec()` to retrieve the full column specification for this data.
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.
## Rows: 319 Columns: 12
## -- Column specification -----
## Delimiter: "\t"
## chr (10): KUK_ID, SourceDB, SourceID, DocumentTitle, Anonymized, RecipientTy...
## lgl (2): ClarityPursuit, Bindingness
##
## i Use `spec()` to retrieve the full column specification for this data.
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.
## Rows: 310 Columns: 13
## -- Column specification -----
## Delimiter: ","
## chr (11): KUK_ID, SourceDB, SourceID, DocumentTitle, Quality, Anonymized, Re...
## lgl (2): ClarityPursuit, Bindingness
##
## i Use `spec()` to retrieve the full column specification for this data.
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.
lifrlaw <- load_kuk_subcorpus_metadata("LiFRLaw")

## Rows: 36 Columns: 4
## -- Column specification -----
## Delimiter: "\t"
## chr (4): KUK_ID, FileName, FileFormat, FolderPath
##
## i Use `spec()` to retrieve the full column specification for this data.
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.
## Rows: 18 Columns: 11
## -- Column specification -----
## Delimiter: "\t"
## chr (9): KUK_ID, SourceDB, SourceID, DocumentTitle, Anonymized, Recipient Ty...
## lgl (2): ClarityPursuit, Bindingness
##
## i Use `spec()` to retrieve the full column specification for this data.
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.
ombuflayers <- load_kuk_subcorpus_metadata("OmbuFlyers")

## Rows: 234 Columns: 4
## -- Column specification -----
## Delimiter: "\t"
## chr (4): KUK_ID, FileName, FileFormat, FolderPath
##
## i Use `spec()` to retrieve the full column specification for this data.
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.
## Rows: 117 Columns: 12
## -- Column specification -----
## Delimiter: "\t"
## chr (8): KUK_ID, DocumentTitle, Anonymized, RecipientType, RecipientIndividu...
## lgl (4): SourceDB, SourceID, ClarityPursuit, Bindingness
##

```

```
## i Use `spec()` to retrieve the full column specification for this data.
## i Specify the column types or set `show_col_types = FALSE` to quiet this message.
```

```
df <- kuky %>%
  bind_rows(czcdbc) %>%
  bind_rows(eso) %>%
  bind_rows(frbo) %>%
  bind_rows(lifrlaw) %>%
  bind_rows(ombuflyers)
```

```
str(df)
```

```
## tibble [244,016 x 21] (S3: tbl_df/tbl/data.frame)
## $ KUK_ID : chr [1:244016] "671918e2c6537d54ff0626db" "671918e2c6537d54ff0626dc" "671918e2c6537d54ff0626dd" ...
## $ FileName : chr [1:244016] "orig_Certifikáty autorizovaných inspektorů" "red_Co je to" "red_Co je to" ...
## $ FileFormat : chr [1:244016] "TXT" "TXT" "TXT" "TXT" ...
## $ FolderPath : chr [1:244016] "data/KUKY/TXT" "data/KUKY/TXT" "data/KUKY/TXT" "data/KUKY/TXT" ...
## $ subcorpus : chr [1:244016] "KUKY" "KUKY" "KUKY" "KUKY" ...
## $ SourceDB : chr [1:244016] "SourceDB" "SourceDB" "SourceDB" "SourceDB" ...
## $ SourceID : chr [1:244016] NA NA NA NA ...
## $ DocumentTitle : chr [1:244016] NA NA NA NA ...
## $ ClarityPursuit : logi [1:244016] NA NA NA NA NA NA ...
## $ Readability : chr [1:244016] "low" "high" "low" "low" ...
## $ SyllogismBased : chr [1:244016] "false" "false" "false" "false" ...
## $ DocumentVersion : chr [1:244016] "Original" "Redesign" "Original" "Original" ...
## $ ParentDocumentID : chr [1:244016] NA NA NA NA ...
## $ LegalActType : chr [1:244016] "normative" "normative" "normative" "normative" ...
## $ Objectivity : chr [1:244016] "quasiobjective" "quasiobjective" "quasiobjective" "quasiobjective" ...
## $ Bindingness : logi [1:244016] FALSE FALSE FALSE FALSE FALSE FALSE ...
## $ AuthorType : chr [1:244016] "individual" "individual" "individual" "authority" ...
## $ RecipientType : chr [1:244016] "natural person" "natural person" "natural person" "natural person" ...
## $ RecipientIndividuation : chr [1:244016] "public" "public" "public" "public" ...
## $ Anonymized : chr [1:244016] "No" "No" "No" "No" ...
## $ Recipient Type : chr [1:244016] NA NA NA NA ...
```

Properties of KUKY

```
kuky_properties_df <- fromJSON(
  "../corpora/KUKY/argumentative.json"
)$documents %>%
  as_tibble() %>%
  bind_rows(
    fromJSON("../corpora/KUKY/normative.json")$documents %>% as_tibble()
  ) %>%
  rename(KUK_ID = doc_id) %>%
  mutate(doclen = str_length(plainText))


table(kuky_properties_df$Readability)
```

```
##
## high low medium
## 125 38 61
```

```
table(kuky_properties_df$Readability, kuky_properties_df$SyllogismBased)
```

```
##
##           false true
##   high      62   62
##   low       38    0
##   medium    48   11

kuky_properties_df %>% ggplot(aes(x = Readability, y = doclen)) +
  geom_boxplot()
```

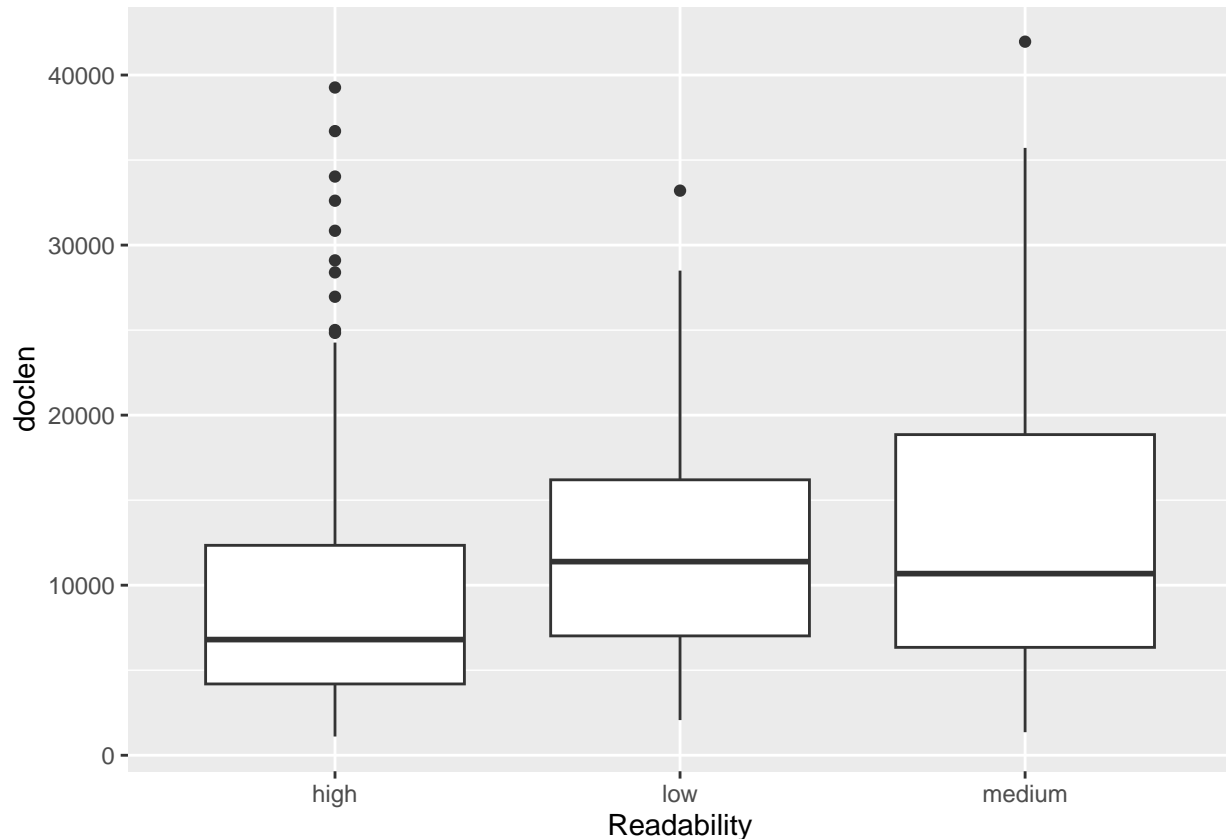

Quick peek into other parts of the data set:

Subcorpus	Low # of chars	High # of chars
CzCDC/ConCo	2.000	18.000
CzCDC/SupAdmCo	3.000	30.000
CzCDC/SupCo	3.000	10.000
ESO	7.000	40.000
FrBo/articles	4.000	15.000

Filter out duplicates

Some subcorpora overlap (*FrBo* with *ESO*, and multiple subcorpora with *KUKY*).

The usage of documents with `ClarityPursuit == NA` is questionable, let's exclude such documents. This effectively comes with a price of excluding the whole *ESO* subcorpus, even though some of its documents are available in *KUKY*.

The usage of documents with `ClarityPursuit == TRUE` is also questionable as they're not reviewed in the same manner as the documents from *KUKY*, yet at the same time they are less likely to be as “unreadable”

as the documents with `ClarityPursuit == FALSE`. Such documents could very well be readable, interfering with the training process.

After filtering `ClarityPursuit == NA` out, the only remaining overlaps are with *KUKY*. Let's keep the documents from *KUKY* as they are associated with a more careful readability evaluation.

Additionally, there are 3 cases where a text is assessed for readability both by *KUKY* and by *FrBo*. In 2 of these cases, the assessments don't agree: the texts are assessed "low" in *KUKY*, but "medium" by *FrBo*. This doesn't matter **under the condition** that we put them both in the same class for the training (i.e., "bad"). Let's keep the observations from *KUKY* for simplicity.

```
table(df$subcorpus, df$ClarityPursuit, useNA = "ifany")
```

```
##
##
##      FALSE  TRUE  <NA>
##  CzCDC    237723    0    0
##   ESO         0    0  5615
##  FrBo      114   205    0
##  KUKY         0    0   224
## LiFRLaw        6   12    0
## OmbuFlyers    52   65    0
```

```
table(df$ClarityPursuit, df$Readability, df$subcorpus, useNA = "ifany")
```

```
## , , = CzCDC
##
##
##      high  low medium  <NA>
##  FALSE    0    0    0 237723
##   TRUE    0    0    0    0
##  <NA>     0    0    0    0
##
## , , = ESO
##
##
##      high  low medium  <NA>
##  FALSE    0    0    0    0
##   TRUE    0    0    0    0
##  <NA>     0    0    0  5615
##
## , , = FrBo
##
##
##      high  low medium  <NA>
##  FALSE   51    0   54    9
##   TRUE  188    0   17    0
##  <NA>    0    0    0    0
##
## , , = KUKY
##
##
##      high  low medium  <NA>
##  FALSE    0    0    0    0
##   TRUE    0    0    0    0
##  <NA>   125   38   61    0
##
```

```
## , , = LiFRLaw
##
##
##      high      low medium  <NA>
## FALSE      0      0      0      6
## TRUE       0      0      0     12
## <NA>       0      0      0      0
##
## , , = OmbuFlyers
##
##
##      high      low medium  <NA>
## FALSE      0      0      0     52
## TRUE       0      0      0     65
## <NA>       0      0      0      0
```

```
# display duplicate file entries
df %>%
  group_by(FileName) %>%
  mutate(n = n()) %>%
  filter(n > 1) %>%
  select(FileName, subcorpus, Readability, ClarityPursuit) %>%
  arrange(FileName) %>%
  print(n = 80)
```

```
## # A tibble: 80 x 4
## # Groups:   FileName [40]
##   FileName subcorpus Readability ClarityPursuit
##   <chr>      <chr>      <chr>      <lgl>
## 1 100      ESO      <NA>      NA
## 2 100      FrBo     high     TRUE
## 3 102      ESO      <NA>      NA
## 4 102      FrBo     high     TRUE
## 5 110      ESO      <NA>      NA
## 6 110      FrBo     medium    TRUE
## 7 14       ESO      <NA>      NA
## 8 14       FrBo     high     TRUE
## 9 142      ESO      <NA>      NA
## 10 142     FrBo     medium    TRUE
## 11 148     ESO      <NA>      NA
## 12 148     FrBo     high     TRUE
## 13 152     ESO      <NA>      NA
## 14 152     FrBo     high     TRUE
## 15 154     ESO      <NA>      NA
## 16 154     FrBo     medium    TRUE
## 17 156     ESO      <NA>      NA
## 18 156     FrBo     high     TRUE
## 19 158     ESO      <NA>      NA
## 20 158     FrBo     high     TRUE
## 21 16      ESO      <NA>      NA
## 22 16      FrBo     high     TRUE
## 23 170     ESO      <NA>      NA
## 24 170     FrBo     medium    TRUE
## 25 176     ESO      <NA>      NA
## 26 176     FrBo     medium    TRUE
```


## 27 18	ESO	<NA>	NA
## 28 18	FrBo	high	TRUE
## 29 190	ESO	<NA>	NA
## 30 190	FrBo	high	TRUE
## 31 200	ESO	<NA>	NA
## 32 200	FrBo	high	TRUE
## 33 202	ESO	<NA>	NA
## 34 202	FrBo	high	TRUE
## 35 204	ESO	<NA>	NA
## 36 204	FrBo	high	TRUE
## 37 206	ESO	<NA>	NA
## 38 206	FrBo	high	TRUE
## 39 208	ESO	<NA>	NA
## 40 208	FrBo	high	TRUE
## 41 24	ESO	<NA>	NA
## 42 24	FrBo	high	TRUE
## 43 28	ESO	<NA>	NA
## 44 28	FrBo	medium	TRUE
## 45 30	ESO	<NA>	NA
## 46 30	FrBo	high	TRUE
## 47 42	ESO	<NA>	NA
## 48 42	FrBo	medium	TRUE
## 49 44	ESO	<NA>	NA
## 50 44	FrBo	high	TRUE
## 51 54	ESO	<NA>	NA
## 52 54	FrBo	high	TRUE
## 53 68	ESO	<NA>	NA
## 54 68	FrBo	medium	TRUE
## 55 70	ESO	<NA>	NA
## 56 70	FrBo	high	TRUE
## 57 76	ESO	<NA>	NA
## 58 76	FrBo	high	TRUE
## 59 Duchody	KUKY	low	NA
## 60 Duchody	OmbuFlye~	<NA>	FALSE
## 61 Odpadni-vody	KUKY	low	NA
## 62 Odpadni-vody	OmbuFlye~	<NA>	FALSE
## 63 ockovani-1_kusv	KUKY	high	NA
## 64 ockovani-1_kusv	LiFRLaw	<NA>	TRUE
## 65 ockovani-3_orig	KUKY	low	NA
## 66 ockovani-3_orig	LiFRLaw	<NA>	FALSE
## 67 orig_Certifikáty autorizovaných inspekt~	KUKY	low	NA
## 68 orig_Certifikáty autorizovaných inspekt~	FrBo	medium	FALSE
## 69 orig_financovani_politickych_stran	KUKY	low	NA
## 70 orig_financovani_politickych_stran	FrBo	medium	FALSE
## 71 red_Co je to územní plánování_final_při~	KUKY	high	NA
## 72 red_Co je to územní plánování_final_při~	FrBo	high	TRUE
## 73 stavarska-1_kusv	KUKY	high	NA
## 74 stavarska-1_kusv	LiFRLaw	<NA>	TRUE
## 75 stavarska-2_orig	KUKY	low	NA
## 76 stavarska-2_orig	LiFRLaw	<NA>	FALSE
## 77 zaloba-1_orig	KUKY	medium	NA
## 78 zaloba-1_orig	LiFRLaw	<NA>	FALSE
## 79 zaloba-2_kusv	KUKY	high	NA
## 80 zaloba-2_kusv	LiFRLaw	<NA>	TRUE

```

# search for FrBo duplicates
df_frbo_duplicates <- df %>%
  filter(str_detect(FileName, "red_|orig_")) %>%
  mutate(new_fname = str_remove(FileName, "[0-9]{3}_")) %>%
  group_by(new_fname) %>%
  mutate(n = n()) %>%
  ungroup() %>%
  filter(n >= 2)

all_frbo_duplicates <- df_frbo_duplicates %>% pull(FileName)

df_frbo_dup_wide <- df_frbo_duplicates %>%
  select(new_fname, subcorpus, Readability, n) %>%
  distinct(new_fname, subcorpus, Readability, n) %>%
  pivot_wider(
    names_from = subcorpus,
    values_from = Readability,
    names_prefix = "Readability_"
  ) %>%
  mutate(
    class_KUKY = as.factor(if_else(Readability_KUKY == "high", "good", "bad")),
    class_FrBo = as.factor(if_else(Readability_FrBo == "high", "good", "bad"))
  )

table(df_frbo_dup_wide$Readability_KUKY, df_frbo_dup_wide$Readability_FrBo)

##
##           high medium
##  high      15      0
##  low        7      5
##  medium     1      0

readability_agreement <- df_frbo_dup_wide %>%
  select(class_KUKY, class_FrBo) %>%
  table()
readability_agreement

##           class_FrBo
## class_KUKY bad good
##      bad      5      8
##      good      0     15

cohen.kappa(readability_agreement)

## Call: cohen.kappa1(x = x, w = w, n.obs = n.obs, alpha = alpha, levels = levels,
##      w.exp = w.exp)
##
## Cohen Kappa and Weighted Kappa correlation coefficients and confidence boundaries
##           lower estimate upper
## unweighted kappa 0.12      0.4 0.68
## weighted kappa   0.12      0.4 0.68
##
## Number of subjects = 28

```

```
# this is valid UNDER THE CONDITION that we construct the "good" class
# out of high-readability texts only
```

```
good_frbo_duplicates <- df_frbo_dup_wide %>%
```

```
  filter(
    Readability_KUKY == Readability_FrBo | (
      (Readability_KUKY == "medium" | Readability_KUKY == "low") &
      (Readability_FrBo == "medium")
    )
  ) %>%
  pull(new_fname)
```

```
bad_frbo_duplicates <- setdiff(all_frbo_duplicates, good_frbo_duplicates)
```

```
# remove FrBo/articles-originated texts from KUKY because:
```

```
# 1. they are duplicates
```

```
# 2. they are actually represented in markdown
```

```
df %>%
```

```
  filter(subcorpus == "KUKY" & str_detect(FileName, "red_|orig_")) %>%
  pull(FileName)
```

```
## [1] "orig_Certifikáty autorizovaných inspektorů"
## [2] "red_Co je to územní plánování_final_přidat odkaz na manuál o RP až bude"
## [3] "orig_financovani_politických_stran"
## [4] "003_red_Jak dosáhnout změny dopravního značení_final"
## [5] "015_orig_Jak komunikovat s úřady elektronicky"
## [6] "021_red_Jak daleko od hranice pozemku musí být umístěno elektrické vedení"
## [7] "013_orig_10 významných práv účastníka správního řízení"
## [8] "020_red_Jak chránit vody a správně s nimi nakládat_revKZ"
## [9] "030_orig_Co je to a jak probíhá integrované povolování_final"
## [10] "018_red_Co je to úřední deska a jak ji využít"
## [11] "012_orig_Jak chránit vody a správně s nimi nakládat_revKZ"
## [12] "010_red_Guerilla gardening, jak zahradničit na veřejném prostranství (ne)legálně_final"
## [13] "014_red_Co je to a jak probíhá integrované povolování_final"
## [14] "031_orig_Co je to EIA_final"
## [15] "023_red_Co dělat, když soused postavil černou stvabu_final, bacha na infragafiku"
## [16] "029_orig_Certifikáty autorizovaných inspektorů"
## [17] "032_orig_Co je to úřední deska a jak ji využít"
## [18] "026_orig_Jak jedná spolek navenek"
## [19] "041_red_Hlukové limity a udělování výjimek_prefinal"
## [20] "027_orig_Jak dosáhnout odpovědnosti úředníka za škodu"
## [21] "038_orig_Co je to korupce a klientelismus"
## [22] "025_red_GDPR Jak právo chrání osobní údaje_final"
## [23] "028_orig_Co dělat, když soused postavil černou stvabu_final, bacha na infragafiku"
## [24] "034_red_Jak dosáhnout zrušení stanoviska EIA_final"
## [25] "036_red_Dotčený vlastník - Kdo to je a jaká má v územním plánování práva_final"
## [26] "059_red_10 významných práv účastníka správního řízení"
## [27] "044_red_financovani_politických_stran úprava 2021"
## [28] "053_orig_Guerilla gardening, jak zahradničit na veřejném prostranství (ne)legálně_final"
## [29] "051_orig_Co je to regulační plán a jak dosáhnout jeho přijetí_původní"
## [30] "049_red_CO je černá stvaba a jak ji ponat"
```

```
df <- df %>%
```

```
  filter(subcorpus != "KUKY" | !str_detect(FileName, "red_|orig_"))
```

```

# remove FrBo articles with different readability assessments by KUKY and FrBo
df <- df %>% filter(!(FileName %in% bad_frbo_duplicates))

# these two are also duplicates
df <- df %>% filter(!(FileName %in% c(
  "orig_Mohou spolky ve správních žalobách používat věcné argumenty_final, odkaz na soudní ochrana spolky",
  "red_Mohou spolky ve správních žalobách používat věcné argumenty_final, odkaz na soudní ochrana spolky"
)))

# remove OmbuFlyer-KUKY duplicates with different names
# keep the ones from KUKY
bad_of_kuky_duplicates <- df %>%
  filter(subcorpus %in% c("KUKY", "OmbuFlyers")) %>%
  mutate(new_fname = str_remove(FileName, "[0-9]{3}_")) %>%
  group_by(new_fname) %>%
  mutate(n = n()) %>%
  ungroup() %>%
  filter(n > 1 & subcorpus == "OmbuFlyers") %>%
  select(!c(new_fname, n)) %>%
  pull(FileName)
bad_of_kuky_duplicates

## [1] "BYDLENÍ - X. 23"
## [2] "Davky-pomoci-v-hmotne-nouzi"
## [3] "Davky-pro-osoby-se-zdravotnim-postizenim"
## [4] "Dětský domov (rodiče) - V. 20"
## [5] "Domaci-nasili"
## [6] "Duchody"
## [7] "DŮCHODOVÉ pojištění - příspěvkové doby - I. 23"
## [8] "Chci ZMĚNIT DŮCHOD - V. 21"
## [9] "Hluk"
## [10] "Hluk - VI. 20"
## [11] "Komunalni-odpad"
## [12] "Nevyplaceni-mzdy"
## [13] "Obcane-EU"
## [14] "Oddluzeni"
## [15] "Odpadni-vody"
## [16] "Ochrana-spotrebitele"
## [17] "Opatrovnictvi"
## [18] "Plisen-a-zavady-v-byte"
## [19] "Policie"
## [20] "DĚTI mezi rodiči - IV. 21"

df <- df %>% filter(!(FileName %in% bad_of_kuky_duplicates))

# keep only rows where either Readability or ClarityPursuit isn't NA
# and exclude ClarityPursuit == TRUE
df <- df %>%
  filter(!is.na(Readability) | ClarityPursuit == FALSE)

# 6 duplicates remaining
# keep the ones from KUKY as they have a readability assessment (see above)
df <- df %>%
  group_by(FileName) %>%

```

```
mutate(n = n()) %>%
ungroup() %>%
filter(n == 1 | subcorpus == "KUKY") %>%
select(!n)
```

The dataset is now free of overlaps.

Prepare for ML

Classes

```
table(df$subcorpus, df$Readability, useNA = "ifany")
```

```
##
##           high    low medium  <NA>
##  CzCDC           0     0      0 237723
##  FrBo           230     0     71      7
##  KUKY           110    22     60      0
##  LiFRLaw         0     0      0      3
##  OmbuFlyers      0     0      0     38
```

```
df <- df %>%
  mutate(class = if_else(Readability %in% c("high"), "good", "bad"))
```

Data set parameters

```
.split_prop <- 4 / 5 # proportion of testing data in the dataset
.no_folds <- 10 # no. of folds in v-fold cross-validation
.balance <- 9 / 20 # proportion of positive samples in the target dataset

dssize_positive <- count(df %>% filter(class == "good"))[[1, 1]]
dssize_total <- dssize_positive / .balance
dssize_negative <- dssize_total - dssize_positive

cat(c(
  paste(c(
    "Data set size: ", dssize_total, "\n"
  ), collapse = ""),
  paste(c(
    "Positive class size: ", dssize_positive, "\n"
  ), collapse = ""),
  paste(c(
    "Negative class size: ", dssize_negative, "\n"
  ), collapse = ""),
  paste(c(
    "Training data set size: ", dssize_total * .split_prop, "\n"
  ), collapse = ""),
  paste(c(
    "Training positive class size: ", dssize_positive * .split_prop, "\n"
  ), collapse = ""),
  paste(c(
    "Training negative class size: ", dssize_negative * .split_prop, "\n"
  ), collapse = ""))
```

```

paste(c(
  "One fold size: ", (dssize_total * .split_prop) / .no_folds, "\n"
), collapse = ""),
paste(c(
  "One fold positive class size: ", (dssize_positive * .split_prop) / .no_folds, "\n"
), collapse = ""),
paste(c(
  "One fold negative class size: ", (dssize_negative * .split_prop) / .no_folds, "\n"
), collapse = ""),
paste(c(
  "Evaluation data set size: ", dssize_total * (1 - .split_prop), "\n"
), collapse = ""),
paste(c(
  "Evaluation positive class size: ", dssize_positive * (1 - .split_prop), "\n"
), collapse = ""),
paste(c(
  "Evaluation negative class size: ", dssize_negative * (1 - .split_prop), "\n"
), collapse = ""))
))

```

```

## Data set size: 755.555555555556
## Positive class size: 340
## Negative class size: 415.555555555556
## Training data set size: 604.444444444444
## Training positive class size: 272
## Training negative class size: 332.444444444444
## One fold size: 60.4444444444444
## One fold positive class size: 27.2
## One fold negative class size: 33.2444444444444
## Evaluation data set size: 151.111111111111
## Evaluation positive class size: 68
## Evaluation negative class size: 83.1111111111111

```

Data set undersampling and split

```
table(df$subcorpus, df$class)
```

```

##
##           bad   good
##  CzCDC      237723    0
##   FrBo        78    230
##   KUKY        82    110
##  LiFRLaw       3     0
##  OmbuFlyers   38     0

```

```
table(df$ClarityPursuit, df$class, useNA = "ifany")
```

```

##
##           bad   good
##  FALSE 237825    44
##   TRUE    17    186
##  <NA>     82    110

```

```

bads <- df %>%
  filter(class == "bad") %>%

```

```

group_by(subcorpus) %>%
mutate(subcorpus_size = n()) %>%
ungroup()

max_negative_subcorpus <- bads %>%
  arrange(-subcorpus_size) %>%
  head(n = 1)

mns_name <- max_negative_subcorpus %>% pull(subcorpus)
mns_size <- max_negative_subcorpus %>% pull(subcorpus_size)
orig_negative_class_size <- bads %>%
  count() %>%
  pull(n)

# target undersample of MNS = target neg. size - other-negative-subcorpora-size
mns_target_size <- dssize_negative - (orig_negative_class_size - mns_size)

mns_sample <- sample(
  bads %>% filter(subcorpus == mns_name) %>% pull(KUK_ID), mns_target_size
)

df <- df %>% filter(
  class == "good" |
  subcorpus != mns_name |
  KUK_ID %in% mns_sample
)

table(df$subcorpus, df$class)

##
##          bad good
##  CzCDC      214   0
##  FrBo        78  230
##  KUKY         82  110
##  LiFRLaw       3   0
##  OmbuFlyers   38   0

write_csv(df, "selected_documents.csv")

# write_csv(
#   df %>%
#     select(
#       KUK_ID,
#       class,
#       FileName,
#       FolderPath,
#       subcorpus,
#       DocumentTitle,
#       Readability,
#       ClarityPursuit,
#       SyllogismBased,
#       SourceDB
#     ),
#   "selected_documents.csv"

```

```

# )

# the split and folds aren't needed at the moment
# they'll be required in the training phase

df_split <- df %>% initial_split(prop = .split_prop)
training_set <- training(df_split)
evaluation_set <- testing(df_split)

folds <- vfold_cv(training_set, v = .no_folds, strata = class)

print(df_split)

## <Training/Testing/Total>
## <604/151/755>

print(folds)

## # 10-fold cross-validation using stratification
## # A tibble: 10 x 2
##   splits          id
##   <list>         <chr>
## 1 <split [543/61]> Fold01
## 2 <split [543/61]> Fold02
## 3 <split [543/61]> Fold03
## 4 <split [543/61]> Fold04
## 5 <split [543/61]> Fold05
## 6 <split [543/61]> Fold06
## 7 <split [544/60]> Fold07
## 8 <split [544/60]> Fold08
## 9 <split [545/59]> Fold09
## 10 <split [545/59]> Fold10

```