

Core Java 8 and Development Tools

Lesson 09 : Exception Handling





Lesson Objectives

On completion of this lesson, you will be able to:

- Explain the concept of Exception
- Describe types of Exceptions
- Handle Exception in Java
- Create your own Exceptions
- State best practices on Exception



9.1: Exception Handling – Fundamentals

Why is exception handling used?

No matter how well-designed a program is, there is always a chance that some kind of error will arise during its execution, for example:

- Attempting to divide by 0
- Attempting to read from a file which does not exist
- Referring to non-existing item in array

An exception is an event that occurs during the execution of a program that disrupt its normal course.





9.1: Exception Handling – Fundamentals

Exception Handling

Exception is an event that occurs during the execution of a program that disrupts the normal flow of instructions:

- Eg: Hard disk crash, Out of bounds array access, Divide by zero etc

When an exception occurs, the executing method creates an Exception object and hands it to the runtime system —“throwing an exception”

The runtime system searches the runtime call stack for a method with an appropriate handler, to handle/catch the exception.





9.1: Exception Handling – Fundamentals

Exception Handling

The general form of exception handling block:

```
try {  
    //code to be monitored.  
}  
catch (Exception1 e1 ) {  
    //exception handler for Type Exception1  
}  
catch (Exception2 e2 ) {  
    //exception handler for Type Exception2  
}  
finally {  
    // code that must be executed.  
}
```



9.1: Exception Handling – Fundamentals Demo

Execute the DefaultDemo.java program

```
class DefaultDemo {  
    public static void main(String a[]) {  
        String str = null;  
        str.equals("Hello");  
    }  
}
```

Output:
Exception in thread "main"
java.lang.NullPointerException at
com.igatepatni.lesson5.DefaultDemo.main(DefaultDemo.
java:6)



9.1: Exception Handling – Fundamentals

Advantages of Exceptions


Separating Error-Handling Code from "Regular" Code:

Code without Exception handling

```
readFile() {  
    open the file;  
    determine its size;  
    allocate that much memory;  
    read the file into memory;  
    close the file;  
}
```

Code with Exception handling

```
readfile() {  
    try {  
        open the file;  
        determine its size;  
        allocate that much memory;  
        read the file into memory;  
        close the file;  
    } catch (fileOpenFailed) { doSomething; }  
    catch (sizeDeterminationFailed) { doSomething; }  
    catch (memoryAllocationFailed) { doSomething; }  
    catch (readFailed) { doSomething; }  
    catch (fileCloseFailed) { doSomething; }  
}
```



Note that error handling code and regular code are separate



9.1: Exception Handling – Fundamentals


Advantages of Exceptions

Notes page



9.2: Exception Types and Hierarchy

Hierarchy of Exception Classes

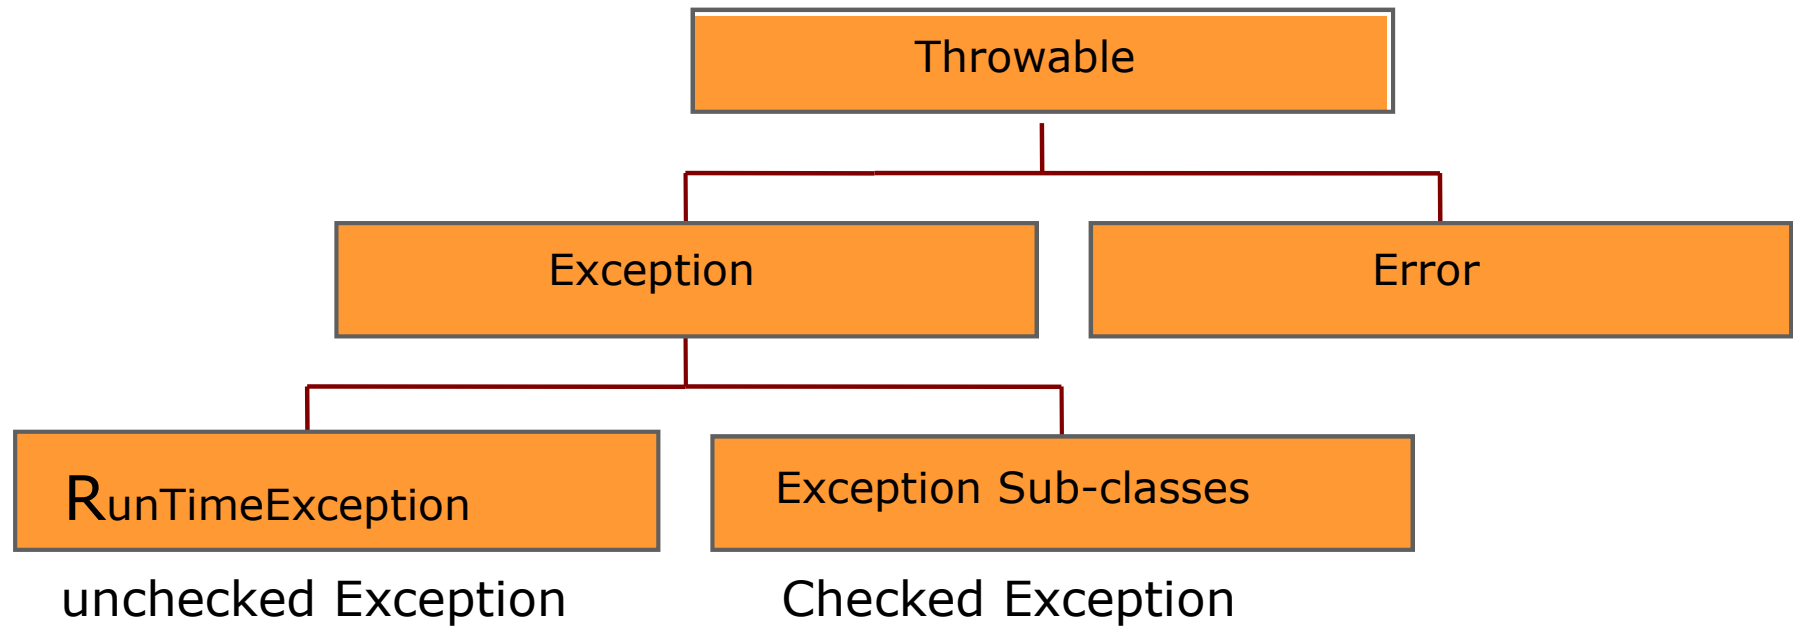



9.2: Exception Types and Hierarchy

Error

An Error is a subclass of Throwable that indicates serious problems that a reasonable application should not try to catch.

Most such errors are abnormal conditions.

Exceptions of type Error are used by the Java run-time system to indicate errors having to do with the run-time environment, itself.

- Stack overflow is an example of such an error.



9.2: Exception Types and Hierarchy

Exception

The Exception class and its subclasses are a form of Throwables. They indicate conditions, which a reasonable application may want to catch.

Two Types:

- Checked Exception
- UnChecked Exception



9.2: Exception Types and Hierarchy

Checked/Compile Time Exceptions

Characteristics of Checked Exceptions:

- They are checked by the compiler at the time of compilation.
- They are inherited from the core Java class Exception.
- They represent exceptions that are frequently considered “non-fatal” to program execution.
- They must be handled in your code, or passed to parent classes for handling.
- Some examples of Checked exceptions include: IOException, SQLException, ClassNotFoundException



9.2: Exception Types and Hierarchy

Unchecked/Runtime Exceptions

Unchecked exceptions represent error conditions that are considered “fatal” to program execution.

- Runtime exceptions are exceptions which are not detected at the time of Compilation.
- They are encountered only when the program is in execution.
- It is called unchecked exception because the compiler does not check to see if a method handles or throws these exceptions.



9.2: Exception Types and Hierarchy

Unchecked/Runtime Exceptions

Notes Page



9.3: Handling Exceptions

Keywords for handling Exceptions

try : This marks the start of a block associated with a set of exception handlers.

catch : The control moves here if an exceptions is generated.

finally :This is called irrespective of whether an exception has occurred or not.

throws : This describes the exceptions which can be raised by a method.

throw : This raises an exception to the first available handler in the call stack, unwinding the stack along the way.



9.3: Handling Exceptions

Why to handle exceptions?

Without Exception handling

```
class WithoutException {  
    public static void main(String args[]) {  
        int d = 0;  
        int a = 42 / d;  
        System.out.println("Will not be printed"); } }
```

With Exception handling

```
class WithExceptionHandling {  
    public static void main(String args[]) {  
        int d=0, a;  
        try {  
            a = 42 / d;  
            System.out.println("This will not be printed.");  
        } catch (ArithmeticException e) {  
            System.out.println("Division by zero.");  
        }  
        System.out.println("This will get printed"); } }
```




5.3: Handling Exceptions

Why to handle exceptions?

Notes page



9.3: Handling Exceptions

Try and Catch

The try structure has three parts:

- The try block : Code in which exceptions are thrown
- One or more catch blocks : Respond to different Exceptions
- An optional finally block : Contains code that will be executed regardless of exception occurring or not

The catch Block:

- If exception occurs in try block, program flow jumps to the catch blocks.
- Any catch block matching the caught exception is executed.



9.3: Handling Exceptions

Using Try and Catch

Execute the TryCatchDemo.java program



9.4: : Try-with-resources Try-with-resources

Resources used by java programs like file or database connection needs to be closed properly

To close resource automatically in exception handling, Java 7 has added try-with-resources:

```
try (resource1; resource 2; ..... resource n) {  
    //resource related work  
}  
catch (Exception e) {  
    //handle exception  
}
```

It can be used to close resources that implement `java.lang.AutoCloseable`



9.5: Multi catch blocks


Multiple Catch Blocks

If you include multiple catch blocks, the order is important.

```
public void divide(int x,int y)
{
    int ans=0;
    try{
        ans=x/y;
    }catch(Exception e) {
        //handle }
    catch(ArithmeticException f) {
        //handle}
```



You must catch subclasses before their ancestors





9.5: Multi catch blocks

Multi-Catch Blocks

Starting from Java 7, a single catch block can be used to catch multiple exceptions

Multi-catch block separates handled exceptions by vertical bar (|)

```
try {  
    }  
catch (exception 1 | exception 2 | .....| exception n) {  
    }
```

Alternatives in multi-catch block is not allowed



9.5: Multi catch blocks

Multiple Catch Blocks

Execute the MultiCatch.java class



9.5: Handling Exceptions

Nested Try Catch Block

```
try {  
    int a = arg.length;  
    int b = 10 / a;  
    System.out.println("a = " + a);  
    try {  
        if(a==1)  
            a = a/(a-a);  
        if(a==2) {  
            int c[] = { 1 };  
            c[42] = 99;  
        }  
    } catch(ArrayIndexOutOfBoundsException e) {  
        System.out.println("Array index out-of-bounds: " + e); }  
    } catch(ArithmeticException e) {  
        System.out.println("Divide by 0: " + e); }
```




9.5: Handling Exceptions

The Finally Clause

The finally block is optional.
It is executed whether or not exception occurs.

```
public void divide(int x,int y)
{
    int ans;
    try{
        ans=x/y;
    }
    catch(Exception e) {
        ans=0; }
    finally{
        return ans; // This is always executed }
}
```



9.5: Handling Exceptions

Demo: The Finally Clause

Execute the FinallyDemo.java program

Output of this prg:

```
inside procA  
procA's finally  
Exception caught  
inside procB  
procB's finally  
inside procC  
procC's finally
```



9.6: Throwing Exceptions

Throwing an Exception

You can throw your own runtime errors:

- To enforce restrictions on use of a method
- To "disable" an inherited method
- To indicate a specific runtime problem

To throw an error, use the throw Statement

- throw ThrowableInstance

where ThrowableInstance is any Throwable Object



9.6: Throwing Exceptions

Throwing an Exception

```
class ThrowDemo {  
    void proc() {  
        try {  
            throw new FileNotFoundException ("From Exception");  
        } catch (FileNotFoundException e) {  
            System.out.println("Caught inside demoproc.");  
            throw e; // rethrow the exception  
        }  
    }  
    public static void main(String args[]) {  
        ThrowDemo t=new ThrowDemo();  
        try {  
            t.proc();  
        } catch (FileNotFoundException e) {  
            System.out.println("Recought: " + e);  
        }  
    }  
}
```



9.7: Declaring exceptions using throws

Using The Throws Clause

If a method might throw an exception, you may declare the method as “throws” that exception and avoid handling the exception yourself.

```
public class ThrowsDemo {
    public static void main(String[] args) {
        try {
            fileOpen();
        } catch (FileNotFoundException e) {
            e.printStackTrace();
            System.out.println("File name specified does not exist "
                               + e.getMessage());
        }

        static void fileOpen() throws FileNotFoundException {
            FileReader fileReader = new FileReader("test.txt");
        } } }
```



9.8: User defined Exceptions

User specific Exception

To create exceptions:

- Write a class that extends(indirectly) Throwable.
- What Superclass to extend?
 - For unchecked exceptions: RuntimeException
 - For checked exceptions: Any other Exception subclass or the Exception itself

```
class AgeException extends Exception {  
    private int age;  
    AgeException(int a) {  
        age = a;  
    }  
    public String toString() {  
        return age+" is an invalid age";  
    }  
}
```



9.8: User defined Exceptions

User specific Exception

To create exceptions:

- Write a class that extends(indirectly) Throwable.
- Which Superclass to extend?
 - For unchecked exceptions: RuntimeException
 - For checked exceptions: Any other Exception subclass or the exception itself

```
class AgeException extends Exception {  
    private int age;  
    AgeException(int a) {  
        age = a;  
    }  
    public String toString() {  
        return age+" is an invalid age"; } }  
}
```



9.8: User defined Exceptions

Demo: User Specific Exception

Execute UserException.java program



9.8: User defined Exceptions

Lab : Exception

Lab 6: Exception Handling



9.9: Best Practices on Exception Handling

The Best Practices

Avoid empty catch blocks.

Avoid throwing and catching a generic exception class.

Pass all the pertinent data to exceptions.

Use the finally block to release the resources



9.9: Best Practices on Exception Handling

Best Practices

Avoid throwing unnecessary exceptions.

Finalize method is not reliable.

Exception thrown by finalizers are ignored.

While using method calls, always handle the exceptions in the method where they occur.

Do not use loops for exception handling.



9.9: Best Practices on Exception Handling

Best Practices

When deciding on checked exceptions vs. unchecked exceptions, ask yourself, "What action can the client code take when the exception occurs?"



Summary

Exceptions are powerful error handling mechanisms.

A program can catch exceptions by using a combination of the try, catch, and finally blocks:

- The try block identifies a block of code in which an exception can occur.
- The catch block identifies a block of code, known as an exception handler.
- The finally block identifies a block of code that is guaranteed to execute.
- Try-with-resources
- Multi-catch blocks

Throw is used to throw an exception by the user.



Review – Match the Following format

1. CheckedException	A. Compulsory to use if a method throws a checked exception and doesn't handle it
2. finally	B. Inherited from RuntimeException
3. throws	C. Can have any number of catch blocks
4. Unchecked Exception	D. Used to avoid "resource leak"
5. try	E. Inherited from Exception