

Meander

User guide

Description

Meander implements a content layout algorithm to provide text threading (when text from one box spills into a different box if it overflows) and image wrap-around.



Quick start

The main function provided is `meander.reflow`, which takes as input some content, and auto-splits it into “containers”, “obstacles”, and “flowing text”. Obstacles are content that are placed on the page with a fixed layout. Containers are created by the function `meander.container`, and everything else is flowing text.

After excluding the zones forbidden by obstacles and segmenting the containers appropriately, the threading algorithm will split the flowing content across containers to wrap around the forbidden regions.


A simple example

`meander.reflow` is contextual, so the invocation needs to be wrapped in a context `{ ... }` block. Currently multi-page setups are not supported, but this is definitely a desired feature.

```
#context meander.reflow[
  // Obstacle
  #place(top + left, my-image-1)

  // Full-page container
  #meander.container()

  // Flowing text
  #lorem(500)
]
```

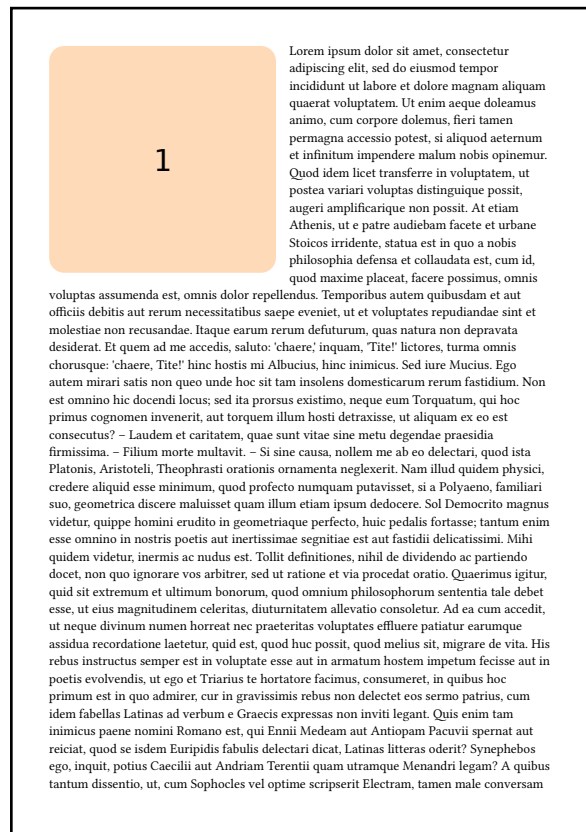


Multiple obstacles

`meander.reflow` can handle as many obstacles as you provide (at the cost of potentially performance issues if there are too many, but experiments have shown that up to ~100 obstacles is no problem).

```
#context meander.reflow[
  // Multiple obstacles
  #place(top + left, my-image-1)
  #place(top + right, my-image-2)
  #place(right, my-image-3)
  #place(bottom + left, my-image-4)
  #place(bottom + left, my-image-5,
    dx: 2cm)

  #meander.container()
  #lorem(500)
]
```

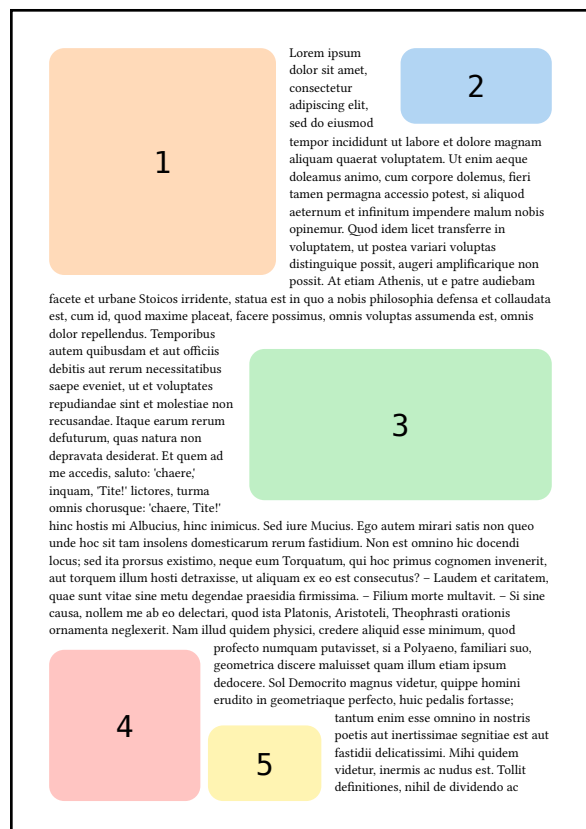


Columns

In order to simulate a multi-column layout, you can provide several container invocations. They will be filled in the order provided.

```
#context meander.reflow[
  #place(bottom + right, my-image-1)
  #place(center + horizon, my-image-2,
    dy: -1cm)
  #place(top + right, my-image-3)

  // Multiple containers produce
  // multiple columns.
  #meander.container(width: 55%)
  #meander.container(right, width: 40%)

  #lorem(600)
]
```

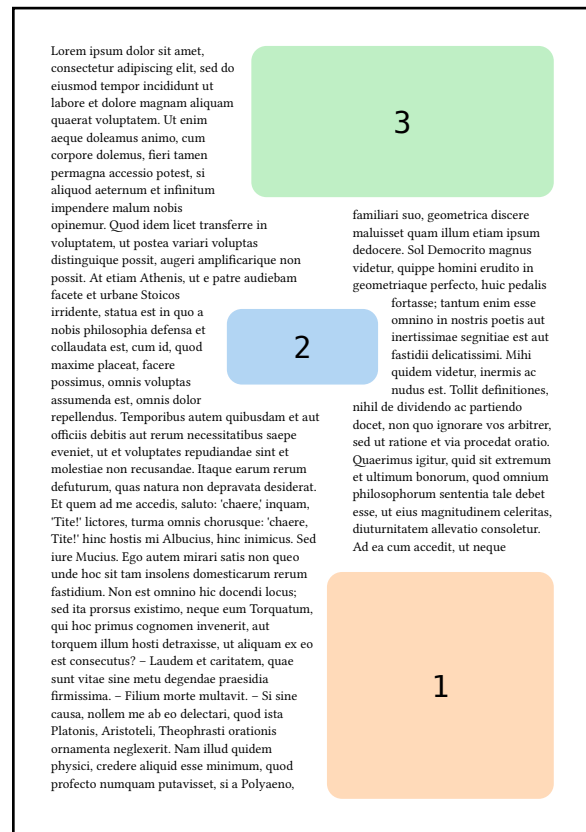


Understanding the algorithm

The same page setup as the previous example will internally be separated into

- obstacles my-image-1, my-image-2, and my-image-3. They are shown on the right in red.
- containers (x: 0%, y: 0%, width: 55%, height: 100%) and (x: 60%, y: 0%, width: 40%, height: 100%)
- flowing text lorem(600), not shown here.

Respecting the horizontal separations of the obstacles, and staying within the bounds of the containers, the page is split into the subcontainers shown to the right in green. These boxes will be filled in order, including heuristics to properly provide vertical spacing between these boxes.

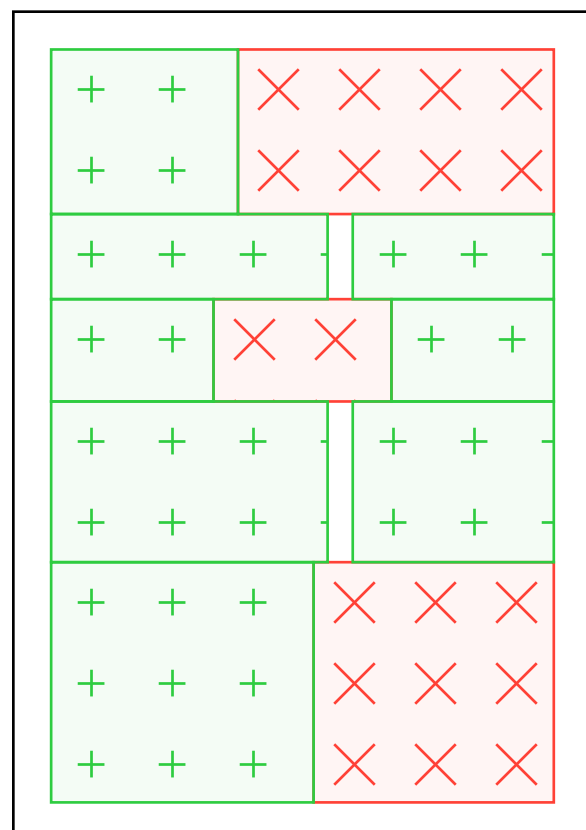

Here is a way to achieve text that follows a special shape.

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt
 ut labore et dolore magnaam aliquam quaerat voluptatem. Ut enim aeque
 doleamus animo, cum corpore doleamus, fieri tamen permagna accessio
 potest, si aliquod aeternum et infinitum impendere malum
 nobis opinemur. Quod idem licet transferre in
 voluptatem, ut postea variari voluptas dissinguique
 possit, augeri amplificarique non possit. At etiam
 Athenis, ut e patre audiebam facete et urbane
 Stoicos irridente, statua est in quo a nobis
 philosophia defensa et collaudata est, cum
 id, quod maxime placeat, facere possimus,
 omnis voluptas assumenda est, omnis
 dolor repellendus. Temporibus autem
 quibusdam et aut officiis debitis aut
 rerum necessitatibus saepe eveniet,
 ut et voluptates repudiandae sint et
 molestiae non recusandae. Itaque
 earum rerum defuturum, quas
 natura non depravata desiderat. Et
 quom ad me accedis, saluto:
 'chaere, inquam, 'Tite! lictores,
 turma omnis chorusque: 'chaere,
 'Tite!' hinc hostis mi Albiucius,
 hinc inimicus. Sed iure Mucius.
 Ego autem mirari solum non quo
 unde hoc sit tam insolens
 domesticarum rerum fastidium.
 Non est omnino hic docendi locus;
 sed ita prorsus existimo, neque eum
 Torquatum, qui hoc primus cognomen
 invenierit, aut torquem illum hosti
 detraxisse, ut aliquam ex eo est
 consecutus? – Laudem et caritatem, quae
 sunt vitae sine metu degendae praesidia
 firmissima. – Filium morte multavit. – Si sine
 causa, nollem me ab eo delectari, quod ista
 Platonis, Aristoteli, Theophrasti orationis
 ornamenta neglexerit. Nam illud quidem physici,
 credere aliquid esse minimum, quod profecto nunquam
 putavisset, si a Polyaeo, familiari suo, geometrica discere
 maluisset quam illum etiam ipsum dedocere. Sol Democrito magnus
 videtur, quippe homini erudito in geometricaque perfecto, hoc pedalis fortasse;
 tantum enim esse omnino in nostris poetis aut inertissimae segnitiae est aut fastidii

- performance issues if you get too wild (though notice that having 50 obstacles in the previous example went fine)
- text that doesn't fit in the boxes at all, in particular if you don't give them any vertical space to grow because they are bounded on both sides.

In short, stay reasonable with this and don't try to add hundreds of obstacles of 1mm height each.

Because meander is cleanly split into three algorithms (content segmentation, page segmentation, text threading), there are plans to provide

- configuration options for each of those steps
- the ability to replace entirely an algorithm by either a variant, or a user-provided alternative that follows the same signature.

Geometry (geometry.typ)

Generalist functions for 1D and 2D geometry.

- clamp()
- between()

- intersects()
- resolve()
- align()

clamp

Bound a value between min and max. No constraints on types as long as they support inequality testing.

Parameters

```
clamp(  
  val: any ,  
  min: any none ,  
  max: any none  
) -> any
```

val any

Base value.

min any or none

Lower bound.

Default: none

max any or none

Upper bound.

Default: none

between

Testing $a \leq b \leq c$, helps only computing b once.

Parameters

```
between(  
  a: length ,  
  b: length ,  
  c: length  
) -> bool
```

a length

Lower bound.

b length

Tested value.

c `length`

Upper bound. Asserted to be \geq c.

intersects

Tests if two intervals intersect.

Parameters

```
intersects(  
    i1: (length, length),  
    i2: (length, length),  
    tolerance: length  
)
```

i1 `(length, length)`

First interval as a tuple of (low, high) in absolute lengths.

i2 `(length, length)`

Second interval.

tolerance `length`

Set to nonzero to ignore small intersections.

Default: `0pt`

resolve

Converts relative and contextual lengths to absolute. The return value will contain each of the arguments once converted, with arguments that contain 'x' or start with 'w' being interpreted as horizontal, and arguments that contain 'y' or start with 'h' being interpreted as vertical.

```
#context resolve(  
    (width: 100pt, height: 200pt),  
    x: 10%, y: 50% + 1pt,  
    width: 50%, height: 5pt,  
)
```

```
(x: 10pt, y: 101pt, width: 50pt, height: 5pt)
```

Parameters

```
resolve(  
    size: (width: length, height: length),  
    ..args: dictionary  
) -> dictionary
```

size (width: length, height: length)

Size of the container as given by the layout function.

align

Compute the position of the upper left corner, taking into account the alignment and displacement.

Parameters

```
align(  
  alignment: alignment,  
  dx: relative,  
  dy: relative,  
  width: relative,  
  height: relative  
) -> (x: relative, y: relative)
```

alignment alignment

Absolute alignment.

dx relative

Horizontal displacement.

Default: 0pt

dy relative

Vertical displacement.

Default: 0pt

width relative

Object width.

Default: 0pt

height relative

Object height.

Default: 0pt

Tiling (tiling/default.typ)

Page splitting algorithm.

- separate()
- forbidden-rectangles()

- tolerable-rectangles()

Variables

- pat-forbidden
- pat-allowed

separate

Splits content into obstacles, containers, and flowing text.

An “obstacle” is any content inside a place at the toplevel. It will be appended in order to the placed field as content.

A “container” is a box(place({})). Both box and place are allowed to have width, height, etc. parameters, but no inner contents. It will be appended in order to the free field as a block, i.e. a dictionary with the fields x, y, width, height describing the upper left corner and the dimensions of the container. See the helper function container that constructs a container directly.

Everything that is neither obstacle nor container is flowing text, and will end in the field flow.

```
#separate[
  // This is an obstacle
  #place(top + left, box(width: 50pt, height: 50pt))
  // This is a container
  #box(height: 50%, place({}))
  // This is flowing text
  #lorem(50)
]
```

Parameters

```
separate(ct: content) -> (flow: (..block,), obstacles: (..content,), containers: content)
```

forbidden-rectangles

From a set of obstacles (see separate: an obstacle is any placed content at the toplevel, so excluding places that are inside box, rect, etc.), construct the blocks (x: length, y: length, width: length, height: length) that surround the obstacles.

The return value is as follows:

- rects, a list of blocks (x: length, y: length, width: length, height: length)
- display, show this to include the placed content in the final output
- debug, show this to include helper boxes to visualize the layout

Parameters

```
forbidden-rectangles(
  obstacles: (..content,),
  margin: length,
  size: (width: length, height: length)
) -> (rects: (..block,), display: content, debug: content)
```

obstacles (..content,)

Array of all the obstacles that are placed on this document.

margin `length`

Add padding around the obstacles.

Default: `0pt`

size `(width: length, height: length)`

Dimensions of the parent container, as provided by `layout`.

Default: `none`

tolerable-rectangles

Partition the complement of `avoid` into containers as a series of rectangles.

The algorithm is roughly as follows:

```
for container in containers {  
  horizontal-cuts = sorted(top and bottom of zone for zone in avoid)  
  for (top, bottom) in horizontal-cuts.windows(2) {  
    vertical-cuts = sorted(  
      left and right of zone for zone in avoid  
      if zone intersects (top, bottom)  
    )  
    new zone (top, bottom, left, right)  
  }  
}
```

The main difficulty is in bookkeeping and handling edge cases (weird intersections, margins of error, containers that overflow the page, etc.) There are no heuristics to exclude zones that are too small, and no worries about zones that intersect vertically. That would be the threading algorithm's job.

Parameters

```
tolerable-rectangles(  
  containers,  
  avoid,  
  size  
) -> (rects: (..block,), debug: content)
```

pat-forbidden `pattern`

Pattern with red crosses to display forbidden zones.

pat-allowed `pattern`

Pattern with green pluses to display allowed zones.

Bisection (`bisect/default.typ`)

Content splitting algorithm.

- `fits-inside()`
- `default-rebuild()`
- `take-it-or-leave-it()`
- `has-text()`
- `has-child()`
- `has-children()`
- `is-list-item()`
- `is-enum-item()`
- `has-body()`
- `dispatch()`
- `fill-box()`

fits-inside

Tests if content fits inside a box.

WARNING: horizontal fit is not strictly checked

The closure of this function constitutes the basis of the entire content splitting algorithm: iteratively add content until it no longer `fits-inside`, with what “iteratively add content” means being defined by the content structure. Essentially all remaining functions in this file are about defining content that can be split and the correct way to invoke `fits-inside` on them.

```
#let dims = (width: 100%, height: 50%)
#box(width: 7cm, height: 3cm)[#layout(size
=> context {
  let words = [#lorem(12)]
  [#fits-inside(dims, words, size: size)]
  linebreak()
  box(..dims, stroke: 0.1pt, words)
}]]
```

true

Lorem ipsum dolor sit amet,
consectetur adipiscing elit,
sed do eiusmod tempor.

```
#let dims = (width: 100%, height: 50%)
#box(width: 7cm, height: 3cm)[#layout(size
=> context {
  let words = [#lorem(15)]
  [#fits-inside(dims, words, size: size)]
  linebreak()
  box(..dims, stroke: 0.1pt, words)
}]]
```

false

Lorem ipsum dolor sit amet,
consectetur adipiscing elit,
sed do eiusmod tempor
incididunt ut labore.

Parameters

```
fits-inside(
  dims: (width: relative, height: relative),
  ct: content,
  size: (width: length, height: length)
) -> bool
```

dims (width: relative, height: relative)

Maximum container dimensions. Relative lengths are allowed.

ct content

Content to fit in.

size (width: length, height: length)

Dimensions of the parent container to resolve relative sizes. These must be absolute sizes.

Default: **none**

default-rebuild

Destructure and rebuild content, separating the outer content builder from the rest to allow substituting the inner contents. In practice what we will usually do is recursively split the inner contents and rebuild the left and right halves separately.

Inspired by wrap-it's implementation (see: `_unwrap` in `github:ntjess/wrap-it`)

```
#let content = box(stroke: red)[Initial]
#let (inner, rebuild) = default-rebuild(
  content, "body",
)
```

```
Content: #content \
Inner: #inner \
Rebuild: #rebuild("foo")
```

Content: **Initial**
Inner: Initial
Rebuild: **foo**

```
#let content = [*_Initial_*]
#let (inner, rebuild) = default-rebuild(
  content, "body",
)
```

```
Content: #content \
Inner: #inner \
Rebuild: #rebuild("foo")
```

Content: ***Initial***
Inner: *Initial*
Rebuild: **foo**

```
#let content = [a:b]
#let (inner, rebuild) = default-rebuild(
  content, "children",
)
```

```
Content: #content \
Inner: #inner \
Rebuild: #rebuild(([x], [y]))
```

Content: a:b
Inner: ([a], [:], [b])
Rebuild: xy

Parameters

```
default-rebuild(  
  ct: content,  
  inner-field: string  
) -> (dictionary, function)
```

inner-field `string`

What “inner” field to fetch (e.g. "body", "text", "children", etc.)

take-it-or-leave-it

“Split” opaque content.

Parameters

```
take-it-or-leave-it(  
  ct: content,  
  fits-inside: function  
) -> (content?, content?)
```

ct `content`

This content cannot be split. If it fits take it, otherwise keep it for later.

fits-inside `function`

Closure to determine if the content fits (see fits-inside above).

has-text

Split content with a "text" main field. Strategy: split by " " and take all words that fit.

Parameters

```
has-text(  
  ct: content,  
  split-dispatch: function,  
  fits-inside: function,  
  cfg: dictionary  
)
```

ct `content`

Content to split.

split-dispatch `function`

Recursively passed around (see split-dispatch below).

fits-inside `function`

Closure to determine if the content fits (see `fits-inside` above).

cfg `dictionary`

Extra configuration options.

has-child

Split content with a "child" main field. Strategy: recursively split the child.

Parameters

```
has-child(  
  ct: content ,  
  split-dispatch: function ,  
  fits-inside: function ,  
  cfg: dictionary  
)
```

ct `content`

Content to split.

split-dispatch `function`

Recursively passed around (see `split-dispatch` below).

fits-inside `function`

Closure to determine if the content fits (see `fits-inside` above).

cfg `dictionary`

Extra configuration options.

has-children

Split content with a "children" main field. Strategy: take all children that fit.

Parameters

```
has-children(  
  ct: content,  
  split-dispatch: function,  
  fits-inside: function,  
  cfg: dictionary  
)
```

ct `content`

Content to split.

split-dispatch `function`

Recursively passed around (see `split-dispatch` below).

fits-inside `function`

Closure to determine if the content fits (see `fits-inside` above).

cfg `dictionary`

Extra configuration options.

is-list-item

Split a `list.item`. Strategy: recursively split the body, and do some magic to simulate a bullet point indent.

Parameters

```
is-list-item(  
  ct: content,  
  split-dispatch: function,  
  fits-inside: function,  
  cfg: dictionary  
)
```

ct `content`

Content to split.

split-dispatch `function`

Recursively passed around (see `split-dispatch` below).

fits-inside `function`

Closure to determine if the content fits (see `fits-inside` above).

cfg `dictionary`

Extra configuration options.

is-enum-item

Split an `enum.item`. Strategy: recursively split the body, and do some magic to simulate a numbering indent.

Parameters

```
is-enum-item(  
  ct: content,  
  split-dispatch: function,  
  fits-inside: function,  
  cfg: dictionary  
)
```

ct `content`

Content to split.

split-dispatch `function`

Recursively passed around (see `split-dispatch` below).

fits-inside `function`

Closure to determine if the content fits (see `fits-inside` above).

cfg `dictionary`

Extra configuration options.

has-body

Split content with a "body" main field. There is a special strategy for `list.item` and `enum.item` which are handled separately. Elements `strong`, `emph`, `underline`, `stroke`, `overline`, `highlight` are splittable, the rest are treated as non-splittable.

Parameters

```
has-body(  
  ct: content,  
  split-dispatch: function,  
  fits-inside: function,  
  cfg: dictionary  
)
```

ct `content`

Content to split.

split-dispatch `function`

Recursively passed around (see `split-dispatch` below).

fits-inside `function`

Closure to determine if the content fits (see `fits-inside` above).

cfg `dictionary`

Extra configuration options.

dispatch

Based on the fields on the content, call the appropriate splitting function. This function is involved in a mutual recursion loop, which is why all other splitting functions take this one as a parameter.

Parameters

```
dispatch(  
  ct: content,  
  fits-inside: function,  
  cfg: dictionary  
)
```

ct `content`

Content to split.

fits-inside `function`

Closure to determine if the content fits (see `fits-inside` above).

cfg `dictionary`

Extra configuration options.

fill-box

Initialize default configuration options and take as much content as fits in a box of given size.

Parameters

```
fill-box(  
    dims: (width: length, height: length) ,  
    ct: content ,  
    size: (width: length, height: length) ,  
    cfg: dictionary  
)
```

dims (width: length, height: length)

Container size.

ct content

Content to split.

size (width: length, height: length)

Parent container size.

Default: (:)

cfg dictionary

Configuration options.

- **list-markers:** (`..content,`), default value (`[•], [▶], [–], [•], [▶], [–]`). If you change the markers of list, put the new value in the parameters so that lists are correctly split.
- **enum-numbering:** (`..str,`), default value (`"1.", "1.", "1.", "1.", "1.", "1."`). If you change the numbering style of enum, put the new style in the parameters so that enums are correctly split.

Default: (:)