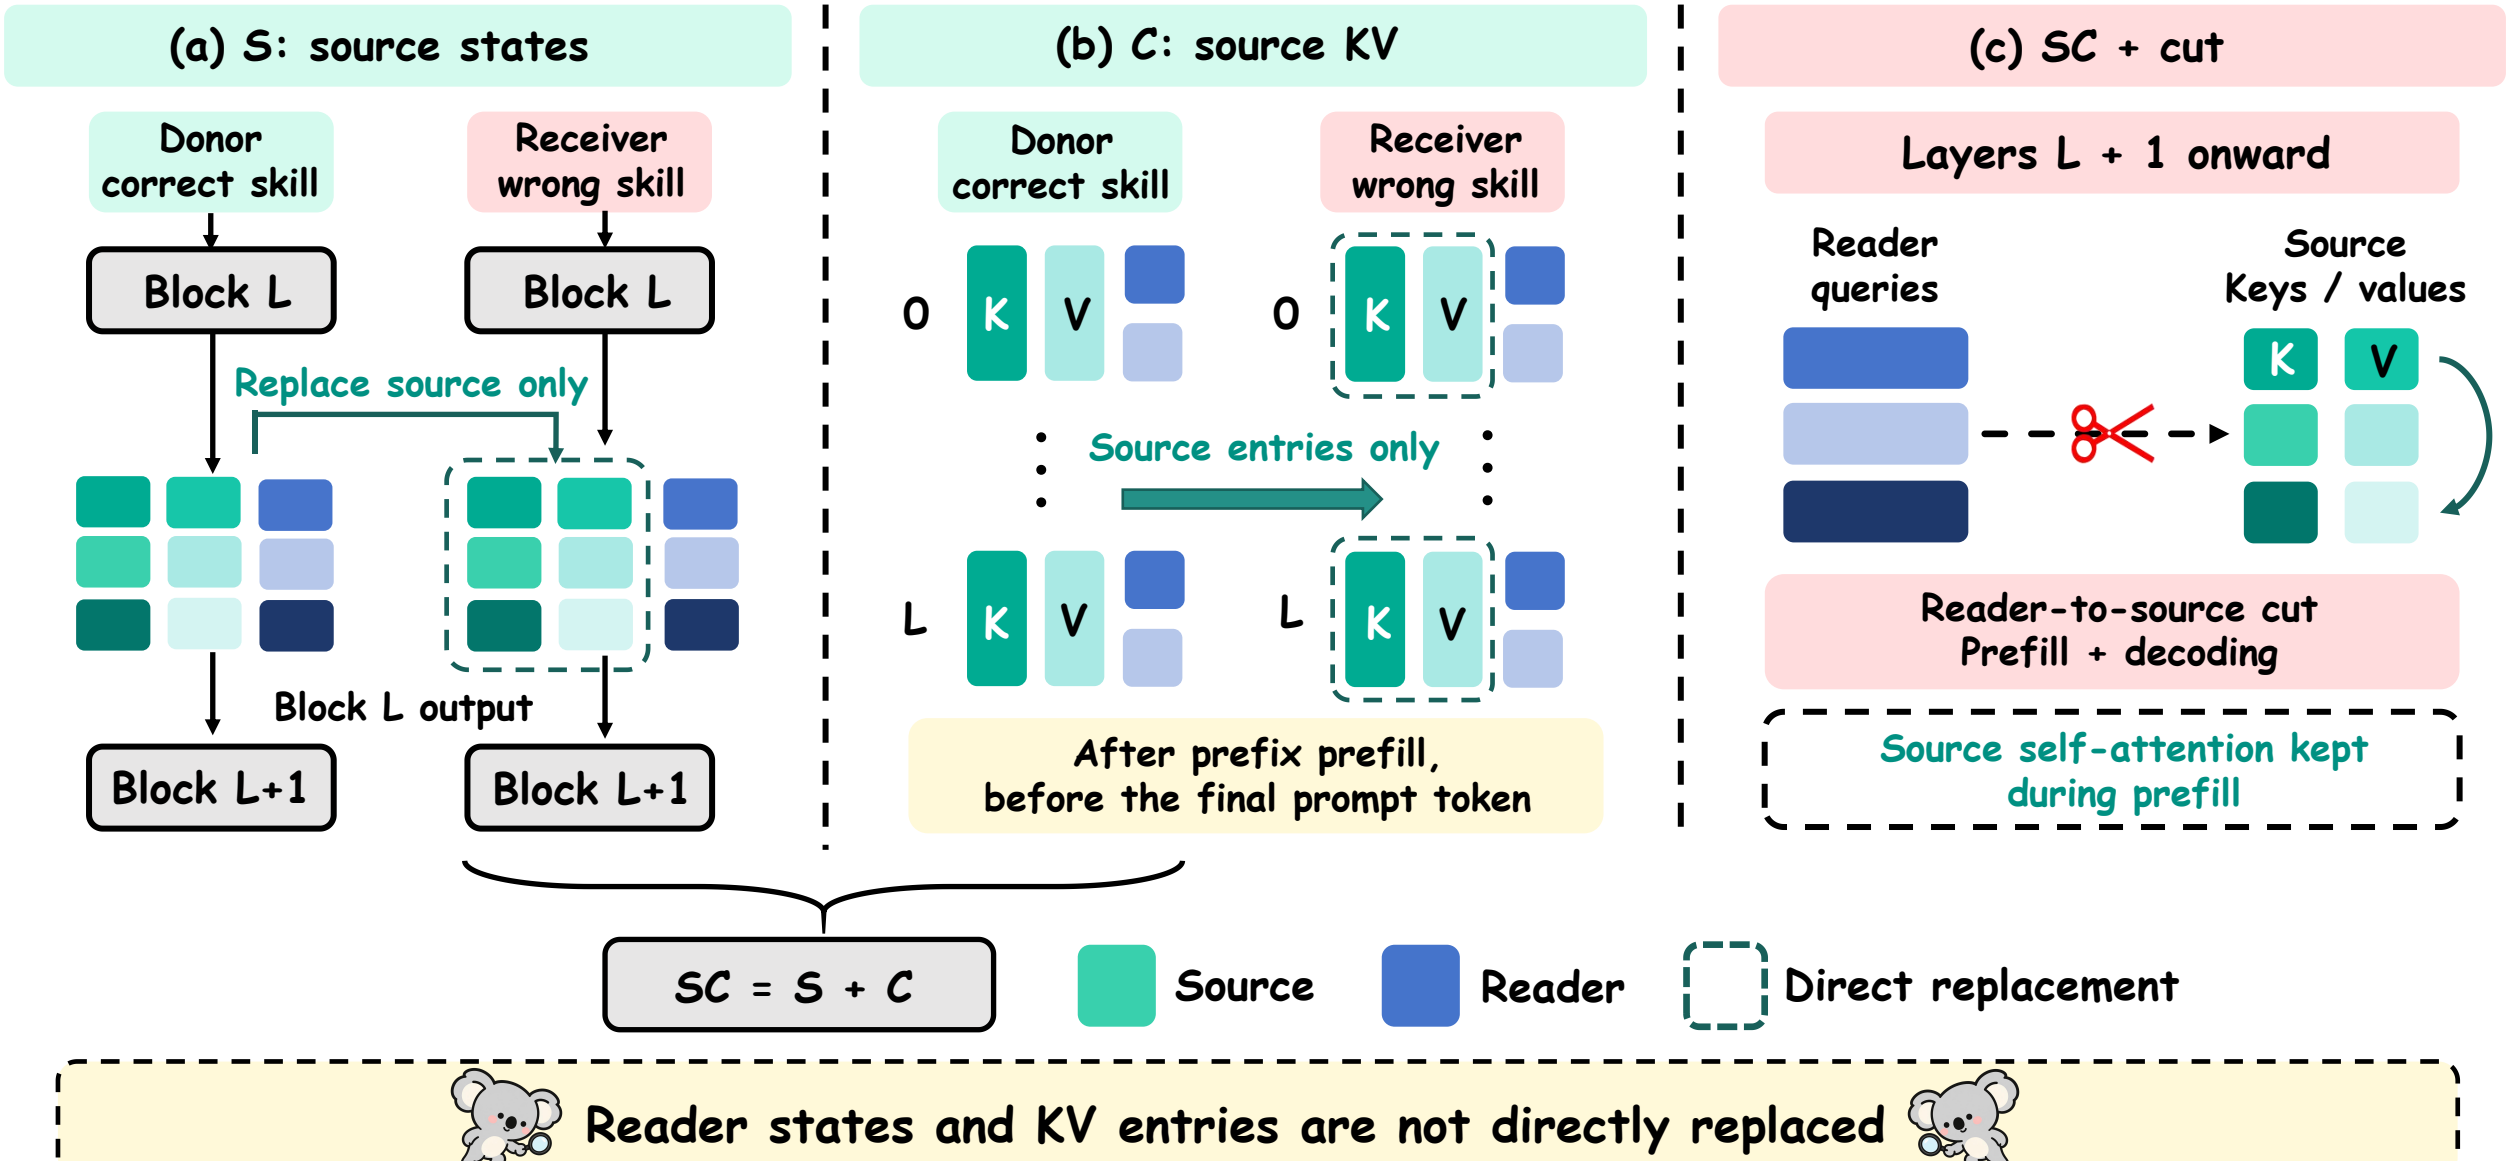

(a) S: source states
Donor
correct skill
Receiver
wrong skill
Block L
Block L
Replace source only
Block L output
Block L+1
Block L+1
(b) C: source KV
Donor
correct skill
Receiver
wrong skill
0
K
V
0
K
V
Source entries only
L
K
V
L
K
V
After prefix prefill,
before the final prompt token
(c) SC + cut
Layers L + 1 onward
Reader
queries
Source
Keys / values
K
V
Reader-to-source cut
Prefill + decoding
Source self-attention kept
during prefill
SC = S + C
Source
Reader
Direct replacement
Reader states and KV entries are not directly replaced