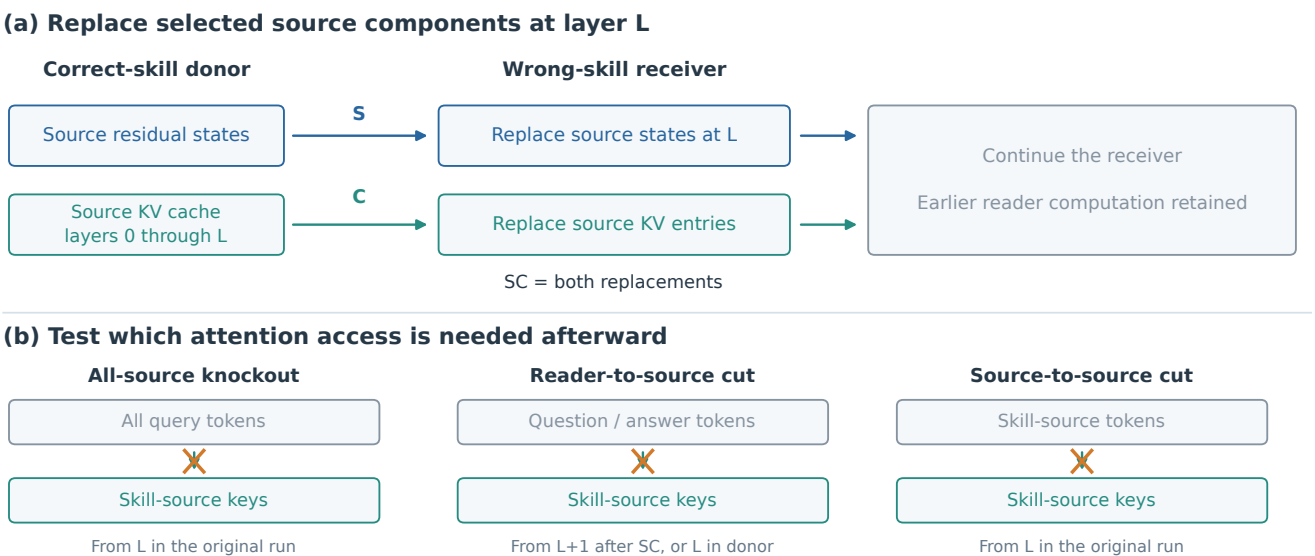
(a) Replace selected source components at layer L
Correct-skill donor
Wrong-skill receiver
Source residual states
S
Replace source states at L
Source KV cache
layers 0 through L
C
Replace source KV entries
Continue the receiver
Earlier reader computation retained
SC = both replacements
(b) Test which attention access is needed afterward
All-source knockout
All query tokens
Skill-source keys
From L in the original run
Reader-to-source cut
Question / answer tokens
Skill-source keys
From L+1 after SC, or L in donor
Source-to-source cut
Skill-source tokens
Skill-source keys
From L in the original run