



Java String Methods

[< Previous](#)[Next >](#)

All String Methods

The **String** class has a set of built-in methods that you can use on strings.

Method	Description	Return Type
<u>charAt()</u>	Returns the character at the specified index (position)	char
<u>codePointAt()</u>	Returns the Unicode of the character at the specified index	int
<u>codePointBefore()</u>	Returns the Unicode of the character before the specified index	int
<u>codePointCount()</u>	Returns the number of Unicode values found in a string.	int
<u>compareTo()</u>	Compares two strings lexicographically	int
<u>compareToIgnoreCase()</u>	Compares two strings lexicographically, ignoring case differences	int
<u>concat()</u>	Appends a string to the end of another string	String



Tutorials ▼

References ▼

Exercises ▼



Sign In

	CSS	JAVASCRIPT	SQL	PYTHON	JAVA	PHP	HOW TO	W3.CSS	C
<u>contains()</u>					Checks whether a string contains the exact same sequence of characters of the specified CharSequence or StringBuffer				
<u>copyValueOf()</u>					Returns a String that represents the characters of the character array				String
<u>endsWith()</u>					Checks whether a string ends with the specified character(s)				boolean
<u>equals()</u>					Compares two strings. Returns true if the strings are equal, and false if not				boolean
<u>equalsIgnoreCase()</u>					Compares two strings, ignoring case considerations				boolean
<u>format()</u>					Returns a formatted string using the specified locale, format string, and arguments				String
<u>getBytes()</u>					Converts a string into an array of bytes				byte[]
<u>getChars()</u>					Copies characters from a string to an array of chars				void
<u>hashCode()</u>					Returns the hash code of a string				int
<u>indexOf()</u>					Returns the position of the first found occurrence of specified characters in a string				int
<u>intern()</u>					Returns the canonical representation for the string object				String
<u>isEmpty()</u>					Checks whether a string is empty or not				boolean
<u>join()</u>					Joins one or more strings with a specified separator				String
<u>lastIndexOf()</u>					Returns the position of the last found occurrence of specified characters in a string				int
<u>length()</u>					Returns the length of a specified string				int



Tutorials ▼

References ▼

Exercises ▼



Sign In


CSS JAVASCRIPT SQL PYTHON JAVA PHP HOW TO W3.CSS C		
<u>indexOf()</u>	Returns the index within this string that is offset from the given index by codePointOffset code points	int
<u>regionMatches()</u>	Tests if two string regions are equal	boolean
<u>replace()</u>	Searches a string for a specified value, and returns a new string where the specified values are replaced	String
<u>replaceAll()</u>	Replaces each substring of this string that matches the given regular expression with the given replacement	String
<u>replaceFirst()</u>	Replaces the first occurrence of a substring that matches the given regular expression with the given replacement	String
<u>split()</u>	Splits a string into an array of substrings	String[]
<u>startsWith()</u>	Checks whether a string starts with specified characters	boolean
<u>subSequence()</u>	Returns a new character sequence that is a subsequence of this sequence	CharSequence
<u>substring()</u>	Returns a new string which is the substring of a specified string	String
<u>toCharArray()</u>	Converts this string to a new character array	char[]
<u>toLowerCase()</u>	Converts a string to lower case letters	String
<u>toString()</u>	Returns the value of a String object	String
<u>toUpperCase()</u>	Converts a string to upper case letters	String
<u>trim()</u>	Removes whitespace from both ends of a string	String
<u>valueOf()</u>	Returns the string representation of the specified value	String

◀ Previous

Sign in to track progress

Next ▶

ADVERTISEMENT

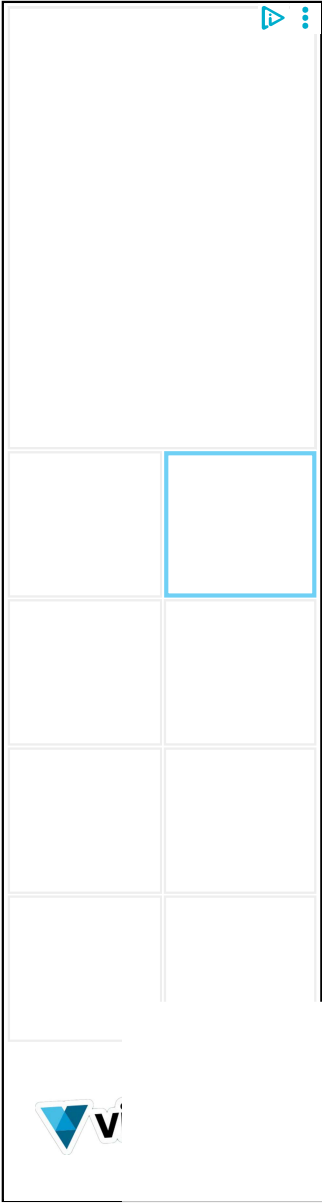

[Tutorials ▼](#)[References ▼](#)[Exercises ▼](#)[Sign In](#)[CSS](#)[JAVASCRIPT](#)[SQL](#)[PYTHON](#)[JAVA](#)[PHP](#)[HOW TO](#)[W3.CSS](#)[C](#)

COLOR PICKER



ADVERTISEMENT



320,00 kr.

207,11 kr.

10 fr 72 22 1

REMOVE ADS

ADVERTISEMENT

[Tutorials](#) ▼[References](#) ▼[Exercises](#) ▼[Sign In](#)[CSS](#)[JAVASCRIPT](#)[SQL](#)[PYTHON](#)[JAVA](#)[PHP](#)[HOW TO](#)[W3.CSS](#)[C](#)

ADVERTISEMENT



PLUS

SPACES

GET CERTIFIED

FOR TEACHERS

FOR BUSINESS

CONTACT US

Top Tutorials



W3.CSS Tutorial

Bootstrap Tutorial

PHP Tutorial

Java Tutorial

C++ Tutorial

jQuery Tutorial

Top References

HTML Reference

CSS Reference

JavaScript Reference

SQL Reference

Python Reference

W3.CSS Reference

Bootstrap Reference

PHP Reference

HTML Colors

Java Reference

AngularJS Reference

jQuery Reference

Top Examples

HTML Examples

CSS Examples

JavaScript Examples

How To Examples

SQL Examples

Python Examples

W3.CSS Examples

Bootstrap Examples

PHP Examples

Java Examples

XML Examples

jQuery Examples

Get Certified

HTML Certificate

CSS Certificate

JavaScript Certificate

Front End Certificate

SQL Certificate

Python Certificate

PHP Certificate

jQuery Certificate

Java Certificate

C++ Certificate

C# Certificate

XML Certificate



FORUM

ABOUT

ACADEMY

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.

Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our [terms of use](#), [cookie and privacy policy](#).

Copyright 1999-2025 by Refsnes Data. All Rights Reserved. W3Schools is Powered by W3.CSS.