



Kom godt i... 11 99...	Projektb eskrive... 0 kr	Automa sér din.. 10 99..
------------------------------	--------------------------------	--------------------------------

Java Logical Operators

< Previous

Next >

Logical Operators

As with comparison operators, you can also test for **true** or **false** values with logical operators.

Logical operators are used to determine the logic between variables or values, by combining multiple conditions::

Operator	Name	Description	Example	Try it
&&	Logical and	Returns true if both statements are true	x < 5 && x < 10	Try it »
	Logical or	Returns true if one of the statements is true	x < 5 x < 4	Try it »
!	Logical not	Reverse the result, returns false if the result is true	!(x < 5 && x < 10)	Try it »

Real-Life Example: Login Check

The example below shows how logical operators can be used in a real situation, e.g. when checking login status and access rights:

[Tutorials ▼](#)[References ▼](#)[Exercises ▼](#)[Sign In](#)[≡](#) [.](#) [CSS](#) [JAVASCRIPT](#) [SQL](#) [PYTHON](#) [JAVA](#) [PHP](#) [HOW TO](#) [W3.CSS](#) [C](#)

```
boolean isLoggedIn = true;
boolean isAdmin = false;

System.out.println("Regular user: " + (isLoggedIn && !isAdmin));
System.out.println("Has access: " + (isLoggedIn || isAdmin));
System.out.println("Not logged in: " + (!isLoggedIn));
```

Result:

Is regular user: true

Has access: true

Not logged in: false

[Try it Yourself »](#)

[◀ Previous](#)[Sign in to track progress](#)[Next >](#)


ADVERTISEMENT

[Tutorials ▼](#)[References ▼](#)[Exercises ▼](#)[Sign In](#)[CSS](#)[JAVASCRIPT](#)[SQL](#)[PYTHON](#)[JAVA](#)[PHP](#)[HOW TO](#)[W3.CSS](#)[C](#)

COLOR PICKER

[REMOVE ADS](#)

ADVERTISEMENT

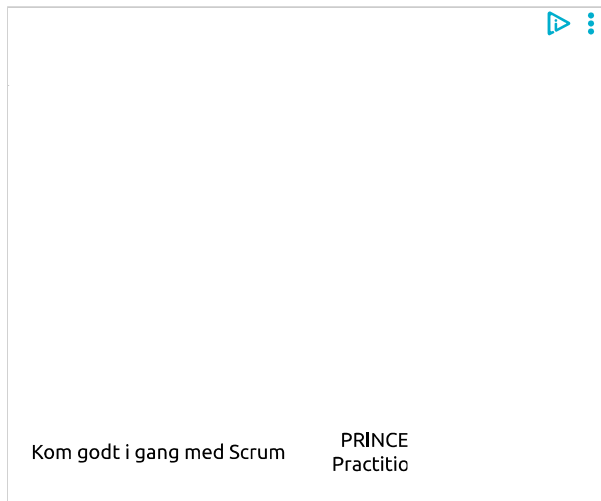



GET CERTIFIED

FOR TEACHERS

FOR BUSINESS

CONTACT US

Top Tutorials

- HTML Tutorial
- CSS Tutorial
- JavaScript Tutorial
- How To Tutorial
- SQL Tutorial
- Python Tutorial
- W3.CSS Tutorial
- Bootstrap Tutorial
- PHP Tutorial
- Java Tutorial
- C++ Tutorial
- jQuery Tutorial

Top References

- HTML Reference
- CSS Reference
- JavaScript Reference
- SQL Reference
- Python Reference
- W3.CSS Reference
- Bootstrap Reference
- PHP Reference
- HTML Colors
- Java Reference
- AngularJS Reference
- jQuery Reference

Top Examples

- HTML Examples
- CSS Examples
- JavaScript Examples
- How To Examples
- SQL Examples
- Python Examples
- W3.CSS Examples
- Bootstrap Examples
- PHP Examples
- Java Examples

Get Certified

- HTML Certificate
- CSS Certificate
- JavaScript Certificate
- Front End Certificate
- SQL Certificate
- Python Certificate
- PHP Certificate
- jQuery Certificate
- Java Certificate
- C++ Certificate

[Tutorials](#) ▼[References](#) ▼[Exercises](#) ▼[Sign In](#)[CSS](#)[JAVASCRIPT](#)[SQL](#)[PYTHON](#)[JAVA](#)[PHP](#)[HOW TO](#)[W3.CSS](#)[C](#)[FORUM](#) [ABOUT](#) [ACADEMY](#)

W3Schools is optimized for learning and training. Examples might be simplified to improve reading and learning.

Tutorials, references, and examples are constantly reviewed to avoid errors, but we cannot warrant full correctness of all content. While using W3Schools, you agree to have read and accepted our [terms of use](#), [cookie and privacy policy](#).

[Copyright 1999-2025](#) by Refsnes Data. All Rights Reserved. [W3Schools](#) is Powered by [W3.CSS](#).