
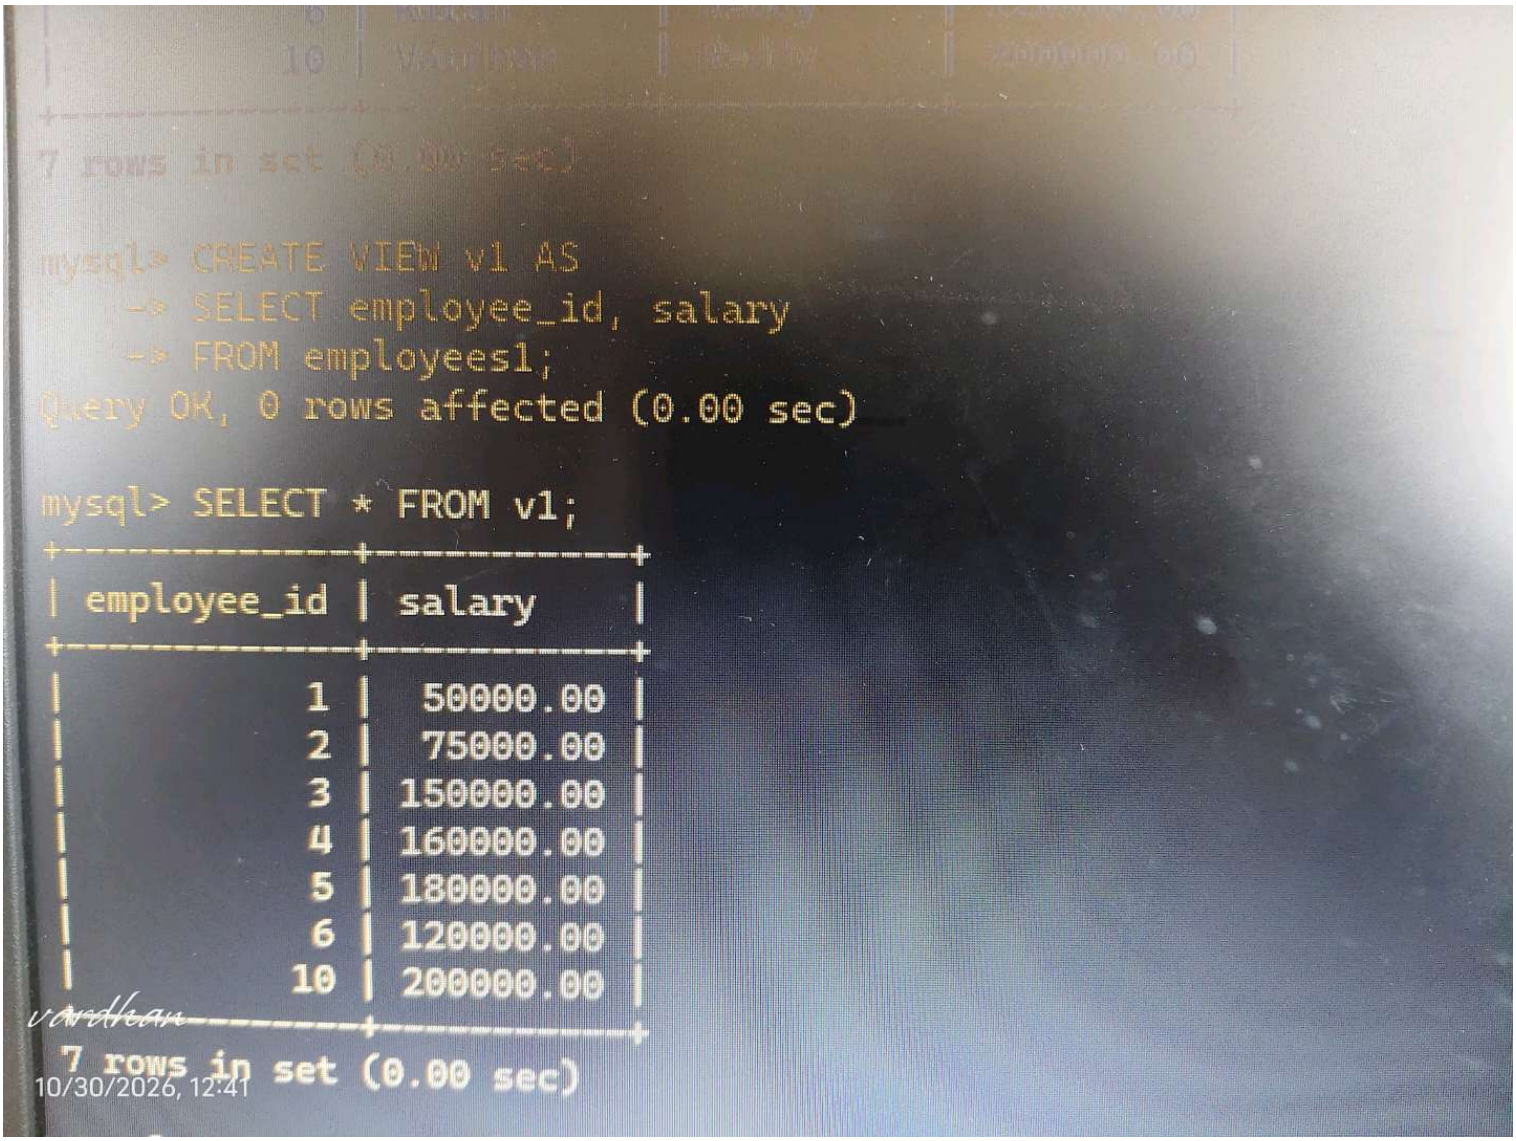


```
mysql> CREATE VIEW v1 AS
    -> SELECT employee_id, salary
    -> FROM employees1;
Query OK, 0 rows affected (0.00 sec)

mysql> SELECT * FROM v1;
+-------------+-----------+
| employee_id | salary    |
+-------------+-----------+
|           1 |  50000.00 |
|           2 |  75000.00 |
|           3 | 150000.00 |
|           4 | 160000.00 |
|           5 | 180000.00 |
|           6 | 120000.00 |
|          10 | 200000.00 |
+-------------+-----------+
7 rows in set (0.00 sec)
```

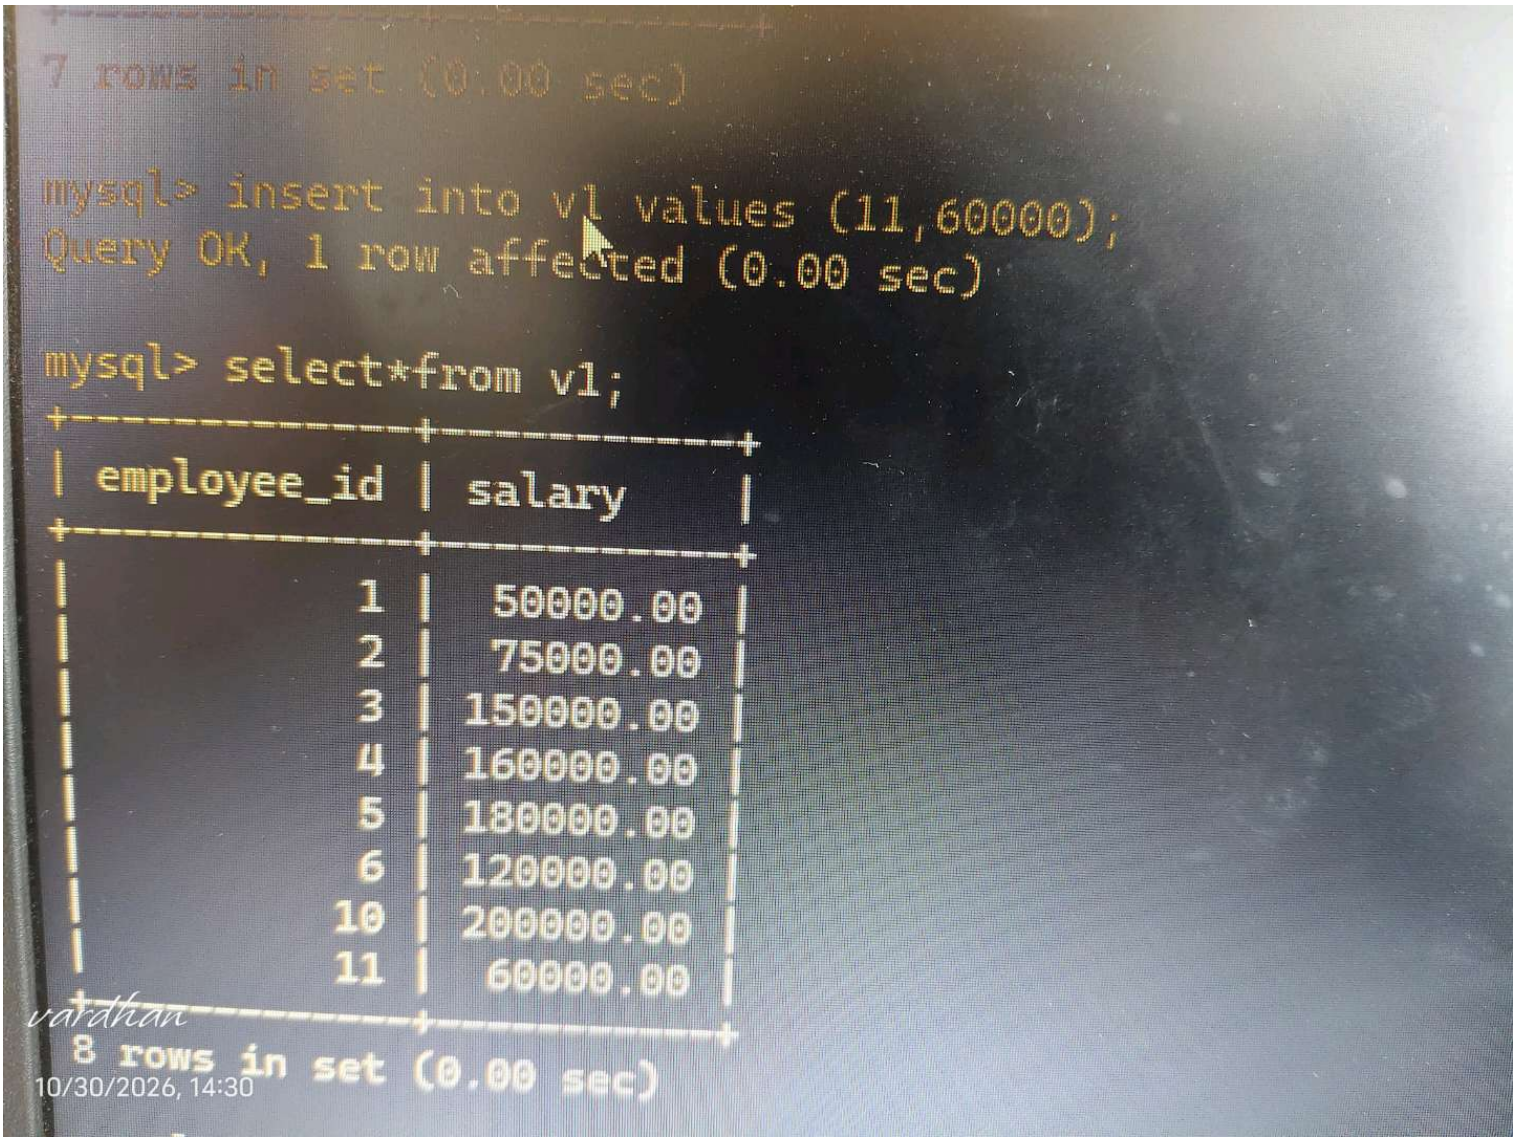


```
7 rows in set (0.00 sec)

mysql> insert into v1 values (11,60000);
Query OK, 1 row affected (0.00 sec)

mysql> select*from v1;
+-------------+-----------+
| employee_id | salary    |
+-------------+-----------+
|           1 |  50000.00 |
|           2 |  75000.00 |
|           3 | 150000.00 |
|           4 | 160000.00 |
|           5 | 180000.00 |
|           6 | 120000.00 |
|          10 | 200000.00 |
|          11 |  60000.00 |
+-------------+-----------+
8 rows in set (0.00 sec)
```

vardhan
10/30/2026, 14:30

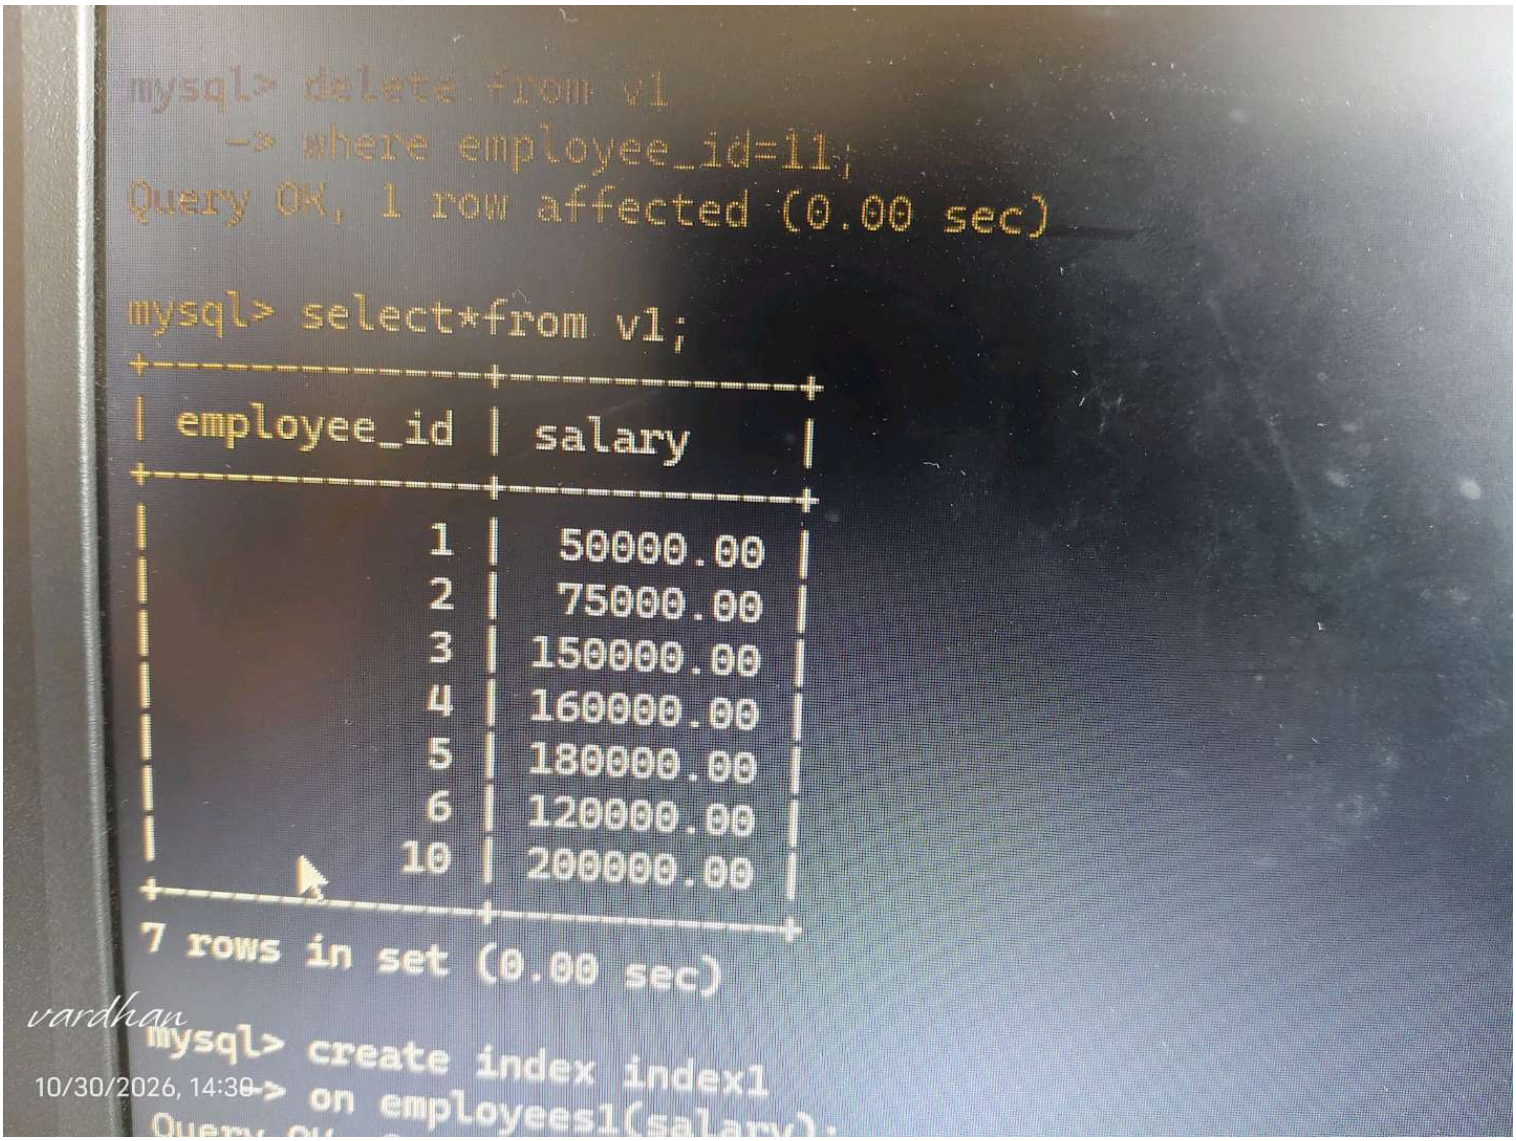



```
mysql> delete from v1
    -> where employee_id=11;
Query OK, 1 row affected (0.00 sec)

mysql> select*from v1;
+-------------+-----------+
| employee_id | salary    |
+-------------+-----------+
|           1 |  50000.00 |
|           2 |  75000.00 |
|           3 | 150000.00 |
|           4 | 160000.00 |
|           5 | 180000.00 |
|           6 | 120000.00 |
|          10 | 200000.00 |
+-------------+-----------+
7 rows in set (0.00 sec)

mysql> create index index1
    -> on employees1(salary);
```

vardhan
10/30/2026, 14:30

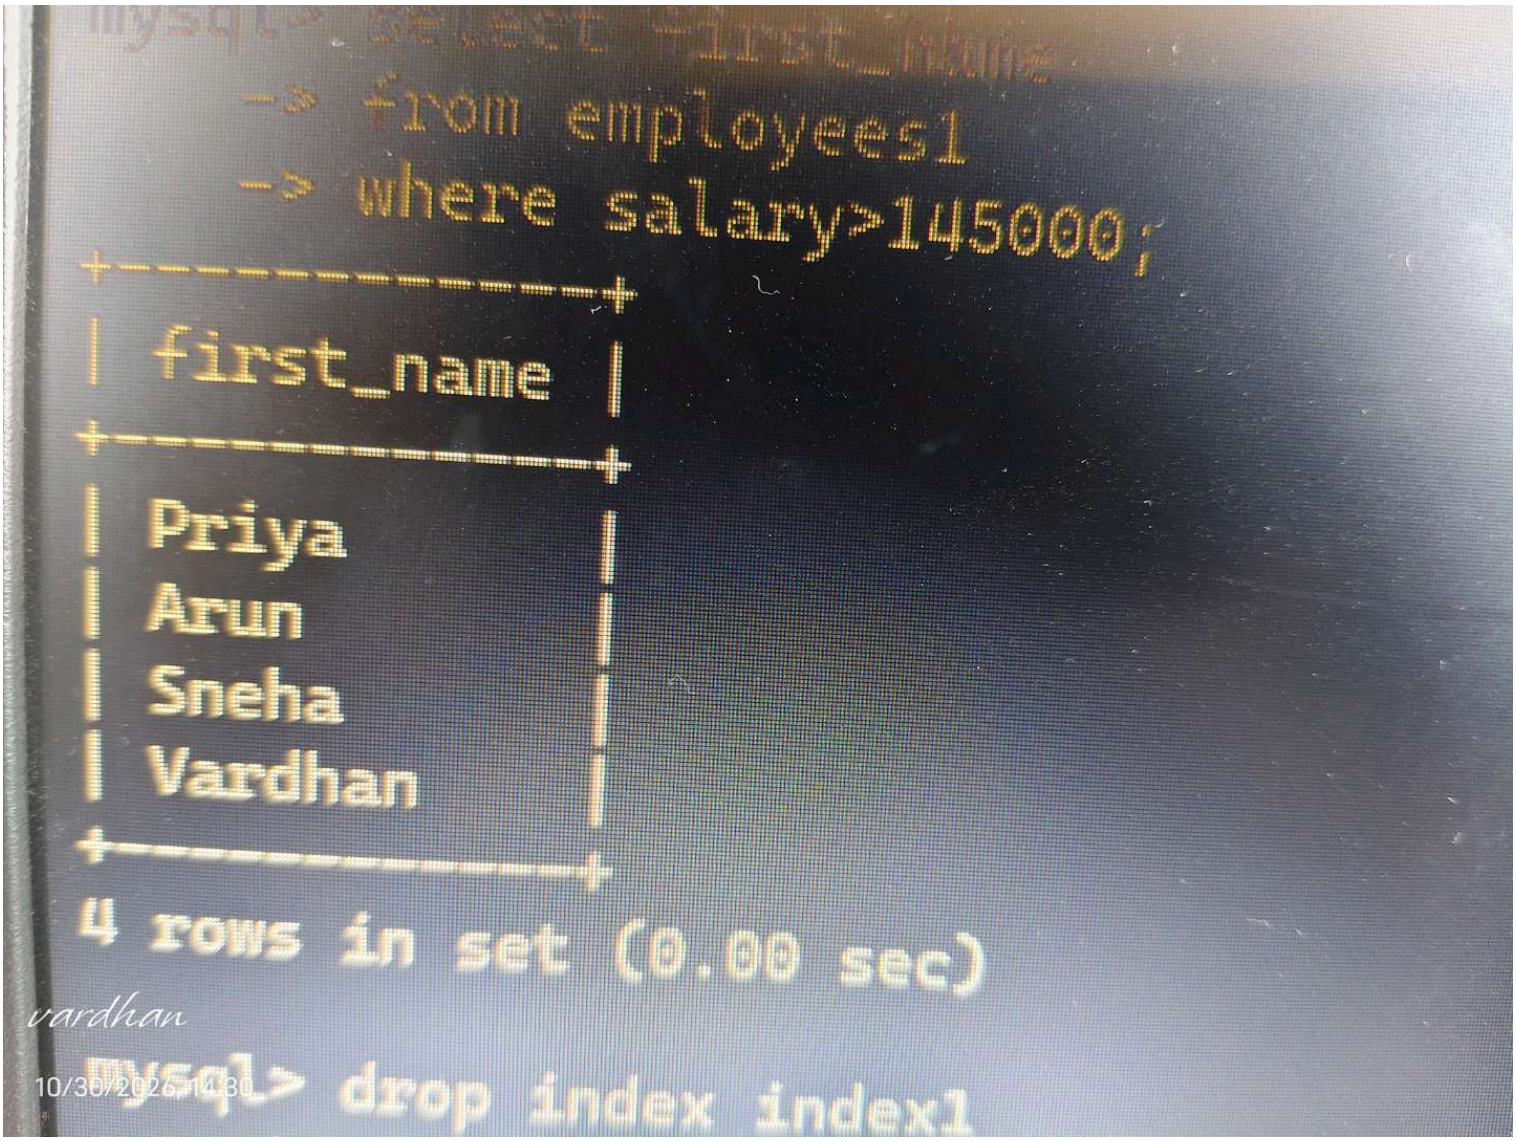
mysql> select first_name
-> from employees1
-> where salary>145000;
| first_name |
| Priya
| Arun
| Sneha
| Vardhan
4 rows in set (0.00 sec)
vardhan
10/30/2026 14:30
mysql> drop index index1

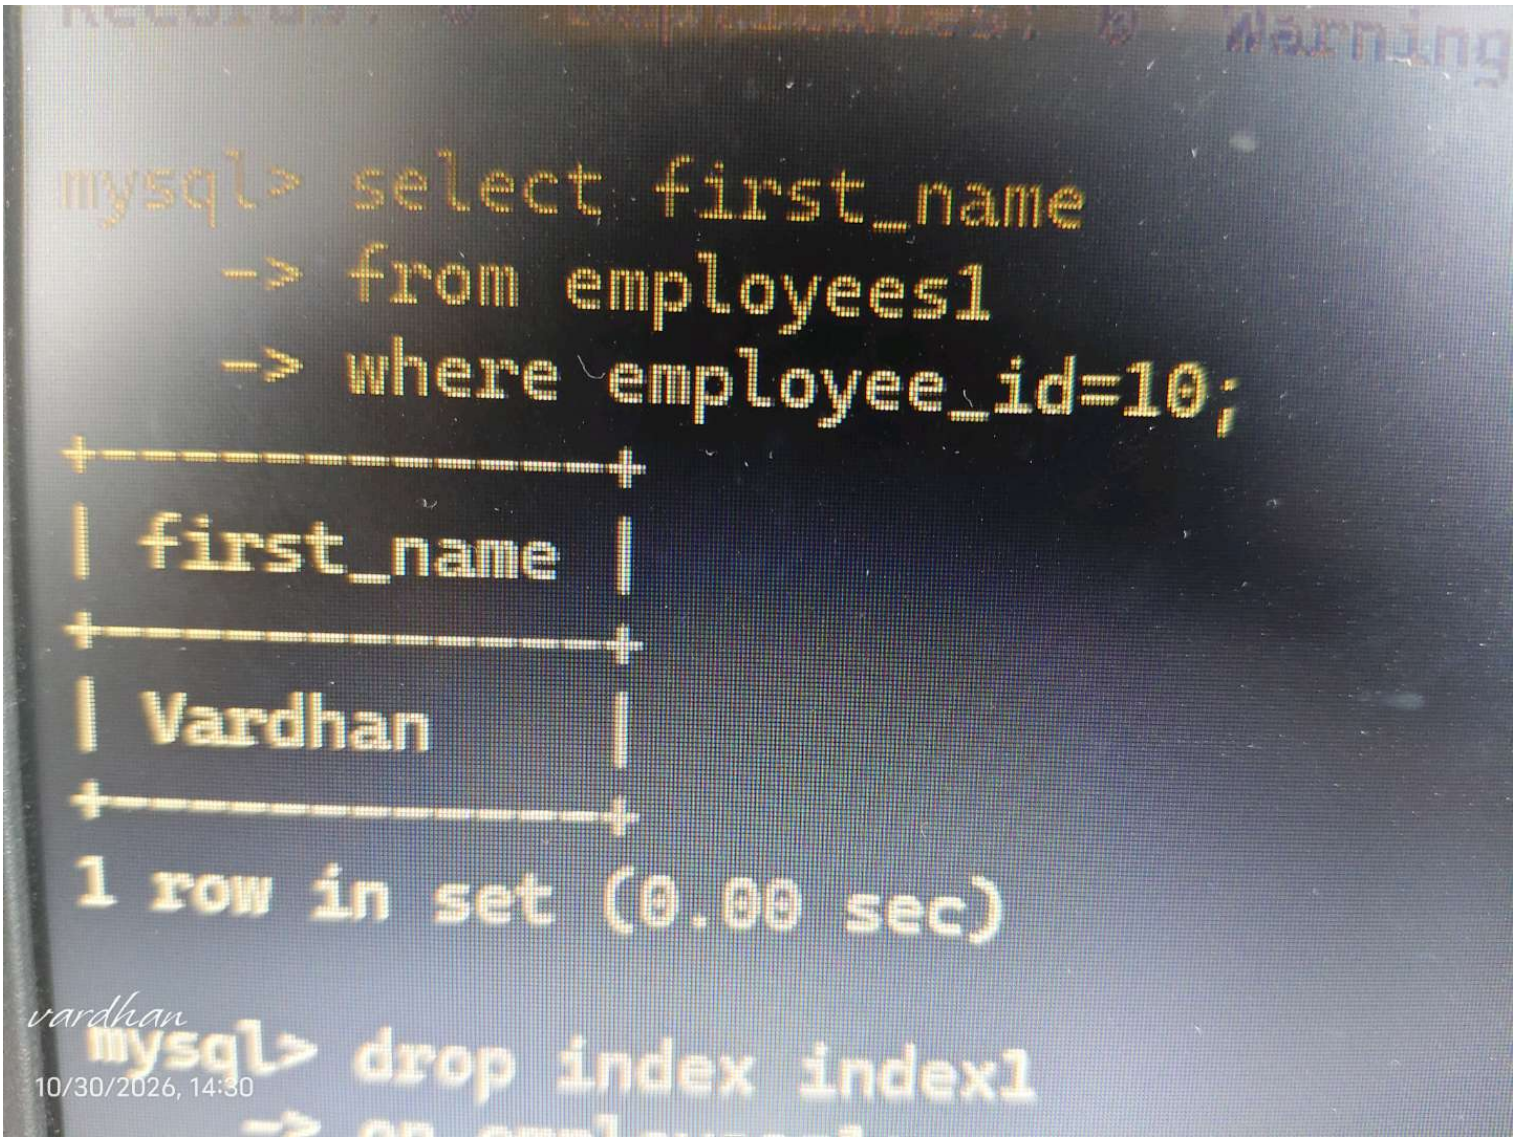
mysql> select first_name
-> from employees1
-> where employee_id=10;
| first_name |
| Vardhan |
1 row in set (0.00 sec)
vardhan
10/30/2026, 14:30
mysql> drop index index1