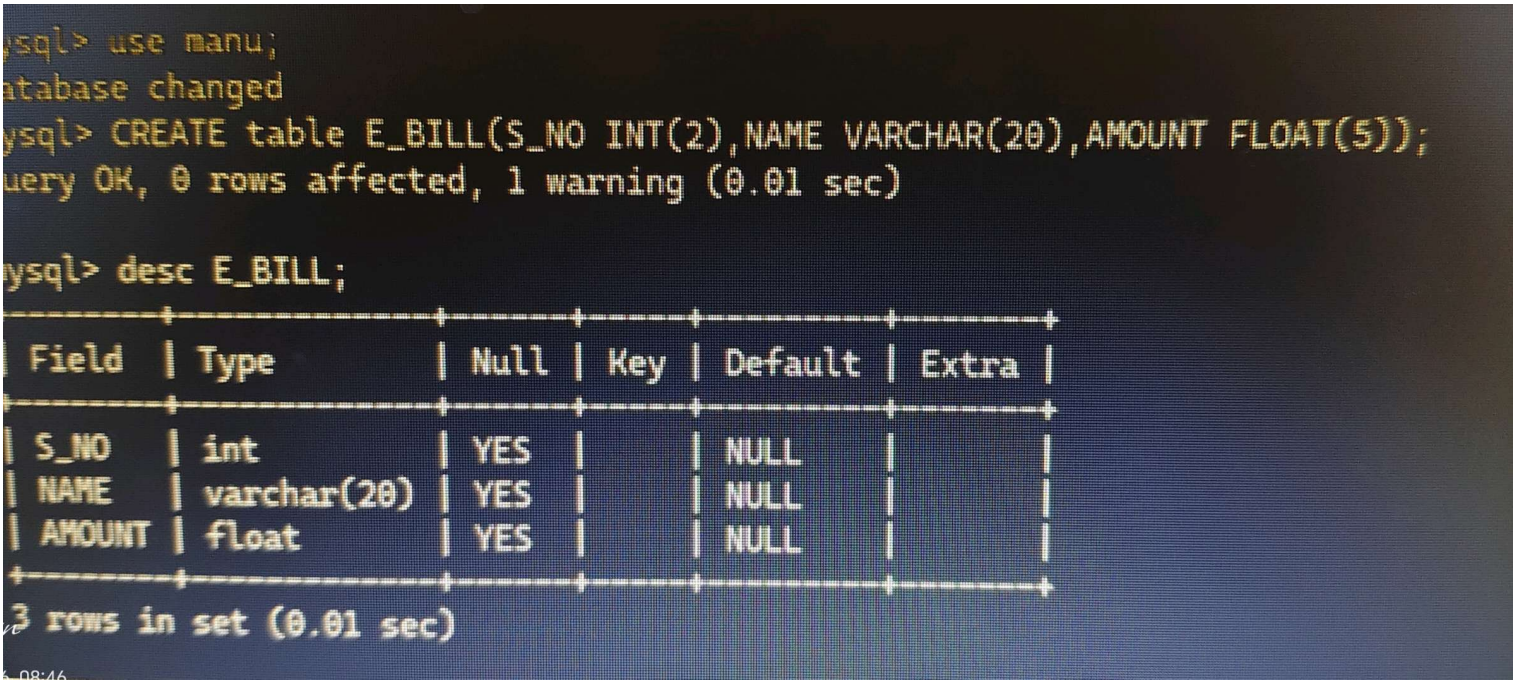
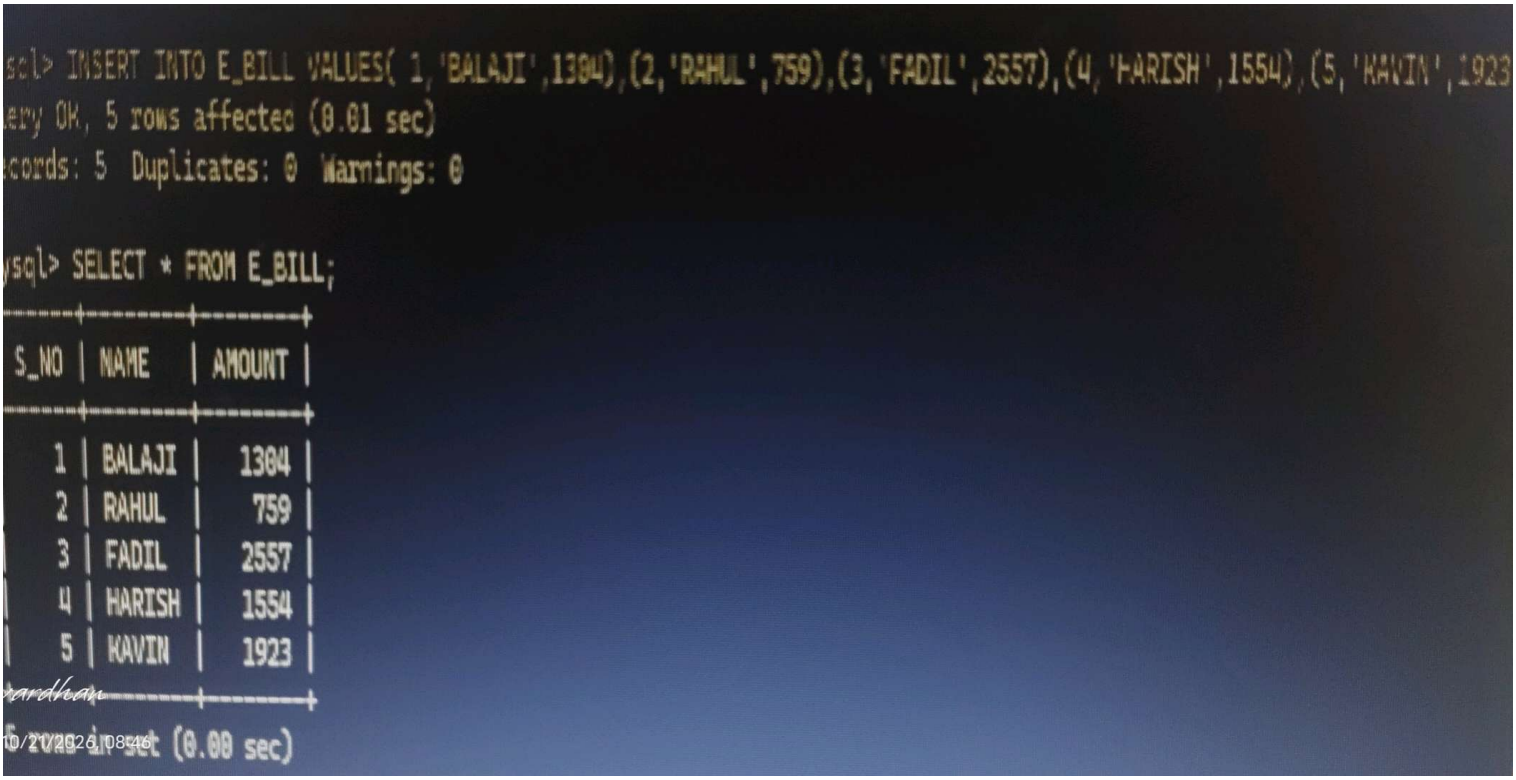
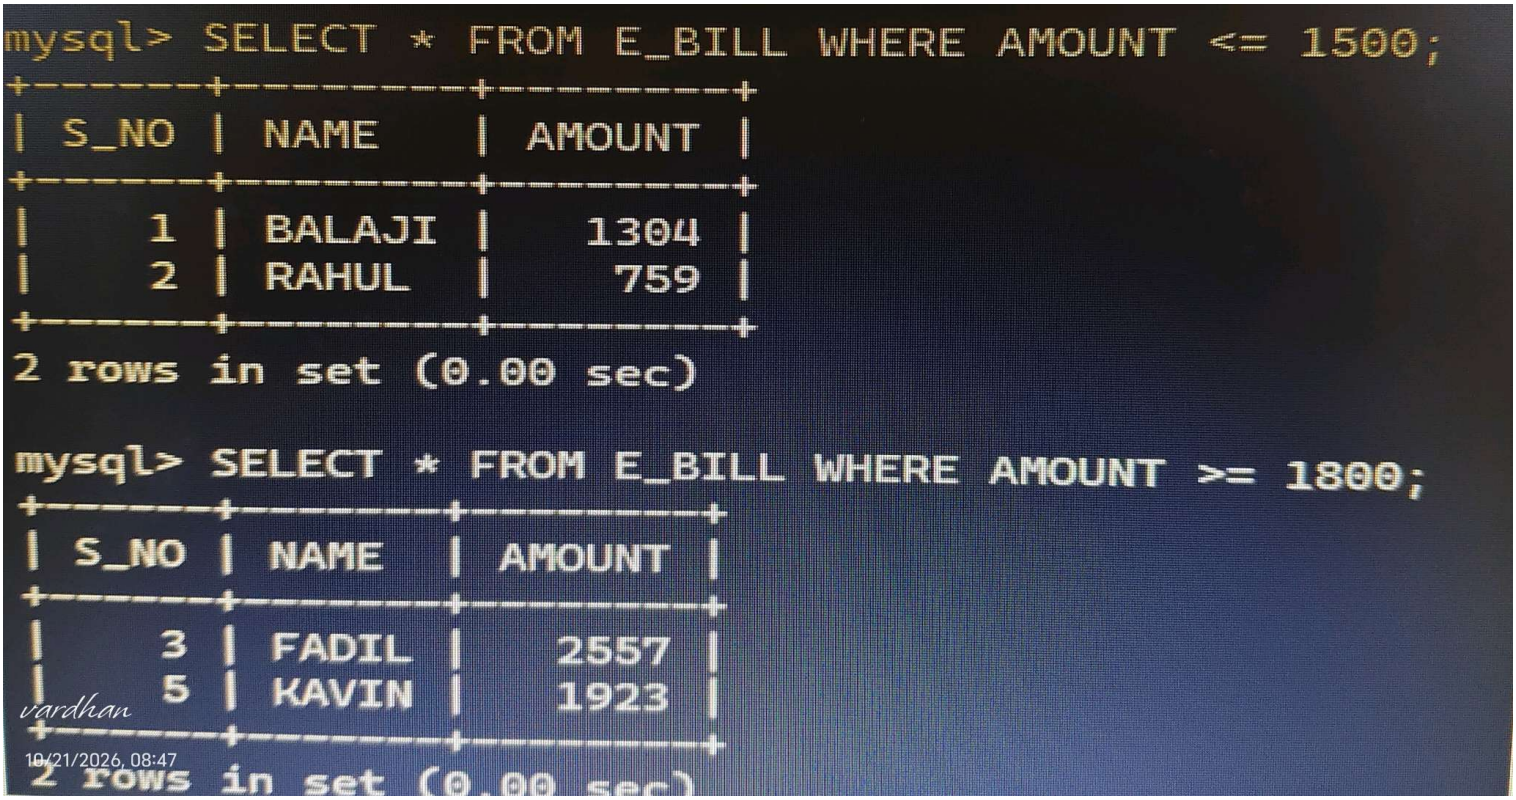
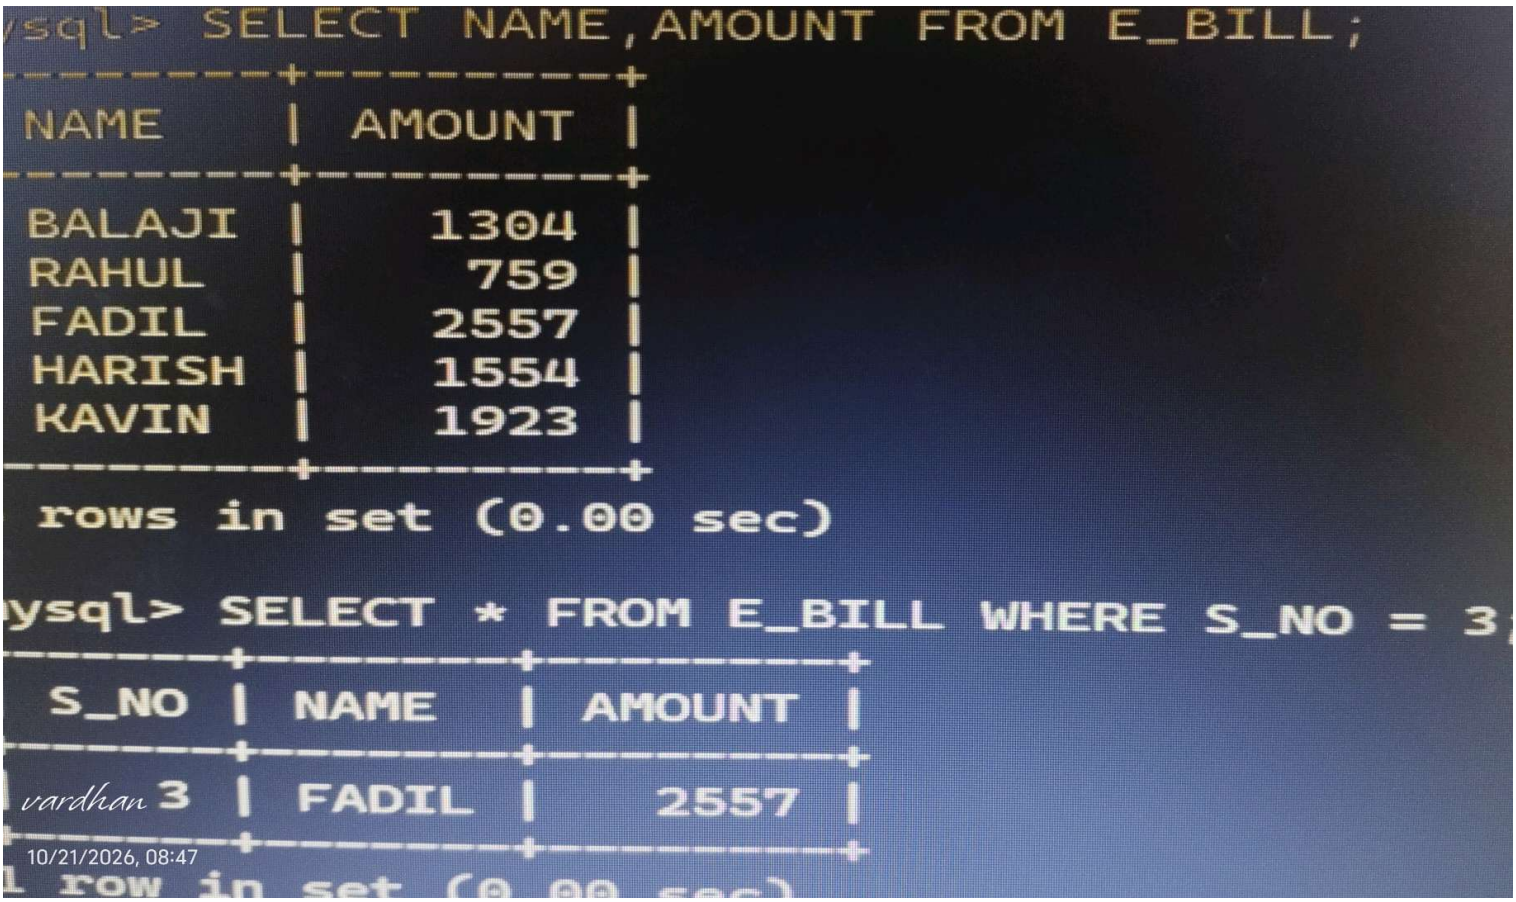

ysql> use manu;
atabase changed
ysql> CREATE table E_BILL(S_NO INT(2),NAME VARCHAR(20),AMOUNT FLOAT(5));
uery OK, 0 rows affected, 1 warning (0.01 sec)
ysql> desc E_BILL;
| Field | Type | Null | Key | Default | Extra |
| S_NO | int | YES | | NULL | |
| NAME | varchar(20) | YES | | NULL | |
| AMOUNT | float | YES | | NULL | |
3 rows in set (0.01 sec)


sql> INSERT INTO E_BILL VALUES( 1,'BALAJI',1304),(2,'RAHUL',759),(3,'FADIL',2557),(4,'HARISH',1554),(5,'KAVIN',1923
ery OK, 5 rows affected (0.01 sec)
ecords: 5 Duplicates: 0 Warnings: 0
ysql> SELECT * FROM E_BILL;
S_NO | NAME | AMOUNT
1 | BALAJI | 1304
2 | RAHUL | 759
3 | FADIL | 2557
4 | HARISH | 1554
5 | KAVIN | 1923
6 rows in set (0.00 sec)


mysql> SELECT * FROM E_BILL WHERE AMOUNT <= 1500;
| S_NO | NAME | AMOUNT |
| 1 | BALAJI | 1304 |
| 2 | RAHUL | 759 |
2 rows in set (0.00 sec)
mysql> SELECT * FROM E_BILL WHERE AMOUNT >= 1800;
| S_NO | NAME | AMOUNT |
| 3 | FADIL | 2557 |
| 5 | KAVIN | 1923 |
2 rows in set (0.00 sec)
vardhan
10/21/2026, 08:47



```
ysql> SELECT NAME,AMOUNT FROM E_BILL;
+---------+----------+
| NAME    | AMOUNT   |
+---------+----------+
| BALAJI  |     1304 |
| RAHUL   |      759 |
| FADIL   |     2557 |
| HARISH  |     1554 |
| KAVIN   |     1923 |
+---------+----------+
 rows in set (0.00 sec)

ysql> SELECT * FROM E_BILL WHERE S_NO = 3;
+------+---------+----------+
| S_NO | NAME    | AMOUNT   |
+------+---------+----------+
|    3 | FADIL   |     2557 |
+------+---------+----------+
1 row in set (0.00 sec)
```

vardhan
10/21/2026, 08:47