3.Scenario: You are working on a project that involves analyzing a dataset containing information about houses in a neighborhood. The dataset is stored in a CSV file, and you have imported it into a NumPy array named house data. Each row of the array represents a house, and the columns contain various features such as the number of bedrooms, square footage, and sale price.

Question: Using NumPy arrays and operations, how would you find the average sale price of houses with more than four bedrooms in the neighborhood?

Code:

```
import numpy as np


# Columns: [bedrooms, square footage, sale price]

house_data = np.array([

    [3, 1500, 250000],

    [5, 2800, 520000],

    [4, 2000, 350000],

    [6, 3200, 610000],

    [5, 2600, 480000],

    [2, 1100, 180000]

])


# Boolean mask: houses with more than 4 bedrooms

mask = house_data[:, 0] > 4


# Select sale prices (column 2) for those houses and average them

avg_price = np.mean(house_data[mask, 2])


print("Average sale price (more than 4 bedrooms):", avg_price)
```

input:

```
[
    [3, 1500, 250000],
    [5, 2800, 520000],
    [4, 2000, 350000],
    [6, 3200, 610000],
    [5, 2600, 480000],
    [2, 1100, 180000]
]
```
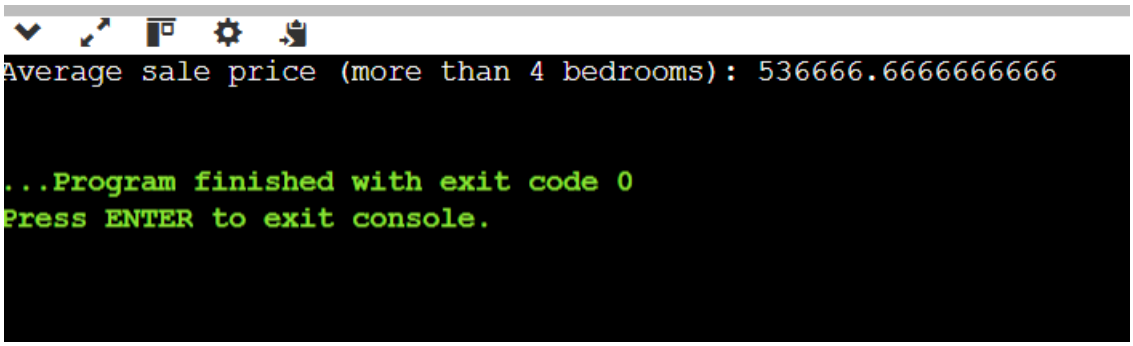
Output: