


ReactJs Hands on Lab -2

Creating a React app named StudentApp

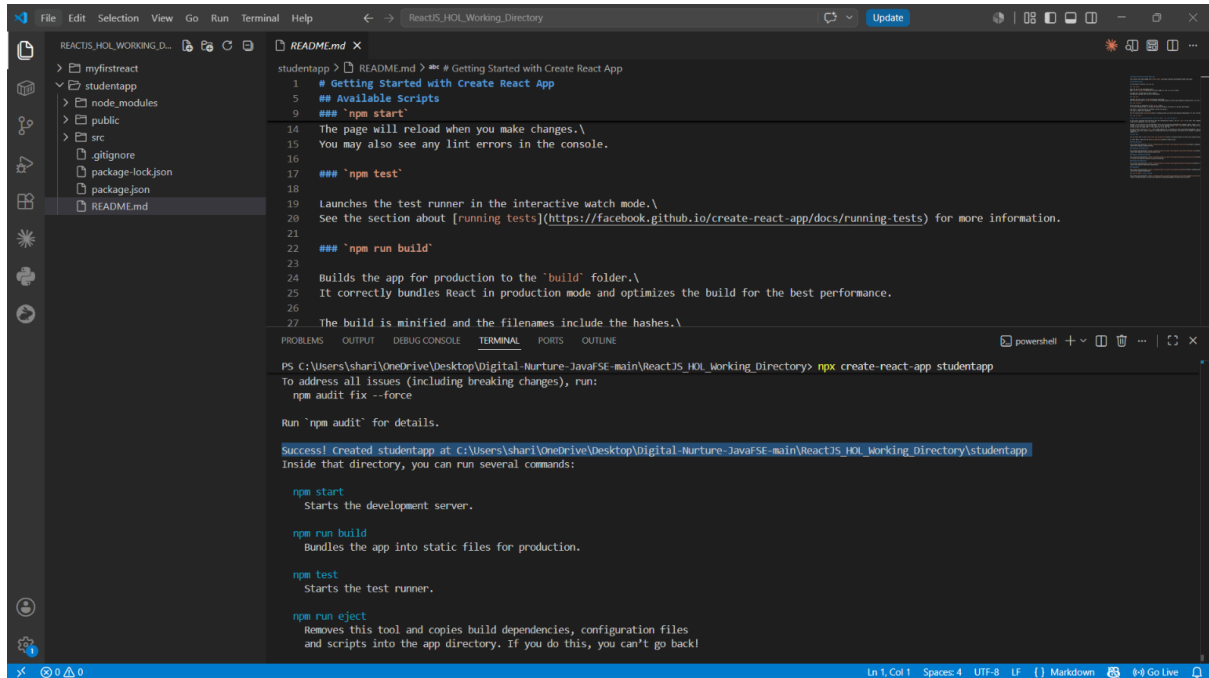

```
PS C:\Users\shari\OneDrive\Desktop\Digital-Nurture-JavaSE-main\ReactJS_HOI_Working_Directory> npx create-react-app studentapp
To address all issues (including breaking changes), run:
  npm audit fix --force

Run 'npm audit' for details.

Success! Created studentapp at C:\Users\shari\OneDrive\Desktop\Digital-Nurture-JavaSE-main\ReactJS_HOI_Working_Directory\studentapp
Inside that directory, you can run several commands:


  npm start
    Starts the development server.

  npm run build
    Bundles the app into static files for production.

  npm test
    Starts the test runner.

  npm run eject
    Removes this tool and copies build dependencies, configuration files
    and scripts into the app directory. If you do this, you can't go back!
```

Created Home.js, About.js, Contact.js

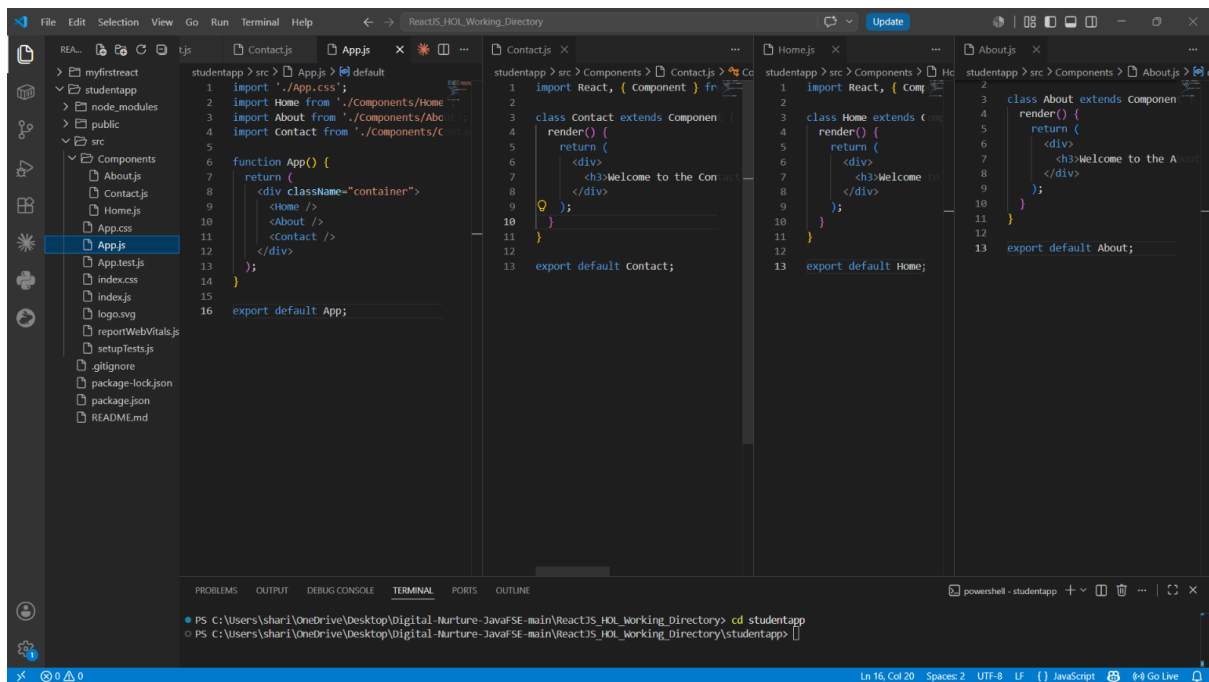

```
studentapp > src > Components > default
1 import './App.css';
2 import Home from './Components/Home';
3 import About from './Components/About';
4 import Contact from './Components/Contact';
5
6 function App() {
7   return (
8     <div className="container">
9       <Home />
10      <About />
11      <Contact />
12    </div>
13  );
14 }
15
16 export default App;
```


```
studentapp > src > Components > Contact.js
1 import React, { Component } from 'react';
2
3 class Contact extends Component {
4   render() {
5     return (
6       <div>
7         <h3>Welcome to the Contact</h3>
8       </div>
9     );
10  }
11 }
12
13 export default Contact;
```

```
studentapp > src > Components > Home.js
1 import React, { Component } from 'react';
2
3 class Home extends Component {
4   render() {
5     return (
6       <div>
7         <h3>Welcome to the Home</h3>
8       </div>
9     );
10  }
11 }
12
13 export default Home;
```

```
studentapp > src > Components > About.js
1 import React, { Component } from 'react';
2
3 class About extends Component {
4   render() {
5     return (
6       <div>
7         <h3>Welcome to the About</h3>
8       </div>
9     );
10  }
11 }
12
13 export default About;
```

```
PS C:\Users\shari\OneDrive\Desktop\Digital-Nurture-JavaSE-main\ReactJS_HOI_Working_Directory> cd studentapp
PS C:\Users\shari\OneDrive\Desktop\Digital-Nurture-JavaSE-main\ReactJS_HOI_Working_Directory\studentapp>
```

Starting the Server

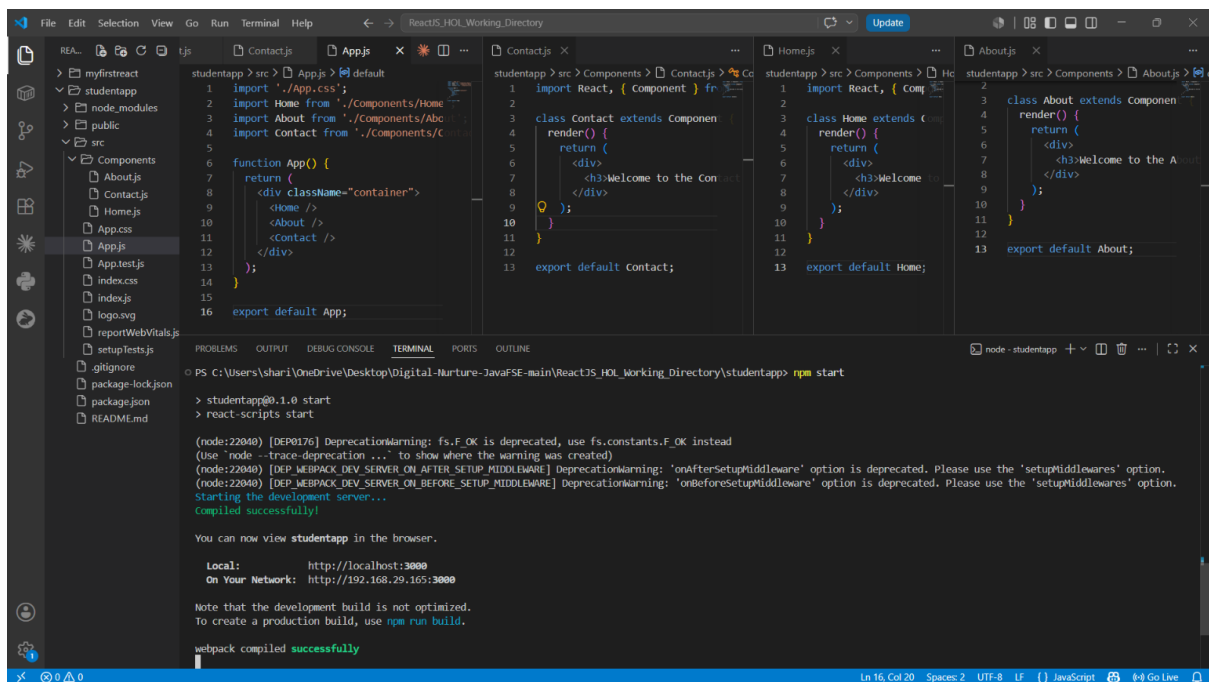

The screenshot shows a Visual Studio Code editor with a project named 'studentapp'. The file explorer on the left shows the project structure. The code editor displays three files: `App.js`, `Home.js`, and `About.js`. The `App.js` file contains a `function App()` that returns a `ReactDOM.render` call. The `Home.js` and `About.js` files contain `class` components. The terminal window at the bottom shows the output of running `npm start`, including deprecation warnings and the message 'Compiled successfully!'. The terminal also shows the local and network URLs for the development server.

```
PS C:\Users\shari\OneDrive\Desktop\Digital-Nurture-JavaFSE-main\ReactJS_HOL_Working_Directory\studentapp> npm start

> studentapp@0.1.0 start
> react-scripts start

(node:22804) [DEP0176] DeprecationWarning: fs.F_OK is deprecated, use fs.constants.F_OK instead
(Use 'node --trace-deprecation ...' to show where the warning was created)
(node:22804) [DEP_WEBPACK_DEV_SERVER_ON_AFTER_SETUP_MIDDLEWARE] DeprecationWarning: 'onAfterSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
(node:22804) [DEP_WEBPACK_DEV_SERVER_ON_BEFORE_SETUP_MIDDLEWARE] DeprecationWarning: 'onBeforeSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
Starting the development server...
Compiled successfully!

You can now view studentapp in the browser.

  Local:            http://localhost:3000
  On Your Network:  http://192.168.29.165:3000

Note that the development build is not optimized.
To create a production build, use npm run build.

webpack compiled successfully
```

OUTPUT

