

# **Velocity Python API**

## **for Velocity 4.0.\***


## Table of Contents

<b>Table of Contents</b>	<b>2</b>
<b>Architecture Overview</b>	<b>4</b>
<b>Command Prompt and Python Interpreter Basics</b>	<b>5</b>
<b>Download and Installation</b>	<b>6</b>
<b>Editing and Running Example Scripts</b>	<b>7</b>
<b>Example Scripts</b>	<b>8</b>
<b>Writing Scripts</b>	<b>9</b>
<b>Viewing Documentation</b>	<b>14</b>
<b><code>__builtin__.SwigPyObject</code></b>	<b>15</b>
<b>Velocity Classes</b>	<b>16</b>
BaseImageBasedRegistrationSettingsStructure	19
BSplineDeformableRegistrationSettingsStructure	21
RigidRegistrationSettingsStructure	26
ManualRegistrationSettingsStructure	29
CropSettings	30
ExportOperations	31
ImportOperations	33
MarginSettings	34
MatrixR22d	36
MatrixR22i	38
MatrixR33d	40
MatrixR33f	42
MatrixR44d	44
MatrixR44f	46
PatientDataItem	48
Image2D	49
Patient	51
Plan	53
Registration	56
RegistrationCommissioningMarkerList	58
Structure	60

StructureSet	63
Volume	66
PatientDataOperations	71
RegistrationMarker	73
RegistrationOperations	74
ReportOperations	77
ScaledVolumeData	79
StructureGuidedRegistrationInformation	80
StructureOperations	82
SurfaceDistanceMetrics	86
TransformedRegistrationMarker	87
VectorR2b	88
VectorR2d	90
VectorR2f	92
VectorR2i	94
VectorR2s	96
VectorR2ub	98
VectorR2ui	100
VectorR2us	102
VectorR3b	104
VectorR3d	106
VectorR3f	108
VectorR3i	110
VectorR3s	112
VectorR3ub	114
VectorR3ui	116
VectorR3us	118
VectorR4b	120
VectorR4d	122
VectorR4f	124
VectorR4i	126
VectorR4s	128
VectorR4ub	130
VectorR4ui	132
VectorR4us	134
VelocityEngine	136
VolumeOperations	142

## Architecture Overview

The Velocity scripting API is defined by an interface called the Velocity Engine. The engine is able to access both Grid and Workstation databases and functions as a client without a graphical user interface. The Scripting API exposes the engine to the particular scripting language (C# or Python), and user scripts written in the scripting language use the engine to drive Velocity functionality.

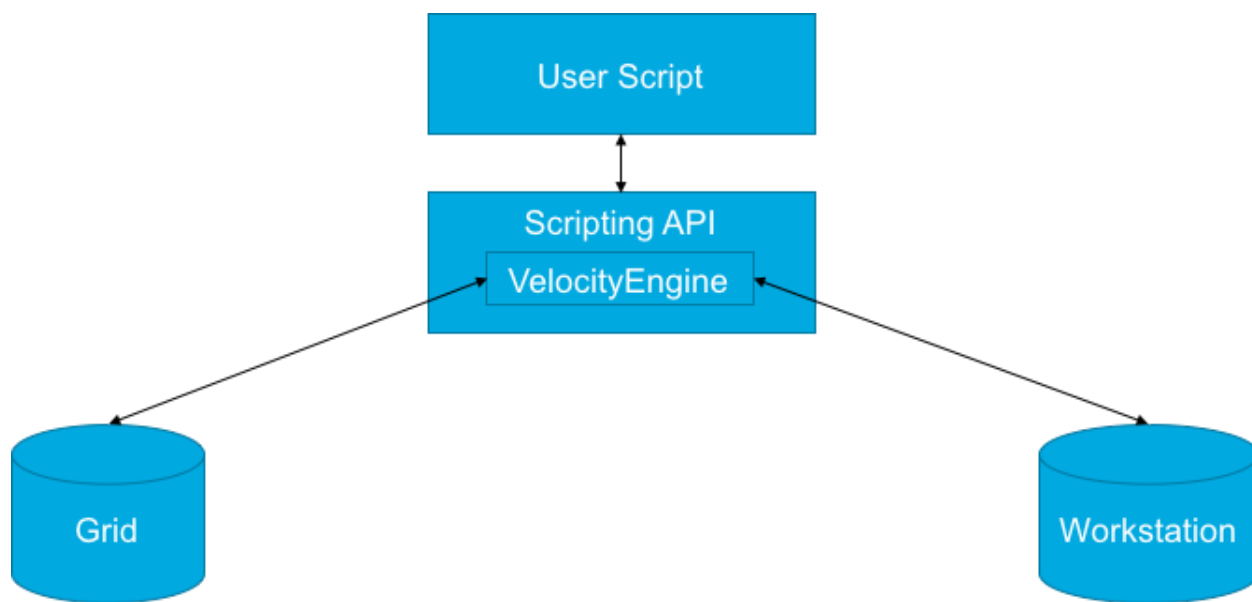

## Command Prompt and Python Interpreter Basics

- Using Command Prompt vs Python Interpreter
  - >
    - Indicates that the following should be typed into the command prompt
  - >>>
    - Indicates that the following should be typed into the python interpreter
- Command Prompt Commands
  - > cd
    - Allows the user to change their working directory
    - Absolute Path
      - A path that starts from the root directory
      - This path must be used if your working directory is not part of the path to get to the desired directory
      - Example
        - > cd C:\absolute\path\to\directory
    - Relative Path
      - A path that starts from the working directory
      - This path can be used if your working directory is part of the path to get to the desired directory
      - Example
        - > cd \relative\path\to\directory
  - > python
    - Allows the user to open the python interpreter
    - If the following command is followed by a .py file, the file will be executed (otherwise, it will just open the python interpreter)
      - Example
        - > python my\_code.py
  - Arrow Keys
    - The up and down arrow keys can be used to navigate through previously entered commands
- Python Interpreter Commands
  - >>> quit()
    - Allows you to exit the python interpreter and return to the command prompt

## Download and Installation

This information is also included in the README file provided in the zip package. We recommend you follow the instructions in the file.

Velocity is packaged as a [Python wheel] (<https://pypi.org/project/wheel/>) that you can install into your environment. We currently require Python 2.7 and you must use the standard CPython interpreter. We support Windows and MacOS.

- Setting up python
  - Download latest version of Python 2.7 (currently 2.7.15)
    - <https://www.python.org/downloads/windows/>
    - Windows x86-64 MSI installer
- Setting up pip
  - Pip should already be downloaded with python
    - To check if pip is already downloaded
      - > pip --version
  - If pip is not already download
    - <https://pip.pypa.io/en/stable/installing/>
- Setting up virtualenv
  - To download virtualenv
    - > pip install virtualenv
  - To create a virtualenv (named "velocity-env")
    - > virtualenv velocity-env
  - To activate the virtualenv
    - > velocity-env\Scripts\activate
- Downloading velocity
  - Download the Velocity API mac or win zip package for python provided
  - To install velocity
    - > pip install velocity-<version\_number>.whl

## Editing and Running Example Scripts

- Editing scripts to run
  - Open the script you want to change in your editor
  - Find the variable DB\_NAME and change it to the database name
    - Example  
DB\_NAME = 'VMS\_GRID'
  - Find the DB\_USER and DB\_PASS and change it to your username and password
    - Example  
DB\_USER = 'script'  
DB\_PASS = 'script'
  - The DB\_IP and DB\_PORT should already be correct
    - DB\_IP = '127.0.0.1'
    - DB\_PORT = 57000
  - Save the file
- Run the script
  - Type the following into the command prompt
    - > python file\_name.py
- Fixing errors
  - RuntimeError: Non-script users may not log in from scripts
    - Log into velocity and go to settings
    - Click on the users tab and create a new user
    - After creating the new user, change the user type to Script
    - Use the username and password created for this user for DB\_USER and DB\_PASS
  - RuntimeError: Could not connect to active database at : \*DB\_IP\* (\*DB\_PORT\*). DbName=\*DB\_NAME\*
    - This means that the DB\_NAME is incorrect
  - RuntimeError: No response from Grid database (\*DB\_IP\*:\*DB\_PORT\*/\*DB\_NAME\*): Resource temporarily unavailable
    - This means that the DB\_IP is incorrect or the DB\_PORT is incorrect
  - RuntimeError: Could not find patient with id: \*patientId\*
    - The specific patient that the script is written for needs to be imported to velocity in order to get the script to run
    - The patientId specifies which patient the script is written for

## Example Scripts

- `BED.py`
  - Runs Biological Effective Dose (BED) calculation
- `Jacobian_structure_mask.py`
  - Creates a deformable registration using default settings.
  - Uses the Jacobian and other volumetric information to create a structure mask that identifies rigid areas like bone that have been deformed under the registration.
  - Converts a structure mask into a structure.
  - Applies post processing operations like margin to create a new structure.
  - Creates a structure set with two structures described above.
- `Liver_import.py`
  - Tests import operations DICOM file import.
- `Pet_ct_registrations.py`
  - Tests running a manual registration, rigid registration, and performing a deformable registration using customized settings.
- `Print_patient.py`
  - Prints out all information and data on the patient.
- `Structure_metrics.py`
  - Copies structures using a deformable.
  - Calculates minimum, median, mean, and standard deviation values, comparing them across the deformable or with the proceeding rigid.



## Writing Scripts

- Required components for writing velocity scripts
  - Import statements
    - import velocity
      - This statement will import all velocity classes
    - import atexit
      - This statement will import the atexit module, which assists with properly closing the program after the script has finished running
  - Attributes
    - DB\_NAME
      - This attribute can be named whatever you choose, but it will represent the name of the database that is used to login to the velocity grid
      - This attribute should be a constant
        - Although it is not necessary put the name in all capitalization, it is suggested to use capitalization to signify that the attribute is a constant
      - Example
        - DB\_NAME = r'VMS\_GRID'
          - The r is used in order to ensure that if there are any escape characters, (a backslash) these characters will be registered as is, rather than as an escape character
    - DB\_USER
      - This attribute can be named whatever you choose, but it will represent the username that is used to log into the velocity grid
      - The username should not be the generic username used to login to velocity, but should be the username that was created when you created a Script user for velocity
      - This attribute should be a constant
      - Example
        - DB\_USER = 'script'
    - DB\_PASS
      - This attribute can be named whatever you choose, but it will represent the password that is used to log into the velocity grid

- The password should not be the generic password used to login to velocity, but should be the password that was created when you created a Script user for velocity
  - This attribute should be a constant
  - Example
    - DB\_PASS = 'script'
- DB\_IP
  - This attribute can be named whatever you choose, but it will represent the IP address for the velocity grid
  - Example
    - DB\_IP = '127.0.0.1'
- DB\_PORT
  - This attribute can be named whatever you choose, but it will represent the port number for the velocity grid
  - Example
    - DB\_PORT = 57000
- PATIENT\_ID
  - This attribute can be named whatever you chose, but it will represent the id of the patient that is being used to run the script
  - Example
    - PATIENT\_ID = 'AW3Y6TA684'
- Creating the velocity engine
  - `e = velocity.VelocityEngine()`  
`def orThrow(c, e=e):`
    - `if not c or (hasattr(c, 'isValid') and not c.isValid()):`
    - `raise RuntimeError(e.getErrorMessage())`
  - This block of code is used to create the velocity engine and checks any errors that occur when creating the engine
  - Determines if the attempt to create the engine is valid using the `isValid()` method from the [PatientDataItem](#) class
  - Uses the `getErrorMessage()` method from the [VelocityEngine](#) class if an error occurs when trying to create the engine
- Logging in to and out of the velocity grid
  - `orThrow(e.loginToGrid(DB_USER, DB_PASS, DB_IP, DB_PORT, DB_NAME))`  
`atexit.register(e.logout)`

- Logs into your velocity grid using the loginToGrid() method from the [VelocityEngine](#) class and using your username, password, ip address, port number, and grid database
  - The username, password, etc. must be in the exact same order as listed above in order to successfully login
- Logs out of the velocity grid after the script has finished running using the register() method from the atexit module
- Other components for writing velocity scripts
  - Based on what you want your script to test, you will most likely need to include other attributes, methods, and print statements
  - Most of the additional methods you will need to use will be from the [VelocityEngine](#) class; however, other methods may be needed
  - Additional attributes will need to be created in order to fill the parameters of the methods that you are testing
  - Scripts can be used to test a singular method to make sure it works properly, or used to test the interaction between multiple methods
  - Examine other scripts in order to get an idea of what is needed to write additional scripts
  - An example script with comments is provided for you on the next page to help visualize how to write your own scripts
    - This script can be copied and pasted into your editor as a .py file
    - A “#” is used to denote that the following information is a comment, not an actual part of the code

```
# The following script is used as an example to get you started.
# In order to create a script, you will need to create a .py file. You can name
# the .py file whatever you want. I have chosen to name my .py file MyScript.py.
# Place the MyScript.py script in the velocity-examples folder. Edit the parameters #
# to reflect your Velocity settings (db path/ip, credentials, etc.) and run the
# script:
#     python MyScript.py
```

```
# The following script uses a patient that already exists in the database (to
# import a patient see the example liver_import.py), loads the patient, and then
# prints out the patient's full name and date of birth. The script tests the
# loadPatientByPatientId() and patientDataOps() methods from the VelocityEngine
# class, the getPatientByPatientId() method from the PatientDataOperations class,
# and the getFirstName() and getLastName() methods from the Patient class.
```

```
import velocity
import atexit

# Attributes
DB_NAME = r'VMS_GRID'
DB_USER = 'script'
DB_PASS = 'script'
DB_IP = '127.0.0.1'
DB_PORT = 57000

# Patient VMS123 must be loaded for the script to work
PATIENT_ID = "VMS123"

# Creates the velocity engine
e = velocity.VelocityEngine()
def orThrow(c, e=e):
    if not c or (hasattr(c, 'isValid') and not c.isValid()):
        raise RuntimeError(e.getErrorMessage())

# Login to velocity grid
orThrow(e.loginToGrid(DB_USER, DB_PASS, DB_IP, DB_PORT, DB_NAME))
# Logout of velocity grid when script is done running
atexit.register(e.logout)

# Loads the patient given the patient ID
orThrow(e.loadPatientByPatientId(PATIENT_ID))
print('Loaded patient: {}'.format(PATIENT_ID))
```

```
# Allows the script to use the patient data operations
patientDataOps = e.getPatientDataOperations()
# Assigns the patient to a variable called patient
patient = patientDataOps.getPatientByPatientId(PATIENT_ID)
# Determines the patient's full name
patientFullName = patient.getFirstName() + " " + patient.getLastName()
print('Patient {} is named {}'.format(PATIENT_ID, patientFullName))
# Determines the patient's date of birth
patientDOB = patient.getDateOfBirth()
print('Patient {} was born {}'.format(PATIENT_ID, patientDOB))
```

## Viewing Documentation

- Entire Velocity Documentation
  - `>>> import velocity`
  - `>>> help(velocity)`
- Specific Class Documentation
  - `>>> import velocity`
  - `>>> help(velocity.Class_Name)`

## **`__builtin__.SwigPyObject`**

- SwigPyObject is an implementation detail. All Velocity classes inherit SwigPyObject but scripting API users **should not use** SwigPyObject methods.

These methods are:

- `acquire()`
- `append()`
- `disown()`
- `next()`
- `own()`

## Velocity Classes

- List of all classes
  - [BaseRegistrationSettingsStructure](#)
    - [BaselImageBasedRegistrationSettingsStructure](#)
      - [BSplineDeformableRegistrationSettingsStructure](#)
      - [RigidRegistrationSettingsStructure](#)
    - [ManualRegistrationSettingsStructure](#)
  - [BoolList](#)
  - [CharList](#)
  - [CropSettings](#)
  - [DoubleList](#)
  - [ExportOperations](#)
  - [FloatList](#)
  - [Image2DList](#)
  - [ImportOperations](#)
  - [IntList](#)
  - [MarginSettings](#)
  - [MatrixR22d](#)
  - [MatrixR22i](#)
  - [MatrixR33d](#)
  - [MatrixR33f](#)
  - [MatrixR44d](#)
  - [MatrixR44f](#)
  - [PatientDataItem](#)
    - [Image2D](#)
    - [Patient](#)
    - [Plan](#)
    - [Registration](#)
    - [RegistrationCommissioningMarkerList](#)
    - [Structure](#)
    - [StructureSet](#)
    - [Volume](#)
  - [PatientDataOperations](#)
  - [PatientList](#)
  - [PlanList](#)
  - [RegistrationCommissioningMarkerLists](#)
  - [RegistrationList](#)
  - [RegistrationMarker](#)



- [RegistrationMarkerList](#)
- [RegistrationOperations](#)
- [ReportOperations](#)
- [ScaledVolumeData](#)
- [StringList](#)
- [StructureGuidedRegistrationInformation](#)
- [StructureList](#)
- [StructureMap](#)
- [StructureOperations](#)
- [StructureSetList](#)
- [SurfaceDistanceMetrics](#)
- [SwigPyIteator](#)
- [TransformedRegistrationMarker](#)
- [VectorR2b](#)
- [VectorR2bList](#)
- [VectorR2d](#)
- [VectorR2dList](#)
- [VectorR2f](#)
- [VectorR2fList](#)
- [VectorR2i](#)
- [VectorR2iList](#)
- [VectorR2s](#)
- [VectorR2sList](#)
- [VectorR2ub](#)
- [VectorR2ubList](#)
- [VectorR2ui](#)
- [VectorR2uiList](#)
- [VectorR2us](#)
- [VectorR2usList](#)
- [VectorR3b](#)
- [VectorR3bList](#)
- [VectorR3d](#)
- [VectorR3dList](#)
- [VectorR3f](#)
- [VectorR3fList](#)
- [VectorR3i](#)
- [VectorR3iList](#)
- [VectorR3s](#)
- [VectorR3sList](#)

- [VectorR3ub](#)
- [VectorR3ubList](#)
- [VectorR3ui](#)
- [VectorR3uiList](#)
- [VectorR3us](#)
- [VectorR3usList](#)
- [VectorR4b](#)
- [VectorR4bList](#)
- [VectorR4d](#)
- [VectorR4dList](#)
- [VectorR4f](#)
- [VectorR4fList](#)
- [VectorR4i](#)
- [VectorR4iList](#)
- [VectorR4s](#)
- [VectorR4sList](#)
- [VectorR4ub](#)
- [VectorR4ubList](#)
- [VectorR4ui](#)
- [VectorR4uiList](#)
- [VectorR4us](#)
- [VectorR4usList](#)
- [VelocityEngine](#)
- [VolumeList](#)
- [VolumeOperations](#)

## BaseImageBasedRegistrationSettingsStructure

- Attributes and data descriptors
  - preprocessingMethods
    - Attribute type
      - PreprocessingFilterMethod object values:
        - NoFilter = 0
        - MRCorrectionPrimary = 1
        - MRCorrectionSecondary = 2
        - CBCTCorrectionSecondary = 3
    - Description
      - In order to increase registration accuracy the user may choose to apply one or more pre-processing filters. These filters are modality specific and they are applied prior to execution of the registration algorithm.
  - primaryEndLevel, primaryStartLevel, secondaryEndLevel, secondaryStartLevel
    - Attribute type
      - Double
    - Description
      - These variables specify the dynamic ranges that will be used in the registration process. The values are expected to be given in the units specific to the volume modality. For CT or CBCT volumes – units are typically given in Hounsfield Units. Use a large range to use the entire range of the volume (e.g. Start Level = -1024, End Level = 3072). To focus on a specific tissue range the user can specify a smaller range, for example, “Start Level = -120” and “End Level = 400” HU.
  - roiEnd, roiStart
    - Attribute type
      - [VectorR3d](#) object
    - Description
      - The roiStart (lowest point) and roiEnd (highest point) define the Region of Interest (ROI) cuboid which will be used in the registration process. Note that the expected coordinates for the values are in the DICOM coordinates of the primary volume.

- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## BSplineDeformableRegistrationSettingsStructure

- Attributes and data descriptors
  - numberOfMultiResolutionLevels
    - Attribute type
      - Integer
    - Description
      - Specifies the number of hierarchical levels that are to be used by the multi-resolution deformable image registration algorithm. Velocity uses 1 level for the single B-Spline DIR, 3 levels for the Multi-pass B-Spline, and 5 levels for the Extended Multi-pass DIR. Note, all other variables in the structure contain multiple values – one for each level in the hierarchical process (so the value of 'numberOfMultiResolutionLevels' determines the size of all other variables).
  - applyBoundaryContinuityConstrains
    - Type
      - vector < bool >
    - Description
      - Specifies whether to establish a smooth deformation vector field (DVF) at the boundary between the ROI and the background. if 'true' then the DVF will extend beyond the currently selected ROI so that a smooth transition region is constructed between the motion (ROI) and the non-motion (background) regions. Note, a smooth boundary is also constructed between overlapping ROIs in cases where the DIR is restarted and different ROIs are selected between restarts. The default value is set to 'false'.
  - applyTopologicalRegularizer
    - Type
      - vector < bool >
    - Description
      - Enables or disables the regularizer algorithm in the gradient descent optimizer. The default value is set to 'false'.
  - gradientMagnitudeTolerance
    - Attribute type

- vector < double >
- Description
  - Used by the optimizer algorithm as part of the early convergence criteria. If the maximum gradient computed during an iteration step is less than this threshold then the optimization process is terminated. The default value is 5e-21.
- gridSize
  - Attribute type
    - vector < VectorR3d >
  - Description
    - Used to define the B-Spline control lattice along with gridSizeType. This 3D lattice can be defined either by specifying the number of control points or by specifying a physical grid size.
- gridSizeType
  - Attribute type
    - vector < char >
  - Description
    - Used to define the B-Spline control lattice along with gridSize. To define the lattice by the total number of control points then specify a value of 'n' in in this variable followed by the number of controls points in "gridSize". To define the lattice by an explicit physical grid size then specify a value of 'p' in "gridSizeType" followed by the physical space between control points (in meters) in "gridSize". Specifying the number of control points to use may create an asymmetric grid spacing (depending on the ROI selected).Specifying a physical grid size will cause the control point count to be "adjusted" to adhere to this size (the originally specified ROI may be adjusted to meet the specified physical grid size requirements).
    - The default values are the following:
      - gridSizeType = {'n','n','n'}
      - gridSize = { {5,5,5}, {10,10,10}, {15,15,15} }
- maximumNumberOfIterations

- Attribute type
  - vector < int >
- Description
  - Specifies the maximum number of iterations that may be used with the optimizer. The default value is 30. Note, the optimizer will terminate prior to reaching this maximum iteration count if any of the other convergence criteria are met.
- maximumNumberOfConsecutiveOptimizerAttempts
  - Attribute type
    - vector < int >
  - Description
    - Used to establish additional termination criteria for the optimizer (this is separate from maximum number of iterations). During the convergence criteria, if no progress has occurred (the progress is defined by “metricValuePercentageDifference”) within the specified number of iteration attempts then we assume that we’ve reached convergence and the optimization process is terminated. Default value is 10.
- metricValuePercentageDifference
  - Attribute type
    - vector < double >
  - Description
    - Used in the convergence criteria. This value is meant to identify that progress is being made during the optimization process. First the percentage difference of the metric results between the last two iteration steps in the optimization process are computed. If this percentage difference is greater or equal to this variable then we conclude that optimization progress is currently being made (the valid value range is between 0 ~ 100, the default value is ‘0’ (disabled)).
- maximumStepLength
  - Attribute type
    - vector < double >
  - Description

- Used to establish convergence criteria for the optimizer. The value specifies the maximum step length (in millimeters). The default value is 100.
- minimumStepLength
  - Attribute type
    - vector < double >
  - Description
    - Used to establish convergence criteria for the optimizer. The value specifies the minimum step length (in millimeters). The default value is 1e-6.
- numberOfHistogramBins
  - Attribute type
    - vector < int >
  - Description
    - It defines the number of bins in the histogram of volume values. The default is 50.
- relaxationFactor
  - Attribute type
    - vector < double >
  - Description
    - Used to establish convergence criteria for the optimizer. The default value is 0.9 .
- samplesDenominator
  - Attribute type
    - vector < int >
  - Description
    - Specifies a reduction in the total number of samples to be used in computing optimization metrics. For example, if the value is set to 1 then all of the pixels from the ROI are used, however, if the value is set to 2 then only half of the pixels from the ROI are used. The default value is 5.
- topologicalRegularizerDistanceLimitingCoefficient
  - Attribute type
    - vector < VectorR3d >
  - Description
    - The regularization values used by the regularization algorithm in the gradient descent optimizer (these are used only if a value of 'true' is specified in the



corresponding level in “applyTopologicalRegularizer”). An example of an acceptable value is 0.333.

- Inherited data descriptors
  - From BaseImageBasedRegistrationSettingsStructure
    - preprocessingMethod
    - primaryEndLevel
    - primaryStartLevel
    - roiEnd
    - roiStart
    - secondaryEndLevel
    - secondaryStartLevel
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## RigidRegistrationSettingsStructure

- Attributes and data descriptors
  - disableRotationsX
    - Attribute type
      - Boolean
    - Description
      - Used to disable rotations along the X axis. Default value is false.
  - disableRotationsY
    - Attribute type
      - Boolean
    - Description
      - Used to disable rotations along the Y axis. Default value is false.
  - disableRotationsZ
    - Attribute type
      - Boolean
    - Description
      - Used to disable rotations along the Z axis. Default value is false.
  - disableTranslationsX
    - Attribute type
      - Boolean
    - Description
      - Used to disable translations along the X axis. Default value is false.
  - disableTranslationsY
    - Attribute type
      - Boolean
    - Used to disable translations along the Y axis. Default value is false.
  - disableTranslationsZ
    - Attribute type
      - Boolean
    - Description
      - Used to disable translations along the Z axis. Default value is false.
  - maximumNumberOfIterations

- Attribute type
  - Integer
- Description
  - The following variable specifies the maximum number of iterations that are to be used with the gradient descent optimizer. The default value is 45.
- maximumStepLength
  - Attribute type
    - Double
  - Description
    - The maximum step length (in millimeters) that will be used with the gradient descent optimizer. The relaxation factor used in conjunction with the min/max values is set to 0.5. The default value is 7.
- minimumStepLength
  - Attribute type
    - Double
  - Description
    - The minimum step length (in millimeters) that will be used with the gradient descent optimizer. The relaxation factor used in conjunction with the min/max values is set to 0.5. The default is 0.0001.
- numberOfHistogramBins
  - Attribute type
    - Integer
  - Description
    - It defines the number of bins in the histogram of volume values. The default value is 25.
- performInitialAutoAlignment
  - Attribute type
    - Boolean
  - Description
    - Prior to any rigid registration the user can specify to perform an initial auto-alignment between the two volumes (this is to quickly get the two volumes closer in alignment before executing the main rigid registration algorithm). The default value is 'true'.
- samplesDenominator
  - Attribute type

- Integer
- Description
  - The following variable defines a reduction in the total number of pixels from the currently specified ROI. For example, if the value is set to 1 then all of the pixels from the ROI are used, however, if the value is set to 2 then only half of the pixels from the ROI are used. The default value is 10.
- Inherited data descriptors
  - From BaselineImageBasedRegistrationSettingsStructure
    - preprocessingMethod
    - primaryEndLevel
    - primaryStartLevel
    - roiEnd
    - roiStart
    - secondaryEndLevel
    - secondaryStartLevel
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## ManualRegistrationSettingsStructure

- Attributes and data descriptors
  - registrationMatrix
    - Attribute type
      - [MatrixR44d](#) object
    - Description
      - Specifies a 4x4 transformation matrix for performing a manual alignment between the primary and secondary volumes. The matrix is expected in column-major order and in DICOM coordinates. The default value is the identity matrix.
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)

## CropSettings

- Data descriptors
  - margin
  - marginDirection
  - operation
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## ExportOperations

- Attributes
  - DICOM\_REG
    - Value
      - 2
  - DICOM\_RTPLAN
    - Value
      - 1
  - DICOM\_RTSTRUCT
    - Value
      - 3
  - DICOM\_VOLUME
    - Value
      - 0
- Other defined methods
  - documentNameStrFilenameFormatted(reportRecordId)
    - Return type
      - String
    - Description
      - Returns the name of the specified document as a formatted string
      - Calls getErrorMessage() method and returns an empty string if there is an error
  - exportDicomObject(objectType, objectUID, folderPath, overrideWithInfoFromDB = false, encodingType = ORIGINAL\_ENCODING)
    - Return type
      - Boolean
    - Description
      - Exports a dicom object to the specified folder path
  - exportReportDocument(reportRecordId, baseFilenameExport, baseFolderPathExport)
    - Return type
      - Boolean
    - Description
      - Exports the report to the specified folder path
      - Returns false if there is an error
  - getErrorMessage()

- Return type
  - String
- Description
  - Returns a string displaying an error message
- getLocalizedMessage()
  - Return type
    - String
  - Description
    - Returns a string displaying an error message
- patientIdStrFilenameFormatted()
  - Return type
    - String
  - Description
    - Returns the patient id as a formatted string
    - Calls the getErrorMessage() method and returns an empty string if an error occurs
- registrationNameStrFilenameFormatted()
  - Return type
    - String
  - Description
    - Returns the name of the current registration object as a formatted string
    - Calls the getErrorMessage() method and returns an empty string if an error occurs
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)



## ImportOperations

- Other defined methods
  - `getErrorMessage()`
    - Return type
      - String
    - Description
      - Returns a string displaying an error message
  - `getLocalizedErrorMessage`
    - Return type
      - String
    - Description
      - Returns a string displaying an error message
  - `importDirectory(path, recursive)`
    - Return type
      - Boolean
    - Description
      - Imports DICOM files
  - `importEclipseTrePointSet(fileLocation, registrationCommissioningName)`
    - Return type
      - Integer
    - Description
      - Imports the TRE Point Set from the Eclipse database and returns the record id
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)

## MarginSettings

- Data descriptors
  - marginDirection
    - MarginGrow = 0
    - MarginShrink = 1
  - marginType
    - MarginSymmetric = 0
    - MarginAsymmetric = 1
  - marginValue
  - marginValueNegX
  - marginValueNegY
  - marginValueNegZ
  - marginValueX
  - marginValueY
  - marginValueZ
- Constructors:
  - Default settings, symmetric with a margin of 0:
    - MarginSettings()
      - marginDirection = 0 (Grow)
      - marginType = 0 (Symmetric)
      - marginValue = 0
      - marginValueNegX = 0
      - marginValueNegY = 0
      - marginValueNegZ = 0
      - marginValueX = 0
      - marginValueY = 0
      - marginValueZ = 0
  - Symmetric margin of the specified value:
    - MarginSettings(margin, direction)
      - marginDirection = direction (default 0)
      - marginType = 0 (Symmetric)
      - marginValue = margin
      - marginValueNegX = 0
      - marginValueNegY = 0
      - marginValueNegZ = 0
      - marginValueX = 0
      - marginValueY = 0
      - marginValueZ = 0

- Asymmetric margin with the specified values:
  - `MarginSettings(marginValueX, marginValueY, marginValueZ, marginValueNegX, marginValueNegY, marginValueNegZ, direction)`
    - `marginDirection = direction` (default 0)
    - `marginType = 1` (Asymmetric)
    - `marginValue = 0`
    - `marginValueNegX = marginValueNegX`
    - `marginValueNegY = marginValueNegY`
    - `marginValueNegZ = marginValueNegZ`
    - `marginValueX = marginValueX`
    - `marginValueY = marginValueY`
    - `marginValueZ = marginValueZ`
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## MatrixR22d

- Attributes
  - num\_cols
    - Attribute type
      - Integer
      - Constant
    - Value
      - 2
  - num\_rows
    - Attribute type
      - Integer
      - Constant
    - Value
      - 2
- Other defined methods
  - elements()
    - Return Type
      - E
    - Description
      - Returns a pointer to an array with the elements in the matrix
  - extractScale(scale)
    - Description
      - Extracts the scale from the matrix
  - extractTranslation(translation)
    - Description
      - Extracts the translation from the matrix
  - get()
  - identity()
    - Description
      - Sets the matrix back to identity
  - invert()
    - Description
      - Changes the matrix to its inverse
  - isRigid()
    - Return type
      - Boolean
    - Description

- Determines if a matrix is a pure Rigid
- set()
- setElements(elementArray)
  - Description
    - Copies the elements from an array into the matrix
- transpose(m)
  - Description
    - Returns the transpose of the matrix
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## MatrixR22i

- Attributes
  - num\_cols
    - Attribute type
      - Integer
      - Constant
    - Value
      - 2
  - num\_rows
    - Attribute type
      - Integer
      - Constant
    - Value
      - 2
- Other defined methods
  - elements()
    - Return Type
      - E
    - Description
      - Returns a pointer to an array with the elements in the matrix
  - extractScale(scale)
    - Description
      - Extracts the scale from the matrix
  - extractTranslation(translation)
    - Description
      - Extracts the translation from the matrix
  - get()
  - identity()
    - Description
      - Sets the matrix back to identity
  - invert()
    - Description
      - Changes the matrix to its inverse
  - isRigid()
    - Return type
      - Boolean
    - Description

- Determines if a matrix is a pure Rigid
- set()
- setElements(elementArray)
  - Description
    - Copies the elements from an array into the matrix
- transpose(m)
  - Description
    - Returns the transpose of the matrix
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## MatrixR33d

- Attributes
  - num\_cols
    - Attribute type
      - Integer
      - Constant
    - Value
      - 3
  - num\_rows
    - Attribute type
      - Integer
      - Constant
    - Value
      - 3
- Other defined methods
  - elements()
    - Return Type
      - E
    - Description
      - Returns a pointer to an array with the elements in the matrix
  - extractScale(scale)
    - Description
      - Extracts the scale from the matrix
  - extractTranslation(translation)
    - Description
      - Extracts the translation from the matrix
  - get()
  - identity()
    - Description
      - Sets the matrix back to identity
  - invert()
    - Description
      - Changes the matrix to its inverse
  - isRigid()
    - Return type
      - Boolean
    - Description



- Determines if a matrix is a pure Rigid
- set()
- setElements(elementArray)
  - Description
    - Copies the elements from an array into the matrix
- transpose(m)
  - Description
    - Returns the transpose of the matrix
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## MatrixR33f

- Attributes
  - num\_cols
    - Attribute type
      - Integer
      - Constant
    - Value
      - 3
  - num\_rows
    - Attribute type
      - Integer
      - Constant
    - Value
      - 3
- Other defined methods
  - elements()
    - Return Type
      - E
    - Description
      - Returns a pointer to an array with the elements in the matrix
  - extractScale(scale)
    - Description
      - Extracts the scale from the matrix
  - extractTranslation(translation)
    - Description
      - Extracts the translation from the matrix
  - get()
  - identity()
    - Description
      - Sets the matrix back to identity
  - invert()
    - Description
      - Changes the matrix to its inverse
  - isRigid()
    - Return type
      - Boolean
    - Description

- Determines if a matrix is a pure Rigid
- set()
- setElements(elementArray)
  - Description
    - Copies the elements from an array into the matrix
- transpose(m)
  - Description
    - Returns the transpose of the matrix
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## MatrixR44d

- Attributes
  - num\_cols
    - Attribute type
      - Integer
      - Constant
    - Value
      - 4
  - num\_rows
    - Attribute type
      - Integer
      - Constant
    - Value
      - 4
- Other defined methods
  - elements()
    - Return Type
      - E
    - Description
      - Returns a pointer to an array with the elements in the matrix
  - extractScale(scale)
    - Description
      - Extracts the scale from the matrix
  - extractTranslation(translation)
    - Description
      - Extracts the translation from the matrix
  - get()
  - identity()
    - Description
      - Sets the matrix back to identity
  - invert()
    - Description
      - Changes the matrix to its inverse
  - isRigid()
    - Return type
      - Boolean
    - Description

- Determines if a matrix is a pure Rigid
- set()
- setElements(elementArray)
  - Description
    - Copies the elements from an array into the matrix
- transpose(m)
  - Description
    - Returns the transpose of the matrix
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## MatrixR44f

- Attributes
  - num\_cols
    - Attribute type
      - Integer
      - Constant
    - Value
      - 4
  - num\_rows
    - Attribute type
      - Integer
      - Constant
    - Value
      - 4
- Other defined methods
  - elements()
    - Return Type
      - E
    - Description
      - Returns a pointer to an array with the elements in the matrix
  - extractScale(scale)
    - Description
      - Extracts the scale from the matrix
  - extractTranslation(translation)
    - Description
      - Extracts the translation from the matrix
  - get()
  - identity()
    - Description
      - Sets the matrix back to identity
  - invert()
    - Description
      - Changes the matrix to its inverse
  - isRigid()
    - Return type
      - Boolean
    - Description

- Determines if a matrix is a pure Rigid
- set()
- setElements(elementArray)
  - Description
    - Copies the elements from an array into the matrix
- transpose(m)
  - Description
    - Returns the transpose of the matrix
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## PatientDataItem

- Other defined methods
  - getVelocityId()
    - Return Type
      - Integer
    - Description
      - Returns the velocity id value of the object
  - isValid()
    - Return Type
      - Boolean
    - Description
      - Determines if the object is a valid object
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)



## Image2D

- Other defined methods
  - getDateCreated()
    - Return type
      - String
    - Description
      - Returns the date that the image was created
      - Formats the date in ISO format
  - getDateEdited()
    - Return type
      - String
    - Description
      - Returns the date that the image was edited
      - Formats the date in ISO format
  - getInstanceUID()
    - Return type
      - String
  - getModality()
    - Return type
      - String
  - getName()
    - Return type
      - String
    - Description
      - Returns the name
  - getPatient()
    - Return type
      - [Patient](#) object
    - Description
      - Returns the patient object
  - getSeriesUID()
    - Return type
      - String
  - getStudyDate()
    - Return type
      - String
    - Description
      - Returns the date of the study

- Formats the date in ISO format
  - getStudyUID()
    - Return type
      - String
  - getType()
    - Return type
      - String
  - isLocked()
    - Return type
      - Boolean
    - Description
      - Determines if the object is locked
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)
  - From `PatientDataItem`
    - `getVelocityId()`
      - Return Type
        - Integer
      - Description
        - Returns the velocity id value of the object
    - `isValid()`
      - Return Type
        - Boolean
      - Description
        - Determines if the object is a valid object

## Patient

- Other defined methods
  - getDate() **getCreateDate()**
    - Return type
      - String
    - Description
      - Returns the date that the record was created
      - Formats the date in ISO format
  - getDateOfBirth()
    - Return type
      - String
    - Description
      - Returns the patient's date of birth
      - Formats the date in ISO format
  - getDateEditDate()
    - Return type
      - String
    - Description
      - Returns the date that the record was edited
      - Formats the date in ISO format
  - getFirstName()
    - Return type
      - String
    - Description
      - Returns the patient's first name
  - getLastName()
    - Return type
      - String
    - Description
      - Returns the patient's last name
  - getPatientId()
    - Return type
      - String
    - Description
      - Returns the patient's id
  - getPlans()
    - Return type
      - vector < Plan >

- getSex()
  - Return type
    - String
  - Description
    - Returns the patient's sex
- getVolumes()
  - Return type
    - vector < Volume >
  - Parameters
    - modalityToGet
- isLocked()
  - Return type
    - Boolean
  - Description
    - Determines if the object is locked
- Inherited methods
  - From \_\_builtin\_\_.SwigPyObject
    - [All builtin .SwigPyObject methods](#)
  - From PatientDataItem
    - getVelocityId()
      - Return Type
        - Integer
      - Description
        - Returns the velocity id value of the object
    - isValid()
      - Return Type
        - Boolean
      - Description
        - Determines if the object is a valid object

## Plan

- Other defined methods
  - getDateCreated()
    - Return type
      - String
    - Description
      - Returns the date the plan was created
      - Formats the date in ISO format
  - getDoseVolumeIds()
    - Return type
      - vector < int >
    - Description
      - Returns the id values of the dose volumes
  - getDoseVolumes()
    - Return type
      - vector < Volume >
    - Description
      - Returns the dose volumes
  - getDateEdited()
    - Return type
      - String
    - Description
      - Returns the date that the plan was edited
      - Formats the date in ISO format
  - getInstanceUID()
    - Return type
      - String
    - Description
      - Returns the UID of the instance
  - getName()
    - Return type
      - String
    - Description
      - Returns the name of the plan
  - getSeriesUID()
    - Return type
      - String
    - Description

- Returns the UID of the series
- `getStructureSet()`
  - Return type
    - [StructureSet](#) object
  - Description
    - Returns the structure set
- `getStructureSetUID()`
  - Return type
    - String
  - Description
    - Returns the UID of the structure sets
- `getStructureVelocityIds()`
  - Return type
    - vector < int >
  - Description
    - Returns the velocity ids of the structures
- `getStructures()`
  - Return type
    - vector < Structure >
  - Description
    - Returns the structures
- `getStudyDate()`
  - Return type
    - String
  - Description
    - Returns the date the study was created
    - Formats the date in ISO format
- `getStudyUID()`
  - Return type
    - String
  - Description
    - Returns the UID of the study
- `getVolume()`
  - Return type
    - [Volume](#) object
  - Description
    - Returns the volume
- `getVolumeVelocityId()`
  - Return type

- Integer
  - Description
    - Returns the velocity id of the volume
- isLocked()
  - Return type
    - Boolean
  - Description
    - Determines if the current plan is locked
- Inherited methods
  - From `__builtin__.SwigPyObject`)
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)
  - From `PatientDataItem`
    - `getVelocityId()`
      - Return Type
        - Integer
      - Description
        - Returns the velocity id value of the object
    - `isValid()`
      - Return Type
        - Boolean
      - Description
        - Determines if the object is a valid object

## Registration

- Other defined methods
  - getDate() `getDate()`
    - Return type
      - String
    - Description
      - Returns the date that the registration was created
      - Formats the date in ISO format
  - getDicomRegistrationUID() `getDicomRegistrationUID()`
    - Return type
      - String
    - Description
      - Returns the UID of the DICOM registration
  - getEditDate() `getEditDate()`
    - Return type
      - String
    - Description
      - Returns the date that the registration was edited
      - Formats the date in ISO format
  - getInstanceUID() `getInstanceUID()`
    - Return type
      - String
    - Description
      - Returns the UID of the instance
  - getName() `getName()`
    - Return type
      - String
    - Description
      - Returns the name of the registration
  - getSourceVolume() `getSourceVolume()`
    - Return type
      - [Volume](#) object
    - Description
      - Returns the source volume
  - getTargetVolume() `getTargetVolume()`
    - Return type
      - [Volume](#) object
    - Description



- Returns the target volume
  - getType()
    - Return type
      - String
    - Description
      - Returns the registration type
  - isLocked()
    - Return type
      - Boolean
    - Description
      - Determines if the registration is locked
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)
  - From `PatientDataItem`
    - `getVelocityId()`
      - Return Type
        - Integer
      - Description
        - Returns the velocity id value of the object
    - `isValid()`
      - Return Type
        - Boolean
      - Description
        - Determines if the object is a valid object

## RegistrationCommissioningMarkerList

- Other defined methods
  - getDate()
    - Return type
      - String
    - Description
      - Returns the date that the registration commissioning marker was created
      - Formats the date in ISO format
  - getName()
    - Return type
      - String
    - Description
      - Returns the name of the registration commissioning marker
  - getPrimaryVolume()
    - Return type
      - [Volume](#) object
    - Description
      - Returns the primary volume
  - getRegistrationMarkerList()
    - Return type
      - vector < RegistrationMarker >
    - Description
      - Returns the list of registration markers
  - getSecondaryVolume()
    - Return type
      - [Volume](#) object
    - Description
      - Returns the secondary volume
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)
  - From PatientDataItem
    - getVelocityId()
      - Return Type
        - Integer
      - Description

- Returns the velocity id value of the object
- isValid()
  - Return Type
    - Boolean
  - Description
    - Determines if the object is a valid object

## Structure

- Other defined methods
  - getDate() `getDate()`
    - Return type
      - String
    - Description
      - Returns the date that the structure was created
      - Formats the date in ISO format
  - getEditDate() `getEditDate()`
    - Return type
      - String
    - Description
      - Returns the date that the structure was edited
      - Formats the date in ISO format
  - getFrameOfReferenceUID() `getFrameOfReferenceUID()`
    - Return type
      - String
    - Description
      - Returns the UID of the frame of reference
  - getInstanceUID() `getInstanceUID()`
    - Return type
      - String
    - Description
      - Returns the UID of the instance
  - getName() `getName()`
    - Return type
      - String
    - Description
      - Returns the name of the structure
  - getROINumber() `getROINumber()`
    - Return type
      - String
    - Description
      - Returns the ROI number of the structure
  - getStructureSet() `getStructureSet()`
    - Return type
      - [StructureSet](#) object
    - Description

- Returns the structure set
- getType()
  - Return type
    - String
  - Description
    - Returns the type of the structure
- getVolume()
  - Return type
    - [Volume](#) object
  - Description
    - Returns the volume of the structure
- getVolumeId()
  - Return type
    - Integer
  - Description
    - Returns the id of the volume of the structure
- getVolumetricSize()
  - Return type
    - Double
  - Description
    - Returns the size of the volume of the structure
- isEditable()
  - Return type
    - Boolean
  - Description
    - Returns if the structure can be edited
- isLocked()
  - Return type
    - Boolean
  - Description
    - Returns if the structure is locked
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)
  - From `PatientDataItem`
    - getVelocityId()
      - Return Type
        - Integer
      - Description

- Returns the velocity id value of the object
- isValid()
  - Return Type
    - Boolean
  - Description
    - Determines if the object is a valid object

## StructureSet

- Other defined methods
  - getDate() **getCreateDate()**
    - Return type
      - String
    - Description
      - Returns the date that the structure set was created
      - Formats the date in ISO format
  - getDate() **getEditDate()**
    - Return type
      - String
    - Description
      - Returns the date that the structure set was edited
      - Formats the date in ISO format
  - getDate() **getInstanceUID()**
    - Return type
      - String
    - Description
      - Returns the UID of the instance
  - getDate() **getName()**
    - Return type
      - String
    - Description
      - Returns the name of the structure set
  - getDate() **getSeriesDescription()**
    - Return type
      - String
    - Description
      - Returns the description of the structure set series
  - getDate() **getSeriesUID()**
    - Return type
      - String
    - Description
      - Returns the UID of the series
  - getDate() **getStructures()**
    - Return type
      - vector < Structure >
    - Description

- Returns the structures in the structure set
- `getStudyDate()`
  - Return type
    - String
  - Description
    - Returns the date that the study was created
    - Formats the date in ISO format
- `getStudyUID()`
  - Return type
    - String
  - Description
    - Returns UID of the study
- `getVolume()`
  - Return type
    - [Volume](#) object
  - Description
    - Returns the volume of the structure set
- `getVolumeUID()`
  - Return type
    - String
  - Description
    - Returns the UID of the volume
- `isLocked()`
  - Return type
    - Boolean
  - Description
    - Returns if the structure set is locked
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)
  - From `PatientDataItem`
    - `getVelocityId()`
      - Return Type
        - Integer
      - Description
        - Returns the velocity id value of the object
    - `isValid()`
      - Return Type
        - Boolean



- Description
  - Determines if the object is a valid object

## Volume

- Other defined methods
  - `getAccessionNumber()`
    - Return type
      - String
    - Description
      - Returns the accession number of the volume
  - `getAllStructures()`
    - Return type
      - `vector < Structure >`
    - Description
      - Returns all of the structures
  - `getCreateDate()`
    - Return type
      - String
    - Description
      - Returns the date that the volume was created
      - Formats the date in ISO format
  - `getDicomPatientDateOfBirth()`
    - Return type
      - String
    - Description
      - Returns the date that the patient was born
      - Formats the date in ISO format
  - `getDicomPatientId()`
    - Return type
      - String
    - Description
      - Returns the patient id
  - `getDicomPatientName()`
    - Return type
      - String
    - Description
      - Returns the name of the patient
  - `getDicomPatientSex()`
    - Return type
      - String
    - Description

- Returns the sex of the patient
- getDicomReferringPhysicianName()
  - Return type
    - String
  - Description
    - Returns the name of the patient's physician
- getEditDate()
  - Return type
    - String
  - Description
    - Returns the date that the volume was edited
    - Formats the date in ISO format
- getFrameOfReferenceUID()
  - Return type
    - String
  - Description
    - Returns the UID of the frame of reference
- getLinkedPlans()
  - Return type
    - vector < Plan >
  - Description
    - Returns the plans linked to the volume
- getLinkedRegistrations()
  - Return type
    - vector < Registration >
  - Description
    - Returns the registrations linked to the volume
- getModality()
  - Return type
    - String
  - Description
    - Returns the modality
- getName()
  - Return type
    - String
  - Description
    - Returns the name of the volume
- getPatient()
  - Return type

- [Patient](#) object
  - Description
    - Returns the patient
- getPlanUID()
  - Return type
    - String
  - Description
    - Returns the plan UID of the dose volumes
- getSeriesDate()
  - Return type
    - String
  - Description
    - Returns the date the series was created
    - Formats the date in ISO format
- getSeriesNumber()
  - Return type
    - String
  - Description
    - Returns the number of the series
- getSeriesTime()
  - Return type
    - String
  - Description
    - Returns the time the series was created
- getSeriesType()
  - Return type
    - String
  - Description
    - Returns the type of the series
- getSeriesUID()
  - Return type
    - String
  - Description
    - Returns the UID of the series
- getSourceType()
  - Return type
    - String
  - Description
    - Returns the type of the source

- `getStructureSets()`
  - Return type
    - `vector < StructureSet >`
  - Description
    - Return the structure sets of the volume
- `getStudyDate()`
  - Return type
    - `String`
  - Description
    - Returns the date the study was created
    - Formats the date in ISO format
- `getStudyDescription()`
  - Return type
    - `String`
  - Description
    - Returns the description of the study
- `getStudyId()`
  - Return type
    - `String`
  - Description
    - Returns the id of the study
- `getStudyInstanceUID()`
  - Return type
    - `String`
  - Description
    - Returns the UID of the study instance
- `getStudyTime()`
  - Return type
    - `String`
  - Description
    - Returns the time the study was created
- `getVolumeUID`
  - Return type
    - `String`
  - Description
    - Returns the UID of the volume
- `isLocked()`
  - Return type
    - `Boolean`

- Description
    - Returns if the volume is locked
  - registrationCommissioningMarkerLists()
    - Return type
      - vector < RegistrationCommissioningMarkerList >
    - Parameters
      - secondaryVolumeld
- Inherited methods
  - From \_\_builtin\_\_.SwigPyObject
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)
  - From PatientDataItem
    - getVelocityId()
      - Return Type
        - Integer
      - Description
        - Returns the velocity id value of the object
    - isValid()
      - Return Type
        - Boolean
      - Description
        - Determines if the object is a valid object

## PatientDataOperations

- Other defined methods
  - `getErrorMessage()`
    - Return type
      - String
    - Description
      - Returns an error message based on the error that has occurred
  - `getLocalizedErrorMessage()`
    - Return type
      - String
    - Description
      - Returns a localized error message based on the error that has occurred
  - `getPatient(vscId)`
    - Return type
      - [Patient](#) object
    - Description
      - Returns the patient of a given vsc id
  - `getPatientByPatientId(patientId)`
    - Return type
      - [Patient](#) object
    - Description
      - Returns the patient of a given patient id
  - `getPatients()`
    - Return type
      - vector < patientdata::Patient >
    - Description
      - Returns the patients
  - `getPlan(velocityId)`
    - Return type
      - [Plan](#) object
    - Description
      - Returns the plan of a given velocity id
  - `getRegistration(velocityId)`
    - Return type
      - [Registration](#) object
    - Description

- Returns the registration of a given velocity id
- getRegistrationCommissioningMarkerList(velocityId)
  - Return type
    - [RegistrationCommissioningMarkerList](#) object
  - Description
    - Returns the registration commissioning marker list of a given velocity id
- getStructure(velocityId)
  - Return type
    - [Structure](#) object
  - Description
    - Returns the structure of a given velocity id
- getStructureSet(velocityId)
  - Return type
    - [StructureSet](#) object
  - Description
    - Returns the structure set of a given velocity id
- getStructureSetByUID(uid)
  - Return type
    - [StructureSet](#) object
  - Description
    - Returns the structure set of a given UID
- getVolume(velocityId)
  - Return type
    - [Volume](#) object
  - Description
    - Returns the volume of a given velocity id
- getVolumeByUID(uid)
  - Return type
    - [Volume](#) object
  - Description
    - Returns the volume of a given UID
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All builtin .SwigPyObject methods](#)



## RegistrationMarker

- Other defined methods
  - getName()
    - Return type
      - String
    - Description
      - Returns the name of the registration marker
  - getPrimaryLocation()
    - Return type
      - [VectorR3d](#) object
    - Description
      - Returns the primary location of the registration marker
  - getSecondaryLocation()
    - Return type
      - [VectorR3d](#) object
    - Description
      - Returns the secondary location of the registration marker
  - isConfirmed()
    - Return type
      - Boolean
    - Returns if the registration marker has been confirmed
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)

## RegistrationOperations

- Other defined methods
  - computeJacobian()
    - Return type
      - [ScaledVolumeData](#) object
    - Description
      - Calculates the Jacobian from loaded volumes and registrations
      - Will return an empty volume data if there is an error
  - createNewRegistration(name, progress = nullptr)
    - Return type
      - [Registration](#) object
    - Description
      - Creates a new rigid registration with a given name
  - exportRegistration(registrationId, progress = nullptr)
    - Description
      - Creates a DICOM file of the current registration
  - getErrorMessage()
    - Return value
      - String
    - Description
      - Returns an error message based on the error that has occurred
  - getLocalizedErrorMessage()
    - Return value
      - String
    - Description
      - Returns a localized error message based on the error that has occurred
  - getTransformedRegistrationCommissioningMarkers(markerListId)
    - Return type
      - pair < bool, vector < TransformedRegistrationMarker > >
    - Description
      - Returns a list of registration commissioned markers
      - The registration commissioned markers will be converted to coordinate systems
  - performBsplineRegistration(settings)
    - **Deprecated**

- Return type
  - Boolean
- Description
  - Performs a BSpline deformable registration of two loaded volumes
  - Requires coordinate and image values to exist in Velocity's coordinate space and units
  - Returns true if the deformable registration occurs successfully
- performBsplineRegistrationDICOM(settings)
  - Return type
    - Boolean
  - Description
    - Performs a BSpline deformable registration of two loaded volumes
    - Requires coordinate and image values to exist in DICOM coordinate space and units
    - Returns true if the deformable registration occurs successfully
- performManualAlignment(settings)
  - **Deprecated**
  - Return type
    - Boolean
  - Description
    - Performs a manual alignment of two loaded volumes
    - Requires coordinate and image values to exist in Velocity's coordinate space and units
    - Returns true if the manual alignment occurs successfully
- performManualAlignmentDICOM(settings)
  - Return type
    - Boolean
  - Description
    - Performs a manual alignment of two loaded volumes
    - Requires coordinate and image values to exist in DICOM coordinate space and units
    - Returns true if the manual alignment occurs successfully
- performRigidRegistration(settings)
  - **Deprecated**
  - Return type

- Boolean
- Description
  - Performs a rigid registration of two loaded volumes
  - Requires coordinate and image values to exist in Velocity's coordinate space and units
  - Returns true if the rigid registration occurs successfully
- performRigidRegistrationDICOM(settings)
  - Return type
    - Boolean
  - Description
    - Performs a rigid registration of two loaded volumes
    - Requires coordinate and image values to exist in DICOM coordinate space and units
    - Returns true if the rigid registration occurs successfully
- saveRegistration(progress = nullptr)
  - Return type
    - [Registration](#) object
  - Description
    - Saves loaded registration to the database
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)

## ReportOperations

- Other defined methods
  - appendToReport(htmlStreamDataToAppend, includePatientHeaderInformation = true)
    - Return type
      - Boolean
    - Description
      - Appends a specified html stream to the internal html report
      - Calls getErrorMessage() method and returns false if an error occurs
  - attachRegistrationCommissioningToReport(registrationCommissioningMarkerListRecord)
    - Return type
      - Boolean
    - Description
      - Attaches the specified registration commissioning marker to the internal report
      - Calls getErrorMessage() method and returns false if an error occurs
  - attachViewer3DToReport()
    - Return type
      - Boolean
    - Description
      - Attaches the viewer state to the internal report
  - clearReport()
    - Description
      - Clears the internal html report
  - getErrorMessage()
    - Return type
      - String
    - Description
      - Returns an error message based on the error that has occurred
  - getLocalizedErrorMessage()
    - Return type
      - String
    - Description

- Returns a localized error message based on the error that has occurred
  - getReport()
    - Return type
      - String
    - Description
      - Returns the internal html report
  - loadPersistentCachedReport()
    - Return type
      - Boolean
    - Description
      - Loads persistent reports for the current patient from the database
  - loadReportFromDatabase(reportRecordId)
    - Return type
      - Boolean
    - Description
      - Loads the specified report from the database
  - persistCachedReport()
    - Return type
      - Boolean
    - Description
      - Puts the internal html report into a temporary file in the database
  - saveReportToDatabase(reportName)
    - Return type
      - Integer
    - Description
      - Saves the internal html report into the database under the specified name
      - Returns the id number of the report if the save is successful, otherwise -1 is returned
      - Clears the internal report if the save is successful
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## ScaledVolumeData

- Attributes and data descriptors
  - data
    - Attribute type
      - `vector < double >`
  - indexTransform
    - Attribute type
      - [MatrixR44d](#) object
  - size
    - Attribute type
      - [VectorR3i](#) object
  - volume
    - Attribute type
      - [Volume](#) object
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)

## StructureGuidedRegistrationInformation

- Attributes and data descriptors
  - burnInStructureVolume
    - Attribute type
      - ImageR3us object
  - burnInVolumeMember
    - Attribute type
      - SelectedVolumeMember object
  - burnInVoxelValue
    - Attribute type
      - Short
  - euclideanDistanceMapModelTransform
    - Attribute type
      - AffineTransformR3d object
  - euclideanDistanceMapOfStructure
    - Attribute type
      - EuclideanDistanceTransformR3 object
  - handleObjectCleanup
    - Attribute type
      - Boolean
  - internalStructurePointsSCE
    - Attribute type
      - vector < VectorR3d >
  - neighboringPointIndices
    - Attribute type
      - vector < vector < int > >
  - primarySurfacePointsSCE
    - Attribute type
      - vector < VectorR3d >
  - secondarySurfacePointsSCE
    - Attribute type
      - vector < VectorR3d >
  - structureGuidedMethod
    - Attribute type
      - StructureGuidedMethod object
  - structureSurfacePointsSCE
    - Attribute type
      - vector < VectorR3d >



- structureWeightCoefficient
  - Attribute type
    - Double
- surfacePointsWeightCoefficients
  - Attribute type
    - vector < double >
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## StructureOperations

- Other defined methods
  - conformity(structureId1, structureId2, reporter = nullptr)
    - Return type
      - Double
    - Description
      - Calculates the conformity of two structures
  - copyStructuresToPrimary(secondaryStructureIds, structureSetId)
    - Return type
      - map < int, Structure >
    - Description
      - Copies the structures in the secondary volume to the primary volume
  - copyStructuresToSecondary(primaryStructureIds, structureSetId)
    - Return type
      - map < int, Structure >
    - Description
      - Copies the structures in the primary volume to the secondary volume
  - createStructure(structureSetId, name, type = "Organ", color = nullptr)
    - Return type
      - [Structure](#) object
    - Description
      - Creates a new structure
      - Requires that the type parameter is a valid DICOM type
  - createStructureSet(name, onPrimary, studyUID = "", studyDate = "")
    - Return type
      - [StructureSet](#) object
    - Description
      - Creates a new structure set
  - crop(sourceStructureId, structureSetId, croppingStructureIds, cropSettings, targetName, targetColor = nullptr, reporter = nullptr)
    - Return type
      - [Structure](#) object
    - Description
      - Crops a structure
  - exportStructureSet(structureSetId, encodingType = "", reporter = nullptr)

- Return type
    - Boolean
  - Description
    - Creates the structure set as a RTSTRUCT DICOM file on the disk
- getErrorMessage()
  - Return type
    - String
  - Description
    - Returns an error message based on the error that has occurred
- getLocalizedErrorMessage()
  - Return type
    - String
  - Description
    - Returns a localized error message based on the error that has occurred
- getStructureHistogram(structureId, onPrimary, bins)
  - Return type
    - pair < bool, vector < VectorR2d > >
    - a pair with the first slot indicating success or failure and second containing the histogram values
  - Description
    - Computes and returns the volume histogram of a given structure
    - structureId - the id of the structure to compute the histogram of
    - onPrimary - histogram will be created on the primary volume if true, on the secondary otherwise (default true)
    - Bins - the number of histogram bins to compute (default 65535)
- getVolumetricStructure(structureId)
  - Return type
    - [ScaledVolumeData](#) object
  - Description
    - Returns the volumetric structure data
    - Requires that the structureId parameter is either the primary or secondary volume

- Will change the secondary volume to the primary volume if the secondary volume is used
- intersectStructures(structureSetId, structureIds, targetName, targetColor = nullptr, reporter = nullptr)
  - Return type
    - [Structure](#) object
  - Description
    - Creates a structure based on the intersection of multiple structures
- margin(structureSetId, sourceId, targetId, settings, reporter = nullptr)
  - Return type
    - [Structure](#) object
  - Description
    - Uses the margin operation on a structure
- saveStructureSets(structureSetId, encodingType = "")
  - Return type
    - [StructureSet](#) object
  - Description
    - Saves changes to a structure set
    - Must be called after finishing a set of modifications to a structure set
- smooth(structureId, structureSetId, targetName, reporter = nullptr)
  - Return type
    - [Structure](#) object
  - Description
    - Creates a new structure after smoothing the current structure
- surfaceDistanceMetrics(structureId1, structureId2)
  - Return type
    - [SurfaceDistanceMetrics](#) object
  - Description
    - Calculates the surface distance between two structures
- unionStructures(structureSetId, structureIds, targetName, targetColor = nullptr, reporter = nullptr)
  - Return type
    - [Structure](#) object
  - Description
    - Used the union from multiple structures to create a new structure

- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## SurfaceDistanceMetrics

- Attributes and data descriptors
  - hausdorffDistance
    - Attribute type
      - Double
  - isValid
    - Attribute type
      - Boolean
  - mean
    - Attribute type
      - Double
  - median
    - Attribute type
      - Double
  - min
    - Attribute type
      - Double
  - standardDeviation
    - Attribute type
      - Double
  - structureName1
    - Attribute type
      - String
  - structureName2
    - Attribute type
      - String
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## TransformedRegistrationMarker

- Attributes and data descriptors
  - deformedSecondaryInPrimaryDICOM
    - Attribute type
      - [VectorR3d](#) object
  - deformedSecondaryInScene
    - Attribute type
      - [VectorR3d](#) object
  - deformedSecondaryInSecondaryDICOM
    - Attribute type
      - [VectorR3d](#) object
  - isConfirmed
    - Attribute type
      - Boolean
  - name
    - Attribute type
      - String
  - primaryInIndex
    - Attribute type
      - [VectorR3d](#) object
  - primaryInPrimaryDICOM
    - Attribute type
      - [VectorR3d](#) object
  - primaryInScene
    - Attribute type
      - [VectorR3d](#) object
  - rigidSecondaryInPrimaryDICOM
    - Attribute type
      - [VectorR3d](#) object
  - rigidSecondaryInSecondaryDICOM
    - Attribute type
      - [VectorR3d](#) object
  - secondaryInIndex
    - Attribute type
      - [VectorR3d](#) object
- Inherited methods
  - From `__builtin__.SwigPyObject`

## VectorR2b

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 2
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E >
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()



- Return type
  - VectorR < 2, E >
- Description
  - Returns the first two components of the vector
  - Sets undefined coordinates to 0
- xyz()
  - Return type
    - VectorR < 3, E >
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - VectorR < 4, E >
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## VectorR2d

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 2
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()

- Return type
    - $\text{VectorR} < 2, E >$
  - Description
    - Returns the first two components of the vector
    - Sets undefined coordinates to 0
- xyz()
  - Return type
    - $\text{VectorR} < 3, E >$
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - $\text{VectorR} < 4, E >$
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)

## VectorR2f

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 2
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()

- Return type
    - $\text{VectorR} < 2, E >$
  - Description
    - Returns the first two components of the vector
    - Sets undefined coordinates to 0
- xyz()
  - Return type
    - $\text{VectorR} < 3, E >$
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - $\text{VectorR} < 4, E >$
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)

## VectorR2i

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 2
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()

- Return type
    - VectorR < 2, E >
  - Description
    - Returns the first two components of the vector
    - Sets undefined coordinates to 0
- xyz()
  - Return type
    - VectorR < 3, E >
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - VectorR < 4, E >
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## VectorR2s

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 2
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()



- Return type
  - $\text{VectorR} < 2, E >$
- Description
  - Returns the first two components of the vector
  - Sets undefined coordinates to 0
- xyz()
  - Return type
    - $\text{VectorR} < 3, E >$
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - $\text{VectorR} < 4, E >$
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)

## VectorR2ub

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 2
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()

- Return type
    - $\text{VectorR} < 2, E >$
  - Description
    - Returns the first two components of the vector
    - Sets undefined coordinates to 0
- xyz()
  - Return type
    - $\text{VectorR} < 3, E >$
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - $\text{VectorR} < 4, E >$
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)

## VectorR2ui

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 2
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector

- `xy()`
  - Return type
    - $\text{VectorR} < 2, E >$
  - Description
    - Returns the first two components of the vector
    - Sets undefined coordinates to 0
- `xyz()`
  - Return type
    - $\text{VectorR} < 3, E >$
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- `xyzw()`
  - Return type
    - $\text{VectorR} < 4, E >$
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)

## VectorR2us

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 2
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()

- Return type
    - $\text{VectorR} < 2, E >$
  - Description
    - Returns the first two components of the vector
    - Sets undefined coordinates to 0
- xyz()
  - Return type
    - $\text{VectorR} < 3, E >$
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - $\text{VectorR} < 4, E >$
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)

## VectorR3b

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 3
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()



- Return type
  - $\text{VectorR} < 2, E >$
- Description
  - Returns the first two components of the vector
  - Sets undefined coordinates to 0
- xyz()
  - Return type
    - $\text{VectorR} < 3, E >$
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - $\text{VectorR} < 4, E >$
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## VectorR3d

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 3
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()

- Return type
  - VectorR < 2, E >
- Description
  - Returns the first two components of the vector
  - Sets undefined coordinates to 0
- xyz()
  - Return type
    - VectorR < 3, E >
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - VectorR < 4, E >
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## VectorR3f

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 3
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()

- Return type
  - $\text{VectorR} < 2, E >$
- Description
  - Returns the first two components of the vector
  - Sets undefined coordinates to 0
- xyz()
  - Return type
    - $\text{VectorR} < 3, E >$
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - $\text{VectorR} < 4, E >$
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)

## VectorR3i

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 3
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()

- Return type
    - $\text{VectorR} < 2, E >$
  - Description
    - Returns the first two components of the vector
    - Sets undefined coordinates to 0
- xyz()
  - Return type
    - $\text{VectorR} < 3, E >$
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - $\text{VectorR} < 4, E >$
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)

## VectorR3s

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 3
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()



- Return type
    - $\text{VectorR} < 2, E >$
  - Description
    - Returns the first two components of the vector
    - Sets undefined coordinates to 0
- xyz()
  - Return type
    - $\text{VectorR} < 3, E >$
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - $\text{VectorR} < 4, E >$
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)

## VectorR3ub

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 3
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()

- Return type
    - $\text{VectorR} < 2, E >$
  - Description
    - Returns the first two components of the vector
    - Sets undefined coordinates to 0
- xyz()
  - Return type
    - $\text{VectorR} < 3, E >$
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - $\text{VectorR} < 4, E >$
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)

## VectorR3ui

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 3
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()

- Return type
    - $\text{VectorR} < 2, E >$
  - Description
    - Returns the first two components of the vector
    - Sets undefined coordinates to 0
- xyz()
  - Return type
    - $\text{VectorR} < 3, E >$
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - $\text{VectorR} < 4, E >$
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)

## VectorR3us

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 3
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()

- Return type
    - $\text{VectorR} < 2, E >$
  - Description
    - Returns the first two components of the vector
    - Sets undefined coordinates to 0
- xyz()
  - Return type
    - $\text{VectorR} < 3, E >$
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - $\text{VectorR} < 4, E >$
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)

## VectorR4b

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 4
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()
    - Return type



- VectorR < 2, E >
  - Description
    - Returns the first two components of the vector
    - Sets undefined coordinates to 0
- xyz()
  - Return type
    - VectorR < 3, E >
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - VectorR < 4, E >
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## VectorR4d

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 4
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()
    - Return type

- VectorR < 2, E >
  - Description
    - Returns the first two components of the vector
    - Sets undefined coordinates to 0
- xyz()
  - Return type
    - VectorR < 3, E >
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - VectorR < 4, E >
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## VectorR4f

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 4
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()
    - Return type

- VectorR < 2, E >
  - Description
    - Returns the first two components of the vector
    - Sets undefined coordinates to 0
- xyz()
  - Return type
    - VectorR < 3, E >
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - VectorR < 4, E >
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## VectorR4i

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 4
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()

- Return type
  - $\text{VectorR} < 2, E >$
- Description
  - Returns the first two components of the vector
  - Sets undefined coordinates to 0
- xyz()
  - Return type
    - $\text{VectorR} < 3, E >$
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - $\text{VectorR} < 4, E >$
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)

## VectorR4s

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 4
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()



- Return type
    - $\text{VectorR} < 2, E >$
  - Description
    - Returns the first two components of the vector
    - Sets undefined coordinates to 0
- xyz()
  - Return type
    - $\text{VectorR} < 3, E >$
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - $\text{VectorR} < 4, E >$
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)

## VectorR4ub

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 4
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()

- Return type
    - $\text{VectorR} < 2, E >$
  - Description
    - Returns the first two components of the vector
    - Sets undefined coordinates to 0
- xyz()
  - Return type
    - $\text{VectorR} < 3, E >$
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - $\text{VectorR} < 4, E >$
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)

## VectorR4ui

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 4
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()

- Return type
  - $\text{VectorR} < 2, E >$
- Description
  - Returns the first two components of the vector
  - Sets undefined coordinates to 0
- xyz()
  - Return type
    - $\text{VectorR} < 3, E >$
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - $\text{VectorR} < 4, E >$
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## VectorR4us

- Attributes
  - SIZE
    - Attribute type
      - Integer
      - Constant
    - Value
      - 4
- Other defined methods
  - nonNegative()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is nonnegative
  - normalized(epsilon = vsc::VSC\_EPSILON)
    - Return type
      - VectorR < N, E > object
    - Description
      - Returns a normalized vector
  - positive()
    - Return type
      - Boolean
    - Description
      - Determines if every element in the vector is positive
  - set(element)
    - Description
      - Changes all elements in the vector to the specified element
  - setElements(elementArray)
    - Description
      - Sets the elements in the vector equal to the elements in the array
      - The vector and array need to have the same number of elements
  - size()
    - Description
      - Determines the size of the vector
  - xy()

- Return type
    - $\text{VectorR} < 2, E >$
  - Description
    - Returns the first two components of the vector
    - Sets undefined coordinates to 0
- xyz()
  - Return type
    - $\text{VectorR} < 3, E >$
  - Description
    - Returns the first three components of the vector
    - Sets undefined coordinates to 0
- xyzw()
  - Return type
    - $\text{VectorR} < 4, E >$
  - Description
    - Returns the first three components of the vector
    - If the w coordinate is undefined, it is set to 1
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)

## VelocityEngine

- Attributes
  - VSC\_PRIMARY\_VALUE
    - Value
      - 0
  - VSC\_SECONDARY\_VALUE
    - Value
      - 1
- Other defined methods
  - deletePatient(patientId, forceDelete)
    - Return type
      - Boolean
    - Description
      - Deletes the patient with the specified patient id
      - If there are multiple patients with the same id, forceDelete must be true in order to delete the patients
      - Returns true if the patient is successfully deleted
  - getCurrentPatient()
    - Return type
      - [Patient](#) object
    - Description
      - Returns the patient that is currently loaded
      - Will print an error message if there is no patient loaded
  - getErrorMessage()
    - Return type
      - String
    - Description
      - Returns an error message based on the error that has occurred
      - If there is not an error, an empty string is returned
  - getExportOperations()
    - Return type
      - [ExportOperations](#) object
    - Description
      - Returns the export operations for the engine
      - Will return a null pointer if the engine is not connected to the database
  - getImportOperations()



- Return type
  - [ImportOperations](#) object
- Description
  - Returns the import operations for the engine
  - Will return a null pointer if the engine is not connected to the database
- getLocalizedMessage()
  - Return type
    - String
  - Description
    - Returns a localized error message based on the error that has occurred
    - If there is not a localized error, an empty string is returned
- getPatientDataOperations()
  - Return type
    - [PatientDataOperations](#) object
  - Description
    - Returns the patient data operations for the engine
    - Will return a null pointer if the engine is not connected to the database
- getPatientVolumeUIDs(patientID, modality)
  - Return type
    - vector < string >
  - Description
    - Returns the volumeUIDs of a specified patient in the form of a vector
- getPrimaryVolume()
  - Return type
    - [Volume](#) object
  - Description
    - Returns the primary volume of the current patient
- getRegistrationOperations()
  - Return type
    - [RegistrationOperations](#) object
  - Description
    - Returns the registration operations for the engine
    - Will return a null pointer if the engine is not connected to the database

- `getReportOperations()`
  - Return type
    - [ReportOperations](#) object
  - Description
    - Returns the report operations for the engine
    - Will return a null pointer if the engine is not connected to the database
- `getSecondaryVolume()`
  - Return type
    - [Volume](#) object
  - Description
    - Returns the secondary volume of the current patient
- `getStructureOperations()`
  - Return type
    - [StructureOperations](#) object
  - Description
    - Returns the structure operations for the engine
    - Will return a null pointer if the engine is not connected to the database
- `getValueAtStructureCenter(volume, linearInterp = true)`
  - Return type
    - Double
  - Description
    - Returns the value at the structure center of the primary and secondary volumes
- `getVolumeOperations()`
  - Return type
    - [VolumeOperations](#) object
  - Description
    - Returns the volume operations for the engine
    - Will return a null pointer if the engine is not connected to the database
- `isLoggedIn()`
  - Return type
    - Boolean
  - Description
    - Determines if the engine is currently logged in
- `loadPatientByPatientId(patientId)`
  - Return type

- [Patient](#) object
- Description
  - Loads a patient based on the specified patient id
  - Returns true if the patient is loaded successfully
- loadPatient(patientId)
  - Return type
    - Boolean
  - Description
    - Load a patient based on the specified internal database id
    - Returns true if the patient is loaded successfully
- loadPlan(velocityId)
  - Return type
    - [Plan](#) object
  - Description
    - Loads a plan based on the specified patient id
- loadPlanByUID(uid)
  - Return type
    - [Plan](#) object
  - Description
    - Loads a plan based on the specified UID
- loadPrimaryVolumeByUID(volumeUID)
  - Return type
    - Boolean
  - Description
    - Loads a primary volume based on the specified volume UID
    - Returns true if the volume is loaded successfully
- loadPrimaryVolume(databaseId)
  - Return type
    - Boolean
- loadRegistration(registrationId)
  - Return type
    - [Registration](#) object
  - Description
    - Loads a registration based on the specified registration id
- loadRegistrationByName(name)
  - Return type
    - [Registration](#) object
  - Description

- Loads a registration based on the specified registration name
- loadSecondaryVolumeByUID(volumeUID)
  - Return type
    - Boolean
  - Description
    - Loads a volume based on the specified volume UID
    - Returns true if the volume is loaded successfully
- loadSecondaryVolume(databaseId)
  - Return type
    - Boolean
- loadStructure(velocityId)
  - Return type
    - [Structure](#) object
  - Description
    - Loads a structure based on the specified velocity id
- loadStructureByName(name, structureSetUID)
  - Return type
    - [Structure](#) object
  - Description
    - Loads a structure based on the specified structure name
    - The structure must have a unique name in the set in order to be loaded properly
- loadStructureByUID(uid)
  - Return type
    - [Structure](#) object
  - Description
    - Loads a structure based on the specified structure UID
- loginToGrid(username, password, ip, port, dbLabel)
  - Return type
    - Boolean
  - Description
    - Logs into the the specified Grid database
    - Returns true if the specified Grid database is successfully logged into
    - All parameters must be valid in order to successfully log in
- loginToWorkstation(username, password, path, force = false)
  - Return type

- Boolean
- Description
  - Logs into the specified workstation database
  - Returns true if the specified workstation database is successfully logged into
  - All parameters must be valid in order to successfully log in
- logout()
  - Return type
    - Boolean
  - Description
    - Logs out of the database
    - Logging out makes all Operations class instances invalid
- unloadPatient()
  - Return type
    - Boolean
  - Description
    - Unloads the current patient
    - Will cause the primary and secondary volumes to also unload
- unloadPrimaryVolume()
  - Return type
    - Boolean
  - Description
    - Unloads the current primary volume
    - Will cause the secondary volume to unload
- unloadSecondaryVolume()
  - Return type
    - Boolean
  - Description
    - Unloads the current secondary volume
- Inherited methods
  - From `__builtin__.SwigPyObject`
    - [All `\_\_builtin\_\_.SwigPyObject` methods](#)

## VolumeOperations

- Other defined methods
  - createBEDose(fractions, structureNames, structureIds, structRatioVal, progress = nullptr)
    - Return type
      - Integer
    - Description
      - Performs the BED scaling for the loaded secondary volume based on the loaded primary volume
      - Returns the volume id of the created volume, unless there is an error, in which -1 is returned
  - createBEDoseByStructureUIDs(fractions, structureNames, structureUIDs, structRatioVal, progress = nullptr)
    - Return type
      - Integer
    - Description
      - Performs the BED scaling for the loaded secondary volume based on the loaded primary volume
      - Returns the volume id of the created volume unless there is an error, in which -1 is returned
  - createResampledVolume(elementOperation, name = "", scalingCoefficient = 1.0)
    - Return type
      - Integer
    - Description
      - Carries out the resampling operation defined by elementOperation against the current primary volume and secondary volumes
      - Returns the volume id of the created volume unless there is an error, in which -1 is returned
      - ElementOperation is an integer corresponding to:
        - VolumeResampleReplace = 0,
        - VolumeResampleAdd = 1
        - VolumeResampleSubtract = 2
        - VolumeResampleMultiply = 3
        - VolumeResampleDivide = 4
        - VolumeResampleAverage = 5
        - VolumeResampleMaximum = 6

- VolumeResampleScale = 7
  - VolumeResampleFadeCorrection = 8
  - VolumeResampleReshape = 9
  - VolumeResampleMinimum = 10
- createResampledPrimaryVolume(elementOperation, name = "", scalingCoefficient = 1.0)
  - Return type
    - Integer
  - Description
    - Performs the resampling of the specified element operation for the loaded primary volume
    - An error will occur if the specified element operation must be performed on multiple volumes
    - Returns the volume id of the created volume unless there is an error, in which -1 is returned
    - The only elementOperation available for single volume resampling is VolumeResampleScale = 7
- getErrorMessage()
  - Return type
    - String
  - Description
    - Returns an error message based on the error that has occurred
- getLocalizedErrorMessage()
  - Return type
    - String
  - Description
    - Returns a localized error message based on the error that has occurred
- Inherited methods
  - From \_\_builtin\_\_.SwigPyObject
    - [All \\_\\_builtin\\_\\_.SwigPyObject methods](#)