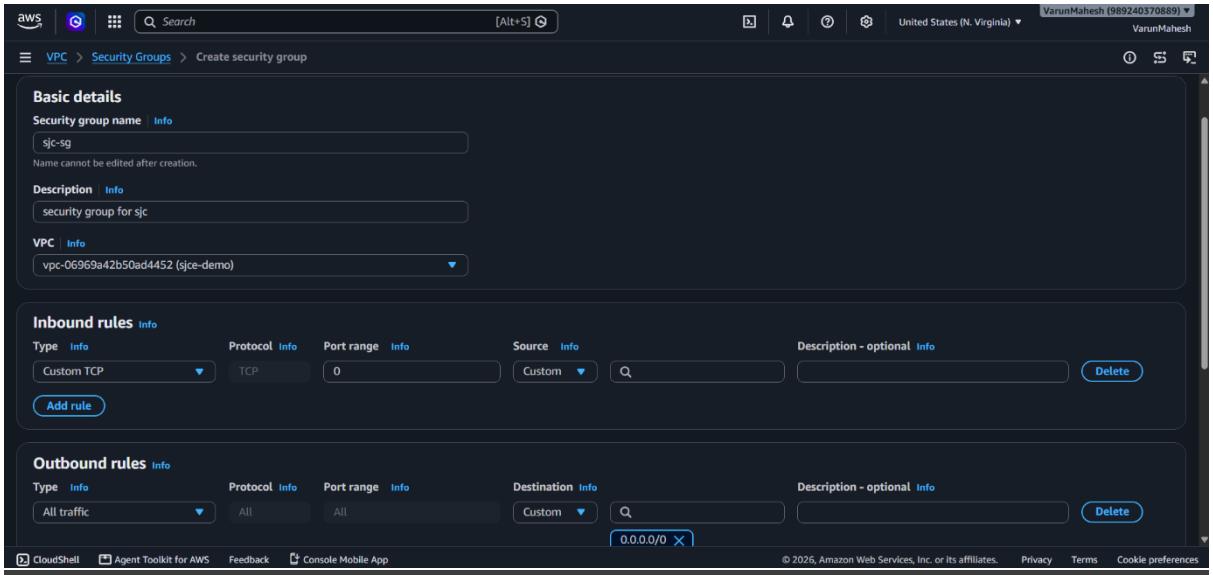
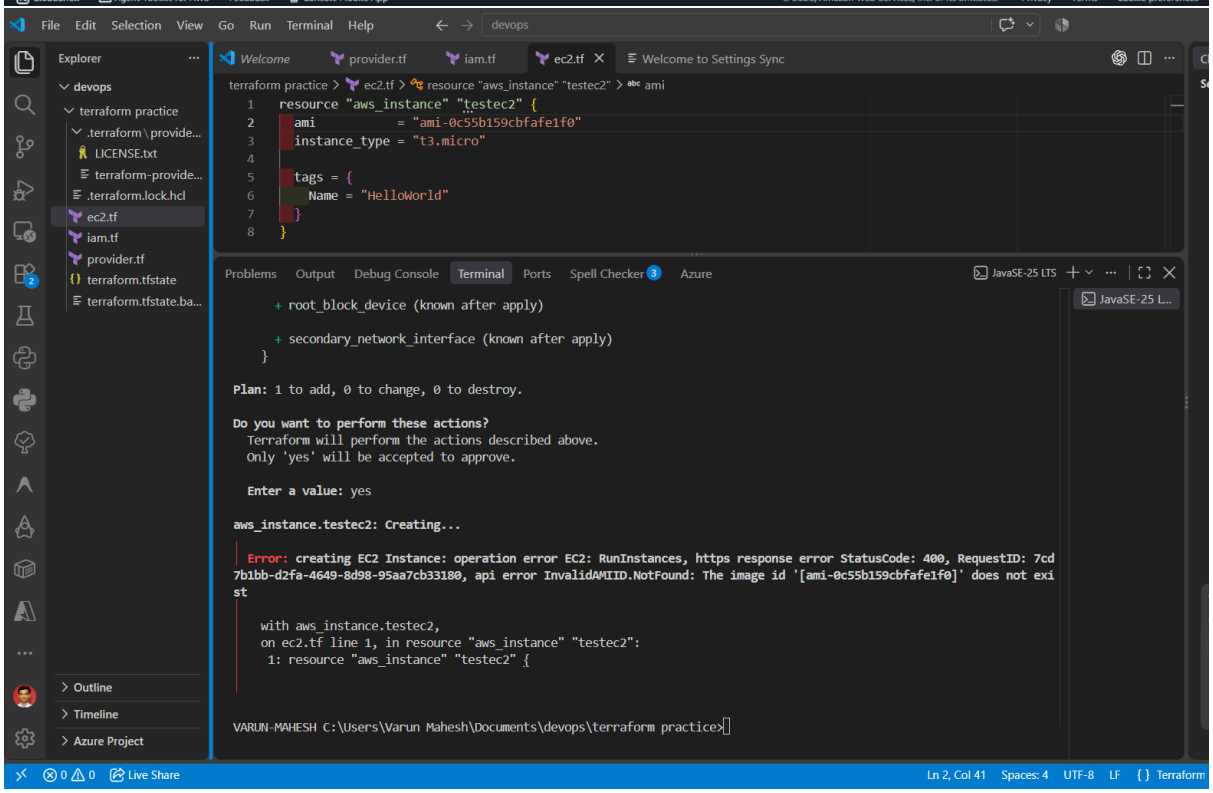
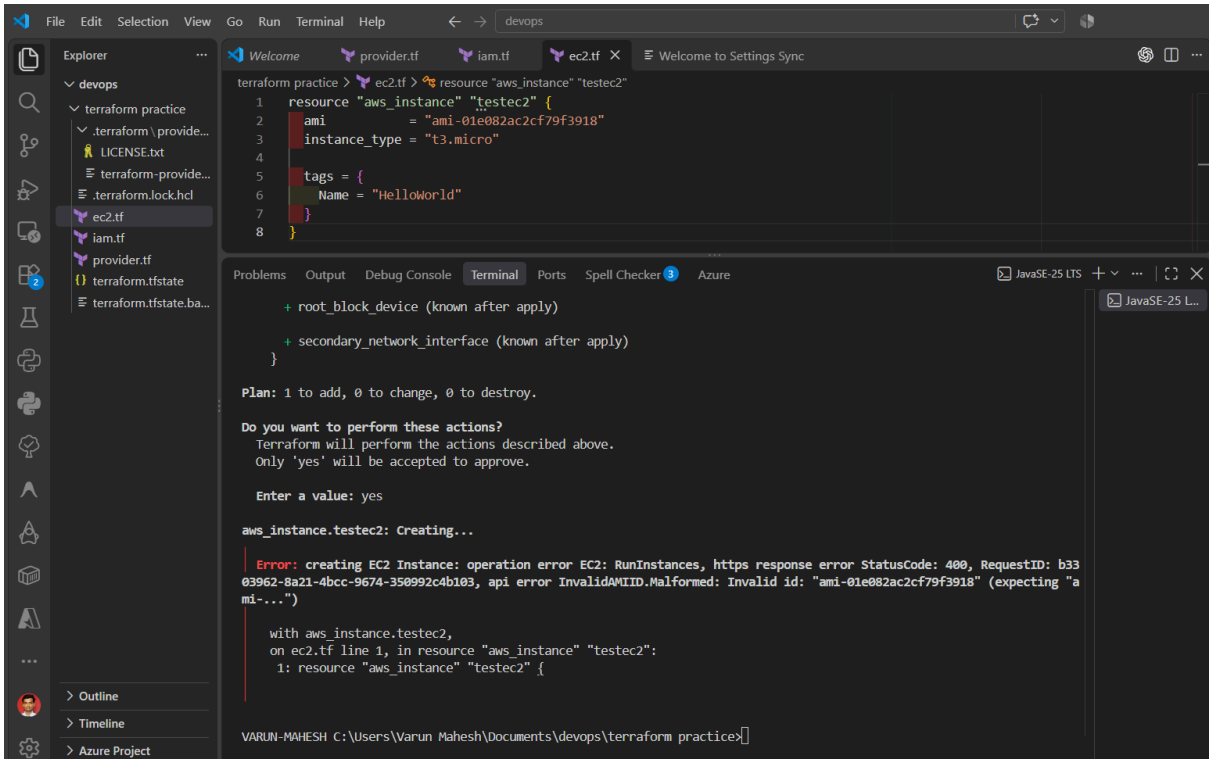
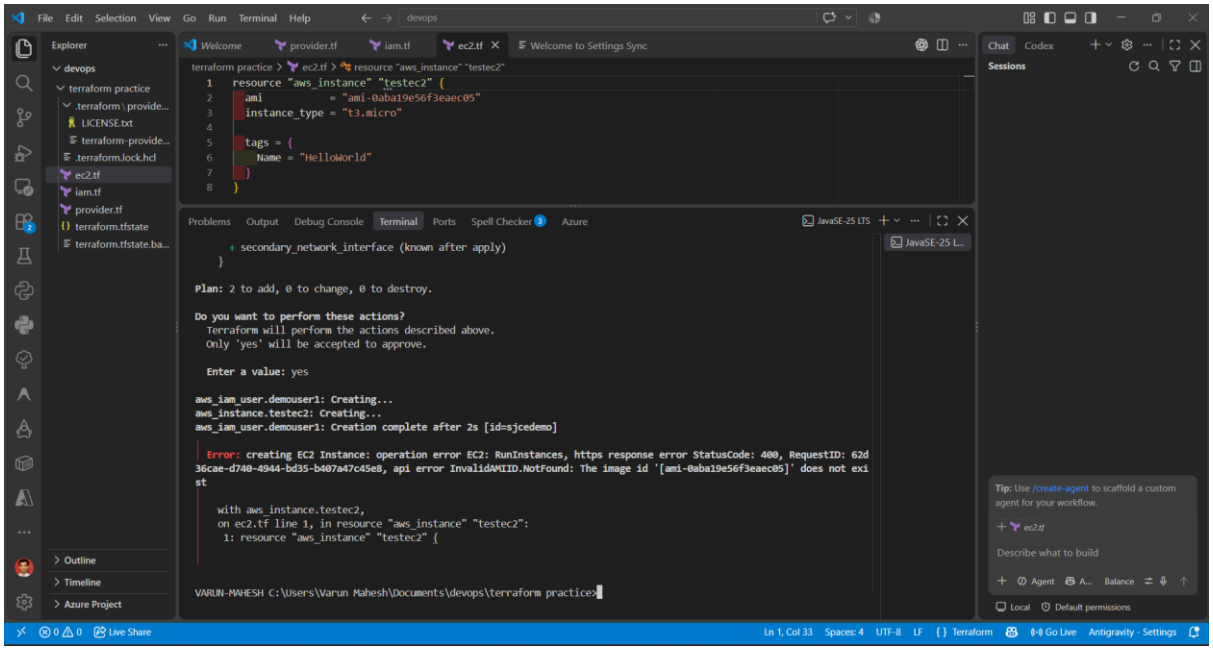
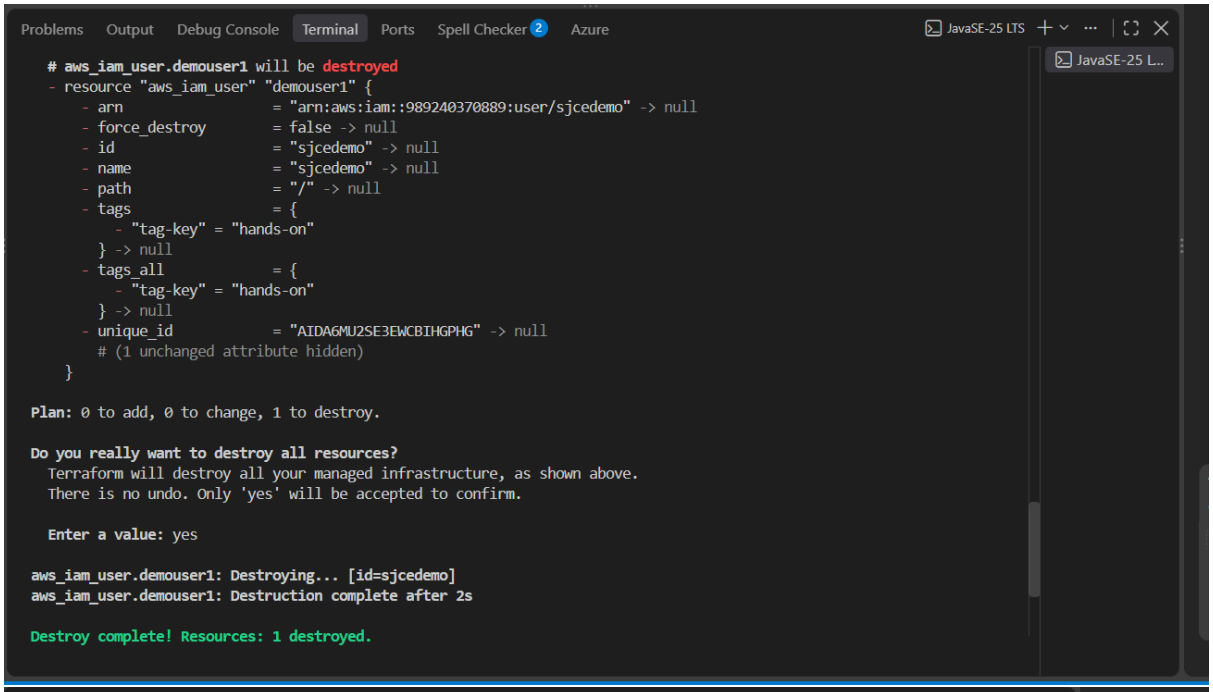
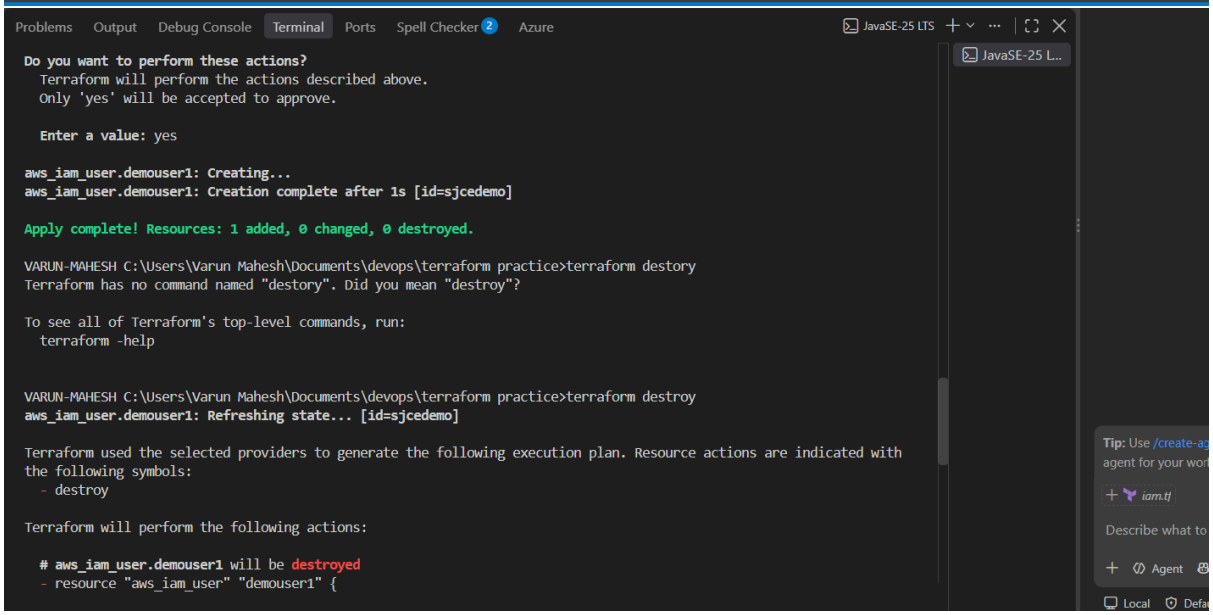

Search
[Alt+S]
United States (N. Virginia)
VarunMahesh (989240370889)
VarunMahesh
VPC > Security Groups > Create security group
Basic details
Security group name Info
sjc-sg
Name cannot be edited after creation.
Description Info
security group for sjc
VPC Info
vpc-06969a42b50ad4452 (sjce-demo)
Inbound rules Info
Type Info
Protocol Info
Port range Info
Source Info
Description - optional Info
Custom TCP
TCP
0
Custom
Delete
Add rule
Outbound rules Info
Type Info
Protocol Info
Port range Info
Destination Info
Description - optional Info
All traffic
All
All
Custom
0.0.0.0/0
Delete
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences


File Edit Selection View Go Run Terminal Help
devops
Explorer
devops
terraform practice
.terraform \ provide...
LICENSE.txt
terraform-provide...
.terraform.lock.hcl
ec2.tf
iam.tf
provider.tf
terraform.tfstate
terraform.tfstate.ba...
Outline
Timeline
Azure Project
Welcome
provider.tf
iam.tf
ec2.tf
Welcome to Settings Sync
terraform practice > ec2.tf > resource "aws_instance" "testec2" > ami
1 resource "aws_instance" "testec2" {
2 ami = "ami-0c55b159cbfafe1f0"
3 instance_type = "t3.micro"
4
5 tags = {
6 Name = "HelloWorld"
7 }
8 }
Problems
Output
Debug Console
Terminal
Ports
Spell Checker 3
Azure
JavaSE-25 LTS
JavaSE-25 L...
+ root_block_device (known after apply)
+ secondary_network_interface (known after apply)
}
Plan: 1 to add, 0 to change, 0 to destroy.
Do you want to perform these actions?
Terraform will perform the actions described above.
Only 'yes' will be accepted to approve.
Enter a value: yes
aws_instance.testec2: Creating...
Error: creating EC2 Instance: operation error EC2: RunInstances, https response error StatusCode: 400, RequestID: 7cd7b1bb-d2fa-4649-8d98-95aa7cb33180, api error InvalidAMIID.NotFound: The image id '[ami-0c55b159cbfafe1f0]' does not exist
with aws_instance.testec2,
on ec2.tf line 1, in resource "aws_instance" "testec2":
1: resource "aws_instance" "testec2" {
VARUN-MAHESH C:\Users\Varun Mahesh\Documents\devops\terraform practice>
Live Share
Ln 2, Col 41
Spaces: 4
UTF-8
LF
Terraform


File Edit Selection View Go Run Terminal Help
devops
Explorer
devops
terraform practice
.terraform \ provide...
LICENSE.txt
terraform-provide...
.terraform.lock.hcl
ec2.tf
iam.tf
provider.tf
terraform.tfstate
terraform.tfstate.ba...
Welcome
provider.tf
iam.tf
ec2.tf
Welcome to Settings Sync
terraform practice > ec2.tf > resource "aws_instance" "testec2"
1 resource "aws_instance" "testec2" {
2 ami = "ami-01e082ac2cf79f3918"
3 instance_type = "t3.micro"
4
5 tags = {
6 Name = "HelloWorld"
7 }
8 }
Problems Output Debug Console Terminal Ports Spell Checker 3 Azure
JavaSE-25 LTS
+ root_block_device (known after apply)
+ secondary_network_interface (known after apply)
}
Plan: 1 to add, 0 to change, 0 to destroy.
Do you want to perform these actions?
Terraform will perform the actions described above.
Only 'yes' will be accepted to approve.
Enter a value: yes
aws_instance.testec2: Creating...
Error: creating EC2 Instance: operation error EC2: RunInstances, https response error StatusCode: 400, RequestID: b33
03962-8a21-4bcc-9674-350992c4b103, api error InvalidAMIID.Malformed: Invalid id: "ami-01e082ac2cf79f3918" (expecting "a
mi-...")
with aws_instance.testec2,
on ec2.tf line 1, in resource "aws_instance" "testec2":
1: resource "aws_instance" "testec2" {
VARUN-MAHESH C:\Users\Varun Mahesh\Documents\devops\terraform practice>


File Edit Selection View Go Run Terminal Help
devops
Explorer
devops
terraform practice
.terraform \ provide...
LICENSE.txt
terraform-provide...
.terraform.lock.hcl
ec2.tf
iam.tf
provider.tf
terraform.tfstate
terraform.tfstate.ba...
Welcome
provider.tf
iam.tf
ec2.tf
Welcome to Settings Sync
terraform practice > ec2.tf > resource "aws_instance" "testec2"
1 resource "aws_instance" "testec2" {
2 ami = "ami-0aba19e56f3eaec05"
3 instance_type = "t3.micro"
4
5 tags = {
6 Name = "HelloWorld"
7 }
8 }
Problems Output Debug Console Terminal Ports Spell Checker 3 Azure
JavaSE-25 LTS
+ secondary_network_interface (known after apply)
}
Plan: 2 to add, 0 to change, 0 to destroy.
Do you want to perform these actions?
Terraform will perform the actions described above.
Only 'yes' will be accepted to approve.
Enter a value: yes
aws_iam_user.demouser1: Creating...
aws_instance.testec2: Creating...
aws_iam_user.demouser1: Creation complete after 2s [id=sjcedemo]
Error: creating EC2 Instance: operation error EC2: RunInstances, https response error StatusCode: 400, RequestID: 62d
36cae-d740-4944-bd35-b407a47c45e8, api error InvalidAMIID.NotFound: The image id '[ami-0aba19e56f3eaec05]' does not exi
st
with aws_instance.testec2,
on ec2.tf line 1, in resource "aws_instance" "testec2":
1: resource "aws_instance" "testec2" {
VARUN-MAHESH C:\Users\Varun Mahesh\Documents\devops\terraform practice>
Chat Codex
Sessions
Tip: Use /create-agent to scaffold a custom agent for your workflow.
ec2.tf
Describe what to build
Agent
Balance
Local
Default permissions
Live Share
Ln 1, Col 33
Spaces: 4
UTF-8
LF
Terraform
Go Live
Antigravity - Settings


Problems Output Debug Console Terminal Ports Spell Checker 2 Azure
JavaSE-25 LTS
JavaSE-25 L...
aws_iam_user.demouser1 will be destroyed
- resource "aws_iam_user" "demouser1" {
- arn = "arn:aws:iam::989240370889:user/sjcedemo" -> null
- force_destroy = false -> null
- id = "sjcedemo" -> null
- name = "sjcedemo" -> null
- path = "/" -> null
- tags = {
- "tag-key" = "hands-on"
} -> null
- tags_all = {
- "tag-key" = "hands-on"
} -> null
- unique_id = "AIDA6MU2SE3EWCBIHGPHG" -> null
(1 unchanged attribute hidden)
}
Plan: 0 to add, 0 to change, 1 to destroy.
Do you really want to destroy all resources?
Terraform will destroy all your managed infrastructure, as shown above.
There is no undo. Only 'yes' will be accepted to confirm.
Enter a value: yes
aws_iam_user.demouser1: Destroying... [id=sjcedemo]
aws_iam_user.demouser1: Destruction complete after 2s
Destroy complete! Resources: 1 destroyed.


Problems Output Debug Console Terminal Ports Spell Checker 2 Azure
JavaSE-25 LTS
JavaSE-25 L...
Do you want to perform these actions?
Terraform will perform the actions described above.
Only 'yes' will be accepted to approve.
Enter a value: yes
aws_iam_user.demouser1: Creating...
aws_iam_user.demouser1: Creation complete after 1s [id=sjcedemo]
Apply complete! Resources: 1 added, 0 changed, 0 destroyed.
VARUN-MAHESH C:\Users\Varun Mahesh\Documents\devops\terraform practice>terraform destory
Terraform has no command named "destory". Did you mean "destroy"?
To see all of Terraform's top-level commands, run:
terraform -help
VARUN-MAHESH C:\Users\Varun Mahesh\Documents\devops\terraform practice>terraform destroy
aws_iam_user.demouser1: Refreshing state... [id=sjcedemo]
Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the following symbols:
- destroy
Terraform will perform the following actions:
aws_iam_user.demouser1 will be destroyed
- resource "aws_iam_user" "demouser1" {
Tip: Use /create-ag
agent for your wor
iam.tf
Describe what to
Agent
Local

```
Note: You didn't use the -out option to save this plan, so Terraform can't guarantee to take exactly these actions if
you run "terraform apply" now.

VARUN-MAHESH C:\Users\Varun Mahesh\Documents\devops\terraform practice>terraform apply

Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with
the following symbols:
  + create

Terraform will perform the following actions:

  # aws_iam_user.demouser1 will be created
  + resource "aws_iam_user" "demouser1" {
      + arn           = (known after apply)
      + force_destroy = false
      + id            = (known after apply)
      + name          = "sjcedemo"
      + path          = "/"
      + tags          = {
          + "tag-key" = "hands-on"
        }
      + tags_all      = {
          + "tag-key" = "hands-on"
        }
      + unique_id     = (known after apply)
    }

Plan: 1 to add, 0 to change, 0 to destroy.
```

```
VARUN-MAHESH C:\Users\Varun Mahesh\Documents\devops\terraform practice>terraform validate
Success! The configuration is valid.


VARUN-MAHESH C:\Users\Varun Mahesh\Documents\devops\terraform practice>terraform plan

Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with
the following symbols:
  + create

Terraform will perform the following actions:

  # aws_iam_user.demouser1 will be created
  + resource "aws_iam_user" "demouser1" {
      + arn           = (known after apply)
      + force_destroy = false
      + id            = (known after apply)
      + name          = "sjcedemo"
      + path          = "/"
      + tags          = {
          + "tag-key" = "hands-on"
        }
      + tags_all      = {
          + "tag-key" = "hands-on"
        }
      + unique_id     = (known after apply)
    }
```

```
VARUN-MAHESH C:\Users\Varun Mahesh\Documents\devops>cd terraform practice

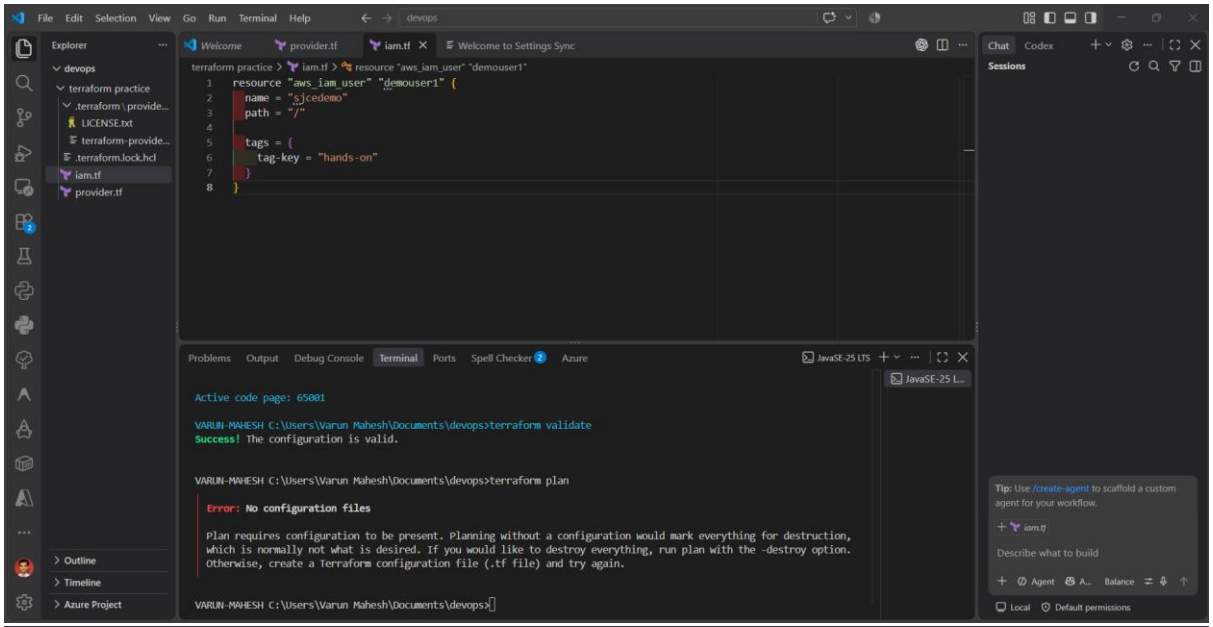
VARUN-MAHESH C:\Users\Varun Mahesh\Documents\devops\terraform practice>terraform validate
Success! The configuration is valid.

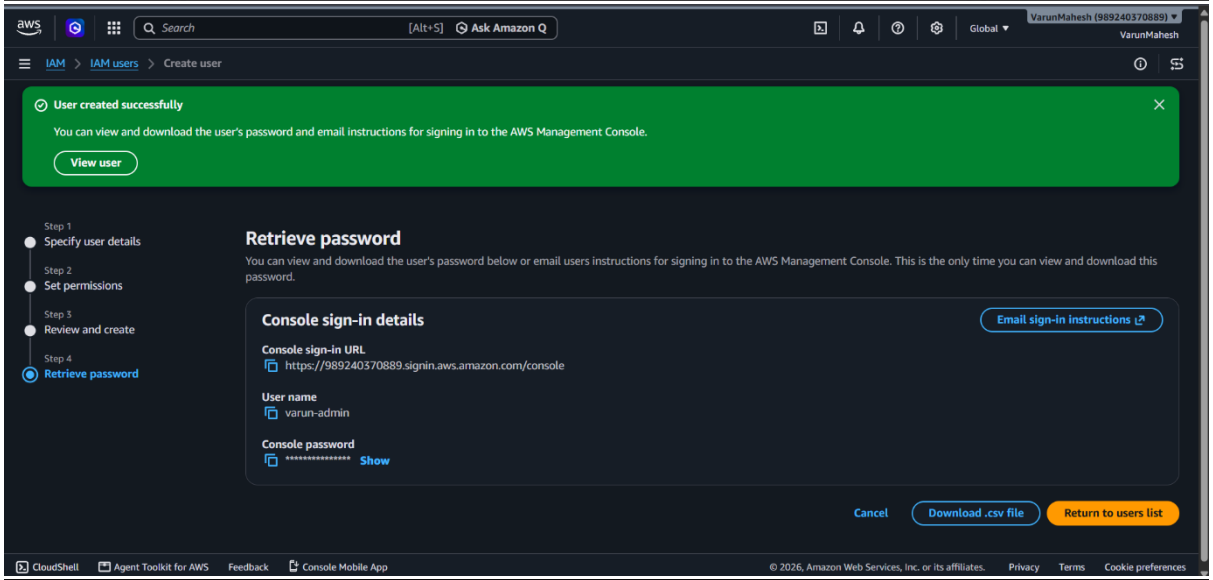

VARUN-MAHESH C:\Users\Varun Mahesh\Documents\devops\terraform practice>terraform plan

Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with
the following symbols:
  + create

Terraform will perform the following actions:

  # aws_iam_user.demouser1 will be created
```

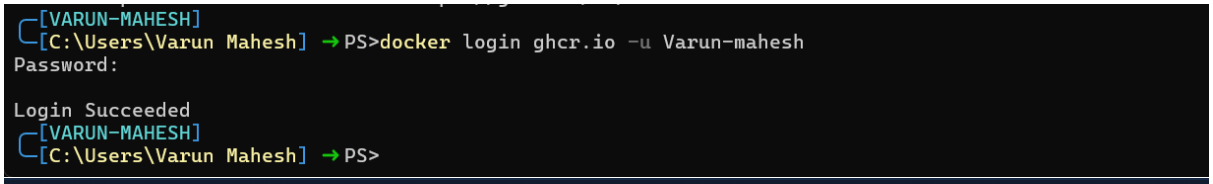


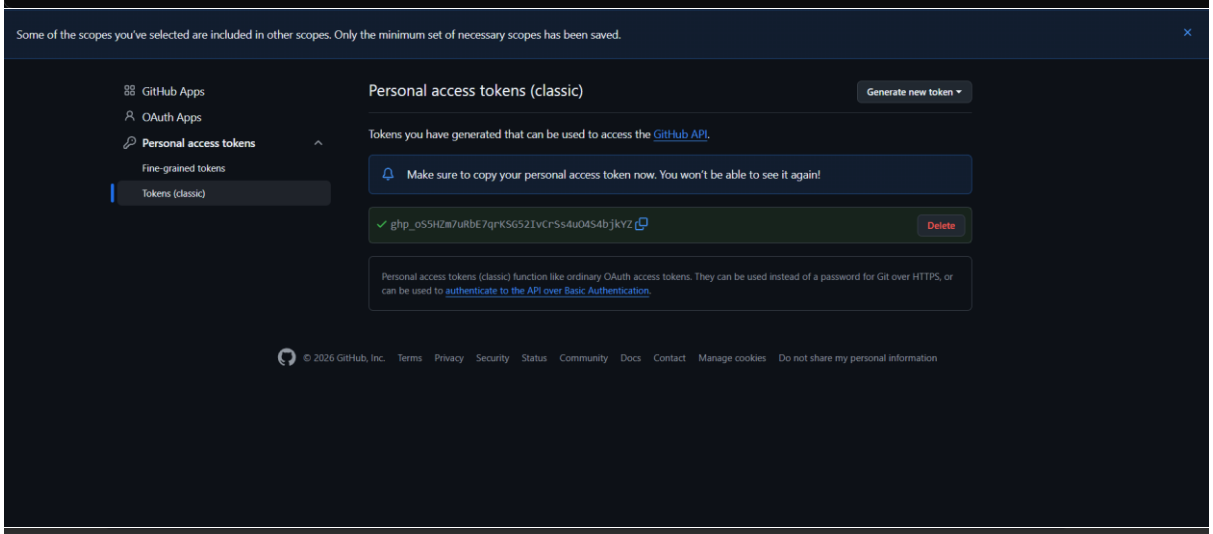


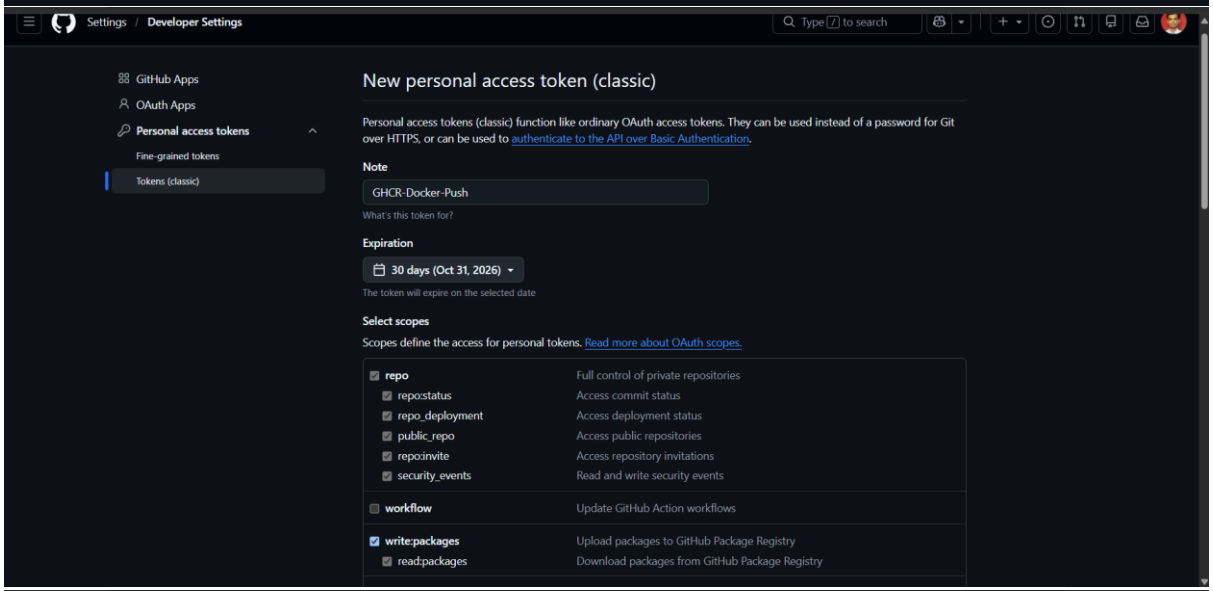

```
┌─[VARUN-MAHESH]
└─[C:\Users\Varun Mahesh] → PS>docker push ghcr.io/varun-mahesh/task-web:latest
The push refers to repository [ghcr.io/varun-mahesh/task-web]
44136fa355b3: Pushed
6db0cf540580: Pushed
6b37362b3da7: Pushed
ba016e230fc5: Pushed
4f4fb700ef54: Pushed
7a3bdd751d95: Pushed
2f4636dca226: Pushed
1320c4426edf: Pushed
19960b870118: Pushed
latest: digest: sha256:ef3388122a742b558989b8f46a9a9ca6fe4220ea90d7ef63e3b5b5cb390c2265 size: 856
┌─[VARUN-MAHESH]
└─[C:\Users\Varun Mahesh] → PS>
```

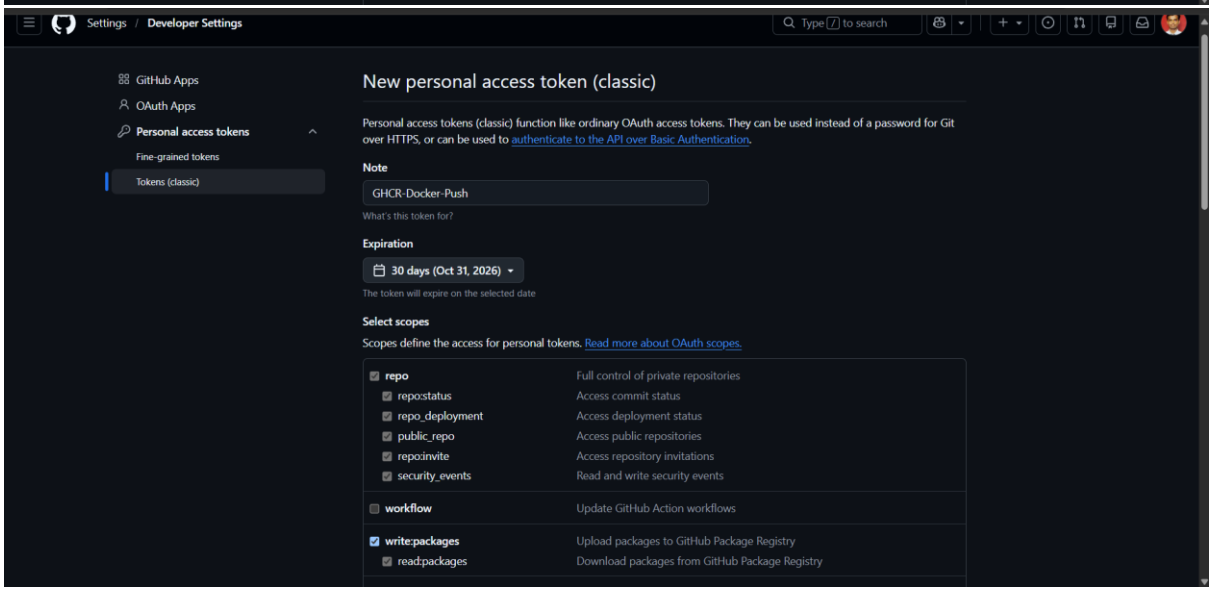
You should see Docker uploading the layers

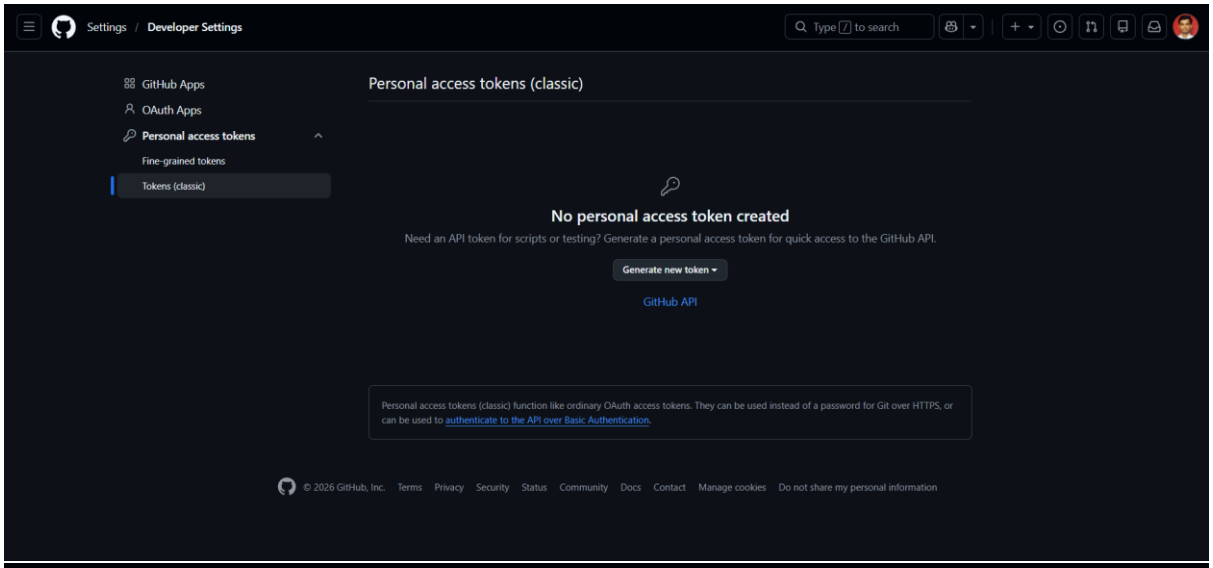
```
┌─[VARUN-MAHESH]
└─[C:\Users\Varun Mahesh] → PS>docker tag task-web:latest ghcr.io/varun-mahesh/task-web:latest
┌─[VARUN-MAHESH]
└─[C:\Users\Varun Mahesh] → PS>docker images
                                                                    i Info →  U  In Use
IMAGE                                  ID             DISK USAGE   CONTENT SIZE   EXTRA
demodocker:latest                      0ffee1206410       175MB         45.3MB
ghcr.io/varun-mahesh/task-web:latest   ef3388122a74       175MB         45.3MB    U
httpd:2.4                              03f858efb82c       177MB         47.6MB
httpd:latest                           03f858efb82c       177MB         47.6MB
node:latest                            a723b54c35a7       1.8GB          461MB
task-backup:latest                     560a8dc2c7f8       175MB         45.3MB
task-web:latest                        ef3388122a74       175MB         45.3MB    U
┌─[VARUN-MAHESH]
└─[C:\Users\Varun Mahesh] → PS>
```

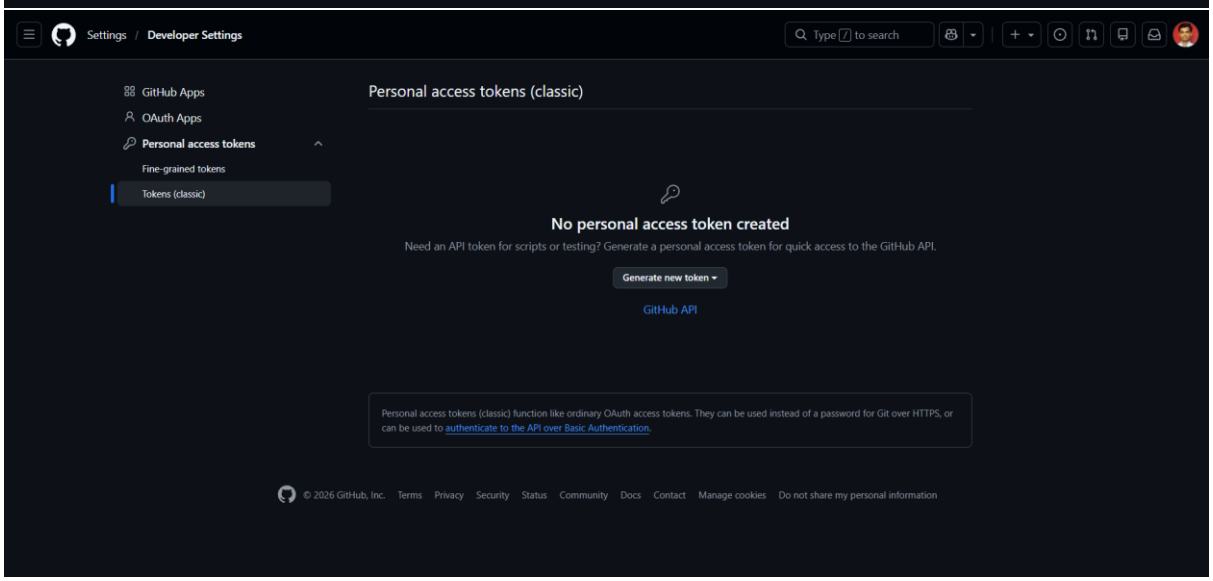

[VARUN-MAHESH]
[C:\Users\Varun Mahesh] ➜ PS>docker login ghcr.io -u Varun-mahesh
Password:
Login Succeeded
[VARUN-MAHESH]
[C:\Users\Varun Mahesh] ➜ PS>

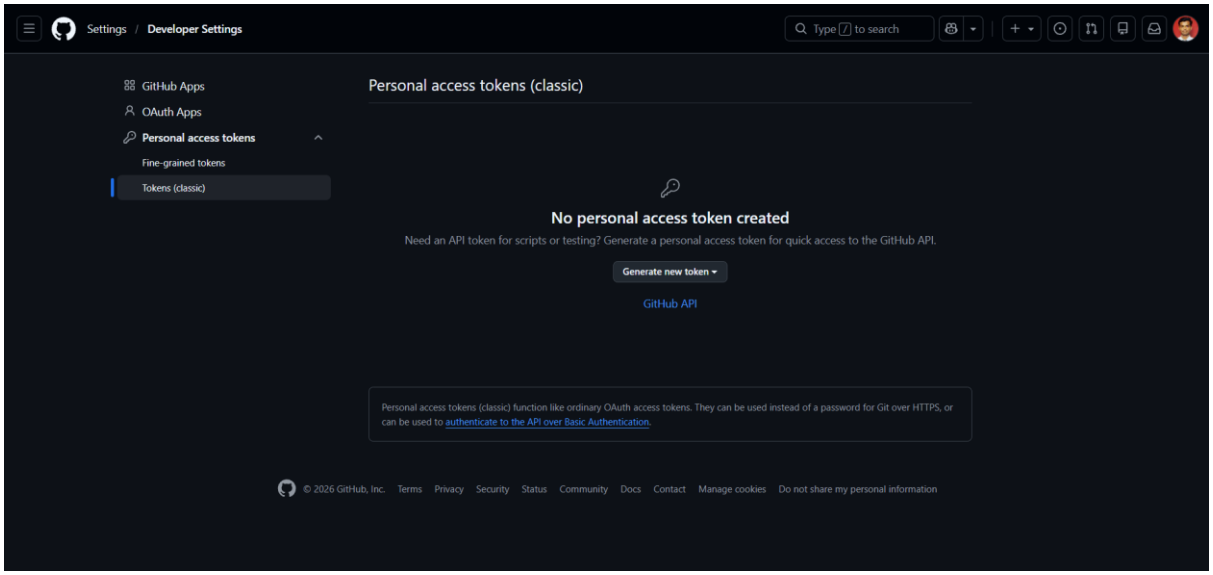

Some of the scopes you've selected are included in other scopes. Only the minimum set of necessary scopes has been saved.
GitHub Apps
OAuth Apps
Personal access tokens
Fine-grained tokens
Tokens (classic)
Personal access tokens (classic)
Generate new token
Tokens you have generated that can be used to access the GitHub API.
Make sure to copy your personal access token now. You won't be able to see it again!
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
Delete
Personal access tokens (classic) function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to authenticate to the API over Basic Authentication.
© 2026 GitHub, Inc. Terms Privacy Security Status Community Docs Contact Manage cookies Do not share my personal information

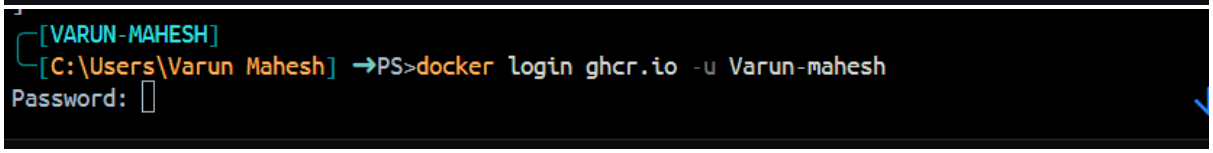

Settings / Developer Settings
Type / to search
GitHub Apps
OAuth Apps
Personal access tokens
Fine-grained tokens
Tokens (classic)
New personal access token (classic)
Personal access tokens (classic) function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to authenticate to the API over Basic Authentication.
Note
GHCR-Docker-Push
What's this token for?
Expiration
30 days (Oct 31, 2026)
The token will expire on the selected date
Select scopes
Scopes define the access for personal tokens. Read more about OAuth scopes.
repo Full control of private repositories
repo:status Access commit status
repo_deployment Access deployment status
public_repo Access public repositories
repo:invite Access repository invitations
security_events Read and write security events
workflow Update GitHub Action workflows
write:packages Upload packages to GitHub Package Registry
read:packages Download packages from GitHub Package Registry

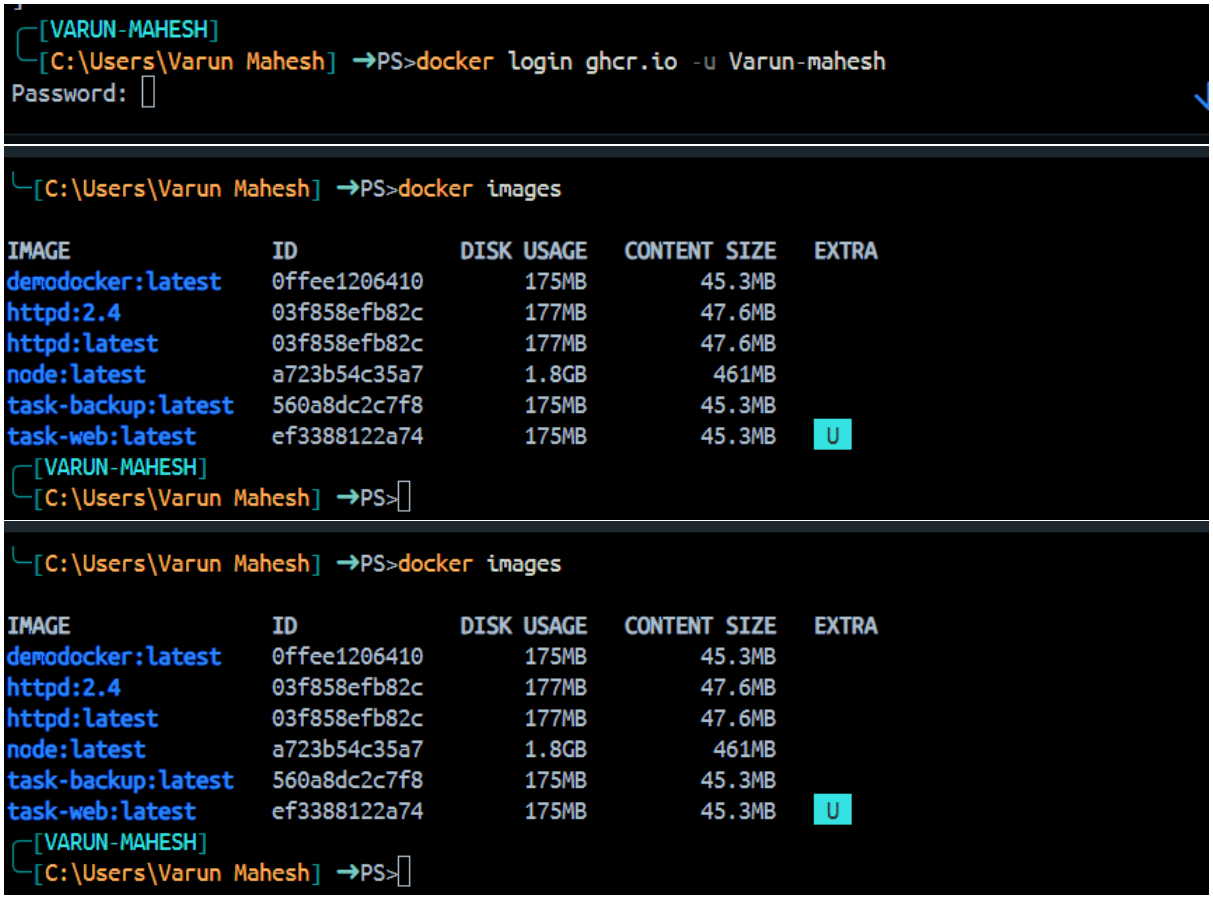

Settings / Developer Settings
Type / to search
GitHub Apps
OAuth Apps
Personal access tokens
Fine-grained tokens
Tokens (classic)
New personal access token (classic)
Personal access tokens (classic) function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to authenticate to the API over Basic Authentication.
Note
GHCR-Docker-Push
What's this token for?
Expiration
30 days (Oct 31, 2026)
The token will expire on the selected date
Select scopes
Scopes define the access for personal tokens. Read more about OAuth scopes.
repo Full control of private repositories
repo:status Access commit status
repo_deployment Access deployment status
public_repo Access public repositories
repo:invite Access repository invitations
security_events Read and write security events
workflow Update GitHub Action workflows
write:packages Upload packages to GitHub Package Registry
read:packages Download packages from GitHub Package Registry


Settings / Developer Settings
Type / to search
GitHub Apps
OAuth Apps
Personal access tokens
Fine-grained tokens
Tokens (classic)
Personal access tokens (classic)
No personal access token created
Need an API token for scripts or testing? Generate a personal access token for quick access to the GitHub API.
Generate new token
GitHub API
Personal access tokens (classic) function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to authenticate to the API over Basic Authentication.
© 2026 GitHub, Inc. Terms Privacy Security Status Community Docs Contact Manage cookies Do not share my personal information


Settings / Developer Settings
Type / to search
GitHub Apps
OAuth Apps
Personal access tokens
Fine-grained tokens
Tokens (classic)
Personal access tokens (classic)
No personal access token created
Need an API token for scripts or testing? Generate a personal access token for quick access to the GitHub API.
Generate new token
GitHub API
Personal access tokens (classic) function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to authenticate to the API over Basic Authentication.
© 2026 GitHub, Inc. Terms Privacy Security Status Community Docs Contact Manage cookies Do not share my personal information


Settings / Developer Settings
Type / to search
GitHub Apps
OAuth Apps
Personal access tokens
Fine-grained tokens
Tokens (classic)
Personal access tokens (classic)
No personal access token created
Need an API token for scripts or testing? Generate a personal access token for quick access to the GitHub API.
Generate new token
GitHub API
Personal access tokens (classic) function like ordinary OAuth access tokens. They can be used instead of a password for Git over HTTPS, or can be used to authenticate to the API over Basic Authentication.
© 2026 GitHub, Inc. Terms Privacy Security Status Community Docs Contact Manage cookies Do not share my personal information


[VARUN-MAHESH]
[C:\Users\Varun Mahesh] →PS>docker login ghcr.io -u Varun-mahesh
Password:


[VARUN-MAHESH]
[C:\Users\Varun Mahesh] →PS>docker login ghcr.io -u Varun-mahesh
Password:
[C:\Users\Varun Mahesh] →PS>docker images
IMAGE ID DISK USAGE CONTENT SIZE EXTRA
demodocker:latest 0ffee1206410 175MB 45.3MB
httpd:2.4 03f858efb82c 177MB 47.6MB
httpd:latest 03f858efb82c 177MB 47.6MB
node:latest a723b54c35a7 1.8GB 461MB
task-backup:latest 560a8dc2c7f8 175MB 45.3MB
task-web:latest ef3388122a74 175MB 45.3MB U
[VARUN-MAHESH]
[C:\Users\Varun Mahesh] →PS>
[C:\Users\Varun Mahesh] →PS>docker images
IMAGE ID DISK USAGE CONTENT SIZE EXTRA
demodocker:latest 0ffee1206410 175MB 45.3MB
httpd:2.4 03f858efb82c 177MB 47.6MB
httpd:latest 03f858efb82c 177MB 47.6MB
node:latest a723b54c35a7 1.8GB 461MB
task-backup:latest 560a8dc2c7f8 175MB 45.3MB
task-web:latest ef3388122a74 175MB 45.3MB U
[VARUN-MAHESH]
[C:\Users\Varun Mahesh] →PS>