



Environment variables, without the `.env` chaos.

Self-hosted secrets for people, applications, and AI agents.


SELF-HOSTED / ENVIRONMENT-SCOPED / SDK + MCP

DEV	01
TEST	02
STAGE	03
PROD	04

envsync.me



.env works. Until everyone needs it.

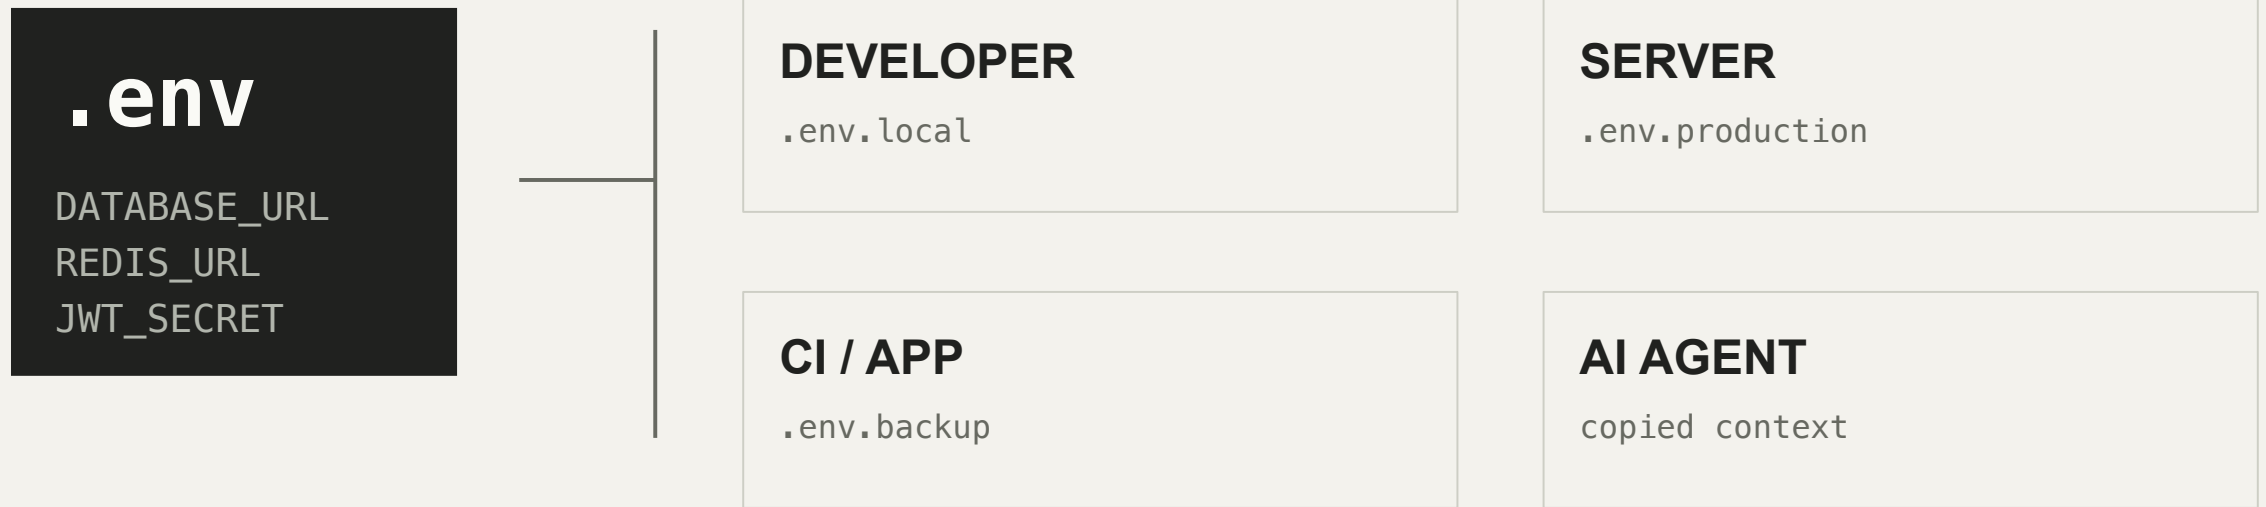

Scattered. Inconsistent. Overexposed. Hard to revoke.



One place. Every environment.

PROJECT / PAYMENTS

01

DEV

DATABASE_URL
REDIS_URL
API_URL

02

TEST

DATABASE_URL
REDIS_URL
API_URL

03

STAGING

DATABASE_URL
REDIS_URL
API_URL

04

PROD

DATABASE_URL
REDIS_URL
API_URL

PEOPLE + APPLICATIONS + AGENTS

ENVSYNCR / SELF-HOSTED SECRETS



Humans. Apps. Agents.

One access model.

IDENTITY	DEV	TEST	PROD
Developer	READ + WRITE	READ + WRITE	DENIED
Backend app	READ	READ	DENIED
QA	READ	READ	DENIED
Coding agent ¹	READ + WRITE	READ	DENIED
Production app	DENIED	DENIED	READ

ILLUSTRATIVE ASSIGNMENTS / ¹ AGENT ACCESS: PREVIEW



Control lives next to the environment.

01 / SECRETS


Attach only what belongs here.

02 / TEAM ACCESS

Share the environment.

03 / AGENTS · PREVIEW

See who has access.

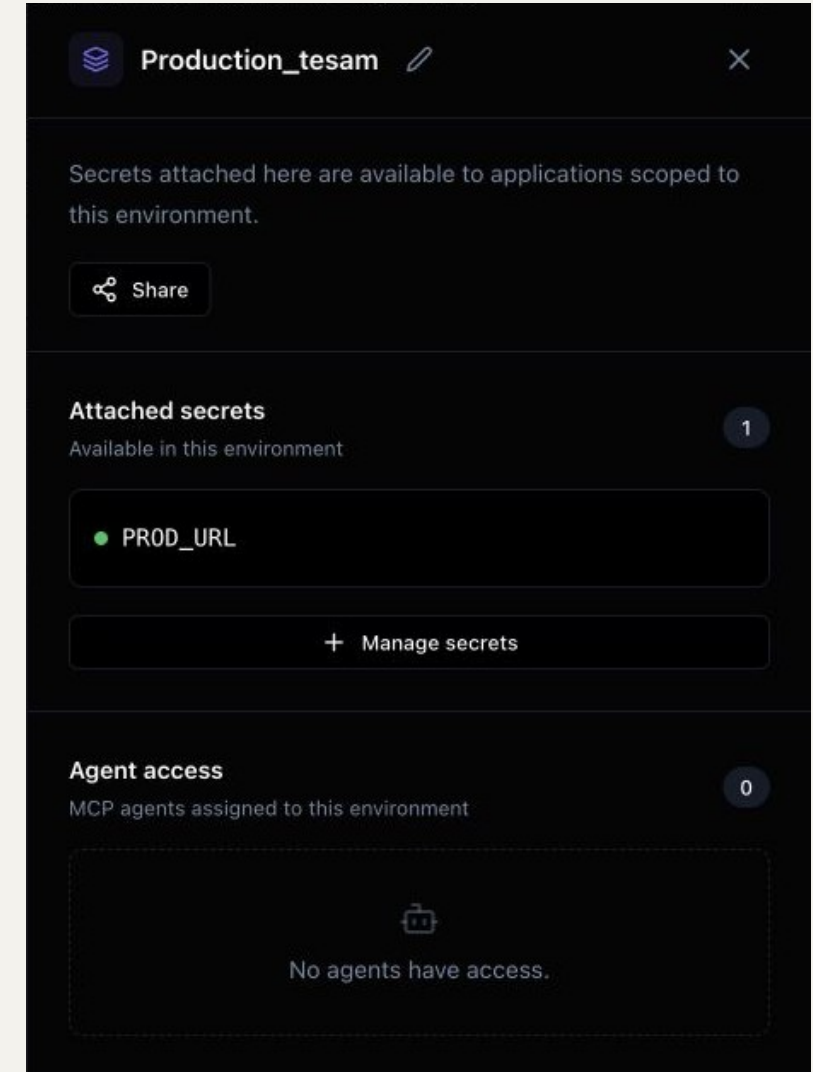



Your app asks for what it needs.

NODE.JS / @envsync/node

```
01 import { EnvSync } from "@envsync/node";
02
03 const envsync = new EnvSync({
04   apiKey: process.env.ENVSYNC_API_KEY,
05   baseUrl: process.env.ENVSYNC_URL
06 });
07
08 const db = await envsync.get("DATABASE_URL");
```

ALSO IMPLEMENTED: PYTHON / envsync

REQUEST PATH

APPLICATION



SCOPED API KEY




ENVSYNC / DEV



DATABASE_URL



Give your agents a workspace. Not your entire vault.

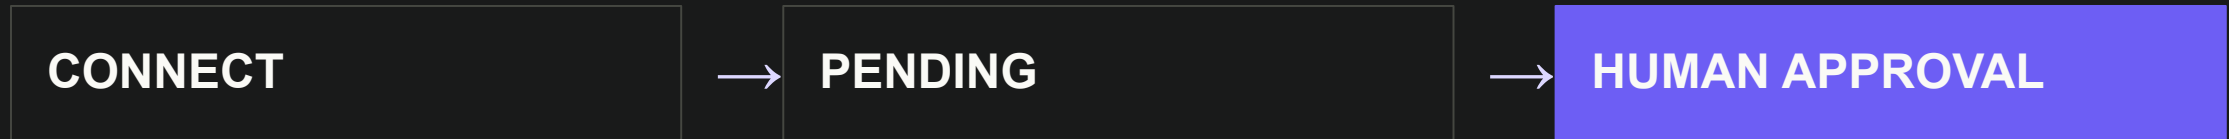


BACKEND CODING AGENT / MCP / PREVIEW

DEVELOPMENT	READ + WRITE	03 : 42 : 18
TESTING	READ	23 : 42 : 18
PRODUCTION	DENIED	NO ACCESS



Connection $\neq$ authorization.

EVERY AGENT SECRET REQUEST / SERVER-SIDE CHECKS

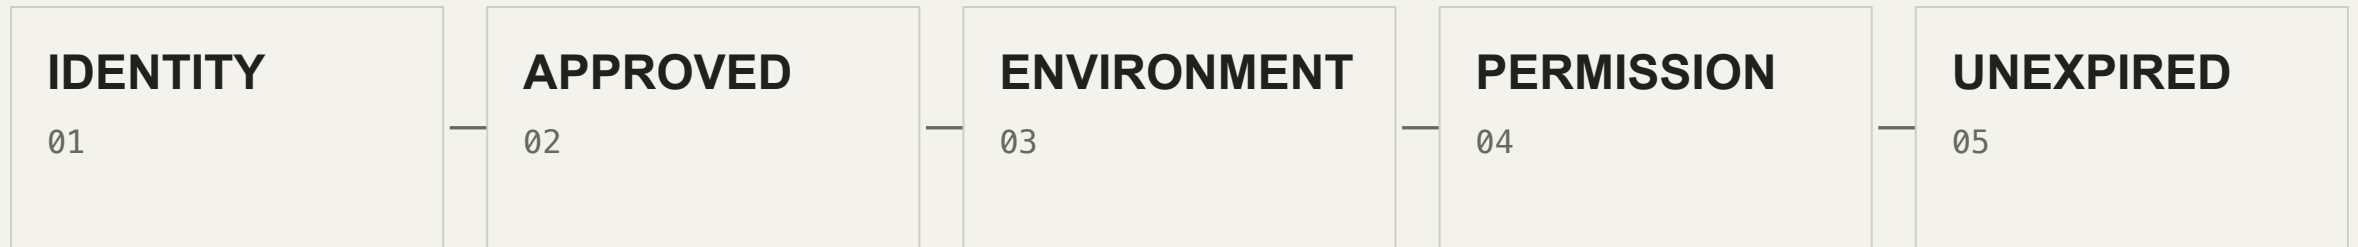

DEFAULT DENY

Unknown · pending · expired · revoked · unassigned

ALL CHECKS PASS

AUTHORIZED



Your infrastructure. Your secrets.

YOUR MACHINE / PRIVATE NETWORK

DOCKER COMPOSE

FRONTEND

NGINX



API

NODE.JS



DATABASE

POSTGRESQL

```
$ npm run setup
```

After cloning / Node.js 20+ + Docker



More than a concept.

01 / IDENTITY

Accounts · sessions

Admin controls

02 / SECRETS

Projects · environments

Encrypted storage

03 / ACCESS

Resource sharing

Scoped application keys

04 / DEVELOPERS

Node.js + Python SDKs

API · documentation

05 / AGENTS · PREVIEW

MCP · approvals

Per-environment grants · TTL

06 / OPERATIONS

Docker · guided setup

Audit history



Built. Now hardening.

BUILT

Core secret workflows

SDK retrieval

Agent policy + MCP

Self-hosted setup

NOW

Real-client MCP testing

Security validation

Deployment verification

Release checks

NEXT

SMTP invitations

Developer experience

Client compatibility

Production readiness

PREVIEW DESCRIBES AGENT MATURITY – NOT A SEPARATE PRODUCT.



**Secrets should go
where they're needed.
Not everywhere.**

HUMANS + APPS + AGENTS → ENVIRONMENTS → SECRETS

envsync.me

github.com/VarunHarinath/EnvSync