

EXP NO:3

DATE:

RAIL FENCE CIPHER

AIM:

To implement an encryption algorithm using Rail Fence Cipher technique.

ALGORITHM:

Step 1: Get the plaintext input from the user.

Step 2: Prompt the user to enter the number of rails (the key) for the Rail Fence Cipher.

Step 3: Preprocess the plaintext by removing any spaces and punctuation, and converting it to uppercase if necessary.

Step 4: Construct the rail fence pattern by dividing the plaintext characters into diagonal "rails" based on the key.

Step 5: Read off the characters row by row to form the encrypted ciphertext.

Step 6: Output the encrypted ciphertext to the user.

PROGRAM:

```
#include<stdio.h>
```

```
#include<string.h>
```

```
void encryptMsg(char msg[], int key){
```

```
    int msgLen = strlen(msg), i, j, k = -1, row = 0, col = 0;
```

```
    char railMatrix[key][msgLen];
```

```
    for(i = 0; i < key; ++i)
```

```
        for(j = 0; j < msgLen; ++j)
```

```
            railMatrix[i][j] = '\n';
```

```
    for(i = 0; i < msgLen; ++i){
```


```
        railMatrix[row][col++] = msg[i];
```

```
        if(row == 0 || row == key-1)
            k= k * (-1);
        row = row + k;
    }

    printf("\nEncrypted Message: ");

    for(i = 0; i < key; ++i)
        for(j = 0; j < msgLen; ++j)
            if(railMatrix[i][j] != '\n')
                printf("%c", railMatrix[i][j]);
    }
int main(){
    char msg[] = "varunesh";
    int key = 3;
    printf("Original Message: %s", msg);
    encryptMsg(msg, key);
    return 0;
}
```

OUTPUT:

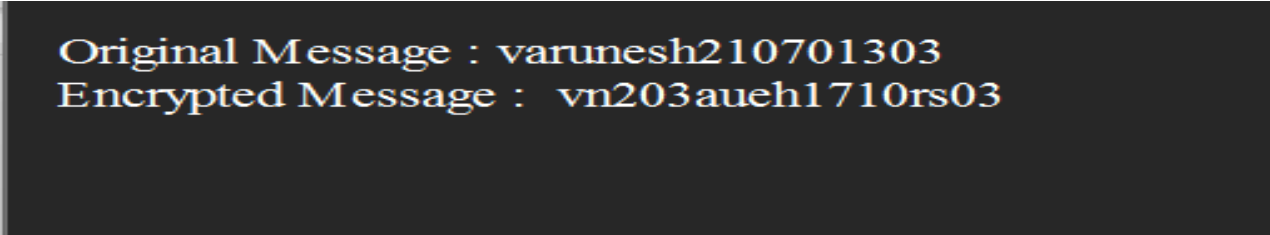

Original Message : varunesh210701303
Encrypted Message : vn203aueh1710rs03

RESULT: